


Punteros - Documentación

/////Capturas de funcionamiento de los códigos

- código punteros.c

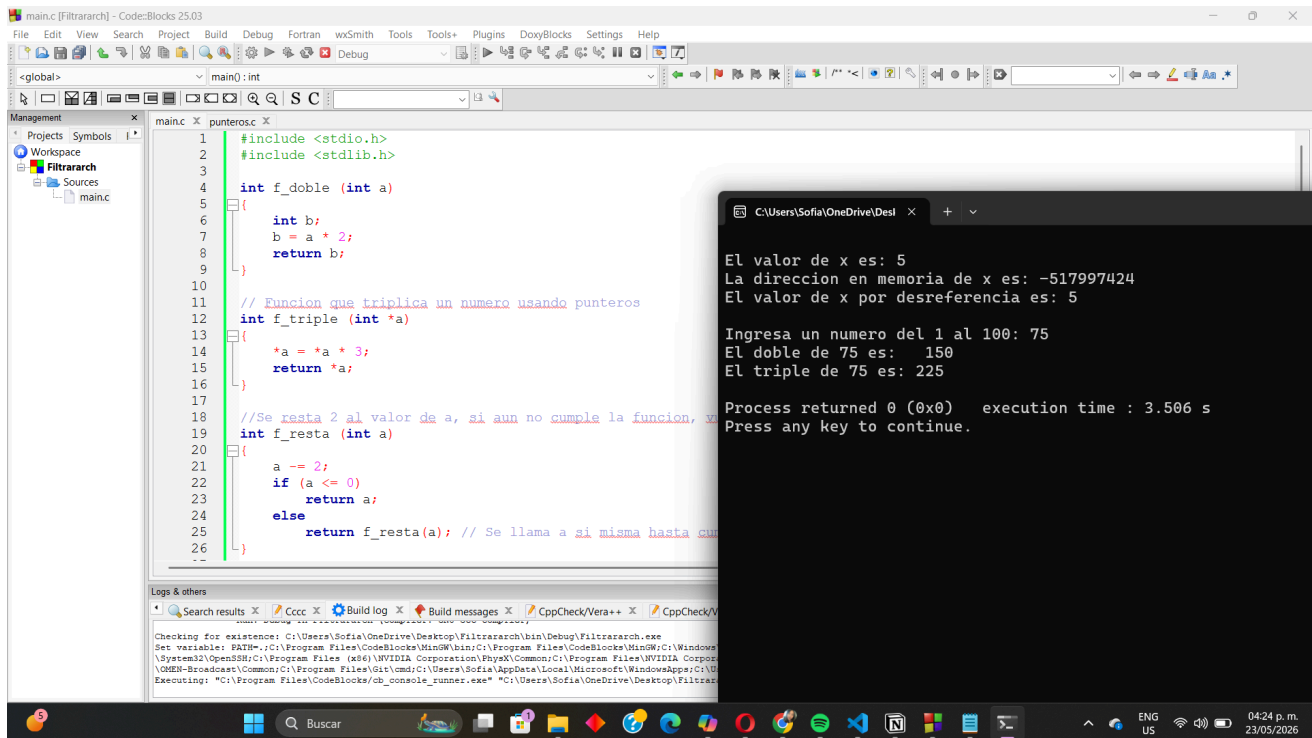

The screenshot shows a code editor with the following C code in `punteros.c`:

```
1 #include <stdio.h>
2 #include <stdlib.h>
3
4 int f_doble (int a)
5 {
6     int b;
7     b = a * 2;
8     return b;
9 }
10
11 // Funcion que triplica un numero usando punteros
12 int f_triple (int *a)
13 {
14     *a = *a * 3;
15     return *a;
16 }
17
18 //Se resta 2 al valor de a, si aun no cumple la funcion, va
19 int f_resta (int a)
20 {
21     a -= 2;
22     if (a <= 0)
23         return a;
24     else
25         return f_resta(a); // Se llama a si misma hasta cu
26 }
```


The execution output in the terminal window is as follows:

```
El valor de x es: 5
La direccion en memoria de x es: -517997424
El valor de x por desreferencia es: 5

Ingresa un numero del 1 al 100: 75
El doble de 75 es: 150
El triple de 75 es: 225

Process returned 0 (0x0)   execution time : 3.506 s
Press any key to continue.
```

- código introduccion_punteros.c

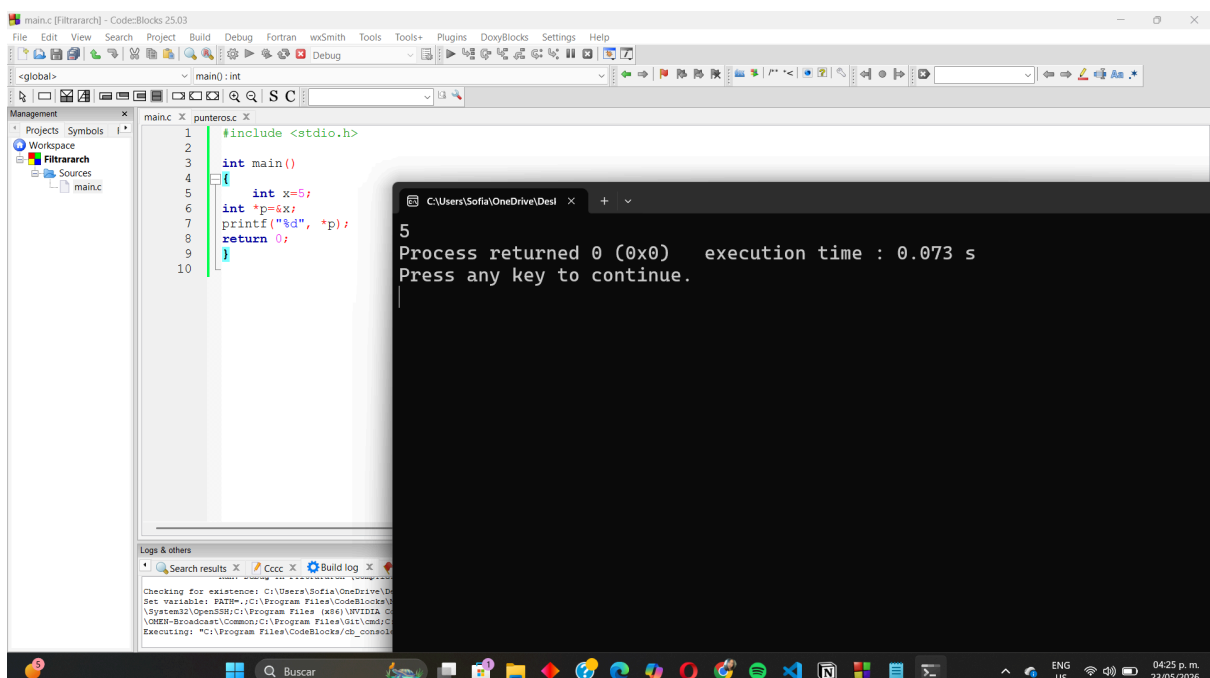

The screenshot shows a code editor with the following C code in `introduccion_punteros.c`:

```
1 #include <stdio.h>
2
3 int main()
4 {
5     int x=5;
6     int *p=&x;
7     printf("%d", *p);
8     return 0;
9 }
```

The execution output in the terminal window is as follows:

```
5
Process returned 0 (0x0)   execution time : 0.073 s
Press any key to continue.
```