



Coupling: network 1's read-out on trial t becomes a constant input to network 2's within-trial loop

Network 1 (one step = one trial)

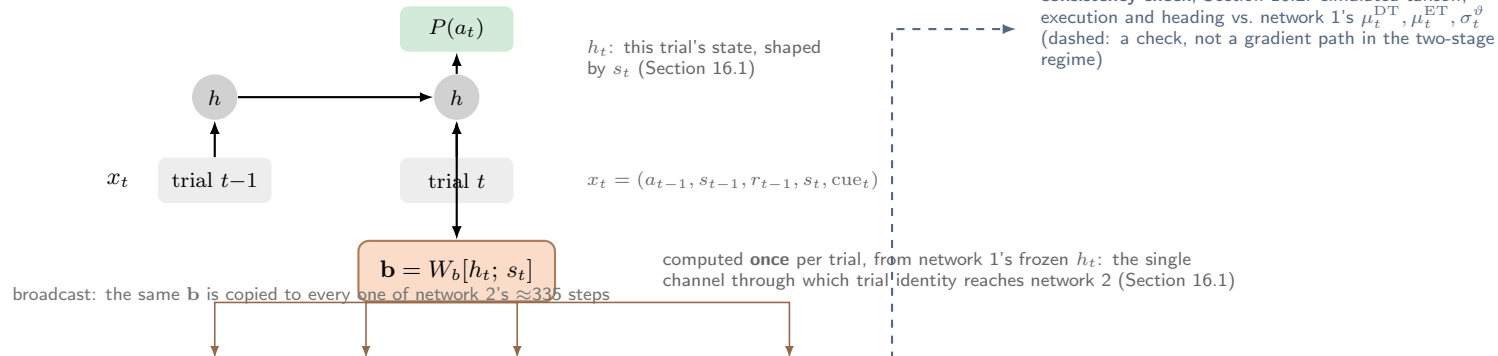

Network 2 (one step = 10 ms, same trial t)

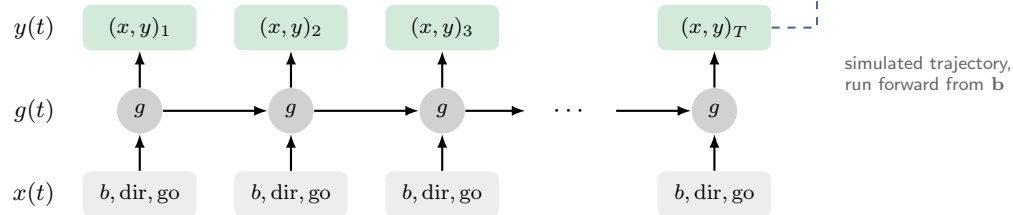

Training order: network 1 is fitted first and frozen; $\mathbf{b}$ is computed from its frozen h_t for every trial of every session; network 2 is then fitted on top (two-stage regime), or the two are fine-tuned jointly afterwards (Section 15.4).