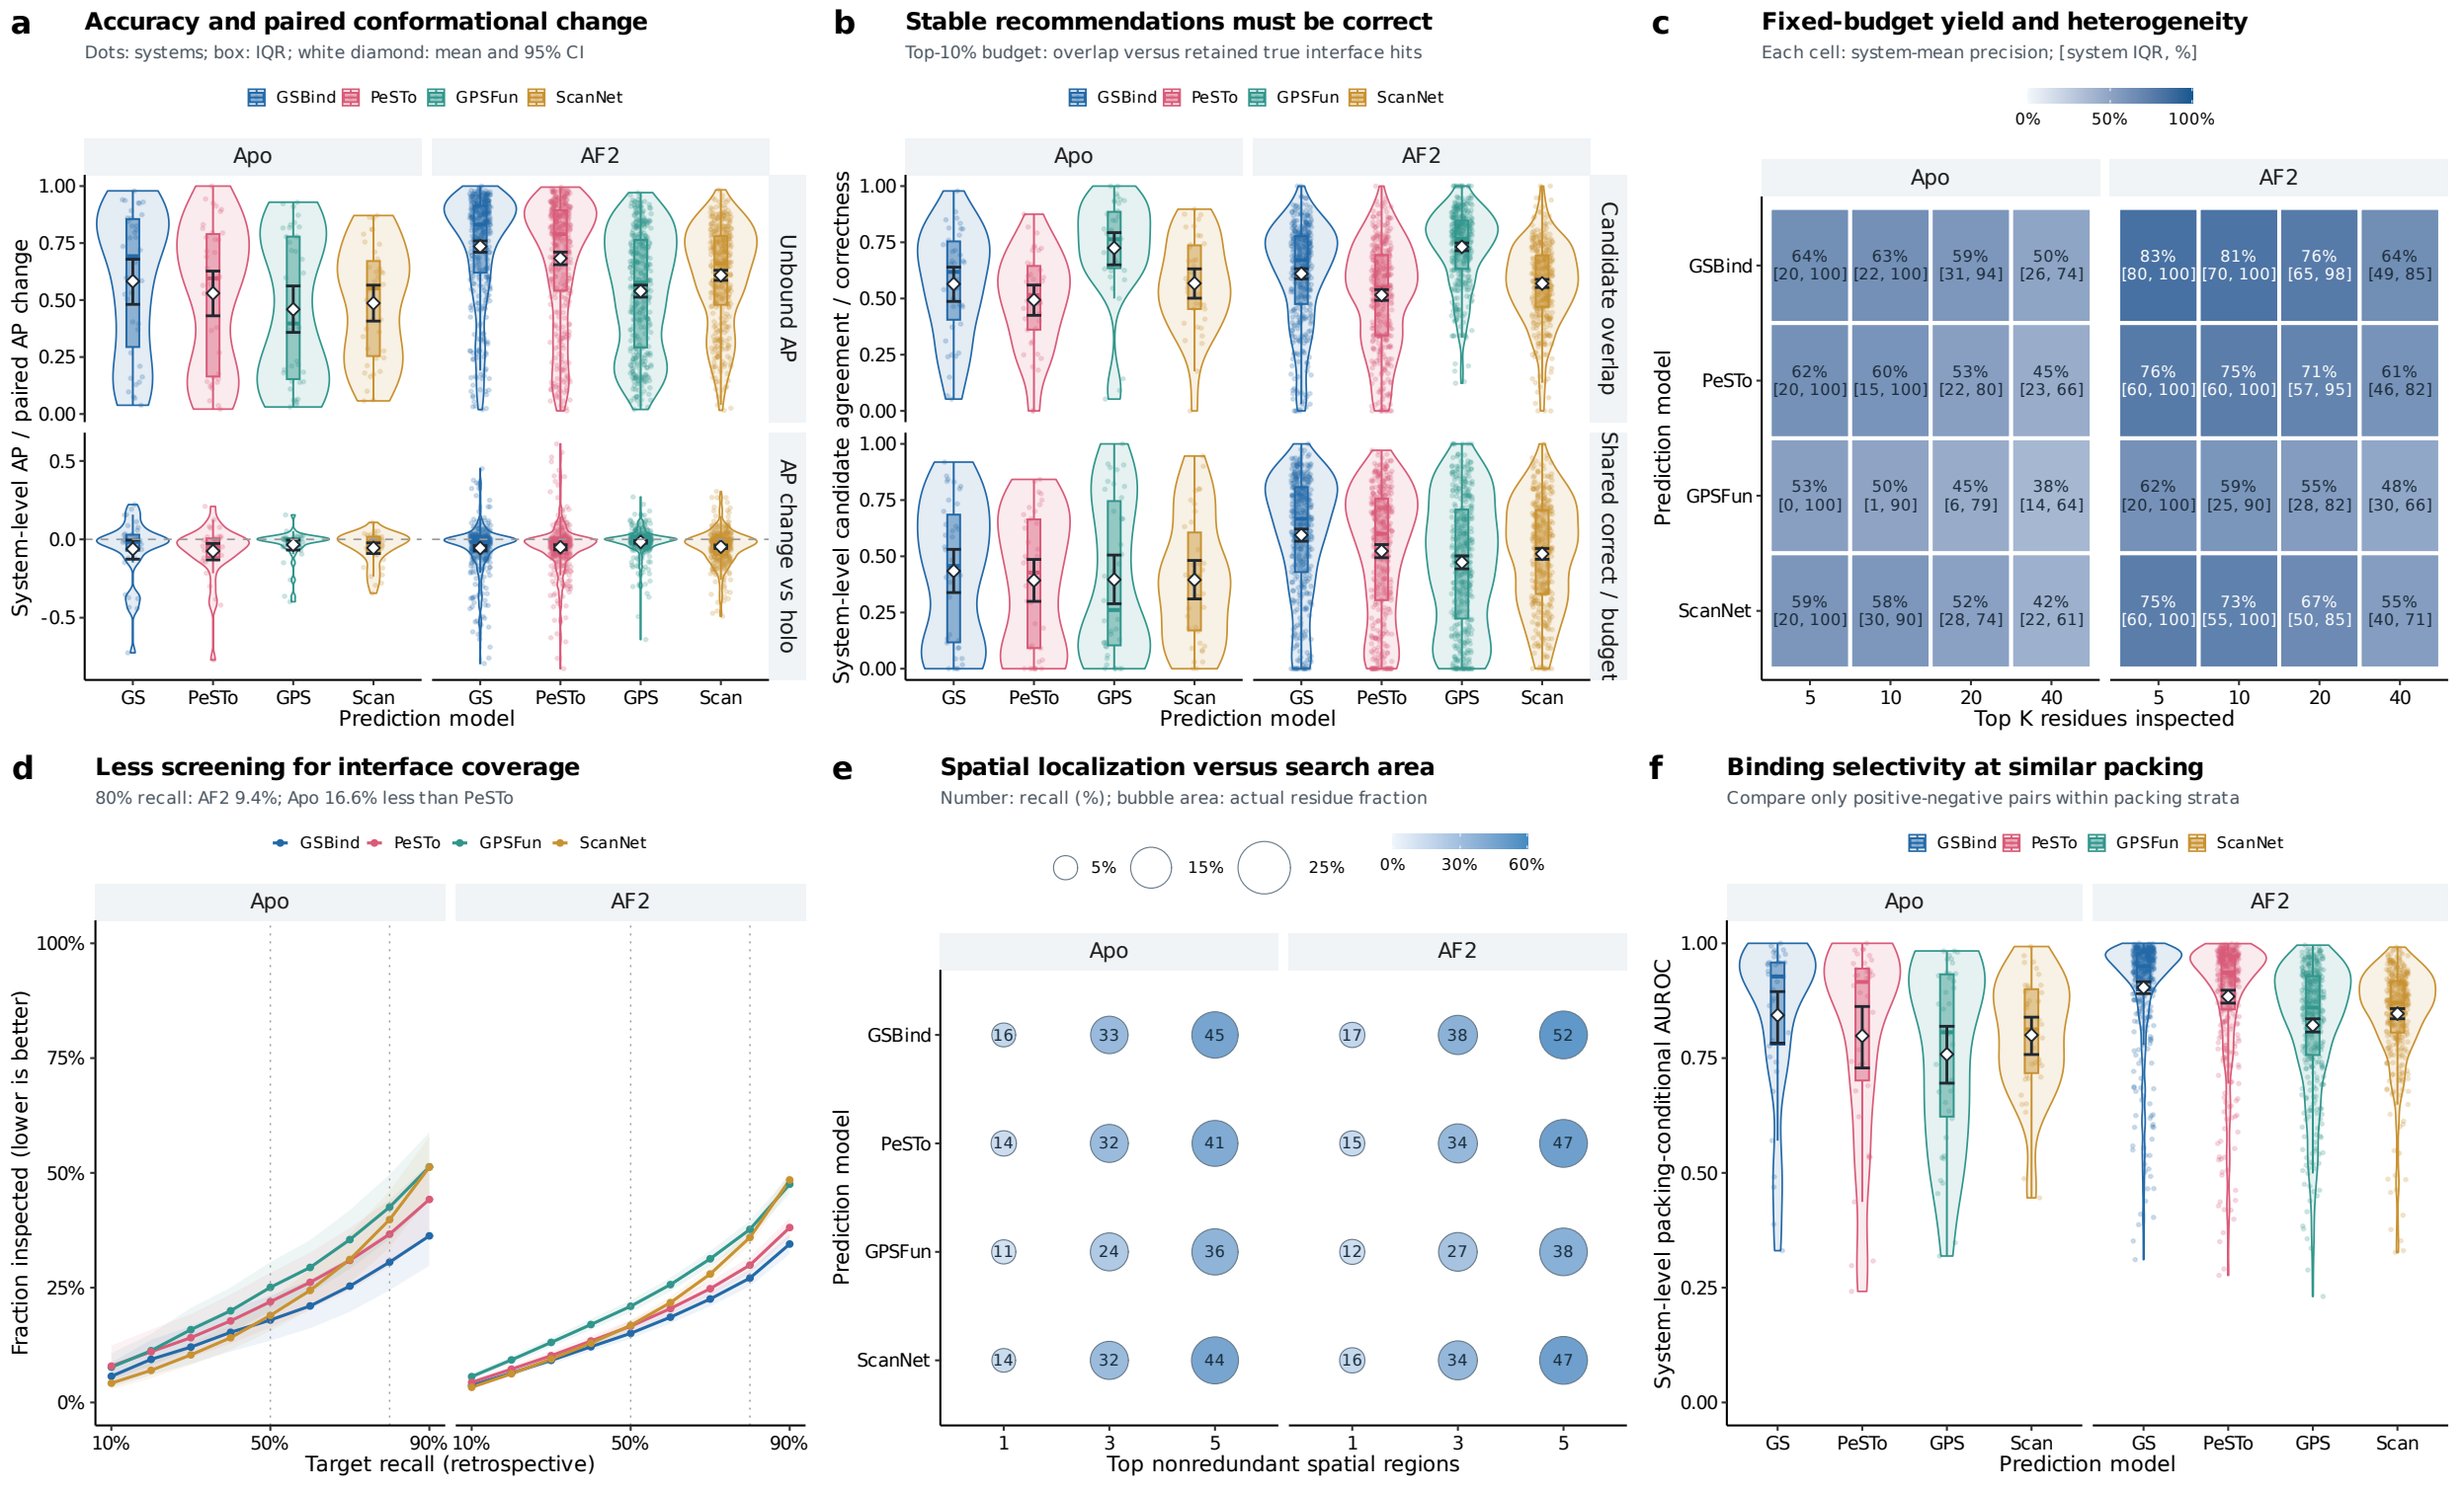

a
Accuracy and paired conformational change
Dots: systems; box: IQR; white diamond: mean and 95% CI
GSBind PeSTo GPSFun ScanNet
Apo
AF2
Unbound AP
AP change vs holo
System-level AP / paired AP change
GS PeSTo GPS Scan
Prediction model
b
Stable recommendations must be correct
Top-10% budget: overlap versus retained true interface hits
Candidate overlap
Shared correct / budget
System-level candidate agreement / correctness
c
Fixed-budget yield and heterogeneity
Each cell: system-mean precision; [system IQR, %]
0% 50% 100%
Prediction model
Top K residues inspected
d
Less screening for interface coverage
80% recall: AF2 9.4%; Apo 16.6% less than PeSTo
Fraction inspected (lower is better)
Target recall (retrospective)
e
Spatial localization versus search area
Number: recall (%); bubble area: actual residue fraction
5% 15% 25%
0% 30% 60%
Top nonredundant spatial regions
f
Binding selectivity at similar packing
Compare only positive-negative pairs within packing strata
System-level packing-conditional AUROC