

HULKI

Generated by Doxygen 1.17.0

Chapter 1

The MIT License (MIT)

Copyright Jörn Zaefferer

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, sublicense, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, subject to the following conditions:

The above copyright notice and this permission notice shall be included in all copies or substantial portions of the Software.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Chapter 2

Directory Hierarchy

2.1 Directories

Api	??
QuotesApiController.cs	??
ShopApiController.cs	??
Controllers	??
Api	??
QuotesApiController.cs	??
ShopApiController.cs	??
AccountController.cs	??
AdminController.cs	??
ConsultationController.cs	??
ForumController.cs	??
HomeController.cs	??
NotificationController.cs	??
PatientController.cs	??
ProfileController.cs	??
StoreController.cs	??
SurveyController.cs	??
TherapyGoalController.cs	??
TherapyGroupController.cs	??
Data	??
ApplicationDbContext.cs	??
StoreDataSeeder.cs	??
Debug	??
net10.0	??
.NETCoreApp,Version=v10.0.AssemblyAttributes.cs	??
Hulki.Web.AssemblyInfo.cs	??
Hulki.Web.GlobalUsings.g.cs	??
Hulki.Web.MvcApplicationPartsAssemblyInfo.cs	??
Hulki.Web.RazorAssemblyInfo.cs	??
Dto	??
QuoteDto.cs	??
ShopItemDto.cs	??
UpdateVisitDetailsDto.cs	??
Hulki	??
Hulki.Web	??
Controllers	??

Api	??
QuotesApiController.cs	??
ShopApiController.cs	??
AccountController.cs	??
AdminController.cs	??
ConsultationController.cs	??
ForumController.cs	??
HomeController.cs	??
NotificationController.cs	??
PatientController.cs	??
ProfileController.cs	??
StoreController.cs	??
SurveyController.cs	??
TherapyGoalController.cs	??
TherapyGroupController.cs	??
Data	??
ApplicationDbContext.cs	??
StoreDataSeeder.cs	??
Migrations	??
20260610135200_InitialCreate.cs	??
20260610135200_InitialCreate.Designer.cs	??
ApplicationDbContextModelSnapshot.cs	??
Models	??
Dto	??
QuoteDto.cs	??
ShopItemDto.cs	??
UpdateVisitDetailsDto.cs	??
AchievementBadge.cs	??
AppUser.cs	??
Consultation.cs	??
ConsultationStatus.cs	??
CreateConsultationDto.cs	??
DailyReport.cs	??
ErrorViewModel.cs	??
FileType.cs	??
ForumCategory.cs	??
ForumPost.cs	??
ForumTopic.cs	??
Game.cs	??
GameSession.cs	??
GameType.cs	??
GoalMilestone.cs	??
GroupMessage.cs	??
GroupQuest.cs	??
GroupResource.cs	??
ItemRarity.cs	??
MoodLog.cs	??
MoodType.cs	??
Notification.cs	??
PatientGroup.cs	??
PatientInventory.cs	??
PointTransaction.cs	??
QuestSubmission.cs	??
ReportAttachment.cs	??
ReportStatus.cs	??
RewardItem.cs	??
Survey.cs	??
SurveyAnswer.cs	??

SurveyQuestion.cs	??
SurveySubmission.cs	??
TherapyGoal.cs	??
TherapyGroup.cs	??
TherapyType.cs	??
UserBadge.cs	??
VisitDetails.cs	??
Wallet.cs	??
obj	??
Debug	??
net10.0	??
.NETCoreApp,Version=v10.0.AssemblyAttributes.cs	??
Hulki.Web.AssemblyInfo.cs	??
Hulki.Web.GlobalUsings.g.cs	??
Hulki.Web.MvcApplicationPartsAssemblyInfo.cs	??
Hulki.Web.RazorAssemblyInfo.cs	??
Services	??
BadgeService.cs	??
ConsultationService.cs	??
IConsultationService.cs	??
IQuoteService.cs	??
IShopService.cs	??
NotificationService.cs	??
PdfReportService.cs	??
QuoteService.cs	??
ShopService.cs	??
SurveyService.cs	??
TherapyGoalService.cs	??
wwwroot	??
lib	??
jquery-validation	??
Program.cs	??
Hulki.Web	??
Controllers	??
Api	??
QuotesApiController.cs	??
ShopApiController.cs	??
AccountController.cs	??
AdminController.cs	??
ConsultationController.cs	??
ForumController.cs	??
HomeController.cs	??
NotificationController.cs	??
PatientController.cs	??
ProfileController.cs	??
StoreController.cs	??
SurveyController.cs	??
TherapyGoalController.cs	??
TherapyGroupController.cs	??
Data	??
ApplicationDbContext.cs	??
StoreDataSeeder.cs	??
Migrations	??
20260610135200_InitialCreate.cs	??
20260610135200_InitialCreate.Designer.cs	??
ApplicationDbContextModelSnapshot.cs	??
Models	??

Dto	??
QuoteDto.cs	??
ShopItemDto.cs	??
UpdateVisitDetailsDto.cs	??
AchievementBadge.cs	??
AppUser.cs	??
Consultation.cs	??
ConsultationStatus.cs	??
CreateConsultationDto.cs	??
DailyReport.cs	??
ErrorViewModel.cs	??
FileType.cs	??
ForumCategory.cs	??
ForumPost.cs	??
ForumTopic.cs	??
Game.cs	??
GameSession.cs	??
GameType.cs	??
GoalMilestone.cs	??
GroupMessage.cs	??
GroupQuest.cs	??
GroupResource.cs	??
ItemRarity.cs	??
MoodLog.cs	??
MoodType.cs	??
Notification.cs	??
PatientGroup.cs	??
PatientInventory.cs	??
PointTransaction.cs	??
QuestSubmission.cs	??
ReportAttachment.cs	??
ReportStatus.cs	??
RewardItem.cs	??
Survey.cs	??
SurveyAnswer.cs	??
SurveyQuestion.cs	??
SurveySubmission.cs	??
TherapyGoal.cs	??
TherapyGroup.cs	??
TherapyType.cs	??
UserBadge.cs	??
VisitDetails.cs	??
Wallet.cs	??
obj	??
Debug	??
net10.0	??
.NETCoreApp,Version=v10.0.AssemblyAttributes.cs	??
Hulki.Web.AssemblyInfo.cs	??
Hulki.Web.GlobalUsings.g.cs	??
Hulki.Web.MvcApplicationPartsAssemblyInfo.cs	??
Hulki.Web.RazorAssemblyInfo.cs	??
Services	??
BadgeService.cs	??
ConsultationService.cs	??
IConsultationService.cs	??
IQuoteService.cs	??
IShopService.cs	??
NotificationService.cs	??

PdfReportService.cs	??
QuoteService.cs	??
ShopService.cs	??
SurveyService.cs	??
TherapyGoalService.cs	??
wwwroot	??
lib	??
jquery-validation	??
Program.cs	??
jquery-validation	??
lib	??
jquery-validation	??
Migrations	??
20260610135200_InitialCreate.cs	??
20260610135200_InitialCreate.Designer.cs	??
ApplicationDbContextModelSnapshot.cs	??
Models	??
Dto	??
QuoteDto.cs	??
ShopItemDto.cs	??
UpdateVisitDetailsDto.cs	??
AchievementBadge.cs	??
AppUser.cs	??
Consultation.cs	??
ConsultationStatus.cs	??
CreateConsultationDto.cs	??
DailyReport.cs	??
ErrorViewModel.cs	??
FileType.cs	??
ForumCategory.cs	??
ForumPost.cs	??
ForumTopic.cs	??
Game.cs	??
GameSession.cs	??
GameType.cs	??
GoalMilestone.cs	??
GroupMessage.cs	??
GroupQuest.cs	??
GroupResource.cs	??
ItemRarity.cs	??
MoodLog.cs	??
MoodType.cs	??
Notification.cs	??
PatientGroup.cs	??
PatientInventory.cs	??
PointTransaction.cs	??
QuestSubmission.cs	??
ReportAttachment.cs	??
ReportStatus.cs	??
RewardItem.cs	??
Survey.cs	??
SurveyAnswer.cs	??
SurveyQuestion.cs	??
SurveySubmission.cs	??
TherapyGoal.cs	??
TherapyGroup.cs	??
TherapyType.cs	??

UserBadge.cs	??
VisitDetails.cs	??
Wallet.cs	??
net10.0	??
.NETCoreApp,Version=v10.0.AssemblyAttributes.cs	??
Hulki.Web.AssemblyInfo.cs	??
Hulki.Web.GlobalUsings.g.cs	??
Hulki.Web.MvcApplicationPartsAssemblyInfo.cs	??
Hulki.Web.RazorAssemblyInfo.cs	??
obj	??
Debug	??
net10.0	??
.NETCoreApp,Version=v10.0.AssemblyAttributes.cs	??
Hulki.Web.AssemblyInfo.cs	??
Hulki.Web.GlobalUsings.g.cs	??
Hulki.Web.MvcApplicationPartsAssemblyInfo.cs	??
Hulki.Web.RazorAssemblyInfo.cs	??
Services	??
BadgeService.cs	??
ConsultationService.cs	??
IConsultationService.cs	??
IQuoteService.cs	??
IShopService.cs	??
NotificationService.cs	??
PdfReportService.cs	??
QuoteService.cs	??
ShopService.cs	??
SurveyService.cs	??
TherapyGoalService.cs	??
wwwroot	??
lib	??
jquery-validation	??

Chapter 3

Namespace Index

3.1 Package List

Here are the packages with brief descriptions (if available):

Hulki	??
Hulki.Web	??
Hulki.Web.Controllers	??
Hulki.Web.Controllers.Api	??
Hulki.Web.Data	??
Hulki.Web.Migrations	??
Hulki.Web.Models	??
Hulki.Web.Models.Dto	??
Hulki.Web.Services	??

Chapter 4

Hierarchical Index

4.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

Hulki.Web.Models.AchievementBadge	??
Hulki.Web.Models.Consultation	??
ConsultationStatus	??
Controller	
Hulki.Web.Controllers.AccountController	??
Hulki.Web.Controllers.AdminController	??
Hulki.Web.Controllers.ConsultationController	??
Hulki.Web.Controllers.ForumController	??
Hulki.Web.Controllers.HomeController	??
Hulki.Web.Controllers.NotificationController	??
Hulki.Web.Controllers.PatientController	??
Hulki.Web.Controllers.ProfileController	??
Hulki.Web.Controllers.StoreController	??
Hulki.Web.Controllers.SurveyController	??
Hulki.Web.Controllers.TherapyGoalController	??
Hulki.Web.Controllers.TherapyGroupController	??
ControllerBase	
Hulki.Web.Controllers.Api.QuotesApiController	??
Hulki.Web.Controllers.Api.ShopApiController	??
Hulki.Web.Models.Dto.CreateConsultationDto	??
Hulki.Web.Models.DailyReport	??
Hulki.Web.Models.ErrorViewModel	??
Hulki.Web.Models.FileType	??
Hulki.Web.Models.ForumCategory	??
Hulki.Web.Models.ForumPost	??
Hulki.Web.Models.ForumTopic	??
Hulki.Web.Models.Game	??
Hulki.Web.Models.GameSession	??
Hulki.Web.Models.GameType	??
Hulki.Web.Models.GoalMilestone	??
Hulki.Web.Models.GroupMessage	??
Hulki.Web.Models.GroupQuest	??
Hulki.Web.Models.GroupResource	??
Hulki.Web.Services.IBadgeService	??
Hulki.Web.Services.BadgeService	??

Hulki.Web.Services.IConsultationService	??
Hulki.Web.Services.ConsultationService	??
IdentityDbContext	
Hulki.Web.Data.ApplicationDbContext	??
IdentityUser	
Hulki.Web.Models.AppUser	??
Hulki.Web.Services.INotificationService	??
Hulki.Web.Services.NotificationService	??
Hulki.Web.Services.IPdfReportService	??
Hulki.Web.Services.PdfReportService	??
Hulki.Web.Services.IQuoteService	??
Hulki.Web.Services.QuoteService	??
Hulki.Web.Services.IShopService	??
Hulki.Web.Services.ShopService	??
Hulki.Web.Services.ISurveyService	??
Hulki.Web.Services.SurveyService	??
Hulki.Web.Models.ItemRarity	??
Hulki.Web.Services.ITherapyGoalService	??
Hulki.Web.Services.TherapyGoalService	??
MedicationDto	??
Migration	
Hulki.Web.Migrations.InitialCreate	??
ModelSnapshot	
Hulki.Web.Migrations.ApplicationDbContextModelSnapshot	??
Hulki.Web.Models.MoodLog	??
Hulki.Web.Models.MoodType	??
Hulki.Web.Models.Notification	??
Hulki.Web.Models.PatientGroup	??
Hulki.Web.Models.PatientInventory	??
Hulki.Web.Models.PointTransaction	??
Hulki.Web.Models.PrescribedMedication	??
Hulki.Web.Models.QuestSubmission	??
Hulki.Web.Models.Dto.QuoteDto	??
Hulki.Web.Models.ReportAttachment	??
Hulki.Web.Models.ReportStatus	??
Hulki.Web.Models.RewardItem	??
Hulki.Web.Models.Dto.ShopItemDto	??
Hulki.Web.Models.Survey	??
Hulki.Web.Models.SurveyAnswer	??
Hulki.Web.Models.SurveyQuestion	??
Hulki.Web.Models.SurveySubmission	??
Hulki.Web.Models.TherapyGoal	??
Hulki.Web.Models.TherapyGroup	??
Hulki.Web.Models.TherapyType	??
UpdateVisitDetailsDto	??
Hulki.Web.Models.UserBadge	??
Hulki.Web.Models.VisitDetails	??
Hulki.Web.Models.Wallet	??

Chapter 5

Class Index

5.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

Hulki.Web.Controllers.AccountController	??
Hulki.Web.Models.AchievementBadge	??
Hulki.Web.Controllers.AdminController	??
Hulki.Web.Data.ApplicationDbContext	??
Hulki.Web.Migrations.ApplicationDbContextModelSnapshot	??
Hulki.Web.Models.AppUser	??
Hulki.Web.Services.BadgeService	??
Hulki.Web.Models.Consultation	??
Hulki.Web.Controllers.ConsultationController	??
Hulki.Web.Services.ConsultationService	??
ConsultationStatus	??
Hulki.Web.Models.Dto.CreateConsultationDto	??
Hulki.Web.Models.DailyReport	??
Hulki.Web.Models.ErrorViewModel	??
Hulki.Web.Models.FileType	??
Hulki.Web.Models.ForumCategory	??
Hulki.Web.Controllers.ForumController	??
Hulki.Web.Models.ForumPost	??
Hulki.Web.Models.ForumTopic	??
Hulki.Web.Models.Game	??
Hulki.Web.Models.GameSession	??
Hulki.Web.Models.GameType	??
Hulki.Web.Models.GoalMilestone	??
Hulki.Web.Models.GroupMessage	??
Hulki.Web.Models.GroupQuest	??
Hulki.Web.Models.GroupResource	??
Hulki.Web.Controllers.HomeController	??
Hulki.Web.Services.IBadgeService	??
Hulki.Web.Services.IConsultationService	??
Hulki.Web.Migrations.InitialCreate	??
??	??
Hulki.Web.Services.INotificationService	??
Hulki.Web.Services.IPdfReportService	??
Hulki.Web.Services.IQuoteService	??
Hulki.Web.Services.IShopService	??

Hulki.Web.Services.ISurveyService	??
Hulki.Web.Models.ItemRarity	??
Hulki.Web.Services.ITherapyGoalService	??
MedicationDto	??
Hulki.Web.Models.MoodLog	??
Hulki.Web.Models.MoodType	??
Hulki.Web.Models.Notification	??
Hulki.Web.Controllers.NotificationController	??
Hulki.Web.Services.NotificationService	??
Hulki.Web.Controllers.PatientController	??
Hulki.Web.Models.PatientGroup	??
Hulki.Web.Models.PatientInventory	??
Hulki.Web.Services.PdfReportService	??
Hulki.Web.Models.PointTransaction	??
Hulki.Web.Models.PrescribedMedication	??
Hulki.Web.Controllers.ProfileController	??
Hulki.Web.Models.QuestSubmission	??
Hulki.Web.Models.Dto.QuoteDto	
Ujednolicony cytat motywacyjny – niezależny od formatu źródła zewnętrznego	??
Hulki.Web.Controllers.Api.QuotesApiController	
Lekki endpoint do pobierania pojedynczego cytatu (używany przez frontend, np. przycisk "Nowy cytat" na stronie głównej)	??
Hulki.Web.Services.QuoteService	??
Hulki.Web.Models.ReportAttachment	??
Hulki.Web.Models.ReportStatus	??
Hulki.Web.Models.RewardItem	??
Hulki.Web.Controllers.Api.ShopApiController	
Publiczne API sklepu. Endpointy są dostępne anonimowo (tylko odczyt oferty), zmień atrybut [AllowAnonymous] na [Authorize], jeśli API ma być chronione	??
Hulki.Web.Models.Dto.ShopItemDto	
DTO zwracane przez publiczne API sklepu (GET /api/shop/items). Nie ujawnia wewnętrznych pól encji (np. FK rzadkości)	??
Hulki.Web.Services.ShopService	??
Hulki.Web.Controllers.StoreController	??
Hulki.Web.Models.Survey	??
Hulki.Web.Models.SurveyAnswer	??
Hulki.Web.Controllers.SurveyController	??
Hulki.Web.Models.SurveyQuestion	??
Hulki.Web.Services.SurveyService	??
Hulki.Web.Models.SurveySubmission	??
Hulki.Web.Models.TherapyGoal	??
Hulki.Web.Controllers.TherapyGoalController	??
Hulki.Web.Services.TherapyGoalService	??
Hulki.Web.Models.TherapyGroup	??
Hulki.Web.Controllers.TherapyGroupController	??
Hulki.Web.Models.TherapyType	??
UpdateVisitDetailsDto	??
Hulki.Web.Models.UserBadge	??
Hulki.Web.Models.VisitDetails	??
Hulki.Web.Models.Wallet	??

Chapter 6

File Index

6.1 File List

Here is a list of all files with brief descriptions:

Hulki/Hulki.Web/ Program.cs	??
Hulki/Hulki.Web/Controllers/ AccountController.cs	??
Hulki/Hulki.Web/Controllers/ AdminController.cs	??
Hulki/Hulki.Web/Controllers/ ConsultationController.cs	??
Hulki/Hulki.Web/Controllers/ ForumController.cs	??
Hulki/Hulki.Web/Controllers/ HomeController.cs	??
Hulki/Hulki.Web/Controllers/ NotificationController.cs	??
Hulki/Hulki.Web/Controllers/ PatientController.cs	??
Hulki/Hulki.Web/Controllers/ ProfileController.cs	??
Hulki/Hulki.Web/Controllers/ StoreController.cs	??
Hulki/Hulki.Web/Controllers/ SurveyController.cs	??
Hulki/Hulki.Web/Controllers/ TherapyGoalController.cs	??
Hulki/Hulki.Web/Controllers/ TherapyGroupController.cs	??
Hulki/Hulki.Web/Controllers/Api/ QuotesApiController.cs	??
Hulki/Hulki.Web/Controllers/Api/ ShopApiController.cs	??
Hulki/Hulki.Web/Data/ ApplicationDbContext.cs	??
Hulki/Hulki.Web/Data/ StoreDataSeeder.cs	??
Hulki/Hulki.Web/Migrations/ 20260610135200_InitialCreate.cs	??
Hulki/Hulki.Web/Migrations/ 20260610135200_InitialCreate.Designer.cs	??
Hulki/Hulki.Web/Migrations/ ApplicationDbContextModelSnapshot.cs	??
Hulki/Hulki.Web/Models/ AchievementBadge.cs	??
Hulki/Hulki.Web/Models/ AppUser.cs	??
Hulki/Hulki.Web/Models/ Consultation.cs	??
Hulki/Hulki.Web/Models/ ConsultationStatus.cs	??
Hulki/Hulki.Web/Models/ CreateConsultationDto.cs	??
Hulki/Hulki.Web/Models/ DailyReport.cs	??
Hulki/Hulki.Web/Models/ ErrorViewModel.cs	??
Hulki/Hulki.Web/Models/ FileType.cs	??
Hulki/Hulki.Web/Models/ ForumCategory.cs	??
Hulki/Hulki.Web/Models/ ForumPost.cs	??
Hulki/Hulki.Web/Models/ ForumTopic.cs	??
Hulki/Hulki.Web/Models/ Game.cs	??
Hulki/Hulki.Web/Models/ GameSession.cs	??
Hulki/Hulki.Web/Models/ GameType.cs	??
Hulki/Hulki.Web/Models/ GoalMilestone.cs	??


Hulki/Hulki.Web/Models/ GroupMessage.cs	??
Hulki/Hulki.Web/Models/ GroupQuest.cs	??
Hulki/Hulki.Web/Models/ GroupResource.cs	??
Hulki/Hulki.Web/Models/ ItemRarity.cs	??
Hulki/Hulki.Web/Models/ MoodLog.cs	??
Hulki/Hulki.Web/Models/ MoodType.cs	??
Hulki/Hulki.Web/Models/ Notification.cs	??
Hulki/Hulki.Web/Models/ PatientGroup.cs	??
Hulki/Hulki.Web/Models/ PatientInventory.cs	??
Hulki/Hulki.Web/Models/ PointTransaction.cs	??
Hulki/Hulki.Web/Models/ QuestSubmission.cs	??
Hulki/Hulki.Web/Models/ ReportAttachment.cs	??
Hulki/Hulki.Web/Models/ ReportStatus.cs	??
Hulki/Hulki.Web/Models/ RewardItem.cs	??
Hulki/Hulki.Web/Models/ Survey.cs	??
Hulki/Hulki.Web/Models/ SurveyAnswer.cs	??
Hulki/Hulki.Web/Models/ SurveyQuestion.cs	??
Hulki/Hulki.Web/Models/ SurveySubmission.cs	??
Hulki/Hulki.Web/Models/ TherapyGoal.cs	??
Hulki/Hulki.Web/Models/ TherapyGroup.cs	??
Hulki/Hulki.Web/Models/ TherapyType.cs	??
Hulki/Hulki.Web/Models/ UserBadge.cs	??
Hulki/Hulki.Web/Models/ VisitDetails.cs	??
Hulki/Hulki.Web/Models/ Wallet.cs	??
Hulki/Hulki.Web/Models/Dto/ QuoteDto.cs	??
Hulki/Hulki.Web/Models/Dto/ ShopItemDto.cs	??
Hulki/Hulki.Web/Models/Dto/ UpdateVisitDetailsDto.cs	??
Hulki/Hulki.Web/obj/Debug/net10.0/ .NETCoreApp,Version=v10.0.AssemblyAttributes.cs	??
Hulki/Hulki.Web/obj/Debug/net10.0/ Hulki.Web.AssemblyInfo.cs	??
Hulki/Hulki.Web/obj/Debug/net10.0/ Hulki.Web.GlobalUsings.g.cs	??
Hulki/Hulki.Web/obj/Debug/net10.0/ Hulki.Web.MvcApplicationPartsAssemblyInfo.cs	??
Hulki/Hulki.Web/obj/Debug/net10.0/ Hulki.Web.RazorAssemblyInfo.cs	??
Hulki/Hulki.Web/Services/ BadgeService.cs	??
Hulki/Hulki.Web/Services/ ConsultationService.cs	??
Hulki/Hulki.Web/Services/ IConsultationService.cs	??
Hulki/Hulki.Web/Services/ IQuoteService.cs	??
Hulki/Hulki.Web/Services/ IShopService.cs	??
Hulki/Hulki.Web/Services/ NotificationService.cs	??
Hulki/Hulki.Web/Services/ PdfReportService.cs	??
Hulki/Hulki.Web/Services/ QuoteService.cs	??
Hulki/Hulki.Web/Services/ ShopService.cs	??
Hulki/Hulki.Web/Services/ SurveyService.cs	??
Hulki/Hulki.Web/Services/ TherapyGoalService.cs	??

Chapter 7

Directory Documentation

7.1 Hulki/Hulki.Web/Controllers/Api Directory Reference

Directory dependency graph for Api:




Files

- file **QuotesApiController.cs**
- file **ShopApiController.cs**

7.2 Hulki/Hulki.Web/Controllers Directory Reference

Directory dependency graph for Controllers:

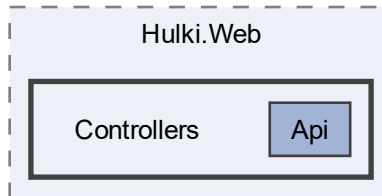

Directories

- directory **Api**

Files

- file **AccountController.cs**
- file **AdminController.cs**
- file **ConsultationController.cs**
- file **ForumController.cs**
- file **HomeController.cs**
- file **NotificationController.cs**
- file **PatientController.cs**
- file **ProfileController.cs**
- file **StoreController.cs**
- file **SurveyController.cs**
- file **TherapyGoalController.cs**
- file **TherapyGroupController.cs**

7.3 Hulki/Hulki.Web/Data Directory Reference

Directory dependency graph for Data:




Files

- file **ApplicationDbContext.cs**
- file **StoreDataSeeder.cs**

7.4 Hulki/Hulki.Web/obj/Debug Directory Reference

Directory dependency graph for Debug:

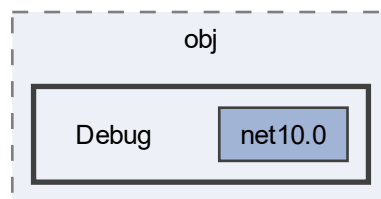**Directories**

- directory **net10.0**

7.5 Hulki/Hulki.Web/Models/Dto Directory Reference

Directory dependency graph for Dto:

**Files**

- file **QuoteDto.cs**
- file **ShopItemDto.cs**
- file **UpdateVisitDetailsDto.cs**

7.6 Hulki Directory Reference

Directories

- directory **Hulki.Web**

7.6.1 Detailed Description

7.6.2 Klinika Hulki – Aplikacja Webowa wspierająca walkę z uzależnieniami

Projekt zaliczeniowy z Programowania aplikacji WWW w technologii .NET realizowany przez zespół w składzie:

- Kacper S
- Kacper H
- Szymon N

7.6.3 Opis Projektu

Aplikacja ma na celu wsparcie pacjentów w procesie wychodzenia z uzależnień poprzez grywalizację, system raportów dziennych, wsparcie społeczności (forum) oraz grupy terapeutyczne. Za codzienne meldunki pacjenci zdobywają punkty, które mogą wymieniać w wewnętrznym sklepie aplikacji.

7.6.4 Architektura i Technologie

Projekt został zbudowany w oparciu o architekturę **BCE (Boundary-Control-Entity)** i wykorzystuje:

- **Backend:** .NET 10 / C#
- **Frontend:** ASP.NET Core MVC (Razor Views, HTML, CSS, Bootstrap)
- **Baza danych:** Microsoft SQL Server (Entity Framework Core)
- **Autentykacja:** ASP.NET Core Identity
- **Generowanie PDF:** QuestPDF

7.6.5 Funkcjonalności systemu

1. **Moduł Pacjenta:** Składanie codziennych raportów, przeglądanie stanu portfela, historia transakcji punktowych.
2. **Grupy Terapeutyczne:** Czat grupowy, wspólne zadania (Questy), ankiety/quizy oraz współdzielone zasoby pomocowe.
3. **Sklep i Grywalizacja:** Kupowanie nagród (kart, zdrapek, ruletki) za punkty zdobyte z raportów.
4. **Forum:** Wymiana doświadczeń, kategorie, wątki oraz posty społeczności.
5. **Panel Administratora:** Zarządzanie kontami pacjentów, edycja przedmiotów w sklepie, weryfikacja przesłanych zgłoszeń i raportów, nadawanie roli Terapeuty.
6. **Konsultacje:** Umawianie wizyt między pacjentem a terapeutą, podgląd szczegółów wizyty i notatek.
7. **Cele Terapeutyczne:** Dodawanie celów z kamieniami milowymi, śledzenie postępów.
8. **Odznaki i Osiągnięcia:** Automatyczne przyznawanie odznak za aktywność (np. ukończone cele, złożone raporty).
9. **Nastroj:** Codzienne logowanie nastroju przez pacjenta.
10. **Ankiety:** Tworzenie i wypełnianie ankiet w ramach grup terapeutycznych.
11. **Powiadomienia:** System powiadomień wewnętrznych dla użytkowników.

7.6.6 Integracje z zewnętrznymi API

System w klasie `QuoteService` wykorzystuje zewnętrzne serwisy przez dedykowane klienty HTTP:

- **ZenQuotes API** (<https://zenquotes.io/api/>) – pobieranie motywacyjnych cytatów dnia (keshowane w pamięci aplikacji).
- **MyMemory API** (<https://api.mymemory.translated.net/>) – automatyczne tłumaczenie pobranych cytatów z języka angielskiego na polski.

7.6.7 Własne API

Aplikacja udostępnia publiczne endpointy REST pod prefiksem `/api/`:

- **GET `/api/quotes/random`** – zwraca losowy cytat motywacyjny (używany przez przycisk „Nowy cytat” na stronie głównej).
- **GET `/api/shop/items`** – zwraca aktualną ofertę przedmiotów sklepu w formacie JSON.
- **@section autotoc_md6 Obsługa załączników** * Pacjent może dołączyć plik (obraz lub PDF) do każdego raportu dziennego. * Terapeuta może wgrywać zasoby pomocowe (pliki) do grup terapeutycznych. * Pliki są przechowywane w folderze `wwwroot/uploads/` i dostępne do pobrania.
- **@section autotoc_md7 Generowanie dokumentów PDF** Aplikacja generuje raporty PDF przy użyciu biblioteki QuestPDF:
 - * **GET `/api/reports/daily`** – lista wpisów pacjenta z opcjonalnym filtrowaniem po datach.
 - * **GET `/api/reports/progress`** – podsumowanie celów terapeutycznych, zdobytych odznak, punktów i konsultacji.
 - * **GET `/api/reports/consultation`** – szczegóły pojedynczej wizyty (dane pacjenta, terapeuta, notatki, zalecenia). Pliki PDF można pobrać bezpośrednio z poziomu panelu pacjenta.
- **@section autotoc_md8 Baza danych – Encje** Aplikacja posiada łącznie 35 encji (+ tabele Identity): 8 słownikowych i 27 niesłownikowych.
- **@subsection autotoc_md9 Encje słownikowe (8)** Encje pomocnicze zawierające stałe wartości/typy używane przez resztę systemu.

Opis

TherapyType

Rodzaj terapii (np. indywidualna, grupowa)

ReportStatus

Status raportu dziennego (np. oczekujący, zatwierdzony)

ItemRarity

Rzadkość przedmiotu w sklepie (np. pospolity, rzadki)

GameType

Typ gry dostępnej w sklepie (np. karta, zdraпка, ruletka)

ForumCategory

Kategoria wątku na forum

FileType

Typ pliku załącznika

MoodType

Typ nastroju (np. dobry, neutralny, zły)

ConsultationStatus (p. ??)

Status konsultacji (np. zaplanowana, zakończona)

7.6.7.1 Encje niesłownikowe (27)

Encje przechowujące właściwe dane aplikacji.

Encja	Opis
TherapyGroup	Grupa terapeutyczna
PatientGroup	Powiązanie pacjenta z grupą (tabela łącząca)
DailyReport	Raport dzienny składany przez pacjenta
ReportAttachment	Załącznik (plik) dołączony do raportu
Wallet	Portfel punktowy pacjenta
PointTransaction	Historia transakcji punktowych
RewardItem	Przedmiot do kupienia w sklepie
PatientInventory	Ekwipunek pacjenta (zakupione nagrody)
Game	Gra dostępna w sklepie
GameSession	Sesja rozgrywki pacjenta
ForumTopic	Wątek na forum


Encja	Opis
ForumPost	Post/odpowiedź w wątku forum
GroupMessage	Wiadomość na czacie grupowym
GroupQuest	Zadanie (quest) przypisane do grupy
QuestSubmission	Odpowiedź pacjenta na zadanie grupowe
GroupResource	Zasób/plik wgrany do grupy przez terapeutę
Consultation	Konsultacja między pacjentem a terapeutą
VisitDetails	Szczegóły wizyty (diagnoza, zalecenia, notatki)
Survey	Ankieta tworzona w grupie
SurveyQuestion	Pytanie w ankiecie
SurveyAnswer	Odpowiedź pacjenta na pytanie ankiety
SurveySubmission	Zgłoszenie wypełnienia ankiety
MoodLog	Dzienny wpis nastroju pacjenta
Notification	Powiadomienie wewnętrzne dla użytkownika
AchievementBadge	Definicja odznaki do zdobycia
UserBadge	Odznaka zdobyta przez pacjenta
TherapyGoal	Cel terapeutyczny pacjenta
GoalMilestone	Kamień milowy w ramach celu terapeutycznego

7.6.8 Pierwsze uruchomienie

- Konfiguracja Bazy Danych:** Upewnij się, że masz poprawnie skonfigurowany `ConnectionString` w pliku `appsettings.json`.
- Automatyczne Migracje:** Przy starcie aplikacja samoczynnie uruchamia `context.Database.MigrateAsync()`, tworząc potrzebne tabele oraz dodając brakujące kolumny.
- Dane Startowe (Seeding):**
 - System automatycznie tworzy rolę `Admin` oraz konto administratora.
 - Dane logowania admina: **Email:** `admin@admin.com` | **Hasło:** `admin123`.
 - Sklep jest automatycznie zasilany początkowymi przedmiotami przez `StoreDataSeeder`.

7.7 Hulki/Hulki.Web Directory Reference

Directory dependency graph for Hulki.Web:

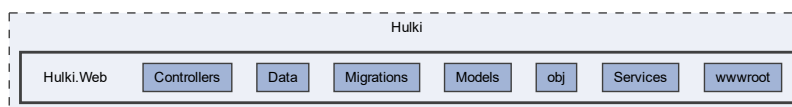

Directories


- directory **Controllers**
- directory **Data**
- directory **Migrations**
- directory **Models**
- directory **obj**
- directory **Services**
- directory **wwwroot**

Files

- file **Program.cs**


7.8 Hulki/Hulki.Web/wwwroot/lib/jquery-validation Directory Reference

Directory dependency graph for jquery-validation:



7.9 Hulki/Hulki.Web/wwwroot/lib Directory Reference

Directory dependency graph for lib:

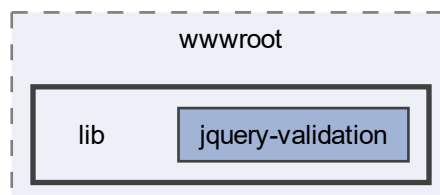


Directories

- directory **jquery-validation**

7.10 Hulki/Hulki.Web/Migrations Directory Reference

Directory dependency graph for Migrations:




Files

- file **20260610135200_InitialCreate.cs**
- file **20260610135200_InitialCreate.Designer.cs**
- file **ApplicationDbContextModelSnapshot.cs**

7.11 Hulki/Hulki.Web/Models Directory Reference

Directory dependency graph for Models:



Directories


- directory **Dto**

Files

- file **AchievementBadge.cs**
- file **AppUser.cs**
- file **Consultation.cs**
- file **ConsultationStatus.cs**
- file **CreateConsultationDto.cs**
- file **DailyReport.cs**
- file **ErrorViewModel.cs**
- file **FileType.cs**
- file **ForumCategory.cs**
- file **ForumPost.cs**
- file **ForumTopic.cs**
- file **Game.cs**
- file **GameSession.cs**
- file **GameType.cs**
- file **GoalMilestone.cs**
- file **GroupMessage.cs**
- file **GroupQuest.cs**
- file **GroupResource.cs**
- file **ItemRarity.cs**
- file **MoodLog.cs**
- file **MoodType.cs**
- file **Notification.cs**
- file **PatientGroup.cs**
- file **PatientInventory.cs**
- file **PointTransaction.cs**
- file **QuestSubmission.cs**
- file **ReportAttachment.cs**
- file **ReportStatus.cs**
- file **RewardItem.cs**
- file **Survey.cs**
- file **SurveyAnswer.cs**
- file **SurveyQuestion.cs**
- file **SurveySubmission.cs**
- file **TherapyGoal.cs**
- file **TherapyGroup.cs**
- file **TherapyType.cs**
- file **UserBadge.cs**
- file **VisitDetails.cs**
- file **Wallet.cs**

7.12 Hulki/Hulki.Web/obj/Debug/net10.0 Directory Reference

Directory dependency graph for net10.0:




Files

- file **.NETCoreApp,Version=v10.0.AssemblyAttributes.cs**
- file **Hulki.Web.AssemblyInfo.cs**
- file **Hulki.Web.GlobalUsings.g.cs**
- file **Hulki.Web.MvcApplicationPartsAssemblyInfo.cs**
- file **Hulki.Web.RazorAssemblyInfo.cs**

7.13 Hulki/Hulki.Web/obj Directory Reference

Directory dependency graph for obj:



Directories

- directory **Debug**

7.14 Hulki/Hulki.Web/Services Directory Reference

Directory dependency graph for Services:




Files

- file **BadgeService.cs**
- file **ConsultationService.cs**
- file **IConsultationService.cs**
- file **IQuoteService.cs**
- file **IShopService.cs**
- file **NotificationService.cs**
- file **PdfReportService.cs**
- file **QuoteService.cs**
- file **ShopService.cs**
- file **SurveyService.cs**
- file **TherapyGoalService.cs**

7.15 Hulki/Hulki.Web/wwwroot Directory Reference

Directory dependency graph for wwwroot:

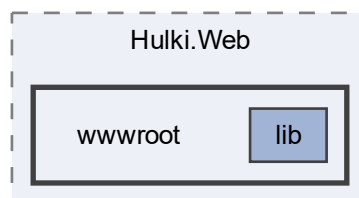

Directories

- directory **lib**

Chapter 8

Namespace Documentation

8.1 Hulki Namespace Reference

Namespaces

- namespace **Web**

8.2 Hulki.Web Namespace Reference

Namespaces

- namespace **Controllers**
- namespace **Data**
- namespace **Migrations**
- namespace **Models**
- namespace **Services**

8.3 Hulki.Web.Controllers Namespace Reference

Namespaces

- namespace **Api**

Classes

- class **AccountController**
- class **AdminController**
- class **ConsultationController**
- class **ForumController**
- class **HomeController**
- class **NotificationController**
- class **PatientController**
- class **ProfileController**
- class **StoreController**
- class **SurveyController**
- class **TherapyGoalController**
- class **TherapyGroupController**

8.4 Hulki.Web.Controllers.Api Namespace Reference

Classes

- class **QuotesApiController**
Lekki endpoint do pobierania pojedynczego cytatu (używany przez frontend, np. przycisk "Nowy cytat" na stronie głównej).
- class **ShopApiController**
Publiczne API sklepu. Endpointy są dostępne anonimowo (tylko odczyt oferty), zmień atrybut [AllowAnonymous] na [Authorize], jeśli API ma być chronione.

8.5 Hulki.Web.Data Namespace Reference

Classes

- class **ApplicationDbContext**
- class **StoreDataSeeder**
*Seeder danych sklepu. Uruchamiany przy starcie aplikacji (**Program.cs** (p. ??)), wypełnia bazę danymi testowymi i przykładowymi nagrodami, gram i rzadkościami.*

8.6 Hulki.Web.Migrations Namespace Reference

Classes

- class **ApplicationDbContextModelSnapshot**
- class **InitialCreate**

8.7 Hulki.Web.Models Namespace Reference

Namespaces

- namespace **Dto**

Classes

- class **AchievementBadge**
- class **AppUser**
- class **Consultation**
- class **DailyReport**
- class **ErrorViewModel**
- class **FileType**
- class **ForumCategory**
- class **ForumPost**
- class **ForumTopic**
- class **Game**
- class **GameSession**
- class **GameType**

- class **GoalMilestone**
- class **GroupMessage**
- class **GroupQuest**
- class **GroupResource**
- class **ItemRarity**
- class **MoodLog**
- class **MoodType**
- class **Notification**
- class **PatientGroup**
- class **PatientInventory**
- class **PointTransaction**
- class **PrescribedMedication**
- class **QuestSubmission**
- class **ReportAttachment**
- class **ReportStatus**
- class **RewardItem**
- class **Survey**
- class **SurveyAnswer**
- class **SurveyQuestion**
- class **SurveySubmission**
- class **TherapyGoal**
- class **TherapyGroup**
- class **TherapyType**
- class **UserBadge**
- class **VisitDetails**
- class **Wallet**

8.8 Hulki.Web.Models.Dto Namespace Reference

Classes

- class **CreateConsultationDto**
- class **QuoteDto**

Ujednolicony cytat motywacyjny – niezależny od formatu źródła zewnętrznego.

- class **ShopItemDto**

DTO zwracane przez publiczne API sklepu (GET /api/shop/items). Nie ujawnia wewnętrznych pól encji (np. FK rzadkości).

8.9 Hulki.Web.Services Namespace Reference

Classes

- class **BadgeService**
- class **ConsultationService**
- interface **IBadgeService**
- interface **IConsultationService**
- interface **INotificationService**
- interface **IPdfReportService**
- interface **IQuoteService**
- interface **IShopService**


- interface **ISurveyService**
- interface **ITherapyGoalService**
- class **NotificationService**
- class **PdfReportService**
- class **QuoteService**
- class **ShopService**
- class **SurveyService**
- class **TherapyGoalService**

Chapter 9


Class Documentation

9.1 Hulki.Web.Controllers.AccountController Class Reference

Inheritance diagram for Hulki.Web.Controllers.AccountController:

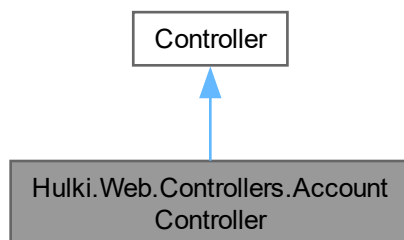

Collaboration diagram for Hulki.Web.Controllers.AccountController:

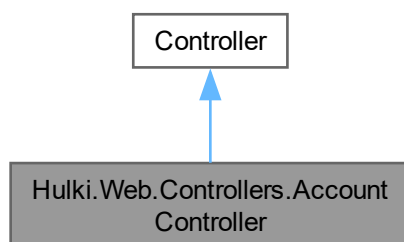

Public Member Functions

- **AccountController** (userManager< **AppUser** > userManager, SignInManager< **AppUser** > signInManager, **ApplicationDbContext** context)
- IActionResult **Register** ()
- async Task< IActionResult > **Register** (string email, string password, string firstName, string lastName)
- async Task< IActionResult > **CheckEmailExists** (string email)
- IActionResult **Login** ()
- async Task< IActionResult > **Login** (string email, string password)
- async Task< IActionResult > **Logout** ()

9.1.1 Constructor & Destructor Documentation

9.1.1.1 AccountController()

```
Hulki.Web.Controllers.AccountController.AccountController (
    UserManager< AppUser > userManager,
    SignInManager< AppUser > signInManager,
    ApplicationDbContext context)
```

9.1.2 Member Function Documentation

9.1.2.1 CheckEmailExists()

```
async Task< IActionResult > Hulki.Web.Controllers.AccountController.CheckEmailExists (
    string email)
```

9.1.2.2 Login() [1/2]

```
IActionResult Hulki.Web.Controllers.AccountController.Login ()
```

9.1.2.3 Login() [2/2]

```
async Task< IActionResult > Hulki.Web.Controllers.AccountController.Login (
    string email,
    string password)
```

9.1.2.4 Logout()

```
async Task< IActionResult > Hulki.Web.Controllers.AccountController.Logout ()
```

9.1.2.5 Register() [1/2]

```
IActionResult Hulki.Web.Controllers.AccountController.Register ()
```

9.1.2.6 Register() [2/2]

```
async Task< IActionResult > Hulki.Web.Controllers.AccountController.Register (
    string email,
    string password,
    string firstName,
    string lastName)
```

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Controllers/ **AccountController.cs**

9.2 Hulki.Web.Models.AchievementBadge Class Reference

Properties

- Guid **Id** [get, set]
- string **Name** [get, set]
- string **Description** [get, set]
- string **IconPath** [get, set]
- string **ConditionType** [get, set]
- int **ConditionValue** [get, set]

9.2.1 Property Documentation

9.2.1.1 ConditionType

```
string Hulki.Web.Models.AchievementBadge.ConditionType [get], [set]
```

9.2.1.2 ConditionValue

```
int Hulki.Web.Models.AchievementBadge.ConditionValue [get], [set]
```

9.2.1.3 Description

```
string Hulki.Web.Models.AchievementBadge.Description [get], [set]
```

9.2.1.4 IconPath

```
string Hulki.Web.Models.AchievementBadge.IconPath [get], [set]
```

9.2.1.5 Id

```
Guid Hulki.Web.Models.AchievementBadge.Id [get], [set]
```

9.2.1.6 Name


```
string Hulki.Web.Models.AchievementBadge.Name [get], [set]
```

The documentation for this class was generated from the following file:


- Hulki/Hulki.Web/Models/ **AchievementBadge.cs**

9.3 Hulki.Web.Controllers.AdminController Class Reference

Inheritance diagram for Hulki.Web.Controllers.AdminController:

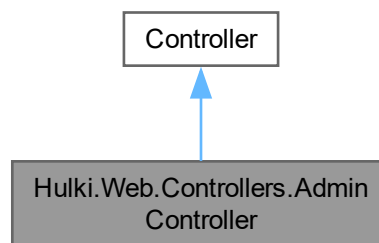

Collaboration diagram for Hulki.Web.Controllers.AdminController:

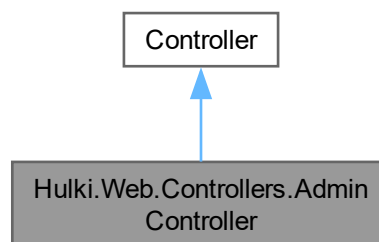

Public Member Functions

- **AdminController** (**ApplicationDbContext** context, UserManager< **AppUser** > userManager, RoleManager< IdentityRole > roleManager, **INotificationService** notificationService)
- async Task< IActionResult > **Index** ()
- async Task< IActionResult > **Patients** (string? search)

- `async Task< IActionResult > PatientDetails` (string id)
- `async Task< IActionResult > AdjustPoints` (string userId, int amount, string? reason)
- `async Task< IActionResult > ToggleLock` (string userId)
- `async Task< IActionResult > ReportDetails` (Guid id)
- `async Task< IActionResult > ApproveReport` (Guid id)
- `async Task< IActionResult > RejectReport` (Guid id)
- `async Task< IActionResult > ToggleTherapist` (string userId, string? returnUrl)
- `async Task< IActionResult > ShopItems` ()
- `async Task< IActionResult > EditRewardItem` (Guid id)
- `async Task< IActionResult > EditRewardItem` (Guid id, string name, string? description, int price, string? iconPath, int itemRarityId)
- `async Task< IActionResult > CreateRewardItem` (string name, string? description, int price, string? iconPath, int itemRarityId)
- `async Task< IActionResult > DeleteRewardItem` (Guid id)

9.3.1 Constructor & Destructor Documentation

9.3.1.1 AdminController()


```
Hulki.Web.Controllers.AdminController.AdminController (
    ApplicationDbContext context,
    UserManager< AppUser > userManager,
    RoleManager< IdentityRole > roleManager,
    INotificationService notificationService)
```

9.3.2 Member Function Documentation

9.3.2.1 AdjustPoints()

```
async Task< IActionResult > Hulki.Web.Controllers.AdminController.AdjustPoints (
    string userId,
    int amount,
    string? reason)
```

Here is the call graph for this function:



9.3.2.2 ApproveReport()

```
async Task< IActionResult > Hulki.Web.Controllers.AdminController.ApproveReport (
    Guid id)
```

9.3.2.3 CreateRewardItem()

```
async Task< IActionResult > Hulki.Web.Controllers.AdminController.CreateRewardItem (
    string name,
    string? description,
    int price,
    string? iconPath,
    int itemRarityId)
```

Here is the call graph for this function:



9.3.2.4 DeleteRewardItem()

```
async Task< IActionResult > Hulki.Web.Controllers.AdminController.DeleteRewardItem (
    Guid id)
```

Here is the call graph for this function:



9.3.2.5 EditRewardItem() [1/2]

```
async Task< IActionResult > Hulki.Web.Controllers.AdminController.EditRewardItem (
    Guid id)
```


9.3.2.6 EditRewardItem() [2/2]

```
async Task< IActionResult > Hulki.Web.Controllers.AdminController.EditRewardItem (
    Guid id,
    string name,
    string? description,
    int price,
    string? iconPath,
    int itemRarityId)
```

Here is the call graph for this function:



9.3.2.7 Index()

```
async Task< IActionResult > Hulki.Web.Controllers.AdminController.Index ()
```


9.3.2.8 PatientDetails()

```
async Task< IActionResult > Hulki.Web.Controllers.AdminController.PatientDetails (
    string id)
```

Here is the call graph for this function:




Here is the caller graph for this function:

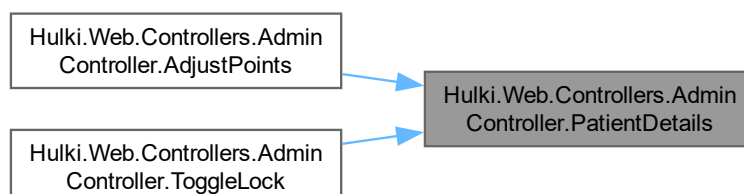

9.3.2.9 Patients()

```
async Task< IActionResult > Hulki.Web.Controllers.AdminController.Patients (
    string? search)
```

Here is the caller graph for this function:

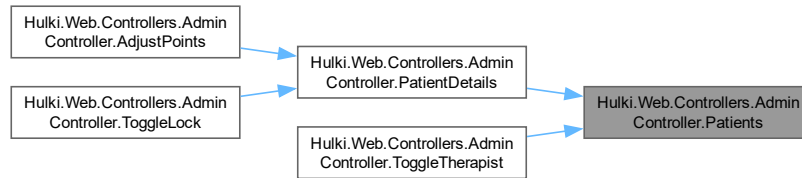

9.3.2.10 RejectReport()

```
async Task< IActionResult > Hulki.Web.Controllers.AdminController.RejectReport (
    Guid id)
```


9.3.2.11 ReportDetails()

```
async Task< IActionResult > Hulki.Web.Controllers.AdminController.ReportDetails (
    Guid id)
```

9.3.2.12 ShopItems()

```
async Task< IActionResult > Hulki.Web.Controllers.AdminController.ShopItems ()
```


Here is the caller graph for this function:

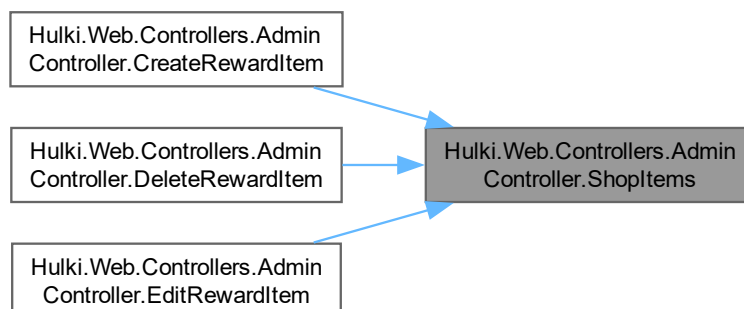

9.3.2.13 ToggleLock()

```
async Task< IActionResult > Hulki.Web.Controllers.AdminController.ToggleLock (
    string userId)
```

Here is the call graph for this function:



9.3.2.14 ToggleTherapist()

```
async Task< IActionResult > Hulki.Web.Controllers.AdminController.ToggleTherapist (
    string userId,
    string? returnUrl)
```

Here is the call graph for this function:




The documentation for this class was generated from the following file:


- Hulki/Hulki.Web/Controllers/ **AdminController.cs**

9.4 Hulki.Web.Data.ApplicationDbContext Class Reference

Inheritance diagram for `Hulki.Web.Data.ApplicationDbContext`:

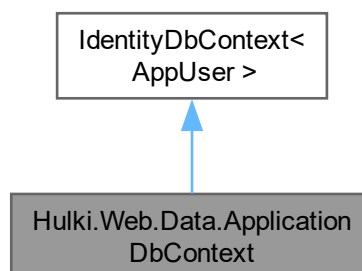

Collaboration diagram for Hulki.Web.Data.ApplicationDbContext:

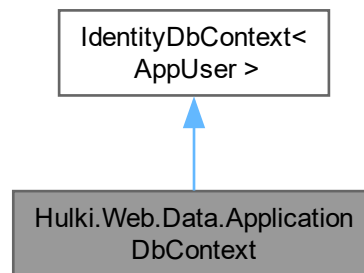

Public Member Functions

- **ApplicationDbContext** (DbContextOptions< ApplicationDbContext > options)

Protected Member Functions

- override void **OnModelCreating** (ModelBuilder builder)

Properties

- DbSet< **TherapyType** > **TherapyTypes** [get, set]
- DbSet< **ReportStatus** > **ReportStatuses** [get, set]
- DbSet< **ItemRarity** > **ItemRarities** [get, set]
- DbSet< **GameType** > **GameTypes** [get, set]
- DbSet< **ForumCategory** > **ForumCategories** [get, set]
- DbSet< **FileType** > **FileTypes** [get, set]
- DbSet< **MoodType** > **MoodTypes** [get, set]
- DbSet< **ConsultationStatus** > **ConsultationStatuses** [get, set]
- DbSet< **TherapyGroup** > **TherapyGroups** [get, set]
- DbSet< **PatientGroup** > **PatientGroups** [get, set]
- DbSet< **DailyReport** > **DailyReports** [get, set]
- DbSet< **ReportAttachment** > **ReportAttachments** [get, set]
- DbSet< **Wallet** > **Wallets** [get, set]
- DbSet< **PointTransaction** > **PointTransactions** [get, set]
- DbSet< **RewardItem** > **RewardItems** [get, set]
- DbSet< **PatientInventory** > **PatientInventories** [get, set]
- DbSet< **Game** > **Games** [get, set]
- DbSet< **GameSession** > **GameSessions** [get, set]
- DbSet< **ForumTopic** > **ForumTopics** [get, set]
- DbSet< **ForumPost** > **ForumPosts** [get, set]
- DbSet< **GroupMessage** > **GroupMessages** [get, set]
- DbSet< **GroupQuest** > **GroupQuests** [get, set]
- DbSet< **QuestSubmission** > **QuestSubmissions** [get, set]
- DbSet< **GroupResource** > **GroupResources** [get, set]

- DbSet< **Consultation** > **Consultations** [get, set]
- DbSet< **Survey** > **Surveys** [get, set]
- DbSet< **SurveyQuestion** > **SurveyQuestions** [get, set]
- DbSet< **SurveyAnswer** > **SurveyAnswers** [get, set]
- DbSet< **SurveySubmission** > **SurveySubmissions** [get, set]
- DbSet< **MoodLog** > **MoodLogs** [get, set]
- DbSet< **Notification** > **Notifications** [get, set]
- DbSet< **AchievementBadge** > **AchievementBadges** [get, set]
- DbSet< **UserBadge** > **UserBadges** [get, set]
- DbSet< **GoalMilestone** > **GoalMilestones** [get, set]
- DbSet< **TherapyGoal** > **TherapyGoals** [get, set]

9.4.1 Constructor & Destructor Documentation

9.4.1.1 ApplicationDbContext()

```
Hulki.Web.Data.ApplicationDbContext.ApplicationDbContext (
    DbContextOptions< ApplicationDbContext > options)
```

9.4.2 Member Function Documentation

9.4.2.1 OnModelCreating()

```
override void Hulki.Web.Data.ApplicationDbContext.OnModelCreating (
    modelBuilder builder) [protected]
```

9.4.3 Property Documentation

9.4.3.1 AchievementBadges

```
DbSet< AchievementBadge> Hulki.Web.Data.ApplicationDbContext.AchievementBadges [get], [set]
```

9.4.3.2 Consultations

```
DbSet< Consultation> Hulki.Web.Data.ApplicationDbContext.Consultations [get], [set]
```

9.4.3.3 ConsultationStatuses

```
DbSet< ConsultationStatus> Hulki.Web.Data.ApplicationDbContext.ConsultationStatuses [get],
[set]
```

9.4.3.4 DailyReports

```
DbSet< DailyReport> Hulki.Web.Data.ApplicationDbContext.DailyReports [get], [set]
```

9.4.3.5 FileTypes

DbSet< **FileType**> Hulki.Web.Data.ApplicationDbContext.FileTypes [get], [set]

9.4.3.6 ForumCategories

DbSet< **ForumCategory**> Hulki.Web.Data.ApplicationDbContext.ForumCategories [get], [set]

9.4.3.7 ForumPosts

DbSet< **ForumPost**> Hulki.Web.Data.ApplicationDbContext.ForumPosts [get], [set]

9.4.3.8 ForumTopics

DbSet< **ForumTopic**> Hulki.Web.Data.ApplicationDbContext.ForumTopics [get], [set]

9.4.3.9 Games

DbSet< **Game**> Hulki.Web.Data.ApplicationDbContext.Games [get], [set]

9.4.3.10 GameSessions

DbSet< **GameSession**> Hulki.Web.Data.ApplicationDbContext.GameSessions [get], [set]

9.4.3.11 GameTypes

DbSet< **GameType**> Hulki.Web.Data.ApplicationDbContext.GameTypes [get], [set]

9.4.3.12 GoalMilestones

DbSet< **GoalMilestone**> Hulki.Web.Data.ApplicationDbContext.GoalMilestones [get], [set]

9.4.3.13 GroupMessages

DbSet< **GroupMessage**> Hulki.Web.Data.ApplicationDbContext.GroupMessages [get], [set]

9.4.3.14 GroupQuests

DbSet< **GroupQuest**> Hulki.Web.Data.ApplicationDbContext.GroupQuests [get], [set]

9.4.3.15 GroupResources

DbSet< **GroupResource**> Hulki.Web.Data.ApplicationDbContext.GroupResources [get], [set]

9.4.3.16 ItemRarities

DbSet< **ItemRarity**> Hulki.Web.Data.ApplicationDbContext.ItemRarities [get], [set]

9.4.3.17 MoodLogs

DbSet< **MoodLog**> Hulki.Web.Data.ApplicationDbContext.MoodLogs [get], [set]

9.4.3.18 MoodTypes

DbSet< **MoodType**> Hulki.Web.Data.ApplicationDbContext.MoodTypes [get], [set]

9.4.3.19 Notifications

DbSet< **Notification**> Hulki.Web.Data.ApplicationDbContext.Notifications [get], [set]

9.4.3.20 PatientGroups

DbSet< **PatientGroup**> Hulki.Web.Data.ApplicationDbContext.PatientGroups [get], [set]

9.4.3.21 PatientInventories

DbSet< **PatientInventory**> Hulki.Web.Data.ApplicationDbContext.PatientInventories [get], [set]

9.4.3.22 PointTransactions

DbSet< **PointTransaction**> Hulki.Web.Data.ApplicationDbContext.PointTransactions [get], [set]

9.4.3.23 QuestSubmissions

DbSet< **QuestSubmission**> Hulki.Web.Data.ApplicationDbContext.QuestSubmissions [get], [set]

9.4.3.24 ReportAttachments

DbSet< **ReportAttachment**> Hulki.Web.Data.ApplicationDbContext.ReportAttachments [get], [set]

9.4.3.25 ReportStatuses

DbSet< **ReportStatus**> Hulki.Web.Data.ApplicationDbContext.ReportStatuses [get], [set]

9.4.3.26 RewardItems

DbSet< **RewardItem**> Hulki.Web.Data.ApplicationDbContext.RewardItems [get], [set]

9.4.3.27 SurveyAnswers

DbSet< **SurveyAnswer**> Hulki.Web.Data.ApplicationDbContext.SurveyAnswers [get], [set]

9.4.3.28 SurveyQuestions

DbSet< **SurveyQuestion**> Hulki.Web.Data.ApplicationDbContext.SurveyQuestions [get], [set]

9.4.3.29 Surveys

DbSet< **Survey**> Hulki.Web.Data.ApplicationDbContext.Surveys [get], [set]

9.4.3.30 SurveySubmissions

DbSet< **SurveySubmission**> Hulki.Web.Data.ApplicationDbContext.SurveySubmissions [get], [set]

9.4.3.31 TherapyGoals

DbSet< **TherapyGoal**> Hulki.Web.Data.ApplicationDbContext.TherapyGoals [get], [set]

9.4.3.32 TherapyGroups

DbSet< **TherapyGroup**> Hulki.Web.Data.ApplicationDbContext.TherapyGroups [get], [set]

9.4.3.33 TherapyTypes

DbSet< **TherapyType**> Hulki.Web.Data.ApplicationDbContext.TherapyTypes [get], [set]

9.4.3.34 UserBadges

DbSet< **UserBadge**> Hulki.Web.Data.ApplicationDbContext.UserBadges [get], [set]

9.4.3.35 Wallets


```
DbSet< Wallet> Hulki.Web.Data.ApplicationDbContext.Wallets [get], [set]
```

The documentation for this class was generated from the following file:


- Hulki/Hulki.Web/Data/ **ApplicationDbContext.cs**

9.5 Hulki.Web.Migrations.ApplicationDbContextModelSnapshot Class Reference

Inheritance diagram for Hulki.Web.Migrations.ApplicationDbContextModelSnapshot:

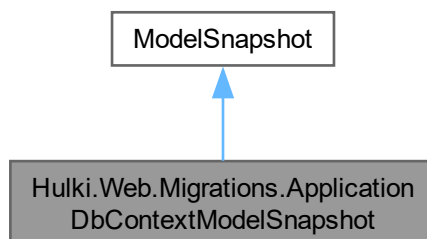

Collaboration diagram for Hulki.Web.Migrations.ApplicationDbContextModelSnapshot:

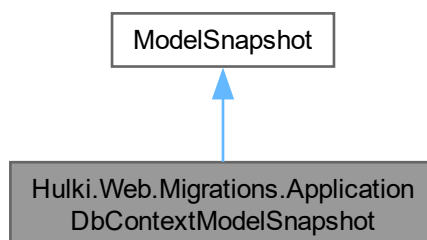

Protected Member Functions

- override void **BuildModel** (ModelBuilder modelBuilder)

9.5.1 Member Function Documentation

9.5.1.1 BuildModel()


```
override void Hulki.Web.Migrations.ApplicationDbContextModelSnapshot.BuildModel (
    modelBuilder modelBuilder) [protected]
```

The documentation for this class was generated from the following file:


- Hulki/Hulki.Web/Migrations/ **ApplicationDbContextModelSnapshot.cs**

9.6 Hulki.Web.Models.AppUser Class Reference

Inheritance diagram for Hulki.Web.Models.AppUser:

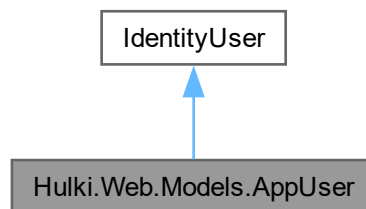

Collaboration diagram for Hulki.Web.Models.AppUser:

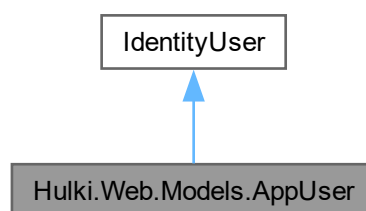

Properties

- string **FirstName** [get, set]
- string **LastName** [get, set]
- bool **IsTherapist** [get, set]
- virtual ICollection< **PatientGroup** > **PatientGroups** [get, set]
- virtual Wallet **Wallet** [get, set]
- virtual ICollection< **DailyReport** > **DailyReports** [get, set]
- virtual ICollection< **PatientInventory** > **InventoryItems** [get, set]

9.6.1 Property Documentation

9.6.1.1 DailyReports

```
virtual ICollection< DailyReport> Hulki.Web.Models.AppUser.DailyReports [get], [set]
```

9.6.1.2 FirstName

```
string Hulki.Web.Models.AppUser.FirstName [get], [set]
```

9.6.1.3 InventoryItems

```
virtual ICollection< PatientInventory> Hulki.Web.Models.AppUser.InventoryItems [get], [set]
```

9.6.1.4 IsTherapist

```
bool Hulki.Web.Models.AppUser.IsTherapist [get], [set]
```

9.6.1.5 LastName

```
string Hulki.Web.Models.AppUser.LastName [get], [set]
```

9.6.1.6 PatientGroups

```
virtual ICollection< PatientGroup> Hulki.Web.Models.AppUser.PatientGroups [get], [set]
```

9.6.1.7 Wallet


```
virtual Wallet Hulki.Web.Models.AppUser.Wallet [get], [set]
```

The documentation for this class was generated from the following file:


- Hulki/Hulki.Web/Models/ **AppUser.cs**

9.7 Hulki.Web.Services.BadgeService Class Reference

Inheritance diagram for Hulki.Web.Services.BadgeService:

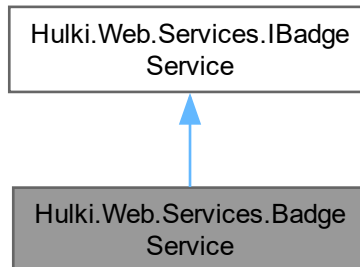

Collaboration diagram for Hulki.Web.Services.BadgeService:

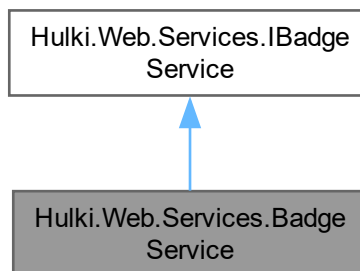

Public Member Functions

- **BadgeService** (**ApplicationDbContext** context, **INotificationService** notificationService)
- async Task< List< **UserBadge** > > **GetUserBadgesAsync** (string userId)
- async Task **CheckAndAwardBadgesAsync** (string userId)

9.7.1 Constructor & Destructor Documentation

9.7.1.1 BadgeService()

```
Hulki.Web.Services.BadgeService.BadgeService (
    ApplicationDbContext context,
    INotificationService notificationService)
```

9.7.2 Member Function Documentation

9.7.2.1 CheckAndAwardBadgesAsync()

```
async Task Hulki.Web.Services.BadgeService.CheckAndAwardBadgesAsync (  
    string userId)
```

Implements **Hulki.Web.Services.IBadgeService** (p. ??).

9.7.2.2 GetUserBadgesAsync()

```
async Task< List< UserBadge > > Hulki.Web.Services.BadgeService.GetUserBadgesAsync (  
    string userId)
```

Implements **Hulki.Web.Services.IBadgeService** (p. ??).

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Services/ **BadgeService.cs**

9.8 Hulki.Web.Models.Consultation Class Reference

Properties

- Guid **Id** [get, set]
- string **PatientId** [get, set]
- virtual **AppUser Patient** [get, set]
- string **TherapistId** [get, set]
- virtual **AppUser Therapist** [get, set]
- DateTime **StartTime** [get, set]
- DateTime **EndTime** [get, set]
- string? **Notes** [get, set]
- int **StatusId** [get, set]
- virtual **ConsultationStatus Status** [get, set]
- **VisitDetails Details** [get, set]

9.8.1 Property Documentation

9.8.1.1 Details

```
VisitDetails Hulki.Web.Models.Consultation.Details [get], [set]
```

9.8.1.2 EndTime

```
DateTime Hulki.Web.Models.Consultation.EndTime [get], [set]
```

9.8.1.3 Id

Guid Hulki.Web.Models.Consultation.Id [get], [set]

9.8.1.4 Notes

string? Hulki.Web.Models.Consultation.Notes [get], [set]

9.8.1.5 Patient

virtual **AppUser** Hulki.Web.Models.Consultation.Patient [get], [set]

9.8.1.6 PatientId

string Hulki.Web.Models.Consultation.PatientId [get], [set]

9.8.1.7 StartTime

DateTime Hulki.Web.Models.Consultation.StartTime [get], [set]

9.8.1.8 Status

virtual **ConsultationStatus** Hulki.Web.Models.Consultation.Status [get], [set]

9.8.1.9 StatusId

int Hulki.Web.Models.Consultation.StatusId [get], [set]

9.8.1.10 Therapist

virtual **AppUser** Hulki.Web.Models.Consultation.Therapist [get], [set]

9.8.1.11 TherapistId


string Hulki.Web.Models.Consultation.TherapistId [get], [set]

The documentation for this class was generated from the following file:


- Hulki/Hulki.Web/Models/ **Consultation.cs**

9.9 Hulki.Web.Controllers.ConsultationController Class Reference

Inheritance diagram for Hulki.Web.Controllers.ConsultationController:

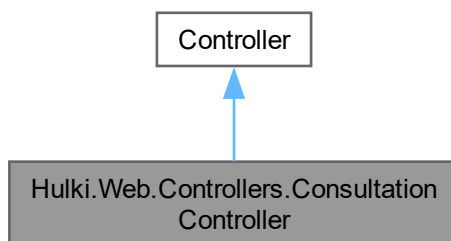

Collaboration diagram for Hulki.Web.Controllers.ConsultationController:

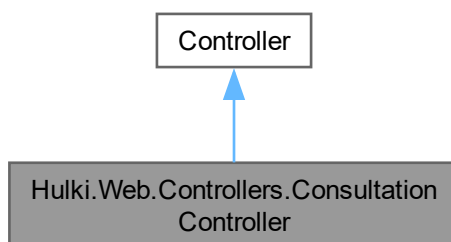

Public Member Functions

- **ConsultationController** (**IConsultationService** consultationService, **UserManager**< **AppUser** > userManager, **ApplicationDbContext** context, **INotificationService** notificationService, **IPdfReportService** pdfReportService)
- **async Task**< **ActionResult** > **Index** ()
- **async Task**< **ActionResult** > **Create** ()
- **async Task**< **ActionResult** > **Create** (**CreateConsultationDto** dto)
- **async Task**< **ActionResult** > **Details** (Guid id)
- **async Task**< **ActionResult** > **SaveDetails** (Guid consultationId, **VisitDetails** detailsFromForm)
- **async Task**< **ActionResult** > **ChangeStatus** (Guid id, int statusId)
- **async Task**< **ActionResult** > **DownloadPdf** (Guid id)

Generuje raport PDF dla pojedynczej konsultacji.

9.9.1 Constructor & Destructor Documentation

9.9.1.1 ConsultationController()

```
Hulki.Web.Controllers.ConsultationController.ConsultationController (
    IConsultationService consultationService,
    UserManager< AppUser > userManager,
    ApplicationDbContext context,
    INotificationService notificationService,
    IPdfReportService pdfReportService)
```

9.9.2 Member Function Documentation

9.9.2.1 ChangeStatus()

```
async Task< IActionResult > Hulki.Web.Controllers.ConsultationController.ChangeStatus (
    Guid id,
    int statusId)
```


Here is the call graph for this function:



9.9.2.2 Create() [1/2]

```
async Task< IActionResult > Hulki.Web.Controllers.ConsultationController.Create ()
```


Here is the caller graph for this function:



9.9.2.3 Create() [2/2]

```
async Task< IActionResult > Hulki.Web.Controllers.ConsultationController.Create (
    CreateConsultationDto dto)
```


Here is the call graph for this function:

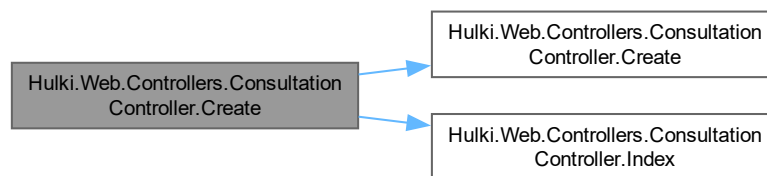

9.9.2.4 Details()

```
async Task< IActionResult > Hulki.Web.Controllers.ConsultationController.Details (
    Guid id)
```

Here is the caller graph for this function:

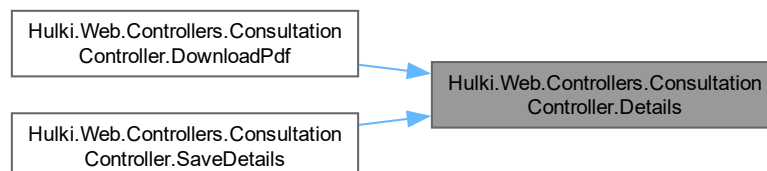


9.9.2.5 DownloadPdf()

```
async Task< IActionResult > Hulki.Web.Controllers.ConsultationController.DownloadPdf (
    Guid id)
```

Generuje raport PDF dla pojedynczej konsultacji.


Here is the call graph for this function:

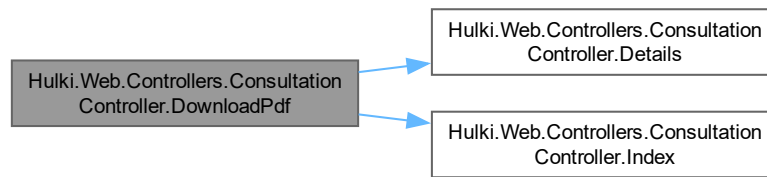

9.9.2.6 Index()

```
async Task< IActionResult > Hulki.Web.Controllers.ConsultationController.Index ()
```

Here is the caller graph for this function:

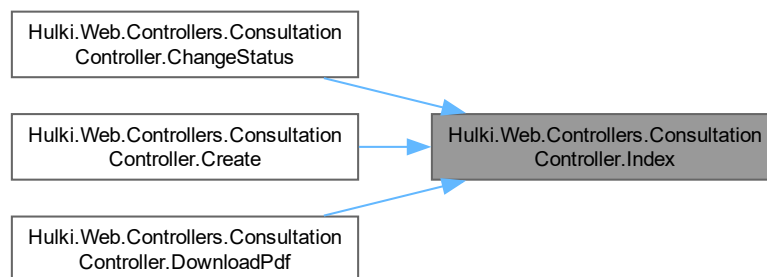

9.9.2.7 SaveDetails()

```
async Task< IActionResult > Hulki.Web.Controllers.ConsultationController.SaveDetails (
    Guid consultationId,
    VisitDetails detailsFromForm)
```

Here is the call graph for this function:




The documentation for this class was generated from the following file:


- Hulki/Hulki.Web/Controllers/ **ConsultationController.cs**

9.10 Hulki.Web.Services.ConsultationService Class Reference

Inheritance diagram for Hulki.Web.Services.ConsultationService:

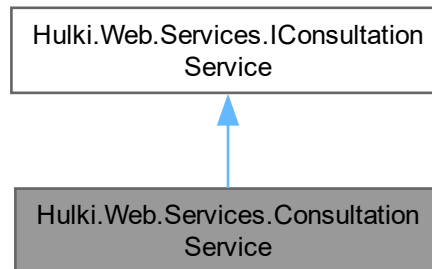

Collaboration diagram for Hulki.Web.Services.ConsultationService:

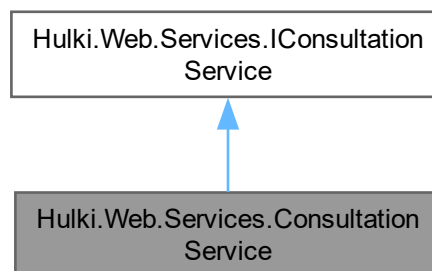

Public Member Functions

- **ConsultationService** (**ApplicationDbContext** context)
- async Task< IEnumerable< **Consultation** > > **GetPatientConsultationsAsync** (string patientId)
- async Task< IEnumerable< **Consultation** > > **GetTherapistConsultationsAsync** (string therapistId)
- async Task **CreateConsultationAsync** (**Consultation** consultation)
- async Task **UpdateStatusAsync** (Guid consultationId, int newStatusId)
- async Task< **Consultation** > **GetConsultationByIdAsync** (Guid id)
- async Task< IEnumerable< **Consultation** > > **GetUserConsultationsAsync** (string userId)
- async Task **UpdateConsultationAsync** (**Consultation** consultation)

9.10.1 Constructor & Destructor Documentation

9.10.1.1 ConsultationService()

```
Hulki.Web.Services.ConsultationService.ConsultationService (
    ApplicationDbContext context)
```

9.10.2 Member Function Documentation

9.10.2.1 CreateConsultationAsync()

```
async Task Hulki.Web.Services.ConsultationService.CreateConsultationAsync (
    Consultation consultation)
```

Implements **Hulki.Web.Services.IConsultationService** (p. ??).

9.10.2.2 GetConsultationByIdAsync()

```
async Task< Consultation > Hulki.Web.Services.ConsultationService.GetConsultationByIdAsync (
    Guid id)
```

Implements **Hulki.Web.Services.IConsultationService** (p. ??).

9.10.2.3 GetPatientConsultationsAsync()

```
async Task< IEnumerable< Consultation > > Hulki.Web.Services.ConsultationService.GetPatient↵
ConsultationsAsync (
    string patientId)
```

Implements **Hulki.Web.Services.IConsultationService** (p. ??).

9.10.2.4 GetTherapistConsultationsAsync()

```
async Task< IEnumerable< Consultation > > Hulki.Web.Services.ConsultationService.GetTherapist↵
ConsultationsAsync (
    string therapistId)
```

Implements **Hulki.Web.Services.IConsultationService** (p. ??).

9.10.2.5 GetUserConsultationsAsync()

```
async Task< IEnumerable< Consultation > > Hulki.Web.Services.ConsultationService.GetUser↵
ConsultationsAsync (
    string userId)
```

Implements **Hulki.Web.Services.IConsultationService** (p. ??).

9.10.2.6 UpdateConsultationAsync()

```
async Task Hulki.Web.Services.ConsultationService.UpdateConsultationAsync (  
    Consultation consultation)
```

Implements **Hulki.Web.Services.IConsultationService** (p. ??).

9.10.2.7 UpdateStatusAsync()

```
async Task Hulki.Web.Services.ConsultationService.UpdateStatusAsync (  
    Guid consultationId,  
    int newStatusId)
```

Implements **Hulki.Web.Services.IConsultationService** (p. ??).

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Services/ **ConsultationService.cs**

9.11 ConsultationStatus Class Reference

Properties

- int **Id** [get, set]
- string **Name** [get, set]

9.11.1 Property Documentation

9.11.1.1 Id

```
int ConsultationStatus.Id [get], [set]
```

9.11.1.2 Name

```
string ConsultationStatus.Name [get], [set]
```

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/ **ConsultationStatus.cs**

9.12 Hulki.Web.Models.Dto.CreateConsultationDto Class Reference

Properties

- string **TargetUserId** [get, set]
- DateTime **StartTime** = DateTime.Now.AddDays(1) [get, set]
- DateTime **EndTime** = DateTime.Now.AddDays(1).AddHours(1) [get, set]
- string? **Notes** [get, set]

9.12.1 Property Documentation

9.12.1.1 EndTime

```
DateTime Hulki.Web.Models.Dto.CreateConsultationDto.EndTime = DateTime.Now.AddDays(1).AddHours(1) [get], [set]
```

9.12.1.2 Notes

```
string? Hulki.Web.Models.Dto.CreateConsultationDto.Notes [get], [set]
```

9.12.1.3 StartTime

```
DateTime Hulki.Web.Models.Dto.CreateConsultationDto.StartTime = DateTime.Now.AddDays(1) [get], [set]
```

9.12.1.4 TargetUserId

```
string Hulki.Web.Models.Dto.CreateConsultationDto.TargetUserId [get], [set]
```

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/ **CreateConsultationDto.cs**

9.13 Hulki.Web.Models.DailyReport Class Reference

Properties

- Guid **Id** [get, set]
- string **Content** [get, set]
- DateTime **CreatedAt** = DateTime.Now [get, set]
- int **ReportStatusId** [get, set]
- virtual ReportStatus **ReportStatus** [get, set]
- string **AppUserId** [get, set]
- virtual AppUser **AppUser** [get, set]
- virtual ICollection< **ReportAttachment** > **ReportAttachments** = new List< **ReportAttachment**>() [get, set]

9.13.1 Property Documentation

9.13.1.1 AppUser

```
virtual AppUser Hulki.Web.Models.DailyReport.AppUser [get], [set]
```

9.13.1.2 AppUserId

```
string Hulki.Web.Models.DailyReport.AppUserId [get], [set]
```

9.13.1.3 Content

```
string Hulki.Web.Models.DailyReport.Content [get], [set]
```

9.13.1.4 CreatedAt

```
DateTime Hulki.Web.Models.DailyReport.CreatedAt = DateTime.Now [get], [set]
```

9.13.1.5 Id

```
Guid Hulki.Web.Models.DailyReport.Id [get], [set]
```

9.13.1.6 ReportAttachments

```
virtual ICollection< ReportAttachment> Hulki.Web.Models.DailyReport.ReportAttachments = new  
List< ReportAttachment>() [get], [set]
```

9.13.1.7 ReportStatus

```
virtual ReportStatus Hulki.Web.Models.DailyReport.ReportStatus [get], [set]
```

9.13.1.8 ReportStatusId

```
int Hulki.Web.Models.DailyReport.ReportStatusId [get], [set]
```

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/ **DailyReport.cs**

9.14 Hulki.Web.Models.ErrorViewModel Class Reference

Properties

- string? **RequestId** [get, set]
- bool **ShowRequestId** [get]

9.14.1 Property Documentation

9.14.1.1 RequestId

```
string? Hulki.Web.Models.ErrorViewModel.RequestId [get], [set]
```

9.14.1.2 ShowRequestId

```
bool Hulki.Web.Models.ErrorViewModel.ShowRequestId [get]
```

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/ **ErrorViewModel.cs**

9.15 Hulki.Web.Models.FileType Class Reference

Properties

- int **Id** [get, set]
- string **Name** [get, set]
- string **Extension** [get, set]
- virtual ? ICollection< **ReportAttachment** > **ReportAttachments** [get, set]

9.15.1 Property Documentation

9.15.1.1 Extension

```
string Hulki.Web.Models.FileType.Extension [get], [set]
```

9.15.1.2 Id

```
int Hulki.Web.Models.FileType.Id [get], [set]
```

9.15.1.3 Name

```
string Hulki.Web.Models.FileType.Name [get], [set]
```

9.15.1.4 ReportAttachments

```
virtual ? ICollection< ReportAttachment> Hulki.Web.Models.FileType.ReportAttachments [get], [set]
```

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/ **FileType.cs**

9.16 Hulki.Web.Models.ForumCategory Class Reference

Properties

- `int Id` [get, set]
- `string Name` [get, set]
- `string? Description` [get, set]
- `virtual ? ICollection< ForumTopic > ForumTopics` [get, set]

9.16.1 Property Documentation

9.16.1.1 Description

`string? Hulki.Web.Models.ForumCategory.Description` [get], [set]

9.16.1.2 ForumTopics

`virtual ? ICollection< ForumTopic> Hulki.Web.Models.ForumCategory.ForumTopics` [get], [set]

9.16.1.3 Id

`int Hulki.Web.Models.ForumCategory.Id` [get], [set]

9.16.1.4 Name


`string Hulki.Web.Models.ForumCategory.Name` [get], [set]

The documentation for this class was generated from the following file:


- `Hulki/Hulki.Web/Models/ ForumCategory.cs`

9.17 Hulki.Web.Controllers.ForumController Class Reference

Inheritance diagram for Hulki.Web.Controllers.ForumController:

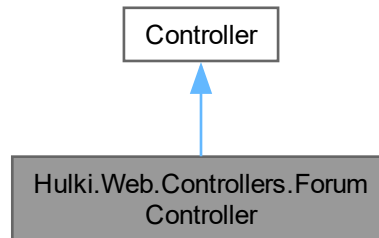

Collaboration diagram for Hulki.Web.Controllers.ForumController:



Public Member Functions

- **ForumController** (**ApplicationDbContext** context, UserManager< **AppUser** > userManager, **INotificationService** notificationService)
- async Task< IActionResult > **Index** ()
- async Task< IActionResult > **Category** (int id)
- async Task< IActionResult > **Topic** (Guid id)
- async Task< IActionResult > **CreateTopic** (int categoryId)
- async Task< IActionResult > **CreateTopic** (int forumCategoryId, string title, string content)
- async Task< IActionResult > **CreatePost** (Guid forumTopicId, string content)
- IActionResult **CreateCategory** ()
- async Task< IActionResult > **CreateCategory** (string name, string? description)

9.17.1 Constructor & Destructor Documentation

9.17.1.1 ForumController()

```
Hulki.Web.Controllers.ForumController.ForumController (
    ApplicationDbContext context,
    UserManager< AppUser > userManager,
    INotificationService notificationService)
```

9.17.2 Member Function Documentation

9.17.2.1 Category()

```
async Task< IActionResult > Hulki.Web.Controllers.ForumController.Category (
    int id)
```

9.17.2.2 CreateCategory() [1/2]

```
IActionResult Hulki.Web.Controllers.ForumController.CreateCategory ()
```

9.17.2.3 CreateCategory() [2/2]

```
async Task< IActionResult > Hulki.Web.Controllers.ForumController.CreateCategory (
    string name,
    string? description)
```


Here is the call graph for this function:



9.17.2.4 CreatePost()

```
async Task< IActionResult > Hulki.Web.Controllers.ForumController.CreatePost (
    Guid forumTopicId,
    string content)
```


Here is the call graph for this function:



9.17.2.5 CreateTopic() [1/2]

```
async Task< IActionResult > Hulki.Web.Controllers.ForumController.CreateTopic (  
    int categoryId)
```


Here is the caller graph for this function:



9.17.2.6 CreateTopic() [2/2]

```
async Task< IActionResult > Hulki.Web.Controllers.ForumController.CreateTopic (  
    int forumCategoryId,  
    string title,  
    string content)
```


Here is the call graph for this function:

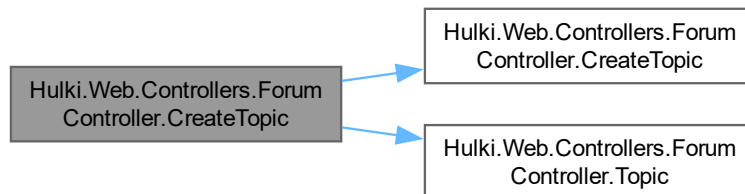

9.17.2.7 Index()

```
async Task< IActionResult > Hulki.Web.Controllers.ForumController.Index ()
```


Here is the caller graph for this function:



9.17.2.8 Topic()

```
async Task< IActionResult > Hulki.Web.Controllers.ForumController.Topic (
    Guid id)
```

Here is the caller graph for this function:

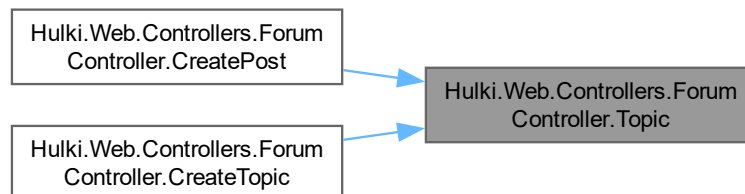

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Controllers/ **ForumController.cs**

9.18 Hulki.Web.Models.ForumPost Class Reference

Properties

- Guid **Id** [get, set]
- string **Content** [get, set]
- DateTime **CreatedAt** = DateTime.Now [get, set]
- string **AppUserId** [get, set]
- virtual AppUser **AppUser** [get, set]
- Guid **ForumTopicId** [get, set]
- virtual ForumTopic **ForumTopic** [get, set]

9.18.1 Property Documentation

9.18.1.1 AppUser

```
virtual AppUser Hulki.Web.Models.ForumPost.AppUser [get], [set]
```

9.18.1.2 AppUserId

```
string Hulki.Web.Models.ForumPost.AppUserId [get], [set]
```

9.18.1.3 Content

```
string Hulki.Web.Models.ForumPost.Content [get], [set]
```

9.18.1.4 CreatedAt

```
DateTime Hulki.Web.Models.ForumPost.CreatedAt = DateTime.Now [get], [set]
```

9.18.1.5 ForumTopic

```
virtual ForumTopic Hulki.Web.Models.ForumPost.ForumTopic [get], [set]
```

9.18.1.6 ForumTopicId

```
Guid Hulki.Web.Models.ForumPost.ForumTopicId [get], [set]
```

9.18.1.7 Id

```
Guid Hulki.Web.Models.ForumPost.Id [get], [set]
```

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/ **ForumPost.cs**

9.19 Hulki.Web.Models.ForumTopic Class Reference

Properties

- Guid **Id** [get, set]
- string **Title** [get, set]
- string **Content** [get, set]
- DateTime **CreatedAt** = DateTime.Now [get, set]
- string **AppUserId** [get, set]
- virtual AppUser **AppUser** [get, set]
- int **ForumCategoryId** [get, set]
- virtual ForumCategory **ForumCategory** [get, set]
- virtual ICollection< **ForumPost** > **Posts** [get, set]

9.19.1 Property Documentation

9.19.1.1 AppUser

```
virtual AppUser Hulki.Web.Models.ForumTopic.AppUser [get], [set]
```

9.19.1.2 AppUserId

```
string Hulki.Web.Models.ForumTopic.AppUserId [get], [set]
```

9.19.1.3 Content

```
string Hulki.Web.Models.ForumTopic.Content [get], [set]
```

9.19.1.4 CreatedAt

```
DateTime Hulki.Web.Models.ForumTopic.CreatedAt = DateTime.Now [get], [set]
```

9.19.1.5 ForumCategory

```
virtual ForumCategory Hulki.Web.Models.ForumTopic.ForumCategory [get], [set]
```

9.19.1.6 ForumCategoryId

```
int Hulki.Web.Models.ForumTopic.ForumCategoryId [get], [set]
```

9.19.1.7 Id

```
Guid Hulki.Web.Models.ForumTopic.Id [get], [set]
```

9.19.1.8 Posts

```
virtual ICollection< ForumPost> Hulki.Web.Models.ForumTopic.Posts [get], [set]
```

9.19.1.9 Title

```
string Hulki.Web.Models.ForumTopic.Title [get], [set]
```

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/ **ForumTopic.cs**

9.20 Hulki.Web.Models.Game Class Reference

Properties

- Guid **Id** [get, set]
- string **Name** [get, set]
- string? **Description** [get, set]
- int **Cost** [get, set]
- int **GameTypeId** [get, set]
- virtual GameType **GameType** [get, set]

9.20.1 Property Documentation

9.20.1.1 Cost

```
int Hulki.Web.Models.Game.Cost [get], [set]
```

9.20.1.2 Description

```
string? Hulki.Web.Models.Game.Description [get], [set]
```

9.20.1.3 GameType

```
virtual GameType Hulki.Web.Models.Game.GameType [get], [set]
```

9.20.1.4 GameTypeId

```
int Hulki.Web.Models.Game.GameTypeId [get], [set]
```

9.20.1.5 Id

```
Guid Hulki.Web.Models.Game.Id [get], [set]
```

9.20.1.6 Name

```
string Hulki.Web.Models.Game.Name [get], [set]
```

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/ **Game.cs**

9.21 Hulki.Web.Models.GameSession Class Reference

Properties

- Guid **Id** [get, set]
- DateTime **PlayedAt** = DateTime.Now [get, set]
- string **AppUserId** [get, set]
- virtual AppUser **AppUser** [get, set]
- Guid **GameId** [get, set]
- virtual Game **Game** [get, set]

9.21.1 Property Documentation

9.21.1.1 AppUser

virtual AppUser Hulki.Web.Models.GameSession.AppUser [get], [set]

9.21.1.2 AppUserId

string Hulki.Web.Models.GameSession.AppUserId [get], [set]

9.21.1.3 Game

virtual Game Hulki.Web.Models.GameSession.Game [get], [set]

9.21.1.4 Gameld

Guid Hulki.Web.Models.GameSession.GameId [get], [set]

9.21.1.5 Id

Guid Hulki.Web.Models.GameSession.Id [get], [set]

9.21.1.6 PlayedAt

DateTime Hulki.Web.Models.GameSession.PlayedAt = DateTime.Now [get], [set]

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/ **GameSession.cs**

9.22 Hulki.Web.Models.GameType Class Reference

Properties

- int **Id** [get, set]
- string **Name** [get, set]
- string? **Description** [get, set]
- virtual ICollection< **Game** > **Games** [get, set]

9.22.1 Property Documentation

9.22.1.1 Description

string? Hulki.Web.Models.GameType.Description [get], [set]

9.22.1.2 Games

```
virtual ? ICollection< Game> Hulki.Web.Models.GameType.Games [get], [set]
```

9.22.1.3 Id

```
int Hulki.Web.Models.GameType.Id [get], [set]
```

9.22.1.4 Name

```
string Hulki.Web.Models.GameType.Name [get], [set]
```

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/ **GameType.cs**

9.23 Hulki.Web.Models.GoalMilestone Class Reference

Properties

- Guid **Id** [get, set]
- Guid **GoalId** [get, set]
- virtual **TherapyGoal Goal** [get, set]
- string **Description** [get, set]
- bool **IsCompleted** [get, set]

9.23.1 Property Documentation

9.23.1.1 Description

```
string Hulki.Web.Models.GoalMilestone.Description [get], [set]
```

9.23.1.2 Goal

```
virtual TherapyGoal Hulki.Web.Models.GoalMilestone.Goal [get], [set]
```

9.23.1.3 GoalId

```
Guid Hulki.Web.Models.GoalMilestone.GoalId [get], [set]
```

9.23.1.4 Id

```
Guid Hulki.Web.Models.GoalMilestone.Id [get], [set]
```

9.23.1.5 IsCompleted

```
bool Hulki.Web.Models.GoalMilestone.IsCompleted [get], [set]
```

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/ **GoalMilestone.cs**

9.24 Hulki.Web.Models.GroupMessage Class Reference

Properties

- int **Id** [get, set]
- string **Content** [get, set]
- DateTime **CreatedAt** = DateTime.Now [get, set]
- string **AppUserId** [get, set]
- virtual AppUser **AppUser** [get, set]
- int **TherapyGroupId** [get, set]
- virtual TherapyGroup **TherapyGroup** [get, set]

9.24.1 Property Documentation

9.24.1.1 AppUser

```
virtual AppUser Hulki.Web.Models.GroupMessage.AppUser [get], [set]
```

9.24.1.2 AppUserId

```
string Hulki.Web.Models.GroupMessage.AppUserId [get], [set]
```

9.24.1.3 Content

```
string Hulki.Web.Models.GroupMessage.Content [get], [set]
```

9.24.1.4 CreatedAt

```
DateTime Hulki.Web.Models.GroupMessage.CreatedAt = DateTime.Now [get], [set]
```

9.24.1.5 Id

```
int Hulki.Web.Models.GroupMessage.Id [get], [set]
```

9.24.1.6 TherapyGroup

```
virtual TherapyGroup Hulki.Web.Models.GroupMessage.TherapyGroup [get], [set]
```

9.24.1.7 TherapyGroupId

```
int Hulki.Web.Models.GroupMessage.TherapyGroupId [get], [set]
```

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/ **GroupMessage.cs**

9.25 Hulki.Web.Models.GroupQuest Class Reference

Properties

- int **Id** [get, set]
- int **TherapyGroupId** [get, set]
- virtual TherapyGroup **TherapyGroup** [get, set]
- string **Title** [get, set]
- string **Description** [get, set]
- string **QuestType** [get, set]
- int **RewardPoints** [get, set]
- DateTime **CreatedAt** = DateTime.Now [get, set]
- string? **OptionA** [get, set]
- string? **OptionB** [get, set]
- string? **OptionC** [get, set]
- string? **OptionD** [get, set]
- string? **CorrectOption** [get, set]
- virtual ICollection< **QuestSubmission** > **Submissions** [get, set]

9.25.1 Property Documentation

9.25.1.1 CorrectOption

```
string? Hulki.Web.Models.GroupQuest.CorrectOption [get], [set]
```

9.25.1.2 CreatedAt

```
DateTime Hulki.Web.Models.GroupQuest.CreatedAt = DateTime.Now [get], [set]
```

9.25.1.3 Description

```
string Hulki.Web.Models.GroupQuest.Description [get], [set]
```

9.25.1.4 Id

```
int Hulki.Web.Models.GroupQuest.Id [get], [set]
```

9.25.1.5 OptionA

```
string? Hulki.Web.Models.GroupQuest.OptionA [get], [set]
```

9.25.1.6 OptionB

```
string? Hulki.Web.Models.GroupQuest.OptionB [get], [set]
```

9.25.1.7 OptionC

```
string? Hulki.Web.Models.GroupQuest.OptionC [get], [set]
```

9.25.1.8 OptionD

```
string? Hulki.Web.Models.GroupQuest.OptionD [get], [set]
```

9.25.1.9 QuestType

```
string Hulki.Web.Models.GroupQuest.QuestType [get], [set]
```

9.25.1.10 RewardPoints

```
int Hulki.Web.Models.GroupQuest.RewardPoints [get], [set]
```

9.25.1.11 Submissions

```
virtual ICollection< QuestSubmission> Hulki.Web.Models.GroupQuest.Submissions [get], [set]
```

9.25.1.12 TherapyGroup

```
virtual TherapyGroup Hulki.Web.Models.GroupQuest.TherapyGroup [get], [set]
```

9.25.1.13 TherapyGroupId

```
int Hulki.Web.Models.GroupQuest.TherapyGroupId [get], [set]
```

9.25.1.14 Title

```
string Hulki.Web.Models.GroupQuest.Title [get], [set]
```

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/ **GroupQuest.cs**

9.26 Hulki.Web.Models.GroupResource Class Reference

Properties

- int **Id** [get, set]
- string **Title** [get, set]
- string **FilePath** [get, set]
- DateTime **CreatedAt** = DateTime.Now [get, set]
- int **TherapyGroupId** [get, set]
- virtual TherapyGroup **TherapyGroup** [get, set]

9.26.1 Property Documentation

9.26.1.1 CreatedAt

```
DateTime Hulki.Web.Models.GroupResource.CreatedAt = DateTime.Now [get], [set]
```

9.26.1.2 FilePath

```
string Hulki.Web.Models.GroupResource.FilePath [get], [set]
```

9.26.1.3 Id

```
int Hulki.Web.Models.GroupResource.Id [get], [set]
```

9.26.1.4 TherapyGroup

```
virtual TherapyGroup Hulki.Web.Models.GroupResource.TherapyGroup [get], [set]
```

9.26.1.5 TherapyGroupId

```
int Hulki.Web.Models.GroupResource.TherapyGroupId [get], [set]
```

9.26.1.6 Title


```
string Hulki.Web.Models.GroupResource.Title [get], [set]
```

The documentation for this class was generated from the following file:


- Hulki/Hulki.Web/Models/ **GroupResource.cs**

9.27 Hulki.Web.Controllers.HomeController Class Reference

Inheritance diagram for Hulki.Web.Controllers.HomeController:



Collaboration diagram for Hulki.Web.Controllers.HomeController:



Public Member Functions

- **HomeController** (**ApplicationDbContext** context, UserManager< **AppUser** > userManager, **IQuoteService** quoteService)
- async Task< IActionResult > **Index** ()
- IActionResult **Privacy** ()

9.27.1 Constructor & Destructor Documentation

9.27.1.1 HomeController()

```
Hulki.Web.Controllers.HomeController.HomeController (
    ApplicationDbContext context,
    UserManager< ApplicationUser > userManager,
    IQuoteService quoteService)
```

9.27.2 Member Function Documentation

9.27.2.1 Index()

```
async Task< IActionResult > Hulki.Web.Controllers.HomeController.Index ()
```

9.27.2.2 Privacy()


```
IActionResult Hulki.Web.Controllers.HomeController.Privacy ()
```

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Controllers/ **HomeController.cs**

9.28 Hulki.Web.Services.IBadgeService Interface Reference

Inheritance diagram for Hulki.Web.Services.IBadgeService:

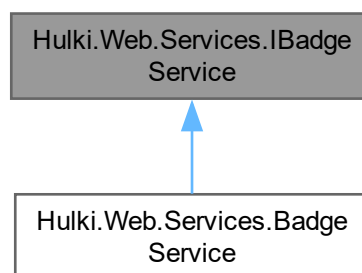

Public Member Functions

- Task< List< **UserBadge** > > **GetUserBadgesAsync** (string userId)
- Task **CheckAndAwardBadgesAsync** (string userId)

9.28.1 Member Function Documentation

9.28.1.1 CheckAndAwardBadgesAsync()

Task Hulki.Web.Services.IBadgeService.CheckAndAwardBadgesAsync (
string *userId*)

Implemented in **Hulki.Web.Services.BadgeService** (p. ??).

9.28.1.2 GetUserBadgesAsync()

Task< List< **UserBadge** > > Hulki.Web.Services.IBadgeService.GetUserBadgesAsync (
string *userId*)


Implemented in **Hulki.Web.Services.BadgeService** (p. ??).

The documentation for this interface was generated from the following file:

- Hulki/Hulki.Web/Services/ **BadgeService.cs**

9.29 Hulki.Web.Services.IConsultationService Interface Reference

Inheritance diagram for Hulki.Web.Services.IConsultationService:

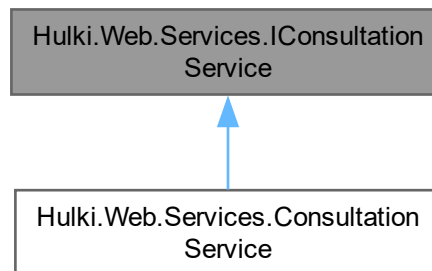

Public Member Functions

- Task< IEnumerable< **Consultation** > > **GetPatientConsultationsAsync** (string *patientId*)
- Task< IEnumerable< **Consultation** > > **GetTherapistConsultationsAsync** (string *therapistId*)
- Task **CreateConsultationAsync** (**Consultation** *consultation*)
- Task **UpdateStatusAsync** (Guid *consultationId*, int *newStatusId*)
- Task< **Consultation** > **GetConsultationByIdAsync** (Guid *id*)
- Task **UpdateConsultationAsync** (**Consultation** *consultation*)
- Task< IEnumerable< **Consultation** > > **GetUserConsultationsAsync** (string *userId*)

9.29.1 Member Function Documentation

9.29.1.1 CreateConsultationAsync()

```
Task Hulki.Web.Services.IConsultationService.CreateConsultationAsync (  
    Consultation consultation)
```

Implemented in **Hulki.Web.Services.ConsultationService** (p. ??).

9.29.1.2 GetConsultationByIdAsync()

```
Task< Consultation > Hulki.Web.Services.IConsultationService.GetConsultationByIdAsync (  
    Guid id)
```

Implemented in **Hulki.Web.Services.ConsultationService** (p. ??).

9.29.1.3 GetPatientConsultationsAsync()

```
Task< IEnumerable< Consultation > > Hulki.Web.Services.IConsultationService.GetPatient↵  
ConsultationsAsync (  
    string patientId)
```

Implemented in **Hulki.Web.Services.ConsultationService** (p. ??).

9.29.1.4 GetTherapistConsultationsAsync()

```
Task< IEnumerable< Consultation > > Hulki.Web.Services.IConsultationService.GetTherapist↵  
ConsultationsAsync (  
    string therapistId)
```

Implemented in **Hulki.Web.Services.ConsultationService** (p. ??).

9.29.1.5 GetUserConsultationsAsync()

```
Task< IEnumerable< Consultation > > Hulki.Web.Services.IConsultationService.GetUserConsultations↵  
Async (  
    string userId)
```

Implemented in **Hulki.Web.Services.ConsultationService** (p. ??).

9.29.1.6 UpdateConsultationAsync()

```
Task Hulki.Web.Services.IConsultationService.UpdateConsultationAsync (  
    Consultation consultation)
```

Implemented in **Hulki.Web.Services.ConsultationService** (p. ??).

9.29.1.7 UpdateStatusAsync()

```
Task Hulki.Web.Services.IConsultationService.UpdateStatusAsync (
    Guid consultationId,
    int newStatusId)
```


Implemented in **Hulki.Web.Services.ConsultationService** (p. ??).

The documentation for this interface was generated from the following file:


- Hulki/Hulki.Web/Services/ **IConsultationService.cs**

9.30 Hulki.Web.Migrations.InitialCreate Class Reference

Inheritance diagram for Hulki.Web.Migrations.InitialCreate:

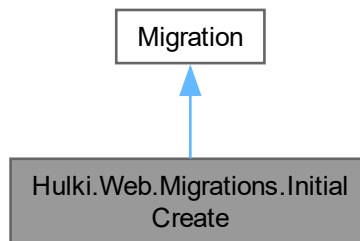

Collaboration diagram for Hulki.Web.Migrations.InitialCreate:

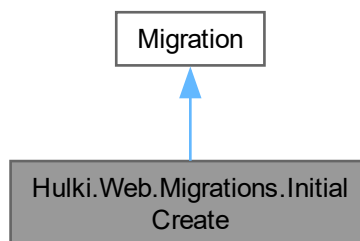

Protected Member Functions

- override void **Up** (MigrationBuilder migrationBuilder)
- override void **Down** (MigrationBuilder migrationBuilder)
- override void **BuildTargetModel** (ModelBuilder modelBuilder)

9.30.1 Detailed Description

9.30.2 Member Function Documentation

9.30.2.1 BuildTargetModel()

```
override void Hulki.Web.Migrations.InitialCreate.BuildTargetModel (
    modelBuilder modelBuilder) [protected]
```

9.30.2.2 Down()

```
override void Hulki.Web.Migrations.InitialCreate.Down (
    MigrationBuilder migrationBuilder) [protected]
```

9.30.2.3 Up()


```
override void Hulki.Web.Migrations.InitialCreate.Up (
    MigrationBuilder migrationBuilder) [protected]
```

The documentation for this class was generated from the following files:

- Hulki/Hulki.Web/Migrations/ 20260610135200_InitialCreate.cs
- Hulki/Hulki.Web/Migrations/ 20260610135200_InitialCreate.Designer.cs

9.31 Hulki.Web.Services.INotificationService Interface Reference

Inheritance diagram for Hulki.Web.Services.INotificationService:

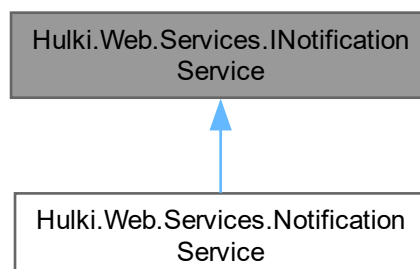

Public Member Functions

- Task< int > **GetUnreadCountAsync** (string userId)
- Task< List< **Notification** > > **GetLatestNotificationsAsync** (string userId, int count=5)
- Task **MarkAsReadAsync** (Guid id)
- Task **MarkAllAsReadAsync** (string userId)
- Task **SendNotificationAsync** (string userId, string content)

9.31.1 Member Function Documentation

9.31.1.1 GetLatestNotificationsAsync()

```
Task< List< Notification > > Hulki.Web.Services.INotificationService.GetLatestNotifications↵
Async (
    string userId,
    int count = 5)
```

Implemented in **Hulki.Web.Services.NotificationService** (p. ??).

9.31.1.2 GetUnreadCountAsync()

```
Task< int > Hulki.Web.Services.INotificationService.GetUnreadCountAsync (
    string userId)
```

Implemented in **Hulki.Web.Services.NotificationService** (p. ??).

9.31.1.3 MarkAllAsReadAsync()

```
Task Hulki.Web.Services.INotificationService.MarkAllAsReadAsync (
    string userId)
```

Implemented in **Hulki.Web.Services.NotificationService** (p. ??).

9.31.1.4 MarkAsReadAsync()

```
Task Hulki.Web.Services.INotificationService.MarkAsReadAsync (
    Guid id)
```

Implemented in **Hulki.Web.Services.NotificationService** (p. ??).

9.31.1.5 SendNotificationAsync()

```
Task Hulki.Web.Services.INotificationService.SendNotificationAsync (
    string userId,
    string content)
```


Implemented in **Hulki.Web.Services.NotificationService** (p. ??).

The documentation for this interface was generated from the following file:

- Hulki/Hulki.Web/Services/ **NotificationService.cs**

9.32 Hulki.Web.Services.IPdfReportService Interface Reference

Inheritance diagram for Hulki.Web.Services.IPdfReportService:

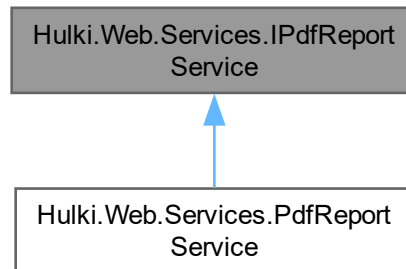

Public Member Functions

- `Task< byte[]> GenerateDailyReportsPdfAsync` (string `userId`, `DateTime?` `startDate=null`, `DateTime?` `endDate=null`)
- `Task< byte[]> GenerateUserProgressReportAsync` (string `userId`)
- `Task< byte[]> GenerateConsultationReportAsync` (Guid `consultationId`)

9.32.1 Member Function Documentation

9.32.1.1 GenerateConsultationReportAsync()

```
Task< byte[]> Hulki.Web.Services.IPdfReportService.GenerateConsultationReportAsync (
    Guid consultationId)
```

Implemented in `Hulki.Web.Services.PdfReportService` (p. ??).

9.32.1.2 GenerateDailyReportsPdfAsync()

```
Task< byte[]> Hulki.Web.Services.IPdfReportService.GenerateDailyReportsPdfAsync (
    string userId,
    DateTime? startDate = null,
    DateTime? endDate = null)
```

Implemented in `Hulki.Web.Services.PdfReportService` (p. ??).

9.32.1.3 GenerateUserProgressReportAsync()

```
Task< byte[] > Hulki.Web.Services.IPdfReportService.GenerateUserProgressReportAsync (
    string userId)
```


Implemented in **Hulki.Web.Services.PdfReportService** (p. ??).

The documentation for this interface was generated from the following file:

- Hulki/Hulki.Web/Services/ **PdfReportService.cs**

9.33 Hulki.Web.Services.IQuoteService Interface Reference

Inheritance diagram for Hulki.Web.Services.IQuoteService:

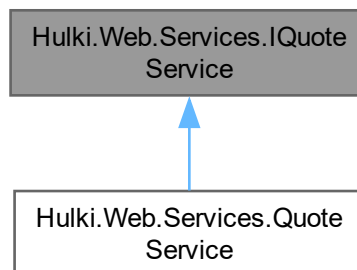

Public Member Functions

- Task< **QuoteDto** > **GetRandomQuoteAsync** (bool forceRefresh=false, CancellationToken cancellationToken=default)

9.33.1 Member Function Documentation

9.33.1.1 GetRandomQuoteAsync()

```
Task< QuoteDto > Hulki.Web.Services.IQuoteService.GetRandomQuoteAsync (
    bool forceRefresh = false,
    CancellationToken cancellationToken = default)
```

Parameters

<i>forceRefresh</i>	Gdy true, pomija lokalny cache i pobiera świeży cytat.
---------------------	--


Implemented in **Hulki.Web.Services.QuoteService** (p. ??).

The documentation for this interface was generated from the following file:

- Hulki/Hulki.Web/Services/ **IQuoteService.cs**

9.34 Hulki.Web.Services.IShopService Interface Reference

Inheritance diagram for Hulki.Web.Services.IShopService:

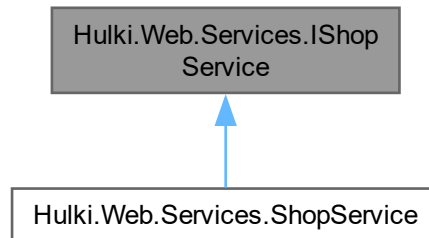

Public Member Functions

- `Task< IReadOnlyList< ShopItemDto > > GetShopItemsAsync (Cancellation.Token cancellationToken = default)`
Zwraca aktualną ofertę przedmiotów dostępnych w sklepie.

9.34.1 Member Function Documentation

9.34.1.1 GetShopItemsAsync()

```
Task< IReadOnlyList< ShopItemDto > > Hulki.Web.Services.IShopService.GetShopItemsAsync (
    Cancellation.Token cancellationToken = default)
```

Zwraca aktualną ofertę przedmiotów dostępnych w sklepie.


Implemented in **Hulki.Web.Services.ShopService** (p. ??).

The documentation for this interface was generated from the following file:

- `Hulki/Hulki.Web/Services/ IShopService.cs`

9.35 Hulki.Web.Services.ISurveyService Interface Reference

Inheritance diagram for Hulki.Web.Services.ISurveyService:

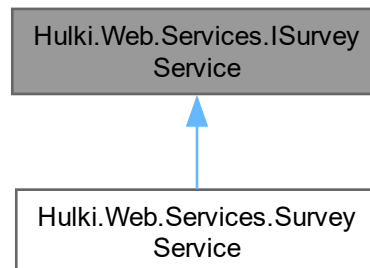

Public Member Functions

- Task< List< **Survey** > > **GetAllSurveysAsync** ()
- Task< **Survey** > **GetSurveyByIdAsync** (Guid id)
- Task **CreateSurveyAsync** (string title, List< string > questions)
- Task **SubmitSurveyAsync** (Guid surveyId, string userId, Dictionary< Guid, string > answers)
- Task< List< **SurveySubmission** > > **GetSurveyResultsAsync** (Guid surveyId)
- Task< bool > **HasUserSubmittedAsync** (Guid surveyId, string userId)

9.35.1 Member Function Documentation

9.35.1.1 CreateSurveyAsync()

```
Task Hulki.Web.Services.ISurveyService.CreateSurveyAsync (  
    string title,  
    List< string > questions)
```

Implemented in **Hulki.Web.Services.SurveyService** (p. ??).

9.35.1.2 GetAllSurveysAsync()

```
Task< List< Survey > > Hulki.Web.Services.ISurveyService.GetAllSurveysAsync ()
```

Implemented in **Hulki.Web.Services.SurveyService** (p. ??).

9.35.1.3 GetSurveyByIdAsync()

```
Task< Survey > Hulki.Web.Services.ISurveyService.GetSurveyByIdAsync (  
    Guid id)
```

Implemented in **Hulki.Web.Services.SurveyService** (p. ??).

9.35.1.4 GetSurveyResultsAsync()

```
Task< List< SurveySubmission > > Hulki.Web.Services.ISurveyService.GetSurveyResultsAsync (
    Guid surveyId)
```

Implemented in **Hulki.Web.Services.SurveyService** (p. ??).

9.35.1.5 HasUserSubmittedAsync()

```
Task< bool > Hulki.Web.Services.ISurveyService.HasUserSubmittedAsync (
    Guid surveyId,
    string userId)
```

Implemented in **Hulki.Web.Services.SurveyService** (p. ??).

9.35.1.6 SubmitSurveyAsync()

```
Task Hulki.Web.Services.ISurveyService.SubmitSurveyAsync (
    Guid surveyId,
    string userId,
    Dictionary< Guid, string > answers)
```

Implemented in **Hulki.Web.Services.SurveyService** (p. ??).

The documentation for this interface was generated from the following file:

- Hulki/Hulki.Web/Services/ **SurveyService.cs**

9.36 Hulki.Web.Models.ItemRarity Class Reference

Properties

- int **Id** [get, set]
- string **Name** [get, set]
- string? **HexColor** [get, set]
- virtual ? ICollection< **RewardItem** > **RewardItems** [get, set]

9.36.1 Property Documentation

9.36.1.1 HexColor

```
string? Hulki.Web.Models.ItemRarity.HexColor [get], [set]
```

9.36.1.2 Id

```
int Hulki.Web.Models.ItemRarity.Id [get], [set]
```

9.36.1.3 Name

```
string Hulki.Web.Models.ItemRarity.Name [get], [set]
```

9.36.1.4 RewardItems


```
virtual ? ICollection< RewardItem> Hulki.Web.Models.ItemRarity.RewardItems [get], [set]
```

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/ **ItemRarity.cs**

9.37 Hulki.Web.Services.ITherapyGoalService Interface Reference

Inheritance diagram for Hulki.Web.Services.ITherapyGoalService:

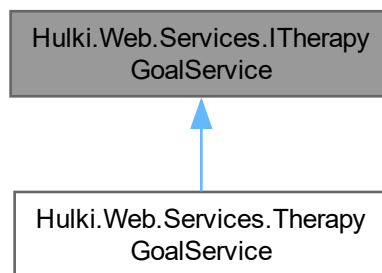

Public Member Functions

- Task< List< **TherapyGoal** > > **GetUserGoalsAsync** (string userId)
- Task **CreateGoalAsync** (**TherapyGoal** goal, List< string > milestones)
- Task **ToggleMilestoneAsync** (Guid milestoneId, string userId)
- Task **DeleteGoalAsync** (Guid goalId, string userId)

9.37.1 Member Function Documentation

9.37.1.1 CreateGoalAsync()

```
Task Hulki.Web.Services.ITherapyGoalService.CreateGoalAsync (
    TherapyGoal goal,
    List< string > milestones)
```

Implemented in **Hulki.Web.Services.TherapyGoalService** (p. ??).

9.37.1.2 DeleteGoalAsync()

```
Task Hulki.Web.Services.ITherapyGoalService.DeleteGoalAsync (
    Guid goalId,
    string userId)
```

Implemented in **Hulki.Web.Services.TherapyGoalService** (p. ??).

9.37.1.3 GetUserGoalsAsync()

```
Task< List< TherapyGoal > > Hulki.Web.Services.ITherapyGoalService.GetUserGoalsAsync (
    string userId)
```

Implemented in **Hulki.Web.Services.TherapyGoalService** (p. ??).

9.37.1.4 ToggleMilestoneAsync()

```
Task Hulki.Web.Services.ITherapyGoalService.ToggleMilestoneAsync (
    Guid milestoneId,
    string userId)
```

Implemented in **Hulki.Web.Services.TherapyGoalService** (p. ??).

The documentation for this interface was generated from the following file:

- Hulki/Hulki.Web/Services/ **TherapyGoalService.cs**

9.38 MedicationDto Class Reference

Properties

- string **Name** [get, set]
- string **Dosage** [get, set]
- string **Duration** [get, set]

9.38.1 Property Documentation

9.38.1.1 Dosage

```
string MedicationDto.Dosage [get], [set]
```

9.38.1.2 Duration

```
string MedicationDto.Duration [get], [set]
```

9.38.1.3 Name

```
string MedicationDto.Name [get], [set]
```

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/Dto/ **UpdateVisitDetailsDto.cs**

9.39 Hulki.Web.Models.MoodLog Class Reference

Properties

- Guid **Id** [get, set]
- string **AppUserId** [get, set]
- DateTime **Date** = DateTime.Now [get, set]
- int **MoodTypeId** [get, set]
- virtual MoodType **MoodType** [get, set]

9.39.1 Property Documentation

9.39.1.1 AppUserId

```
string Hulki.Web.Models.MoodLog.AppUserId [get], [set]
```

9.39.1.2 Date

```
DateTime Hulki.Web.Models.MoodLog.Date = DateTime.Now [get], [set]
```

9.39.1.3 Id

```
Guid Hulki.Web.Models.MoodLog.Id [get], [set]
```

9.39.1.4 MoodType

```
virtual MoodType Hulki.Web.Models.MoodLog.MoodType [get], [set]
```

9.39.1.5 MoodTypeId

```
int Hulki.Web.Models.MoodLog.MoodTypeId [get], [set]
```

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/ **MoodLog.cs**

9.40 Hulki.Web.Models.MoodType Class Reference

Properties

- int **Id** [get, set]
- string **Name** [get, set]

9.40.1 Property Documentation

9.40.1.1 Id

int Hulki.Web.Models.MoodType.Id [get], [set]

9.40.1.2 Name

string Hulki.Web.Models.MoodType.Name [get], [set]

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/ **MoodType.cs**

9.41 Hulki.Web.Models.Notification Class Reference

Properties

- Guid **Id** [get, set]
- string **AppUserId** [get, set]
- string **Content** [get, set]
- bool **IsRead** [get, set]
- DateTime **CreatedAt** = DateTime.Now [get, set]

9.41.1 Property Documentation

9.41.1.1 AppUserId

string Hulki.Web.Models.Notification.AppUserId [get], [set]

9.41.1.2 Content

string Hulki.Web.Models.Notification.Content [get], [set]

9.41.1.3 CreatedAt

```
DateTime Hulki.Web.Models.Notification.CreatedAt = DateTime.Now [get], [set]
```

9.41.1.4 Id

```
Guid Hulki.Web.Models.Notification.Id [get], [set]
```

9.41.1.5 IsRead


```
bool Hulki.Web.Models.Notification.IsRead [get], [set]
```

The documentation for this class was generated from the following file:


- Hulki/Hulki.Web/Models/ **Notification.cs**

9.42 Hulki.Web.Controllers.NotificationController Class Reference

Inheritance diagram for Hulki.Web.Controllers.NotificationController:

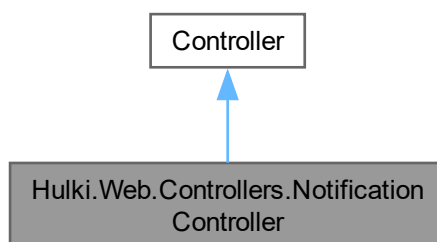

Collaboration diagram for Hulki.Web.Controllers.NotificationController:

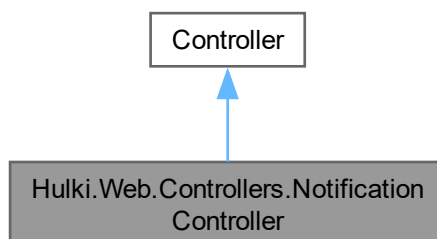

Public Member Functions

- **NotificationController** (**INotificationService** notificationService, UserManager< **AppUser** > userManager) Manager)
- async Task< IActionResult > **GetMyNotifications** ()
- async Task< IActionResult > **MarkAsRead** (Guid id)
- async Task< IActionResult > **MarkAllAsRead** ()

9.42.1 Constructor & Destructor Documentation

9.42.1.1 NotificationController()

```
Hulki.Web.Controllers.NotificationController.NotificationController (
    INotificationService notificationService,
    UserManager< AppUser > userManager)
```

9.42.2 Member Function Documentation

9.42.2.1 GetMyNotifications()

```
async Task< IActionResult > Hulki.Web.Controllers.NotificationController.GetMyNotifications ()
```

9.42.2.2 MarkAllAsRead()

```
async Task< IActionResult > Hulki.Web.Controllers.NotificationController.MarkAllAsRead ()
```

9.42.2.3 MarkAsRead()


```
async Task< IActionResult > Hulki.Web.Controllers.NotificationController.MarkAsRead (
    Guid id)
```

The documentation for this class was generated from the following file:


- Hulki/Hulki.Web/Controllers/ **NotificationController.cs**

9.43 Hulki.Web.Services.NotificationService Class Reference

Inheritance diagram for Hulki.Web.Services.NotificationService:

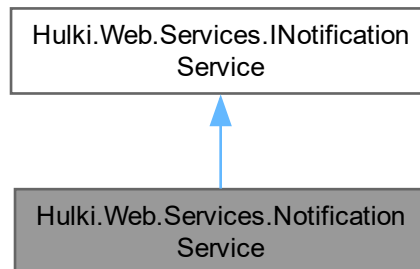

Collaboration diagram for Hulki.Web.Services.NotificationService:

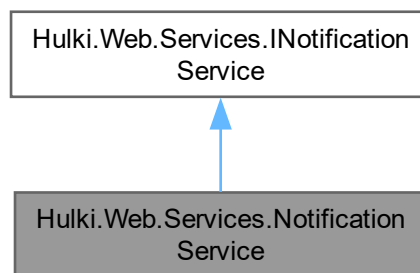

Public Member Functions

- **NotificationService** (**ApplicationDbContext** context)
- async Task< int > **GetUnreadCountAsync** (string userId)
- async Task< List< **Notification** > > **GetLatestNotificationsAsync** (string userId, int count=5)
- async Task **MarkAsReadAsync** (Guid id)
- async Task **MarkAllAsReadAsync** (string userId)
- async Task **SendNotificationAsync** (string userId, string content)

9.43.1 Constructor & Destructor Documentation

9.43.1.1 NotificationService()

```

Hulki.Web.Services.NotificationService.NotificationService (
    ApplicationDbContext context)
  
```

9.43.2 Member Function Documentation

9.43.2.1 GetLatestNotificationsAsync()

```
async Task< List< Notification > > Hulki.Web.Services.NotificationService.GetLatestNotificationsAsync (
    string userId,
    int count = 5)
```

Implements **Hulki.Web.Services.INotificationService** (p. ??).

9.43.2.2 GetUnreadCountAsync()

```
async Task< int > Hulki.Web.Services.NotificationService.GetUnreadCountAsync (
    string userId)
```

Implements **Hulki.Web.Services.INotificationService** (p. ??).

9.43.2.3 MarkAllAsReadAsync()

```
async Task Hulki.Web.Services.NotificationService.MarkAllAsReadAsync (
    string userId)
```

Implements **Hulki.Web.Services.INotificationService** (p. ??).

9.43.2.4 MarkAsReadAsync()

```
async Task Hulki.Web.Services.NotificationService.MarkAsReadAsync (
    Guid id)
```

Implements **Hulki.Web.Services.INotificationService** (p. ??).

9.43.2.5 SendNotificationAsync()

```
async Task Hulki.Web.Services.NotificationService.SendNotificationAsync (
    string userId,
    string content)
```


Implements **Hulki.Web.Services.INotificationService** (p. ??).

The documentation for this class was generated from the following file:


- Hulki/Hulki.Web/Services/ **NotificationService.cs**

9.44 Hulki.Web.Controllers.PatientController Class Reference

Inheritance diagram for Hulki.Web.Controllers.PatientController:

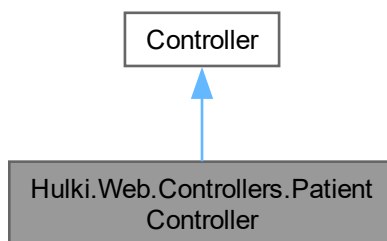

Collaboration diagram for Hulki.Web.Controllers.PatientController:

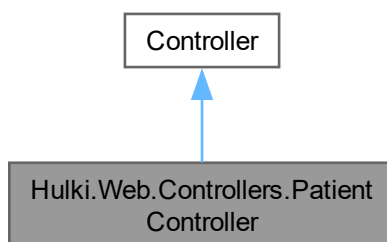

Public Member Functions

- **PatientController** (**ApplicationDbContext** context, UserManager< **AppUser** > userManager, IWeb↔
HostEnvironment webHostEnvironment, **INotificationService** notificationService, **IPdfReportService** pdf↔
ReportService)
- async Task< IActionResult > **Index** ()
- async Task< IActionResult > **AddMood** ()
- async Task< IActionResult > **AddMood** (int moodTypeId)
- async Task< IActionResult > **DailyReport** ()
- async Task< IActionResult > **DailyReport** (string content, IFormFile? attachment)
- async Task< IActionResult > **DownloadDailyReportsPdf** (DateTime? startDate=null, DateTime? end↔
Date=null)
Generuje PDF z raportami dziennymi z opcjonalnym filtrowaniem dat.
- async Task< IActionResult > **DownloadProgressReportPdf** ()
Generuje PDF z raportem postępów (cele, odznaki, statystyki).

9.44.1 Constructor & Destructor Documentation

9.44.1.1 PatientController()

```
Hulki.Web.Controllers.PatientController.PatientController (
    ApplicationDbContext context,
    UserManager< ApplicationUser > userManager,
    IWebHostEnvironment webHostEnvironment,
    INotificationService notificationService,
    IPdfReportService pdfReportService)
```

9.44.2 Member Function Documentation

9.44.2.1 AddMood() [1/2]

```
async Task< IActionResult > Hulki.Web.Controllers.PatientController.AddMood ()
```


9.44.2.2 AddMood() [2/2]

```
async Task< IActionResult > Hulki.Web.Controllers.PatientController.AddMood (
    int moodTypeId)
```

9.44.2.3 DailyReport() [1/2]

```
async Task< IActionResult > Hulki.Web.Controllers.PatientController.DailyReport ()
```


Here is the caller graph for this function:



9.44.2.4 DailyReport() [2/2]

```
async Task< IActionResult > Hulki.Web.Controllers.PatientController.DailyReport (
    string content,
    IFormFile? attachment)
```

Here is the call graph for this function:



9.44.2.5 DownloadDailyReportsPdf()

```
async Task< IActionResult > Hulki.Web.Controllers.PatientController.DownloadDailyReportsPdf (
    DateTime? startDate = null,
    DateTime? endDate = null)
```

Generuje PDF z raportami dziennymi z opcjonalnym filtrowaniem dat.

Here is the call graph for this function:



9.44.2.6 DownloadProgressReportPdf()

```
async Task< IActionResult > Hulki.Web.Controllers.PatientController.DownloadProgressReportPdf
()
```

Generuje PDF z raportem postępów (cele, odznaki, statystyki).


Here is the call graph for this function:



9.44.2.7 Index()

```
async Task< IActionResult > Hulki.Web.Controllers.PatientController.Index ()
```

Here is the caller graph for this function:

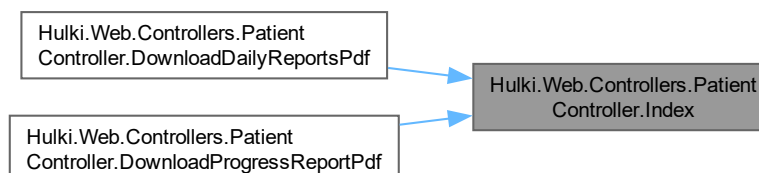

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Controllers/ **PatientController.cs**

9.45 Hulki.Web.Models.PatientGroup Class Reference

Properties

- string **AppUserId** [get, set]
- virtual AppUser **AppUser** [get, set]
- int **TherapyGroupId** [get, set]
- virtual TherapyGroup **TherapyGroup** [get, set]
- DateTime **JoinedDate** = DateTime.Now [get, set]
- bool **IsApproved** = false [get, set]

9.45.1 Property Documentation

9.45.1.1 AppUser

```
virtual AppUser Hulki.Web.Models.PatientGroup.AppUser [get], [set]
```

9.45.1.2 AppUserId

```
string Hulki.Web.Models.PatientGroup.AppUserId [get], [set]
```

9.45.1.3 IsApproved

```
bool Hulki.Web.Models.PatientGroup.IsApproved = false [get], [set]
```

9.45.1.4 JoinedDate

```
DateTime Hulki.Web.Models.PatientGroup.JoinedDate = DateTime.Now [get], [set]
```

9.45.1.5 TherapyGroup

```
virtual TherapyGroup Hulki.Web.Models.PatientGroup.TherapyGroup [get], [set]
```

9.45.1.6 TherapyGroupId

```
int Hulki.Web.Models.PatientGroup.TherapyGroupId [get], [set]
```

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/ **PatientGroup.cs**

9.46 Hulki.Web.Models.PatientInventory Class Reference

Properties

- string **AppUserId** [get, set]
- virtual AppUser **AppUser** [get, set]
- Guid **RewardItemId** [get, set]
- virtual RewardItem **RewardItem** [get, set]
- DateTime **AcquiredDate** = DateTime.Now [get, set]

9.46.1 Property Documentation

9.46.1.1 AcquiredDate

DateTime Hulki.Web.Models.PatientInventory.AcquiredDate = DateTime.Now [get], [set]

9.46.1.2 AppUser

virtual AppUser Hulki.Web.Models.PatientInventory.AppUser [get], [set]

9.46.1.3 AppUserId

string Hulki.Web.Models.PatientInventory.AppUserId [get], [set]

9.46.1.4 RewardItem

virtual RewardItem Hulki.Web.Models.PatientInventory.RewardItem [get], [set]

9.46.1.5 RewardItemId


Guid Hulki.Web.Models.PatientInventory.RewardItemId [get], [set]

The documentation for this class was generated from the following file:


- Hulki/Hulki.Web/Models/ **PatientInventory.cs**

9.47 Hulki.Web.Services.PdfReportService Class Reference

Inheritance diagram for Hulki.Web.Services.PdfReportService:

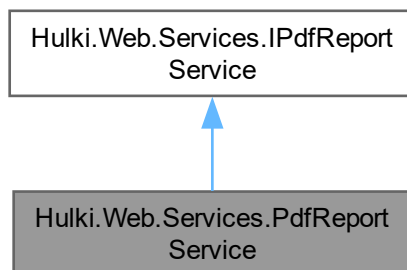

Collaboration diagram for Hulki.Web.Services.PdfReportService:

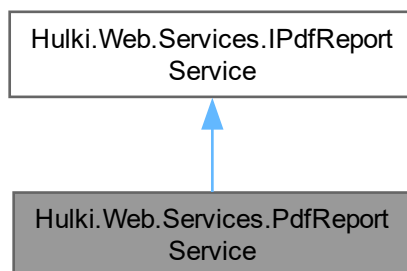

Public Member Functions

- **PdfReportService** (**ApplicationDbContext** context)
- async Task< byte[]> **GenerateDailyReportsPdfAsync** (string userId, DateTime? startDate=null, DateTime? endDate=null)
Generuje PDF z raportami dziennymi użytkownika w określonym przedziale czasowym.
- async Task< byte[]> **GenerateUserProgressReportAsync** (string userId)
Generuje raport postępów użytkownika (cele, punkty, odznaki).
- async Task< byte[]> **GenerateConsultationReportAsync** (Guid consultationId)
Generuje raport z pojedynczej konsultacji.

9.47.1 Constructor & Destructor Documentation

9.47.1.1 PdfReportService()

```
Hulki.Web.Services.PdfReportService.PdfReportService (
    ApplicationDbContext context)
```

9.47.2 Member Function Documentation

9.47.2.1 GenerateConsultationReportAsync()

```
async Task< byte[]> Hulki.Web.Services.PdfReportService.GenerateConsultationReportAsync (
    Guid consultationId)
```

Generuje raport z pojedynczej konsultacji.

Implements **Hulki.Web.Services.IPdfReportService** (p. ??).

9.47.2.2 GenerateDailyReportsPdfAsync()

```
async Task< byte[]> Hulki.Web.Services.PdfReportService.GenerateDailyReportsPdfAsync (
    string userId,
    DateTime? startDate = null,
    DateTime? endDate = null)
```

Generuje PDF z raportami dziennymi użytkownika w określonym przedziale czasowym.

Implements **Hulki.Web.Services.IPdfReportService** (p. ??).

9.47.2.3 GenerateUserProgressReportAsync()

```
async Task< byte[]> Hulki.Web.Services.PdfReportService.GenerateUserProgressReportAsync (
    string userId)
```

Generuje raport postępów użytkownika (cele, punkty, odznaki).

Implements **Hulki.Web.Services.IPdfReportService** (p. ??).

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Services/ **PdfReportService.cs**

9.48 Hulki.Web.Models.PointTransaction Class Reference

Properties

- Guid **Id** [get, set]
- int **Amount** [get, set]
- string **Description** [get, set]
- DateTime **TransactionDate** = DateTime.Now [get, set]
- Guid **WalletId** [get, set]
- virtual Wallet **Wallet** [get, set]

9.48.1 Property Documentation

9.48.1.1 Amount

```
int Hulki.Web.Models.PointTransaction.Amount [get], [set]
```

9.48.1.2 Description

```
string Hulki.Web.Models.PointTransaction.Description [get], [set]
```

9.48.1.3 Id

```
Guid Hulki.Web.Models.PointTransaction.Id [get], [set]
```

9.48.1.4 TransactionDate

```
DateTime Hulki.Web.Models.PointTransaction.TransactionDate = DateTime.Now [get], [set]
```

9.48.1.5 Wallet

```
virtual Wallet Hulki.Web.Models.PointTransaction.Wallet [get], [set]
```

9.48.1.6 WalletId

```
Guid Hulki.Web.Models.PointTransaction.WalletId [get], [set]
```

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/ **PointTransaction.cs**

9.49 Hulki.Web.Models.PrescribedMedication Class Reference

Properties

- int **Id** [get, set]
- string **Name** [get, set]
- string **Dosage** [get, set]
- string **Duration** [get, set]

9.49.1 Property Documentation

9.49.1.1 Dosage

```
string Hulki.Web.Models.PrescribedMedication.Dosage [get], [set]
```

9.49.1.2 Duration

```
string Hulki.Web.Models.PrescribedMedication.Duration [get], [set]
```

9.49.1.3 Id

```
int Hulki.Web.Models.PrescribedMedication.Id [get], [set]
```

9.49.1.4 Name


```
string Hulki.Web.Models.PrescribedMedication.Name [get], [set]
```

The documentation for this class was generated from the following file:


- Hulki/Hulki.Web/Models/ **VisitDetails.cs**

9.50 Hulki.Web.Controllers.ProfileController Class Reference

Inheritance diagram for Hulki.Web.Controllers.ProfileController:

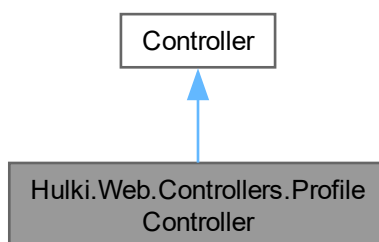

Collaboration diagram for Hulki.Web.Controllers.ProfileController:

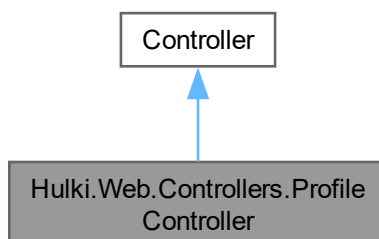

Public Member Functions

- **ProfileController** (**ApplicationDbContext** context, UserManager< **AppUser** > userManager, **IBadgeService** badgeService)
- async Task< IActionResult > **Index** ()

9.50.1 Constructor & Destructor Documentation

9.50.1.1 ProfileController()

```
Hulki.Web.Controllers.ProfileController.ProfileController (
    ApplicationDbContext context,
    UserManager< AppUser > userManager,
    IBadgeService badgeService)
```

9.50.2 Member Function Documentation

9.50.2.1 Index()

```
async Task< IActionResult > Hulki.Web.Controllers.ProfileController.Index ()
```

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Controllers/ **ProfileController.cs**

9.51 Hulki.Web.Models.QuestSubmission Class Reference

Properties

- int **Id** [get, set]
- int **GroupQuestId** [get, set]
- virtual GroupQuest **GroupQuest** [get, set]
- string **AppUserId** [get, set]
- virtual AppUser **AppUser** [get, set]
- string **AnswerText** [get, set]
- DateTime **SubmittedAt** = DateTime.Now [get, set]
- bool **IsEvaluated** = false [get, set]
- bool **IsAccepted** = false [get, set]

9.51.1 Property Documentation

9.51.1.1 AnswerText

```
string Hulki.Web.Models.QuestSubmission.AnswerText [get], [set]
```

9.51.1.2 AppUser

```
virtual AppUser Hulki.Web.Models.QuestSubmission.AppUser [get], [set]
```

9.51.1.3 AppUserId

```
string Hulki.Web.Models.QuestSubmission.AppUserId [get], [set]
```

9.51.1.4 GroupQuest

```
virtual GroupQuest Hulki.Web.Models.QuestSubmission.GroupQuest [get], [set]
```

9.51.1.5 GroupQuestId

```
int Hulki.Web.Models.QuestSubmission.GroupQuestId [get], [set]
```

9.51.1.6 Id

```
int Hulki.Web.Models.QuestSubmission.Id [get], [set]
```

9.51.1.7 IsAccepted

```
bool Hulki.Web.Models.QuestSubmission.IsAccepted = false [get], [set]
```

9.51.1.8 IsEvaluated

```
bool Hulki.Web.Models.QuestSubmission.IsEvaluated = false [get], [set]
```

9.51.1.9 SubmittedAt

```
DateTime Hulki.Web.Models.QuestSubmission.SubmittedAt = DateTime.Now [get], [set]
```

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/ **QuestSubmission.cs**

9.52 Hulki.Web.Models.Dto.QuoteDto Class Reference

Ujednolicony cytat motywacyjny – niezależny od formatu źródła zewnętrznego.

Properties

- string **Content** = default! [get, set]
- string? **Author** [get, set]
- string **Source** = default! [get, set]

9.52.1 Detailed Description

Ujednolicony cytat motywacyjny – niezależny od formatu źródła zewnętrznego.

9.52.2 Property Documentation

9.52.2.1 Author

```
string? Hulki.Web.Models.Dto.QuoteDto.Author [get], [set]
```

9.52.2.2 Content

```
string Hulki.Web.Models.Dto.QuoteDto.Content = default! [get], [set]
```

9.52.2.3 Source

```
string Hulki.Web.Models.Dto.QuoteDto.Source = default! [get], [set]
```


The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/Dto/ **QuoteDto.cs**


9.53 Hulki.Web.Controllers.Api.QuotesApiController Class Reference

Lekki endpoint do pobierania pojedynczego cytatu (używany przez frontend, np. przycisk "Nowy cytat" na stronie głównej).

Inheritance diagram for Hulki.Web.Controllers.Api.QuotesApiController:

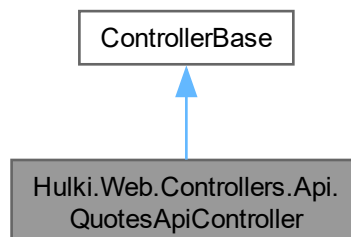

Collaboration diagram for Hulki.Web.Controllers.Api.QuotesApiController:

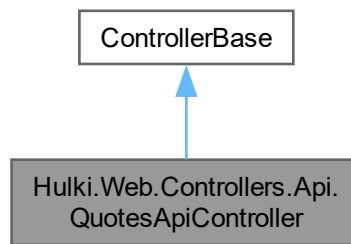

Public Member Functions

- **QuotesApiController** (**IQuoteService** quoteService)
- `async Task< ActionResult< QuoteDto > > GetRandom` (CancellationTokn cancellationTokn)

9.53.1 Detailed Description

Lekki endpoint do pobierania pojedynczego cytatu (używany przez frontend, np. przycisk "Nowy cytat" na stronie głównej).

9.53.2 Constructor & Destructor Documentation

9.53.2.1 QuotesApiController()

```
Hulki.Web.Controllers.Api.QuotesApiController.QuotesApiController (
    IQuoteService quoteService)
```

9.53.3 Member Function Documentation

9.53.3.1 GetRandom()


```
async Task< ActionResult< QuoteDto > > Hulki.Web.Controllers.Api.QuotesApiController.Get↔
Random (
    CancellationTokn cancellationTokn)
```

The documentation for this class was generated from the following file:


- Hulki/Hulki.Web/Controllers/Api/ **QuotesApiController.cs**

9.54 Hulki.Web.Services.QuoteService Class Reference

Inheritance diagram for Hulki.Web.Services.QuoteService:

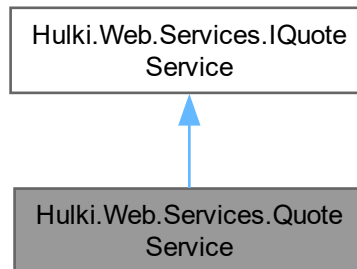

Collaboration diagram for Hulki.Web.Services.QuoteService:

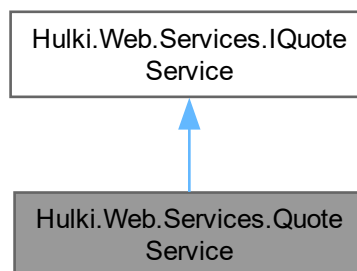

Public Member Functions

- **QuoteService** (IHttpClientFactory httpClientFactory, IMemoryCache cache, ILogger< QuoteService > logger)
- async Task< **QuoteDto** > **GetRandomQuoteAsync** (bool forceRefresh=false, CancellationToken cancellationToken=default)

Static Public Attributes

- const string **QuotesClientName** = "ZenQuotes"
- const string **TranslationClientName** = "MyMemory"

9.54.1 Constructor & Destructor Documentation

9.54.1.1 QuoteService()

```
Hulki.Web.Services.QuoteService.QuoteService (
    IHttpConnectionFactory httpClientFactory,
    IMemoryCache cache,
    ILogger< QuoteService > logger)
```

9.54.2 Member Function Documentation

9.54.2.1 GetRandomQuoteAsync()

```
async Task< QuoteDto > Hulki.Web.Services.QuoteService.GetRandomQuoteAsync (
    bool forceRefresh = false,
    CancellationToken cancellationToken = default)
```

Parameters

<i>forceRefresh</i>	Gdy true, pomija lokalny cache i pobiera świeży cytat.
---------------------	--

Implements **Hulki.Web.Services.IQuoteService** (p. ??).

9.54.3 Member Data Documentation

9.54.3.1 QuotesClientName

```
const string Hulki.Web.Services.QuoteService.QuotesClientName = "ZenQuotes" [static]
```

9.54.3.2 TranslationClientName

```
const string Hulki.Web.Services.QuoteService.TranslationClientName = "MyMemory" [static]
```

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Services/ **QuoteService.cs**

9.55 Hulki.Web.Models.ReportAttachment Class Reference

Properties

- Guid **Id** [get, set]
- string **FileName** [get, set]
- string **FilePath** [get, set]
- int **FileTypeId** [get, set]
- virtual FileType **FileType** [get, set]
- Guid **DailyReportId** [get, set]
- virtual DailyReport **DailyReport** [get, set]

9.55.1 Property Documentation

9.55.1.1 DailyReport

`virtual DailyReport Hulki.Web.Models.ReportAttachment.DailyReport [get], [set]`

9.55.1.2 DailyReportId

`Guid Hulki.Web.Models.ReportAttachment.DailyReportId [get], [set]`

9.55.1.3 FileName

`string Hulki.Web.Models.ReportAttachment.FileName [get], [set]`

9.55.1.4 FilePath

`string Hulki.Web.Models.ReportAttachment.FilePath [get], [set]`

9.55.1.5 FileType

`virtual FileType Hulki.Web.Models.ReportAttachment.FileType [get], [set]`

9.55.1.6 FileTypeId

`int Hulki.Web.Models.ReportAttachment.FileTypeId [get], [set]`

9.55.1.7 Id

`Guid Hulki.Web.Models.ReportAttachment.Id [get], [set]`

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/ **ReportAttachment.cs**

9.56 Hulki.Web.Models.ReportStatus Class Reference

Properties

- `int Id [get, set]`
- `string Name [get, set]`
- `virtual ICollection< DailyReport > DailyReports [get, set]`

9.56.1 Property Documentation

9.56.1.1 DailyReports

```
virtual ? ICollection< DailyReport> Hulki.Web.Models.ReportStatus.DailyReports [get], [set]
```

9.56.1.2 Id

```
int Hulki.Web.Models.ReportStatus.Id [get], [set]
```

9.56.1.3 Name

```
string Hulki.Web.Models.ReportStatus.Name [get], [set]
```

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/ **ReportStatus.cs**

9.57 Hulki.Web.Models.RewardItem Class Reference

Properties

- Guid **Id** [get, set]
- string **Name** [get, set]
- string? **Description** [get, set]
- int **Price** [get, set]
- string? **IconPath** [get, set]
- int **ItemRarityId** [get, set]
- virtual ItemRarity **ItemRarity** [get, set]

9.57.1 Property Documentation

9.57.1.1 Description

```
string? Hulki.Web.Models.RewardItem.Description [get], [set]
```

9.57.1.2 IconPath

```
string? Hulki.Web.Models.RewardItem.IconPath [get], [set]
```

9.57.1.3 Id

```
Guid Hulki.Web.Models.RewardItem.Id [get], [set]
```

9.57.1.4 ItemRarity

```
virtual ItemRarity Hulki.Web.Models.RewardItem.ItemRarity [get], [set]
```

9.57.1.5 ItemRarityId

```
int Hulki.Web.Models.RewardItem.ItemRarityId [get], [set]
```

9.57.1.6 Name

```
string Hulki.Web.Models.RewardItem.Name [get], [set]
```

9.57.1.7 Price

```
int Hulki.Web.Models.RewardItem.Price [get], [set]
```


The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/ **RewardItem.cs**


9.58 Hulki.Web.Controllers.Api.ShopApiController Class Reference

Publiczne API sklepu. Endpointy są dostępne anonimowo (tylko odczyt oferty), zmień atrybut [AllowAnonymous] na [Authorize], jeśli API ma być chronione.

Inheritance diagram for Hulki.Web.Controllers.Api.ShopApiController:

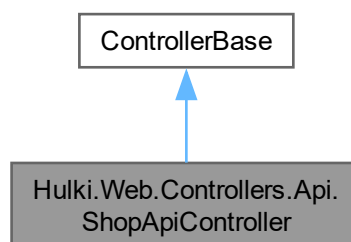

Collaboration diagram for Hulki.Web.Controllers.Api.ShopApiController:

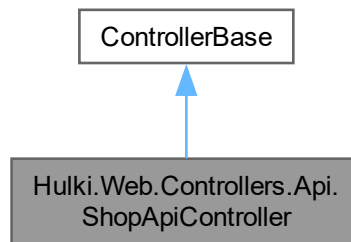

Public Member Functions

- **ShopApiController** (**IShopService** shopService)
- async Task< ActionResult< IReadOnlyList< **ShopItemDto** > > > **GetItems** (Cancellation token cancellationToken)
GET /api/shop/items – zwraca aktualną ofertę przedmiotów sklepu.

9.58.1 Detailed Description

Publiczne API sklepu. Endpointy są dostępne anonimowo (tylko odczyt oferty), zmień atrybut [AllowAnonymous] na [Authorize], jeśli API ma być chronione.

9.58.2 Constructor & Destructor Documentation

9.58.2.1 ShopApiController()

```
Hulki.Web.Controllers.Api.ShopApiController.ShopApiController (
    IShopService shopService)
```

9.58.3 Member Function Documentation

9.58.3.1 GetItems()

```
async Task< ActionResult< IReadOnlyList< ShopItemDto > > > Hulki.Web.Controllers.Api.ShopApiController.GetItems (
    Cancellation token cancellationToken)
```

GET /api/shop/items – zwraca aktualną ofertę przedmiotów sklepu.

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Controllers/Api/ **ShopApiController.cs**

9.59 Hulki.Web.Models.Dto.ShopItemDto Class Reference

DTO zwracane przez publiczne API sklepu (GET /api/shop/items). Nie ujawnia wewnętrznych pól encji (np. FK rzadkości).

Properties

- string **Id** = default! [get, set]
- string **Name** = default! [get, set]
- string? **Description** [get, set]
- int **Price** [get, set]
- string? **IconPath** [get, set]
- string? **Rarity** [get, set]

9.59.1 Detailed Description

DTO zwracane przez publiczne API sklepu (GET /api/shop/items). Nie ujawnia wewnętrznych pól encji (np. FK rzadkości).

9.59.2 Property Documentation

9.59.2.1 Description

```
string? Hulki.Web.Models.Dto.ShopItemDto.Description [get], [set]
```

9.59.2.2 IconPath

```
string? Hulki.Web.Models.Dto.ShopItemDto.IconPath [get], [set]
```

9.59.2.3 Id

```
string Hulki.Web.Models.Dto.ShopItemDto.Id = default! [get], [set]
```

9.59.2.4 Name

```
string Hulki.Web.Models.Dto.ShopItemDto.Name = default! [get], [set]
```

9.59.2.5 Price

```
int Hulki.Web.Models.Dto.ShopItemDto.Price [get], [set]
```

9.59.2.6 Rarity


```
string? Hulki.Web.Models.Dto.ShopItemDto.Rarity [get], [set]
```

The documentation for this class was generated from the following file:


- Hulki/Hulki.Web/Models/Dto/ **ShopItemDto.cs**

9.60 Hulki.Web.Services.ShopService Class Reference

Inheritance diagram for Hulki.Web.Services.ShopService:

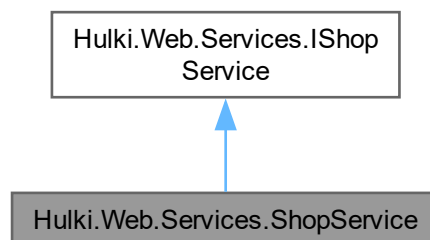

Collaboration diagram for Hulki.Web.Services.ShopService:

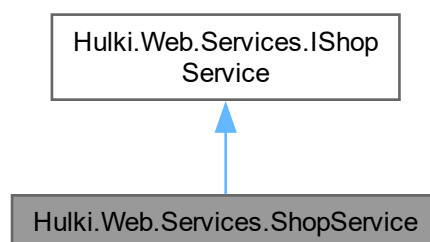

Public Member Functions

- **ShopService** (**ApplicationDbContext** context)
- async Task< IReadOnlyList< **ShopItemDto** > > **GetShopItemsAsync** (CancellationTokentoken cancellation←Token=default)

Zwraca aktualną ofertę przedmiotów dostępnych w sklepie.

9.60.1 Constructor & Destructor Documentation

9.60.1.1 ShopService()

```
Hulki.Web.Services.ShopService.ShopService (  
    ApplicationDbContext context)
```

9.60.2 Member Function Documentation

9.60.2.1 GetShopItemsAsync()

```
async Task< IReadOnlyList< ShopItemDto > > Hulki.Web.Services.ShopService.GetShopItemsAsync  
(  
    CancellationToken cancellationToken = default)
```

Zwraca aktualną ofertę przedmiotów dostępnych w sklepie.


Implements **Hulki.Web.Services.IShopService** (p. ??).

The documentation for this class was generated from the following file:


- Hulki/Hulki.Web/Services/ **ShopService.cs**

9.61 Hulki.Web.Controllers.StoreController Class Reference

Inheritance diagram for Hulki.Web.Controllers.StoreController:

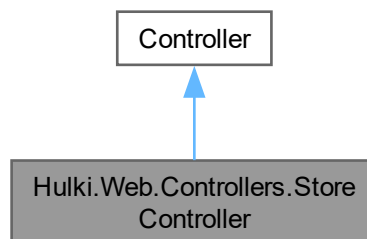

Collaboration diagram for Hulki.Web.Controllers.StoreController:

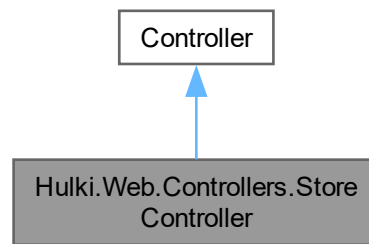

Public Member Functions

- **StoreController** (**ApplicationDbContext** context, UserManager< **AppUser** > userManager, **INotificationService** notificationService)
- async Task< IActionResult > **Index** ()
- async Task< IActionResult > **PlayRoulette** (Guid gameId)
- async Task< IActionResult > **PlayCards** (Guid gameId)
- async Task< IActionResult > **PlayScratchcard** (Guid gameId)
- async Task< IActionResult > **SellItem** (Guid itemId)
- async Task< IActionResult > **SellMultiple** (List< Guid > itemIds)
- async Task< IActionResult > **AddRewardItem** (string name, int itemRarityId, string? description, int price, string? iconPath)

9.61.1 Constructor & Destructor Documentation

9.61.1.1 StoreController()

```

Hulki.Web.Controllers.StoreController.StoreController (
    ApplicationDbContext context,
    UserManager< AppUser > userManager,
    INotificationService notificationService)
  
```

9.61.2 Member Function Documentation

9.61.2.1 AddRewardItem()

```

async Task< IActionResult > Hulki.Web.Controllers.StoreController.AddRewardItem (
    string name,
    int itemRarityId,
    string? description,
    int price,
    string? iconPath)
  
```

9.61.2.2 Index()

```
async Task< IActionResult > Hulki.Web.Controllers.StoreController.Index ()
```

9.61.2.3 PlayCards()

```
async Task< IActionResult > Hulki.Web.Controllers.StoreController.PlayCards (  
    Guid gameId)
```

9.61.2.4 PlayRoulette()

```
async Task< IActionResult > Hulki.Web.Controllers.StoreController.PlayRoulette (  
    Guid gameId)
```

9.61.2.5 PlayScratchcard()

```
async Task< IActionResult > Hulki.Web.Controllers.StoreController.PlayScratchcard (  
    Guid gameId)
```

9.61.2.6 SellItem()

```
async Task< IActionResult > Hulki.Web.Controllers.StoreController.SellItem (  
    Guid itemId)
```

9.61.2.7 SellMultiple()

```
async Task< IActionResult > Hulki.Web.Controllers.StoreController.SellMultiple (  
    List< Guid > itemIds)
```

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Controllers/ **StoreController.cs**

9.62 Hulki.Web.Models.Survey Class Reference

Properties

- Guid **Id** [get, set]
- string **Title** [get, set]
- virtual ICollection< **SurveyQuestion** > **Questions** = new List< **SurveyQuestion**>() [get, set]
- virtual ICollection< **SurveySubmission** > **Submissions** = new List< **SurveySubmission**>() [get, set]

9.62.1 Property Documentation

9.62.1.1 Id

Guid Hulki.Web.Models.Survey.Id [get], [set]

9.62.1.2 Questions

```
virtual ICollection< SurveyQuestion> Hulki.Web.Models.Survey.Questions = new List< Survey↵↵  
Question>() [get], [set]
```

9.62.1.3 Submissions

```
virtual ICollection< SurveySubmission> Hulki.Web.Models.Survey.Submissions = new List< Survey↵↵  
Submission>() [get], [set]
```

9.62.1.4 Title

string Hulki.Web.Models.Survey.Title [get], [set]

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/ **Survey.cs**

9.63 Hulki.Web.Models.SurveyAnswer Class Reference

Properties

- Guid **Id** [get, set]
- Guid **SubmissionId** [get, set]
- virtual **SurveySubmission Submission** [get, set]
- Guid **QuestionId** [get, set]
- virtual **SurveyQuestion Question** [get, set]
- string **AnswerText** [get, set]

9.63.1 Property Documentation

9.63.1.1 AnswerText

string Hulki.Web.Models.SurveyAnswer.AnswerText [get], [set]

9.63.1.2 Id

Guid Hulki.Web.Models.SurveyAnswer.Id [get], [set]

9.63.1.3 Question

```
virtual SurveyQuestion Hulki.Web.Models.SurveyAnswer.Question [get], [set]
```

9.63.1.4 QuestionId

```
Guid Hulki.Web.Models.SurveyAnswer.QuestionId [get], [set]
```

9.63.1.5 Submission

```
virtual SurveySubmission Hulki.Web.Models.SurveyAnswer.Submission [get], [set]
```

9.63.1.6 SubmissionId


```
Guid Hulki.Web.Models.SurveyAnswer.SubmissionId [get], [set]
```

The documentation for this class was generated from the following file:


- Hulki/Hulki.Web/Models/ **SurveyAnswer.cs**

9.64 Hulki.Web.Controllers.SurveyController Class Reference

Inheritance diagram for Hulki.Web.Controllers.SurveyController:



Collaboration diagram for Hulki.Web.Controllers.SurveyController:

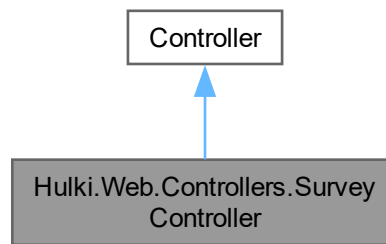

Public Member Functions

- **SurveyController** (**ISurveyService** surveyService, UserManager< **AppUser** > userManager)
- async Task< IActionResult > **Index** ()
- IActionResult **Create** ()
- async Task< IActionResult > **Create** (string title, List< string > questions)
- async Task< IActionResult > **Fill** (Guid id)
- async Task< IActionResult > **Submit** (Guid surveyId, Dictionary< Guid, string > answers)
- async Task< IActionResult > **Results** (Guid id)

9.64.1 Constructor & Destructor Documentation

9.64.1.1 SurveyController()

```

Hulki.Web.Controllers.SurveyController.SurveyController (
    ISurveyService surveyService,
    UserManager< AppUser > userManager)
  
```

9.64.2 Member Function Documentation

9.64.2.1 Create() [1/2]

```

IActionResult Hulki.Web.Controllers.SurveyController.Create ()
  
```

9.64.2.2 Create() [2/2]

```
async Task< IActionResult > Hulki.Web.Controllers.SurveyController.Create (  
    string title,  
    List< string > questions)
```


Here is the call graph for this function:



9.64.2.3 Fill()

```
async Task< IActionResult > Hulki.Web.Controllers.SurveyController.Fill (  
    Guid id)
```


Here is the call graph for this function:



9.64.2.4 Index()

```
async Task< IActionResult > Hulki.Web.Controllers.SurveyController.Index ()
```

Here is the caller graph for this function:

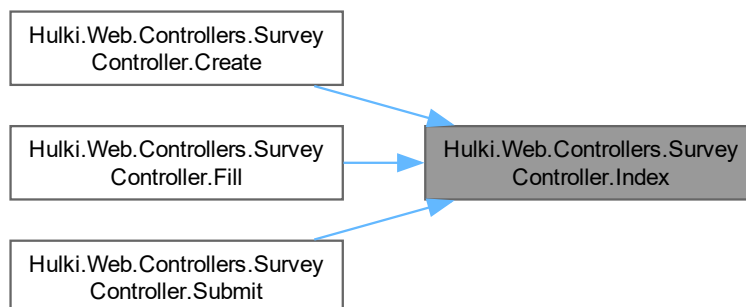


9.64.2.5 Results()

```
async Task< IActionResult > Hulki.Web.Controllers.SurveyController.Results (
    Guid id)
```

9.64.2.6 Submit()

```
async Task< IActionResult > Hulki.Web.Controllers.SurveyController.Submit (
    Guid surveyId,
    Dictionary< Guid, string > answers)
```

Here is the call graph for this function:



The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Controllers/ **SurveyController.cs**

9.65 Hulki.Web.Models.SurveyQuestion Class Reference

Properties

- Guid **Id** [get, set]
- string **Text** [get, set]
- Guid **SurveyId** [get, set]
- virtual Survey **Survey** [get, set]

9.65.1 Property Documentation

9.65.1.1 Id

```
Guid Hulki.Web.Models.SurveyQuestion.Id [get], [set]
```

9.65.1.2 Survey

```
virtual Survey Hulki.Web.Models.SurveyQuestion.Survey [get], [set]
```

9.65.1.3 SurveyId

`Guid Hulki.Web.Models.SurveyQuestion.SurveyId [get], [set]`

9.65.1.4 Text


`string Hulki.Web.Models.SurveyQuestion.Text [get], [set]`

The documentation for this class was generated from the following file:


- `Hulki/Hulki.Web/Models/ SurveyQuestion.cs`

9.66 Hulki.Web.Services.SurveyService Class Reference

Inheritance diagram for `Hulki.Web.Services.SurveyService`:



Collaboration diagram for `Hulki.Web.Services.SurveyService`:



Public Member Functions

- **SurveyService** (**ApplicationDbContext** context)
- async Task< List< **Survey** > > **GetAllSurveysAsync** ()
- async Task< **Survey** > **GetSurveyByIdAsync** (Guid id)
- async Task **CreateSurveyAsync** (string title, List< string > questions)
- async Task **SubmitSurveyAsync** (Guid surveyId, string userId, Dictionary< Guid, string > answers)
- async Task< List< **SurveySubmission** > > **GetSurveyResultsAsync** (Guid surveyId)
- async Task< bool > **HasUserSubmittedAsync** (Guid surveyId, string userId)

9.66.1 Constructor & Destructor Documentation

9.66.1.1 SurveyService()

```
Hulki.Web.Services.SurveyService.SurveyService (
    ApplicationDbContext context)
```

9.66.2 Member Function Documentation

9.66.2.1 CreateSurveyAsync()

```
async Task Hulki.Web.Services.SurveyService.CreateSurveyAsync (
    string title,
    List< string > questions)
```

Implements **Hulki.Web.Services.ISurveyService** (p. ??).

9.66.2.2 GetAllSurveysAsync()

```
async Task< List< Survey > > Hulki.Web.Services.SurveyService.GetAllSurveysAsync ()
```

Implements **Hulki.Web.Services.ISurveyService** (p. ??).

9.66.2.3 GetSurveyByIdAsync()

```
async Task< Survey > Hulki.Web.Services.SurveyService.GetSurveyByIdAsync (
    Guid id)
```

Implements **Hulki.Web.Services.ISurveyService** (p. ??).

9.66.2.4 GetSurveyResultsAsync()

```
async Task< List< SurveySubmission > > Hulki.Web.Services.SurveyService.GetSurveyResults←
Async (
    Guid surveyId)
```

Implements **Hulki.Web.Services.ISurveyService** (p. ??).

9.66.2.5 HasUserSubmittedAsync()

```
async Task< bool > Hulki.Web.Services.SurveyService.HasUserSubmittedAsync (
    Guid surveyId,
    string userId)
```

Implements **Hulki.Web.Services.ISurveyService** (p. ??).

9.66.2.6 SubmitSurveyAsync()

```
async Task Hulki.Web.Services.SurveyService.SubmitSurveyAsync (
    Guid surveyId,
    string userId,
    Dictionary< Guid, string > answers)
```

Implements **Hulki.Web.Services.ISurveyService** (p. ??).

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Services/ **SurveyService.cs**

9.67 Hulki.Web.Models.SurveySubmission Class Reference

Properties

- Guid **Id** [get, set]
- string **AppUserId** [get, set]
- virtual AppUser **AppUser** [get, set]
- Guid **SurveyId** [get, set]
- virtual Survey **Survey** [get, set]
- DateTime **SubmittedAt** = DateTime.Now [get, set]
- virtual ICollection< **SurveyAnswer** > **Answers** = new List< **SurveyAnswer**>() [get, set]

9.67.1 Property Documentation

9.67.1.1 Answers

```
virtual ICollection< SurveyAnswer> Hulki.Web.Models.SurveySubmission.Answers = new List<
SurveyAnswer>() [get], [set]
```

9.67.1.2 AppUser

```
virtual AppUser Hulki.Web.Models.SurveySubmission.AppUser [get], [set]
```

9.67.1.3 AppUserId

```
string Hulki.Web.Models.SurveySubmission.AppUserId [get], [set]
```

9.67.1.4 Id

Guid Hulki.Web.Models.SurveySubmission.Id [get], [set]

9.67.1.5 SubmittedAt

DateTime Hulki.Web.Models.SurveySubmission.SubmittedAt = DateTime.Now [get], [set]

9.67.1.6 Survey

virtual Survey Hulki.Web.Models.SurveySubmission.Survey [get], [set]

9.67.1.7 SurveyId

Guid Hulki.Web.Models.SurveySubmission.SurveyId [get], [set]

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/ **SurveySubmission.cs**

9.68 Hulki.Web.Models.TherapyGoal Class Reference

Properties

- Guid **Id** [get, set]
- string **AppUserId** [get, set]
- virtual AppUser **AppUser** [get, set]
- string **Title** [get, set]
- string? **Description** [get, set]
- DateTime **Deadline** [get, set]
- bool **IsCompleted** [get, set]
- virtual ICollection< **GoalMilestone** > **Milestones** = new List< **GoalMilestone**>() [get, set]

9.68.1 Property Documentation

9.68.1.1 AppUser

virtual AppUser Hulki.Web.Models.TherapyGoal.AppUser [get], [set]

9.68.1.2 AppUserId

string Hulki.Web.Models.TherapyGoal.AppUserId [get], [set]

9.68.1.3 Deadline

`DateTime Hulki.Web.Models.TherapyGoal.Deadline [get], [set]`

9.68.1.4 Description

`string? Hulki.Web.Models.TherapyGoal.Description [get], [set]`

9.68.1.5 Id

`Guid Hulki.Web.Models.TherapyGoal.Id [get], [set]`

9.68.1.6 IsCompleted

`bool Hulki.Web.Models.TherapyGoal.IsCompleted [get], [set]`

9.68.1.7 Milestones

`virtual ICollection< GoalMilestone> Hulki.Web.Models.TherapyGoal.Milestones = new List< GoalMilestone>() [get], [set]`

9.68.1.8 Title


`string Hulki.Web.Models.TherapyGoal.Title [get], [set]`

The documentation for this class was generated from the following file:


- Hulki/Hulki.Web/Models/ **TherapyGoal.cs**

9.69 Hulki.Web.Controllers.TherapyGoalController Class Reference

Inheritance diagram for Hulki.Web.Controllers.TherapyGoalController:

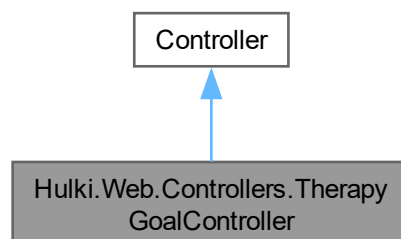

Collaboration diagram for Hulki.Web.Controllers.TherapyGoalController:

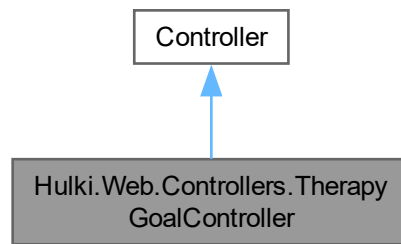

Public Member Functions

- **TherapyGoalController** (**ITherapyGoalService** goalService, UserManager< **AppUser** > userManager, **INotificationService** notificationService)
- async Task< IActionResult > **Index** ()
- async Task< IActionResult > **Create** (string title, DateTime deadline, List< string > milestones)
- async Task< IActionResult > **ToggleMilestone** (Guid milestoneId)
- async Task< IActionResult > **Delete** (Guid id)

9.69.1 Constructor & Destructor Documentation

9.69.1.1 TherapyGoalController()

```

Hulki.Web.Controllers.TherapyGoalController.TherapyGoalController (
    ITherapyGoalService goalService,
    UserManager< AppUser > userManager,
    INotificationService notificationService)
  
```

9.69.2 Member Function Documentation

9.69.2.1 Create()

```

async Task< IActionResult > Hulki.Web.Controllers.TherapyGoalController.Create (
    string title,
    DateTime deadline,
    List< string > milestones)
  
```


Here is the call graph for this function:



9.69.2.2 Delete()

```
async Task< IActionResult > Hulki.Web.Controllers.TherapyGoalController.Delete (
    Guid id)
```


Here is the call graph for this function:



9.69.2.3 Index()

```
async Task< IActionResult > Hulki.Web.Controllers.TherapyGoalController.Index ()
```

Here is the caller graph for this function:

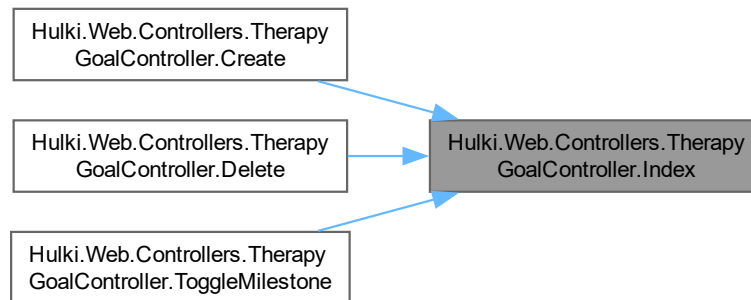

9.69.2.4 ToggleMilestone()

```
async Task< IActionResult > Hulki.Web.Controllers.TherapyGoalController.ToggleMilestone (
    Guid milestoneId)
```

Here is the call graph for this function:




The documentation for this class was generated from the following file:


- Hulki/Hulki.Web/Controllers/ **TherapyGoalController.cs**

9.70 Hulki.Web.Services.TherapyGoalService Class Reference

Inheritance diagram for Hulki.Web.Services.TherapyGoalService:



Collaboration diagram for Hulki.Web.Services.TherapyGoalService:



Public Member Functions

- **TherapyGoalService** (**ApplicationDbContext** context, **IBadgeService** badgeService, **INotificationService** notificationService)
- async Task< List< **TherapyGoal** > > **GetUserGoalsAsync** (string userId)
- async Task **CreateGoalAsync** (**TherapyGoal** goal, List< string > milestones)
- async Task **ToggleMilestoneAsync** (Guid milestoneId, string userId)
- async Task **DeleteGoalAsync** (Guid goalId, string userId)

9.70.1 Constructor & Destructor Documentation

9.70.1.1 TherapyGoalService()

```
Hulki.Web.Services.TherapyGoalService.TherapyGoalService (
    ApplicationDbContext context,
    IBadgeService badgeService,
    INotificationService notificationService)
```

9.70.2 Member Function Documentation

9.70.2.1 CreateGoalAsync()

```
async Task Hulki.Web.Services.TherapyGoalService.CreateGoalAsync (
    TherapyGoal goal,
    List< string > milestones)
```

Implements **Hulki.Web.Services.ITherapyGoalService** (p. ??).

9.70.2.2 DeleteGoalAsync()

```
async Task Hulki.Web.Services.TherapyGoalService.DeleteGoalAsync (
    Guid goalId,
    string userId)
```

Implements **Hulki.Web.Services.ITherapyGoalService** (p. ??).

9.70.2.3 GetUserGoalsAsync()

```
async Task< List< TherapyGoal > > Hulki.Web.Services.TherapyGoalService.GetUserGoalsAsync (
    string userId)
```

Implements **Hulki.Web.Services.ITherapyGoalService** (p. ??).

9.70.2.4 ToggleMilestoneAsync()

```
async Task Hulki.Web.Services.TherapyGoalService.ToggleMilestoneAsync (
    Guid milestoneId,
    string userId)
```

Implements **Hulki.Web.Services.ITherapyGoalService** (p. ??).

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Services/ **TherapyGoalService.cs**

9.71 Hulki.Web.Models.TherapyGroup Class Reference

Properties

- int **Id** [get, set]
- string **Name** [get, set]
- string **Description** [get, set]
- int **MaxParticipants** = 10 [get, set]
- int **TherapyTypeId** [get, set]
- virtual TherapyType **TherapyType** [get, set]
- virtual ICollection< **PatientGroup** > **PatientGroups** [get, set]

9.71.1 Property Documentation

9.71.1.1 Description

```
string Hulki.Web.Models.TherapyGroup.Description [get], [set]
```

9.71.1.2 Id

```
int Hulki.Web.Models.TherapyGroup.Id [get], [set]
```

9.71.1.3 MaxParticipants

```
int Hulki.Web.Models.TherapyGroup.MaxParticipants = 10 [get], [set]
```

9.71.1.4 Name

```
string Hulki.Web.Models.TherapyGroup.Name [get], [set]
```

9.71.1.5 PatientGroups

```
virtual ICollection< PatientGroup> Hulki.Web.Models.TherapyGroup.PatientGroups [get], [set]
```

9.71.1.6 TherapyType

```
virtual TherapyType Hulki.Web.Models.TherapyGroup.TherapyType [get], [set]
```

9.71.1.7 TherapyTypeId


```
int Hulki.Web.Models.TherapyGroup.TherapyTypeId [get], [set]
```

The documentation for this class was generated from the following file:


- Hulki/Hulki.Web/Models/ **TherapyGroup.cs**

9.72 Hulki.Web.Controllers.TherapyGroupController Class Reference

Inheritance diagram for Hulki.Web.Controllers.TherapyGroupController:

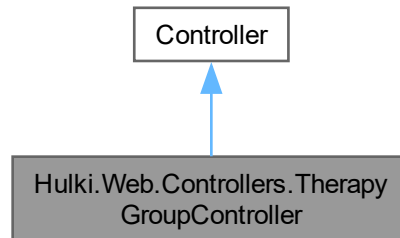

Collaboration diagram for Hulki.Web.Controllers.TherapyGroupController:

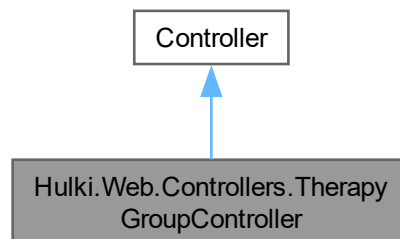

Public Member Functions

- **TherapyGroupController** (**ApplicationDbContext** context, UserManager< **AppUser** > userManager, **INotificationService** notificationService)
- async Task< IActionResult > **Index** ()
- async Task< IActionResult > **Join** (int id)
- async Task< IActionResult > **Manage** (int id)
- async Task< IActionResult > **Details** (int id)
- async Task< IActionResult > **AddMessage** (int groupId, string content)
- async Task< IActionResult > **Approve** (int groupId, string userId)
- async Task< IActionResult > **Reject** (int groupId, string userId)
- async Task< IActionResult > **Create** ()
- async Task< IActionResult > **Create** (**TherapyGroup** group)
- async Task< IActionResult > **Edit** (int id)
- async Task< IActionResult > **Edit** (int id, **TherapyGroup** group)
- async Task< IActionResult > **Delete** (int id)

- `async Task< IActionResult > CreateQuest` (int groupId, string title, string description, string questType, int rewardPoints, string? optionA, string? optionB, string? optionC, string? optionD, string? correctOption)
- `async Task< IActionResult > SubmitQuest` (int questId, int groupId, string answerText)
- `async Task< IActionResult > EvaluateQuest` (int submissionId, int groupId, bool accept)
- `async Task< IActionResult > DeleteQuest` (int questId, int groupId)
- `async Task< IActionResult > UploadResource` (int groupId, string title, IFormFile uploadedFile)

9.72.1 Constructor & Destructor Documentation

9.72.1.1 TherapyGroupController()


```
Hulki.Web.Controllers.TherapyGroupController.TherapyGroupController (
    ApplicationDbContext context,
    UserManager< AppUser > userManager,
    INotificationService notificationService)
```

9.72.2 Member Function Documentation

9.72.2.1 AddMessage()

```
async Task< IActionResult > Hulki.Web.Controllers.TherapyGroupController.AddMessage (
    int groupId,
    string content)
```

Here is the call graph for this function:



9.72.2.2 Approve()

```
async Task< IActionResult > Hulki.Web.Controllers.TherapyGroupController.Approve (
    int groupId,
    string userId)
```

Here is the call graph for this function:




9.72.2.3 Create() [1/2]

```
async Task< IActionResult > Hulki.Web.Controllers.TherapyGroupController.Create ()
```

9.72.2.4 Create() [2/2]

```
async Task< IActionResult > Hulki.Web.Controllers.TherapyGroupController.Create (  
    TherapyGroup group)
```


Here is the call graph for this function:



9.72.2.5 CreateQuest()

```
async Task< IActionResult > Hulki.Web.Controllers.TherapyGroupController.CreateQuest (  
    int groupId,  
    string title,  
    string description,  
    string questType,  
    int rewardPoints,  
    string? optionA,  
    string? optionB,  
    string? optionC,  
    string? optionD,  
    string? correctOption)
```


Here is the call graph for this function:



9.72.2.6 Delete()

```
async Task< IActionResult > Hulki.Web.Controllers.TherapyGroupController.Delete (
    int id)
```


Here is the call graph for this function:



9.72.2.7 DeleteQuest()

```
async Task< IActionResult > Hulki.Web.Controllers.TherapyGroupController.DeleteQuest (
    int questId,
    int groupId)
```

Here is the call graph for this function:




9.72.2.8 Details()

```
async Task< IActionResult > Hulki.Web.Controllers.TherapyGroupController.Details (
    int id)
```

Here is the call graph for this function:



Here is the caller graph for this function:

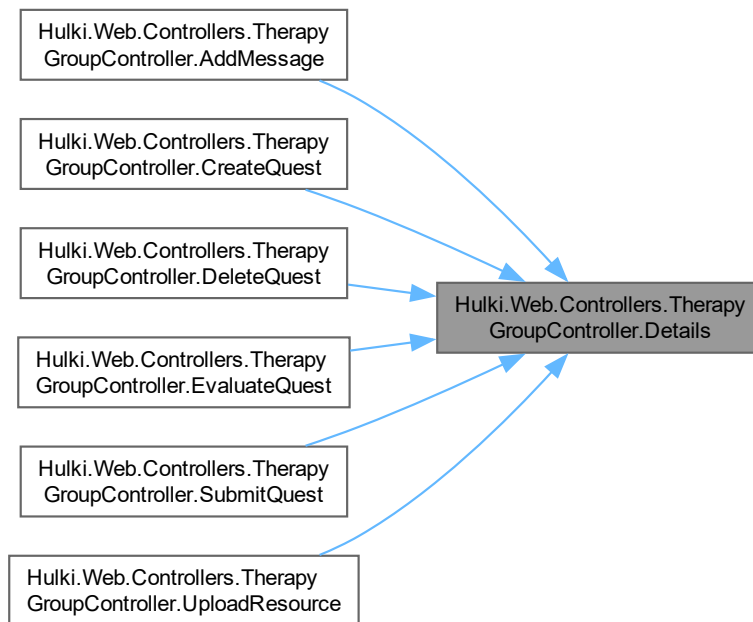

9.72.2.9 Edit() [1/2]

```
async Task< IActionResult > Hulki.Web.Controllers.TherapyGroupController.Edit (
    int id)
```

9.72.2.10 Edit() [2/2]

```
async Task< IActionResult > Hulki.Web.Controllers.TherapyGroupController.Edit (
    int id,
    TherapyGroup group)
```

Here is the call graph for this function:




9.72.2.11 EvaluateQuest()

```

async Task< IActionResult > Hulki.Web.Controllers.TherapyGroupController.EvaluateQuest (
    int submissionId,
    int groupId,
    bool accept)

```

Here is the call graph for this function:


**9.72.2.12 Index()**

```

async Task< IActionResult > Hulki.Web.Controllers.TherapyGroupController.Index ()

```

Here is the caller graph for this function:

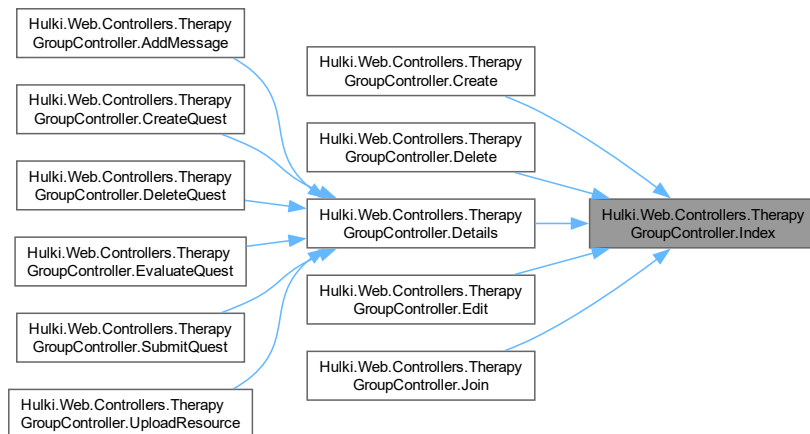**9.72.2.13 Join()**

```

async Task< IActionResult > Hulki.Web.Controllers.TherapyGroupController.Join (
    int id)

```


Here is the call graph for this function:



9.72.2.14 Manage()

```
async Task< IActionResult > Hulki.Web.Controllers.TherapyGroupController.Manage (
    int id)
```

Here is the caller graph for this function:

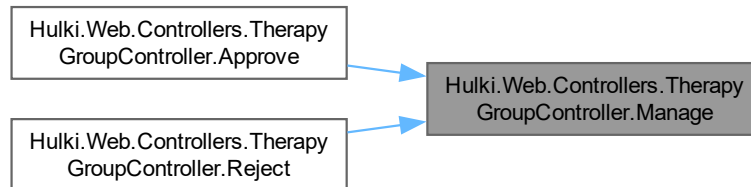

9.72.2.15 Reject()

```
async Task< IActionResult > Hulki.Web.Controllers.TherapyGroupController.Reject (
    int groupId,
    string userId)
```


Here is the call graph for this function:



9.72.2.16 SubmitQuest()

```
async Task< IActionResult > Hulki.Web.Controllers.TherapyGroupController.SubmitQuest (
    int questId,
    int groupId,
    string answerText)
```


Here is the call graph for this function:



9.72.2.17 UploadResource()

```
async Task< IActionResult > Hulki.Web.Controllers.TherapyGroupController.UploadResource (
    int groupId,
    string title,
    IFormFile uploadedFile)
```

Here is the call graph for this function:



The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Controllers/ **TherapyGroupController.cs**

9.73 Hulki.Web.Models.TherapyType Class Reference

Properties

- int **Id** [get, set]
- string **Name** [get, set]

9.73.1 Property Documentation

9.73.1.1 Id

```
int Hulki.Web.Models.TherapyType.Id [get], [set]
```

9.73.1.2 Name

```
string Hulki.Web.Models.TherapyType.Name [get], [set]
```

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/ **TherapyType.cs**

9.74 UpdateVisitDetailsDto Class Reference

Properties

- string **MedicalHistory** [get, set]
- string **Diagnosis** [get, set]
- string **Recommendations** [get, set]
- string **InternalNotes** [get, set]
- List< **MedicationDto** > **Medications** [get, set]

9.74.1 Property Documentation

9.74.1.1 Diagnosis

string UpdateVisitDetailsDto.Diagnosis [get], [set]

9.74.1.2 InternalNotes

string UpdateVisitDetailsDto.InternalNotes [get], [set]

9.74.1.3 MedicalHistory

string UpdateVisitDetailsDto.MedicalHistory [get], [set]

9.74.1.4 Medications

List< **MedicationDto**> UpdateVisitDetailsDto.Medications [get], [set]

9.74.1.5 Recommendations

string UpdateVisitDetailsDto.Recommendations [get], [set]

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/Dto/ **UpdateVisitDetailsDto.cs**

9.75 Hulki.Web.Models.UserBadge Class Reference

Properties

- Guid **Id** [get, set]
- string **AppUserId** [get, set]
- virtual AppUser **AppUser** [get, set]
- Guid **BadgeId** [get, set]
- virtual **AchievementBadge Badge** [get, set]
- DateTime **EarnedAt** = DateTime.Now [get, set]

9.75.1 Property Documentation

9.75.1.1 AppUser

`virtual AppUser Hulki.Web.Models.UserBadge.AppUser [get], [set]`

9.75.1.2 AppUserId

`string Hulki.Web.Models.UserBadge.AppUserId [get], [set]`

9.75.1.3 Badge

`virtual AchievementBadge Hulki.Web.Models.UserBadge.Badge [get], [set]`

9.75.1.4 Badgeld

`Guid Hulki.Web.Models.UserBadge.BadgeId [get], [set]`

9.75.1.5 EarnedAt

`DateTime Hulki.Web.Models.UserBadge.EarnedAt = DateTime.Now [get], [set]`

9.75.1.6 Id

`Guid Hulki.Web.Models.UserBadge.Id [get], [set]`

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/ **UserBadge.cs**

9.76 Hulki.Web.Models.VisitDetails Class Reference

Properties

- `int Id [get, set]`
- `Guid ConsultationId [get, set]`
- `string MedicalHistory [get, set]`
- `string Diagnosis [get, set]`
- `string Recommendations [get, set]`
- `List< PrescribedMedication > Medications = new() [get, set]`
- `string InternalNotes [get, set]`

9.76.1 Property Documentation

9.76.1.1 ConsultationId

Guid Hulki.Web.Models.VisitDetails.ConsultationId [get], [set]

9.76.1.2 Diagnosis

string Hulki.Web.Models.VisitDetails.Diagnosis [get], [set]

9.76.1.3 Id

int Hulki.Web.Models.VisitDetails.Id [get], [set]

9.76.1.4 InternalNotes

string Hulki.Web.Models.VisitDetails.InternalNotes [get], [set]

9.76.1.5 MedicalHistory

string Hulki.Web.Models.VisitDetails.MedicalHistory [get], [set]

9.76.1.6 Medications

List< **PrescribedMedication**> Hulki.Web.Models.VisitDetails.Medications = new() [get], [set]

9.76.1.7 Recommendations

string Hulki.Web.Models.VisitDetails.Recommendations [get], [set]

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/ **VisitDetails.cs**

9.77 Hulki.Web.Models.Wallet Class Reference

Properties

- Guid **Id** [get, set]
- int **Balance** = 0 [get, set]
- string **AppUserId** [get, set]
- virtual AppUser **AppUser** [get, set]

9.77.1 Property Documentation

9.77.1.1 AppUser

```
virtual AppUser Hulki.Web.Models.Wallet.AppUser [get], [set]
```

9.77.1.2 AppUserId

```
string Hulki.Web.Models.Wallet.AppUserId [get], [set]
```

9.77.1.3 Balance

```
int Hulki.Web.Models.Wallet.Balance = 0 [get], [set]
```

9.77.1.4 Id

```
Guid Hulki.Web.Models.Wallet.Id [get], [set]
```

The documentation for this class was generated from the following file:

- Hulki/Hulki.Web/Models/ **Wallet.cs**

Chapter 10

File Documentation

10.1 Hulki/Hulki.Web/Controllers/AccountController.cs File Reference

Classes

- class **Hulki.Web.Controllers.AccountController**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Controllers**

10.2 Hulki/Hulki.Web/Controllers/AdminController.cs File Reference

Classes

- class **Hulki.Web.Controllers.AdminController**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Controllers**

10.3 Hulki/Hulki.Web/Controllers/Api/QuotesApiController.cs File Reference

Classes

- class **Hulki.Web.Controllers.Api.QuotesApiController**

Lekki endpoint do pobierania pojedynczego cytatu (używany przez frontend, np. przycisk "Nowy cytat" na stronie głównej).

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Controllers**
- namespace **Hulki.Web.Controllers.Api**

10.4 Hulki/Hulki.Web/Controllers/Api/ShopApiController.cs File Reference

Classes

- class **Hulki.Web.Controllers.Api.ShopApiController**
Publiczne API sklepu. Endpointy są dostępne anonimowo (tylko odczyt oferty), zmień atrybut [AllowAnonymous] na [Authorize], jeśli API ma być chronione.

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Controllers**
- namespace **Hulki.Web.Controllers.Api**

10.5 Hulki/Hulki.Web/Controllers/ConsultationController.cs File Reference

Classes

- class **Hulki.Web.Controllers.ConsultationController**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Controllers**

10.6 Hulki/Hulki.Web/Controllers/ForumController.cs File Reference

Classes

- class **Hulki.Web.Controllers.ForumController**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Controllers**

10.7 Hulki/Hulki.Web/Controllers/HomeController.cs File Reference

Classes

- class **Hulki.Web.Controllers.HomeController**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Controllers**

10.8 Hulki/Hulki.Web/Controllers/NotificationController.cs File Reference

Classes

- class **Hulki.Web.Controllers.NotificationController**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Controllers**

10.9 Hulki/Hulki.Web/Controllers/PatientController.cs File Reference

Classes

- class **Hulki.Web.Controllers.PatientController**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Controllers**

10.10 Hulki/Hulki.Web/Controllers/ProfileController.cs File Reference

Classes

- class **Hulki.Web.Controllers.ProfileController**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Controllers**

10.11 Hulki/Hulki.Web/Controllers/StoreController.cs File Reference

Classes

- class **Hulki.Web.Controllers.StoreController**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Controllers**

10.12 Hulki/Hulki.Web/Controllers/SurveyController.cs File Reference

Classes

- class **Hulki.Web.Controllers.SurveyController**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Controllers**

10.13 Hulki/Hulki.Web/Controllers/TherapyGoalController.cs File Reference

Classes

- class **Hulki.Web.Controllers.TherapyGoalController**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Controllers**

10.14 Hulki/Hulki.Web/Controllers/TherapyGroupController.cs File Reference

Classes

- class **Hulki.Web.Controllers.TherapyGroupController**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Controllers**

10.15 Hulki/Hulki.Web/Data/ApplicationDbContext.cs File Reference

Classes

- class **Hulki.Web.Data.ApplicationDbContext**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Data**

10.16 Hulki/Hulki.Web/Data/StoreDataSeeder.cs File Reference

Classes

- class **Hulki.Web.Data.StoreDataSeeder**

*Seeder danych sklepu. Uruchamiany przy starcie aplikacji (**Program.cs** (p. ??)), wypełnia bazę danymi testowymi i przykładowymi nagrodami, gram i rzadkościami.*

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Data**

10.17 Hulki/Hulki.Web/Migrations/20260610135200_InitialCreate.cs File Reference

Classes

- class **Hulki.Web.Migrations.InitialCreate**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Migrations**

10.18 Hulki/Hulki.Web/Migrations/20260610135200_Initial↔ Create.Designer.cs File Reference

Classes

- class **Hulki.Web.Migrations.InitialCreate**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Migrations**

10.19 Hulki/Hulki.Web/Migrations/ApplicationDbContextModel↔ Snapshot.cs File Reference

Classes

- class **Hulki.Web.Migrations.ApplicationDbContextModelSnapshot**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Migrations**

10.20 Hulki/Hulki.Web/Models/AchievementBadge.cs File Reference

Classes

- class **Hulki.Web.Models.AchievementBadge**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**

10.21 Hulki/Hulki.Web/Models/AppUser.cs File Reference

Classes

- class **Hulki.Web.Models.AppUser**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**

10.22 Hulki/Hulki.Web/Models/Consultation.cs File Reference

Classes

- class **Hulki.Web.Models.Consultation**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**

10.23 Hulki/Hulki.Web/Models/ConsultationStatus.cs File Reference

Classes

- class **ConsultationStatus**

10.24 Hulki/Hulki.Web/Models/CreateConsultationDto.cs File Reference

Classes

- class **Hulki.Web.Models.Dto.CreateConsultationDto**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**
- namespace **Hulki.Web.Models.Dto**

10.25 Hulki/Hulki.Web/Models/DailyReport.cs File Reference

Classes

- class **Hulki.Web.Models.DailyReport**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**

10.26 Hulki/Hulki.Web/Models/Dto/QuoteDto.cs File Reference

Classes

- class **Hulki.Web.Models.Dto.QuoteDto**
Ujednolicony cytat motywacyjny – niezależny od formatu źródła zewnętrznego.

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**
- namespace **Hulki.Web.Models.Dto**

10.27 Hulki/Hulki.Web/Models/Dto/ShopItemDto.cs File Reference

Classes

- class **Hulki.Web.Models.Dto.ShopItemDto**
DTO zwracane przez publiczne API sklepu (GET /api/shop/items). Nie ujawnia wewnętrznych pól encji (np. FK rzadkości).

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**
- namespace **Hulki.Web.Models.Dto**

10.28 Hulki/Hulki.Web/Models/Dto/UpdateVisitDetailsDto.cs File Reference

Classes

- class **UpdateVisitDetailsDto**
- class **MedicationDto**

10.29 Hulki/Hulki.Web/Models/ErrorViewModel.cs File Reference

Classes

- class **Hulki.Web.Models.ErrorViewModel**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**

10.30 Hulki/Hulki.Web/Models/FileType.cs File Reference

Classes

- class **Hulki.Web.Models.FileType**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**

10.31 Hulki/Hulki.Web/Models/ForumCategory.cs File Reference

Classes

- class **Hulki.Web.Models.ForumCategory**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**

10.32 Hulki/Hulki.Web/Models/ForumPost.cs File Reference

Classes

- class **Hulki.Web.Models.ForumPost**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**

10.33 Hulki/Hulki.Web/Models/ForumTopic.cs File Reference

Classes

- class **Hulki.Web.Models.ForumTopic**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**

10.34 Hulki/Hulki.Web/Models/Game.cs File Reference

Classes

- class **Hulki.Web.Models.Game**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**

10.35 Hulki/Hulki.Web/Models/GameSession.cs File Reference

Classes

- class **Hulki.Web.Models.GameSession**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**

10.36 Hulki/Hulki.Web/Models/GameType.cs File Reference

Classes

- class `Hulki.Web.Models.GameType`

Namespaces

- namespace `Hulki`
- namespace `Hulki.Web`
- namespace `Hulki.Web.Models`

10.37 Hulki/Hulki.Web/Models/GoalMilestone.cs File Reference

Classes

- class `Hulki.Web.Models.GoalMilestone`

Namespaces

- namespace `Hulki`
- namespace `Hulki.Web`
- namespace `Hulki.Web.Models`

10.38 Hulki/Hulki.Web/Models/GroupMessage.cs File Reference

Classes

- class `Hulki.Web.Models.GroupMessage`

Namespaces

- namespace `Hulki`
- namespace `Hulki.Web`
- namespace `Hulki.Web.Models`

10.39 Hulki/Hulki.Web/Models/GroupQuest.cs File Reference

Classes

- class `Hulki.Web.Models.GroupQuest`

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**

10.40 Hulki/Hulki.Web/Models/GroupResource.cs File Reference

Classes

- class **Hulki.Web.Models.GroupResource**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**

10.41 Hulki/Hulki.Web/Models/ItemRarity.cs File Reference

Classes

- class **Hulki.Web.Models.ItemRarity**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**

10.42 Hulki/Hulki.Web/Models/MoodLog.cs File Reference

Classes

- class **Hulki.Web.Models.MoodLog**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**

10.43 Hulki/Hulki.Web/Models/MoodType.cs File Reference

Classes

- class `Hulki.Web.Models.MoodType`

Namespaces

- namespace `Hulki`
- namespace `Hulki.Web`
- namespace `Hulki.Web.Models`

10.44 Hulki/Hulki.Web/Models/Notification.cs File Reference

Classes

- class `Hulki.Web.Models.Notification`

Namespaces

- namespace `Hulki`
- namespace `Hulki.Web`
- namespace `Hulki.Web.Models`

10.45 Hulki/Hulki.Web/Models/PatientGroup.cs File Reference

Classes

- class `Hulki.Web.Models.PatientGroup`

Namespaces

- namespace `Hulki`
- namespace `Hulki.Web`
- namespace `Hulki.Web.Models`

10.46 Hulki/Hulki.Web/Models/PatientInventory.cs File Reference

Classes

- class `Hulki.Web.Models.PatientInventory`

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**

10.47 Hulki/Hulki.Web/Models/PointTransaction.cs File Reference

Classes

- class **Hulki.Web.Models.PointTransaction**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**

10.48 Hulki/Hulki.Web/Models/QuestSubmission.cs File Reference

Classes

- class **Hulki.Web.Models.QuestSubmission**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**

10.49 Hulki/Hulki.Web/Models/ReportAttachment.cs File Reference

Classes

- class **Hulki.Web.Models.ReportAttachment**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**

10.50 Hulki/Hulki.Web/Models/ReportStatus.cs File Reference

Classes

- class `Hulki.Web.Models.ReportStatus`

Namespaces

- namespace `Hulki`
- namespace `Hulki.Web`
- namespace `Hulki.Web.Models`

10.51 Hulki/Hulki.Web/Models/RewardItem.cs File Reference

Classes

- class `Hulki.Web.Models.RewardItem`

Namespaces

- namespace `Hulki`
- namespace `Hulki.Web`
- namespace `Hulki.Web.Models`

10.52 Hulki/Hulki.Web/Models/Survey.cs File Reference

Classes

- class `Hulki.Web.Models.Survey`

Namespaces

- namespace `Hulki`
- namespace `Hulki.Web`
- namespace `Hulki.Web.Models`

10.53 Hulki/Hulki.Web/Models/SurveyAnswer.cs File Reference

Classes

- class `Hulki.Web.Models.SurveyAnswer`

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**

10.54 Hulki/Hulki.Web/Models/SurveyQuestion.cs File Reference**Classes**

- class **Hulki.Web.Models.SurveyQuestion**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**

10.55 Hulki/Hulki.Web/Models/SurveySubmission.cs File Reference**Classes**

- class **Hulki.Web.Models.SurveySubmission**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**

10.56 Hulki/Hulki.Web/Models/TherapyGoal.cs File Reference**Classes**

- class **Hulki.Web.Models.TherapyGoal**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**

10.57 Hulki/Hulki.Web/Models/TherapyGroup.cs File Reference

Classes

- class **Hulki.Web.Models.TherapyGroup**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**

10.58 Hulki/Hulki.Web/Models/TherapyType.cs File Reference

Classes

- class **Hulki.Web.Models.TherapyType**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**

10.59 Hulki/Hulki.Web/Models/UserBadge.cs File Reference

Classes

- class **Hulki.Web.Models.UserBadge**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**

10.60 Hulki/Hulki.Web/Models/VisitDetails.cs File Reference

Classes

- class **Hulki.Web.Models.VisitDetails**
- class **Hulki.Web.Models.PrescribedMedication**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**

10.61 Hulki/Hulki.Web/Models/Wallet.cs File Reference

Classes

- class **Hulki.Web.Models.Wallet**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Models**

10.62 Hulki/Hulki.Web/obj/Debug/net10.0/.NETCore↵ App,Version=v10.0.AssemblyAttributes.cs File Reference

10.63 Hulki/Hulki.Web/obj/Debug/net10.0/Hulki.Web.AssemblyInfo.cs File Reference

10.64 Hulki/Hulki.Web/obj/Debug/net10.0/Hulki.Web.GlobalUsings.g.cs File Reference

10.65 Hulki/Hulki.Web/obj/Debug/net10.0/Hulki.Web.MvcApplication↵ PartsAssemblyInfo.cs File Reference

10.66 Hulki/Hulki.Web/obj/Debug/net10.0/Hulki.Web.RazorAssembly↵ Info.cs File Reference

10.67 Hulki/Hulki.Web/Program.cs File Reference

Typedefs

- using **scope**

Functions

- builder.Services. **AddDbContext**< **ApplicationDbContext** > (options=> options.UseSqlServer(**connectionString**))
- builder.Services. **AddDatabaseDeveloperPageExceptionFilter** ()
- builder.Services. **AddIdentity**< **AppUser**, **IdentityRole** > (options=> { options.SignIn.RequireConfirmedAccount=false;options.Password.RequireDigit=false;options.Password.RequiredLength=6;options.Password.RequireNonAlphanumeric=false;options.Password.RequireUppercase=false;options.Password.RequireLowercase=false;}) .AddEntityFrameworkStores< **ApplicationDbContext** >().AddDefaultTokenProviders()
- builder.Services. **AddControllersWithViews** ()
- builder.Services. **AddRazorPages** ()
- builder.Services. **AddScoped**< **IShopService**, **ShopService** > ()
- builder.Services. **AddMemoryCache** ()
- builder.Services. **AddHttpClient** (**QuoteService.QuotesClientName**, client=> { client.BaseAddress=new Uri("https://zenquotes.io/api/");client.Timeout=TimeSpan.FromSeconds(5);client.DefaultRequestHeaders.Add("Accept", "application/json");client.DefaultRequestHeaders.Add("User-Agent", "Hulki.Web/1.0");})
- builder.Services. **AddHttpClient** (**QuoteService.TranslationClientName**, client=> { client.BaseAddress=new Uri("https://api.mymemory.translated.net/");client.Timeout=TimeSpan.FromSeconds(5);client.DefaultRequestHeaders.Add("Accept", "application/json");client.DefaultRequestHeaders.Add("User-Agent", "Hulki.Web/1.0");})
- builder.Services. **AddScoped**< **IQuoteService**, **QuoteService** > ()
- builder.Services. **AddScoped**< **IConsultationService**, **ConsultationService** > ()
- builder.Services. **AddScoped**< **INotificationService**, **NotificationService** > ()
- builder.Services. **AddScoped**< **ITherapyGoalService**, **TherapyGoalService** > ()
- builder.Services. **AddScoped**< **IBadgeService**, **BadgeService** > ()
- builder.Services. **AddScoped**< **ISurveyService**, **SurveyService** > ()
- builder.Services. **AddScoped**< **IPdfReportService**, **PdfReportService** > ()
- app. **UseStaticFiles** ()
- app. **UseRouting** ()
- app. **UseAuthentication** ()
- app. **UseAuthorization** ()
- app. **MapControllerRoute** (name:"default", pattern:"{controller=Home}/{action=Index}/{id?}")
- app. **MapControllers** ()
- app. **MapRazorPages** ()
- app. **Run** ()

Variables

- var **builder** = WebApplication.CreateBuilder(args)
- var **connectionString** = builder.Configuration.GetConnectionString("DefaultConnection") ?? throw new InvalidOperationException("Connection string 'DefaultConnection' not found.")
- var **app** = builder.Build()

10.67.1 Typedef Documentation

10.67.1.1 scope

```
using scope
```

10.67.2 Function Documentation

10.67.2.1 AddControllersWithViews()

```
builder.Services. AddControllersWithViews ()
```

10.67.2.2 AddDatabaseDeveloperPageExceptionFilter()

```
builder.Services. AddDatabaseDeveloperPageExceptionFilter ()
```

10.67.2.3 AddDbContext< ApplicationDbContext >()

```
builder.Services. AddDbContext< ApplicationDbContext > (
    options ,
    options. UseSqlServer(connectionString)
```

10.67.2.4 AddHttpClient() [1/2]

```
builder.Services. AddHttpClient (
    QuoteService. QuotesClientName,
    client ,
    { client.BaseAddress=new Uri("https://zenquotes.io/api/");client.Timeout=Time↵
    Span.FromSeconds(5);client.DefaultRequestHeaders.Add("Accept", "application/json");client.↵
    DefaultRequestHeaders.Add("User-Agent", "Hulki.Web/1.0");} )
```

10.67.2.5 AddHttpClient() [2/2]

```
builder.Services. AddHttpClient (
    QuoteService. TranslationClientName,
    client ,
    { client.BaseAddress=new Uri("https://api.mymemory.translated.net/");client.↵
    Timeout=TimeSpan.FromSeconds(5);client.DefaultRequestHeaders.Add("Accept", "application/↵
    json");client.DefaultRequestHeaders.Add("User-Agent", "Hulki.Web/1.0");} )
```

10.67.2.6 AddIdentity< AppUser, IdentityRole >()

```
builder.Services. AddIdentity< AppUser, IdentityRole > (
    options ,
    { options.SignIn.RequireConfirmedAccount=false;options.Password.RequireDigit=false;options.↵
    Password.RequiredLength=6;options.Password.RequireNonAlphanumeric=false;options.Password.↵
    RequireUppercase=false;options.Password.RequireLowercase=false;} )
```

10.67.2.7 AddMemoryCache()

```
builder.Services. AddMemoryCache ()
```

10.67.2.8 AddRazorPages()

```
builder.Services. AddRazorPages ()
```

10.67.2.9 AddScoped< IBadgeService, BadgeService >()

```
builder.Services. AddScoped< IBadgeService, BadgeService > ()
```

10.67.2.10 AddScoped< IConsultationService, ConsultationService >()

```
builder.Services. AddScoped< IConsultationService, ConsultationService > ()
```

10.67.2.11 AddScoped< INotificationService, NotificationService >()

```
builder.Services. AddScoped< INotificationService, NotificationService > ()
```

10.67.2.12 AddScoped< IPdfReportService, PdfReportService >()

```
builder.Services. AddScoped< IPdfReportService, PdfReportService > ()
```

10.67.2.13 AddScoped< IQuoteService, QuoteService >()

```
builder.Services. AddScoped< IQuoteService, QuoteService > ()
```

10.67.2.14 AddScoped< IShopService, ShopService >()

```
builder.Services. AddScoped< IShopService, ShopService > ()
```

10.67.2.15 AddScoped< ISurveyService, SurveyService >()

```
builder.Services. AddScoped< ISurveyService, SurveyService > ()
```

10.67.2.16 AddScoped< ITherapyGoalService, TherapyGoalService >()

```
builder.Services. AddScoped< ITherapyGoalService, TherapyGoalService > ()
```

10.67.2.17 MapControllerRoute()

```
app. MapControllerRoute (
    name:"default" ,
    pattern:"{controller=Home}/{action=Index}/{id?}" )
```

10.67.2.18 MapControllers()

```
app. MapControllers ()
```

10.67.2.19 MapRazorPages()

```
app. MapRazorPages ()
```

10.67.2.20 Run()

```
app. Run ()
```

10.67.2.21 UseAuthentication()

```
app. UseAuthentication ()
```

10.67.2.22 UseAuthorization()

```
app. UseAuthorization ()
```

10.67.2.23 UseRouting()

```
app. UseRouting ()
```

10.67.2.24 UseStaticFiles()

```
app. UseStaticFiles ()
```

10.67.3 Variable Documentation**10.67.3.1 app**

```
var app = builder.Build()
```

10.67.3.2 builder

```
var builder = WebApplication.CreateBuilder(args)
```

10.67.3.3 connectionString

```
var connectionString = builder.Configuration.GetConnectionString("DefaultConnection") ?? throw  
new InvalidOperationException("Connection string 'DefaultConnection' not found.")
```

10.68 Hulki/Hulki.Web/Services/BadgeService.cs File Reference

Classes

- interface **Hulki.Web.Services.IBadgeService**
- class **Hulki.Web.Services.BadgeService**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Services**

10.69 Hulki/Hulki.Web/Services/ConsultationService.cs File Reference

Classes

- class **Hulki.Web.Services.ConsultationService**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Services**

10.70 Hulki/Hulki.Web/Services/IConsultationService.cs File Reference

Classes

- interface **Hulki.Web.Services.IConsultationService**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Services**

10.71 Hulki/Hulki.Web/Services/IQuoteService.cs File Reference

Classes

- interface **Hulki.Web.Services.IQuoteService**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Services**

10.72 Hulki/Hulki.Web/Services/IShopService.cs File Reference

Classes

- interface **Hulki.Web.Services.IShopService**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Services**

10.73 Hulki/Hulki.Web/Services/NotificationService.cs File Reference

Classes

- interface **Hulki.Web.Services.INotificationService**
- class **Hulki.Web.Services.NotificationService**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Services**

10.74 Hulki/Hulki.Web/Services/PdfReportService.cs File Reference

Classes

- interface **Hulki.Web.Services.IPdfReportService**
- class **Hulki.Web.Services.PdfReportService**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Services**

10.75 Hulki/Hulki.Web/Services/QuoteService.cs File Reference

Classes

- class **Hulki.Web.Services.QuoteService**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Services**

10.76 Hulki/Hulki.Web/Services/ShopService.cs File Reference

Classes

- class **Hulki.Web.Services.ShopService**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Services**

10.77 Hulki/Hulki.Web/Services/SurveyService.cs File Reference

Classes

- interface **Hulki.Web.Services.ISurveyService**
- class **Hulki.Web.Services.SurveyService**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Services**

10.78 Hulki/Hulki.Web/Services/TherapyGoalService.cs File Reference

Classes

- interface **Hulki.Web.Services.ITherapyGoalService**
- class **Hulki.Web.Services.TherapyGoalService**

Namespaces

- namespace **Hulki**
- namespace **Hulki.Web**
- namespace **Hulki.Web.Services**

10.79 Hulki/Hulki.Web/wwwroot/lib/jquery-validation/LICENSE.md File Reference**10.80 Hulki/README.md File Reference**