
PRACTICAL 2


AWS Cloud Computing Practicals

2 (a) Enabling Multi-Factor Authentication to Secure Your Access
2 (b) Creating First Linux Instance
2 (c) S3 Bucket Creation and Upload Objects


2 (a) – Enabling Multi-Factor Authentication to Secure Your Access

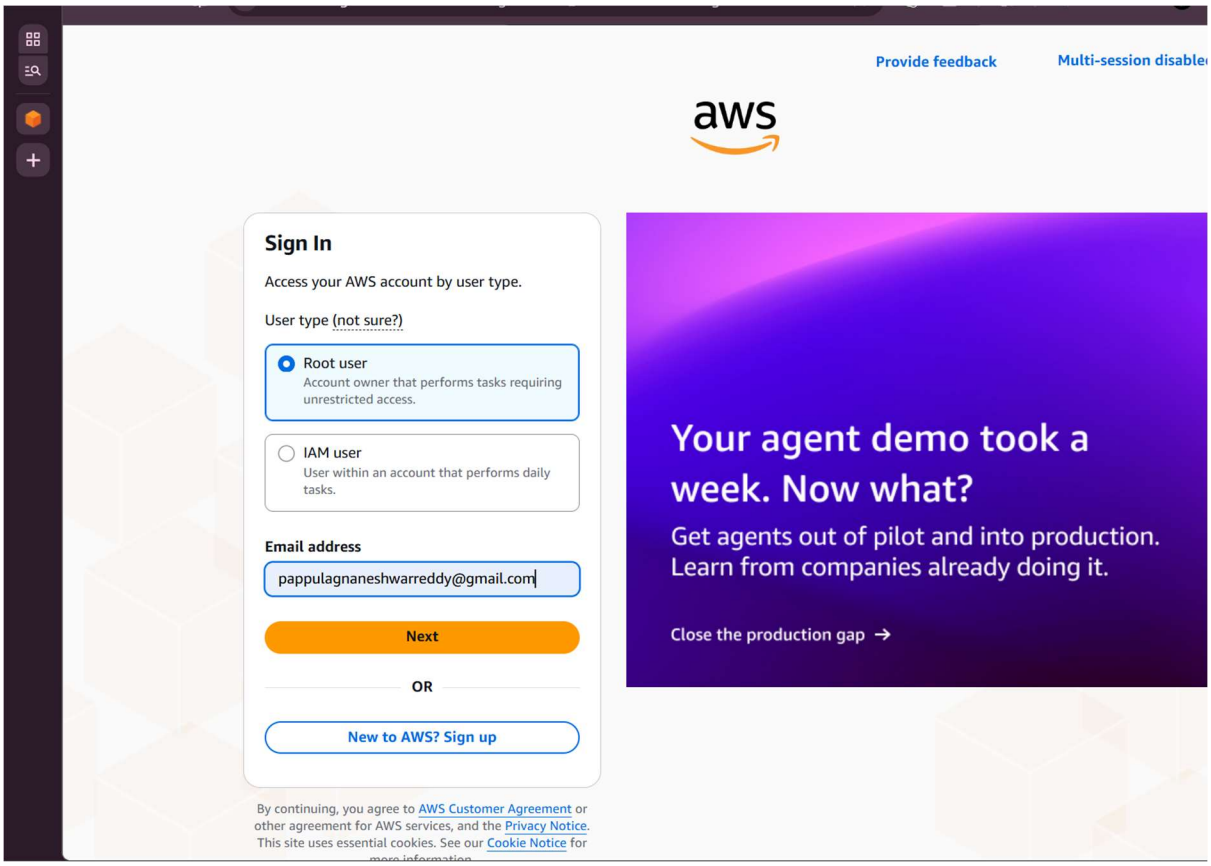


The AWS sign-in page is opened and the root user account email is entered.

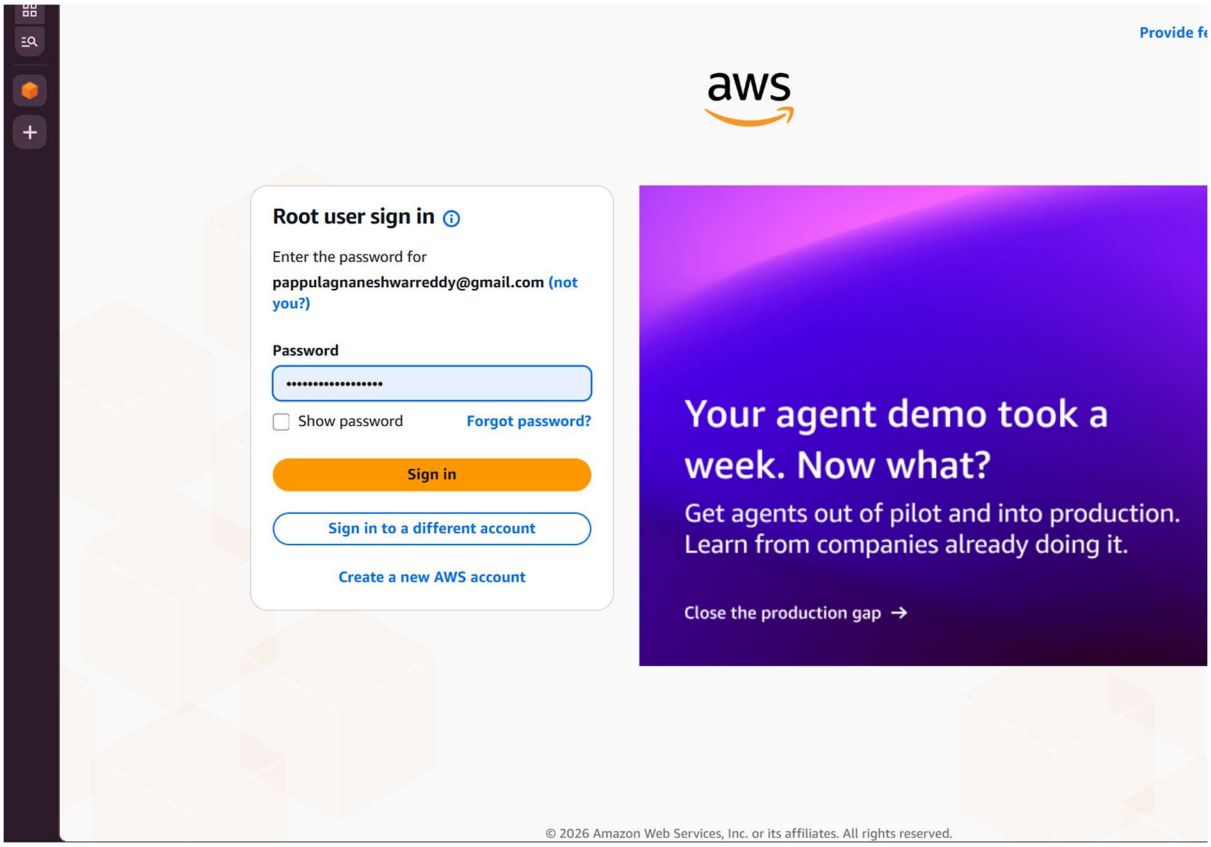


The root user password is entered to sign in to the AWS account.

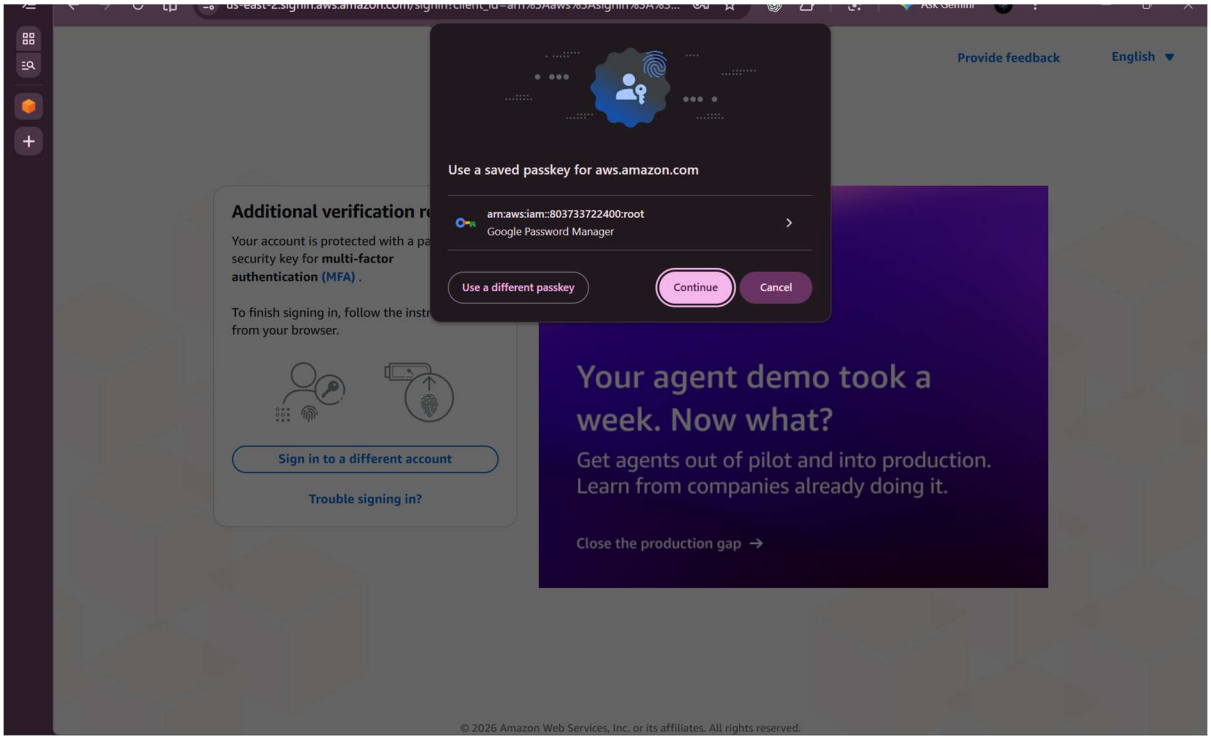

AWS requests an additional verification step to complete the sign-in process.

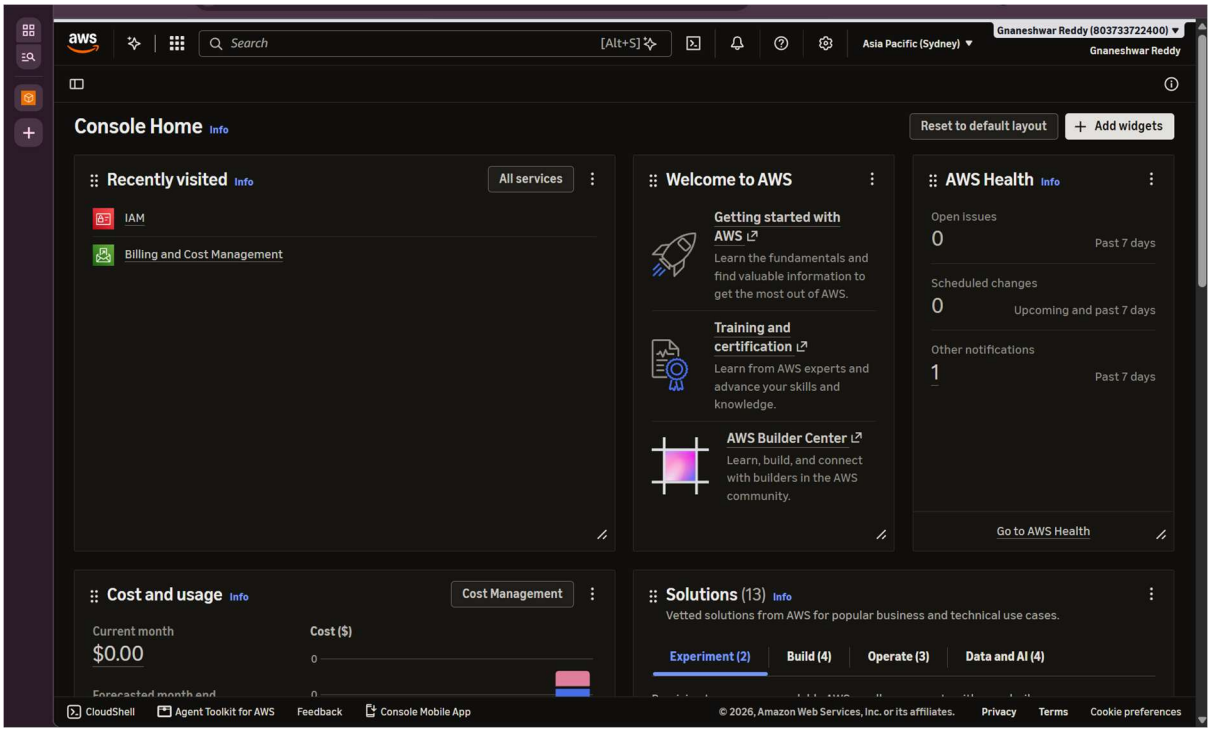


The AWS Management Console home page is displayed after successful sign-in.

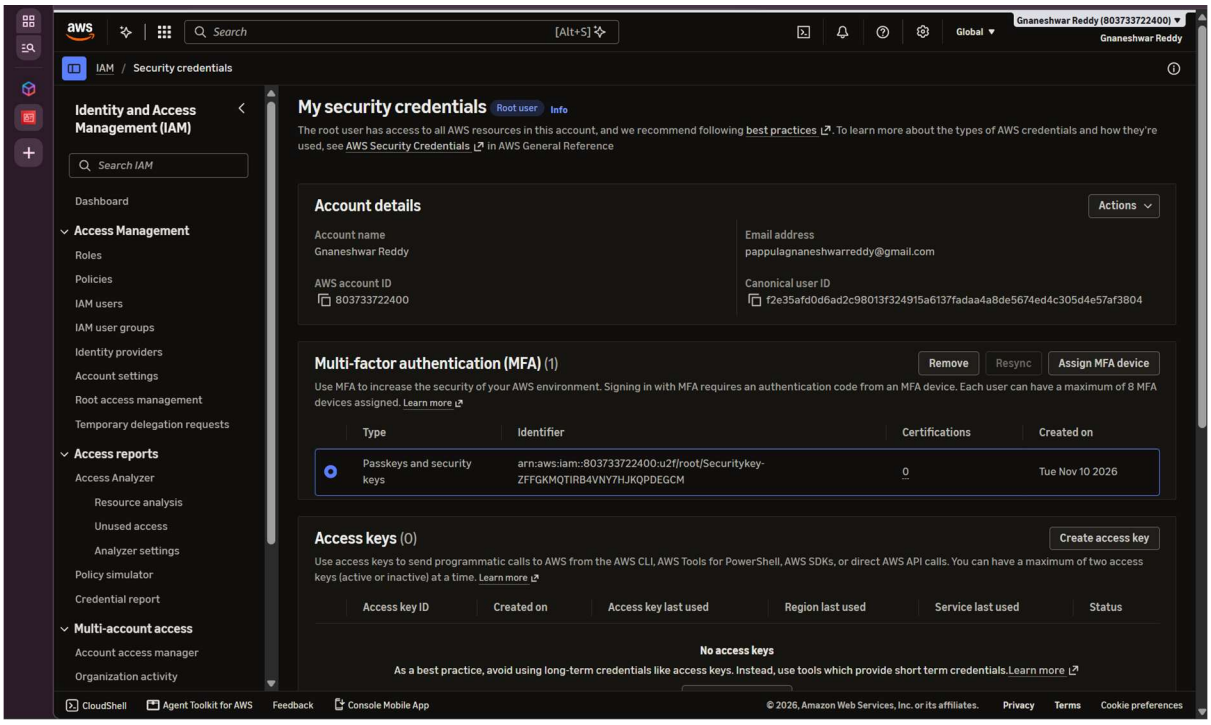


The Security Credentials page displays the Multi-Factor Authentication (MFA) settings.


2 (b) – Creating First Linux Instance

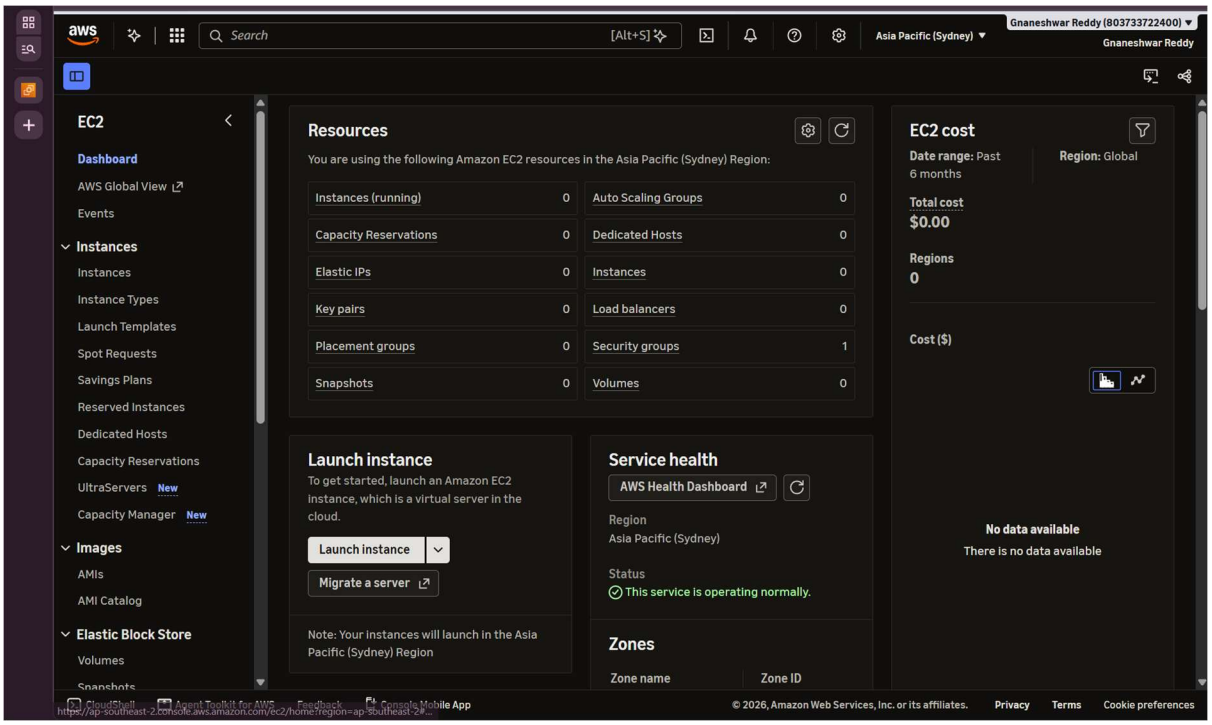


The EC2 dashboard is opened to begin creating a Linux virtual machine.

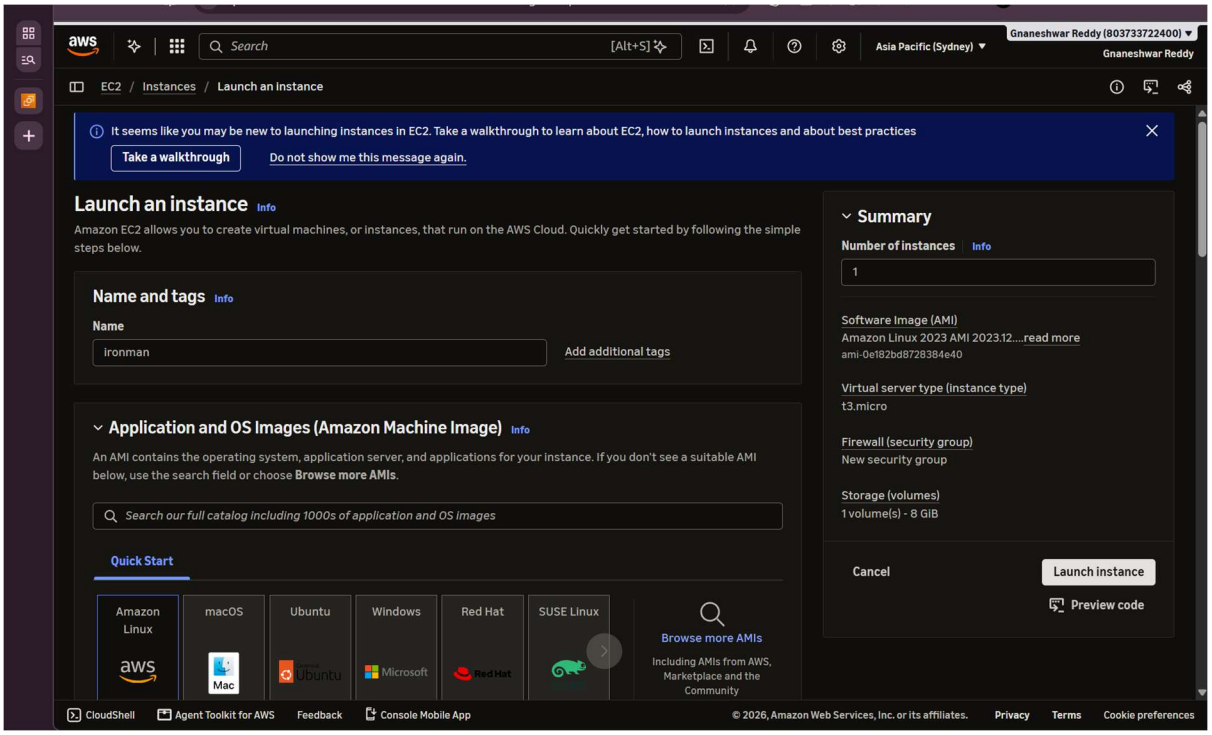


The Launch an instance page is used to enter the instance name and select an Amazon Machine Image.

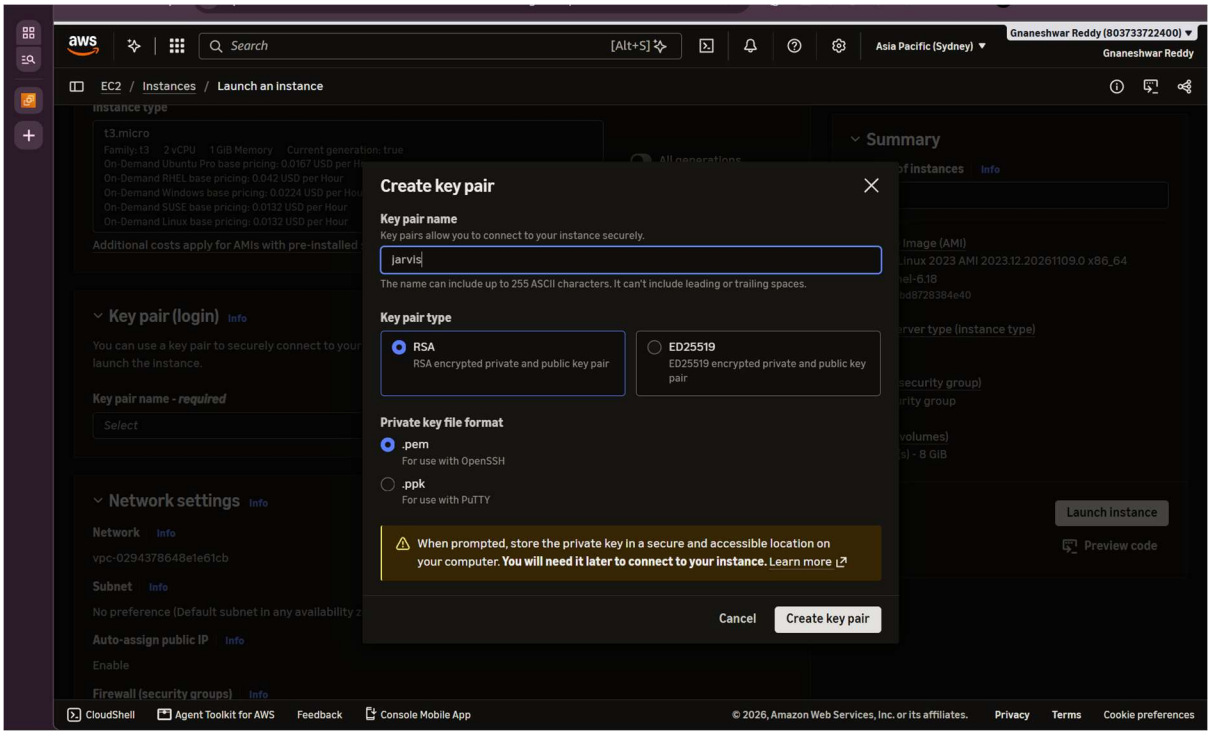


A new key pair is created so the instance can be accessed securely.

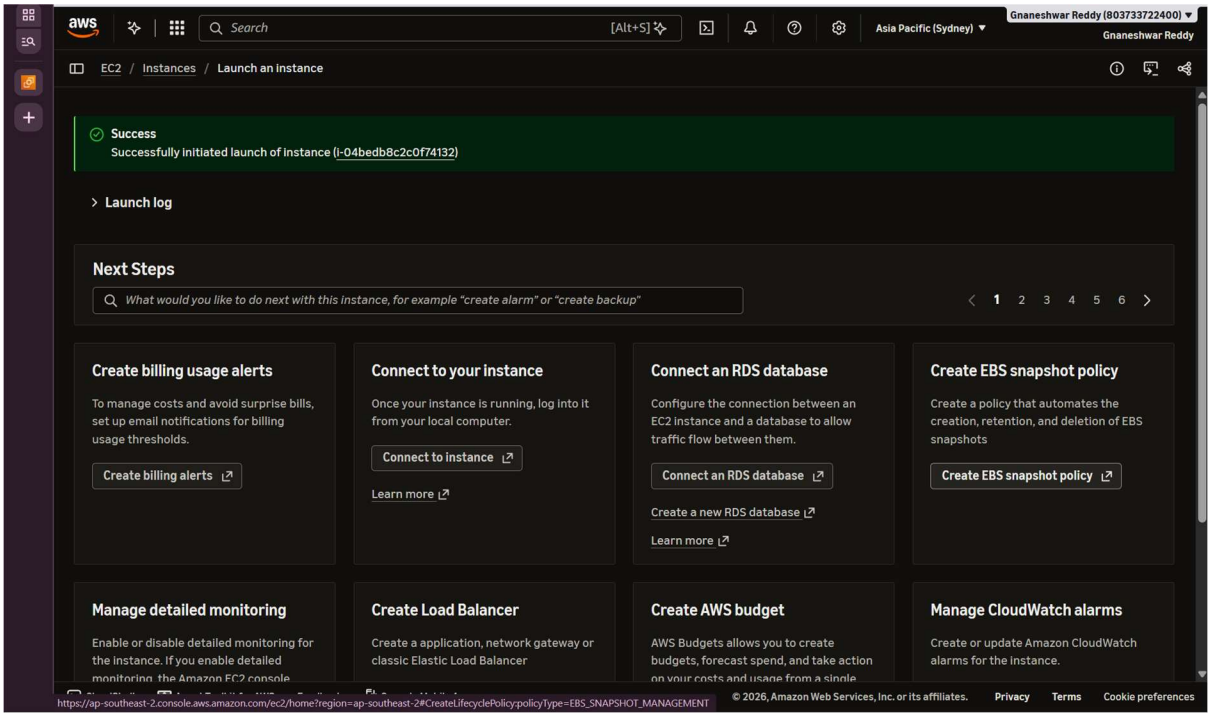


AWS displays a success message confirming that the EC2 instance was launched.

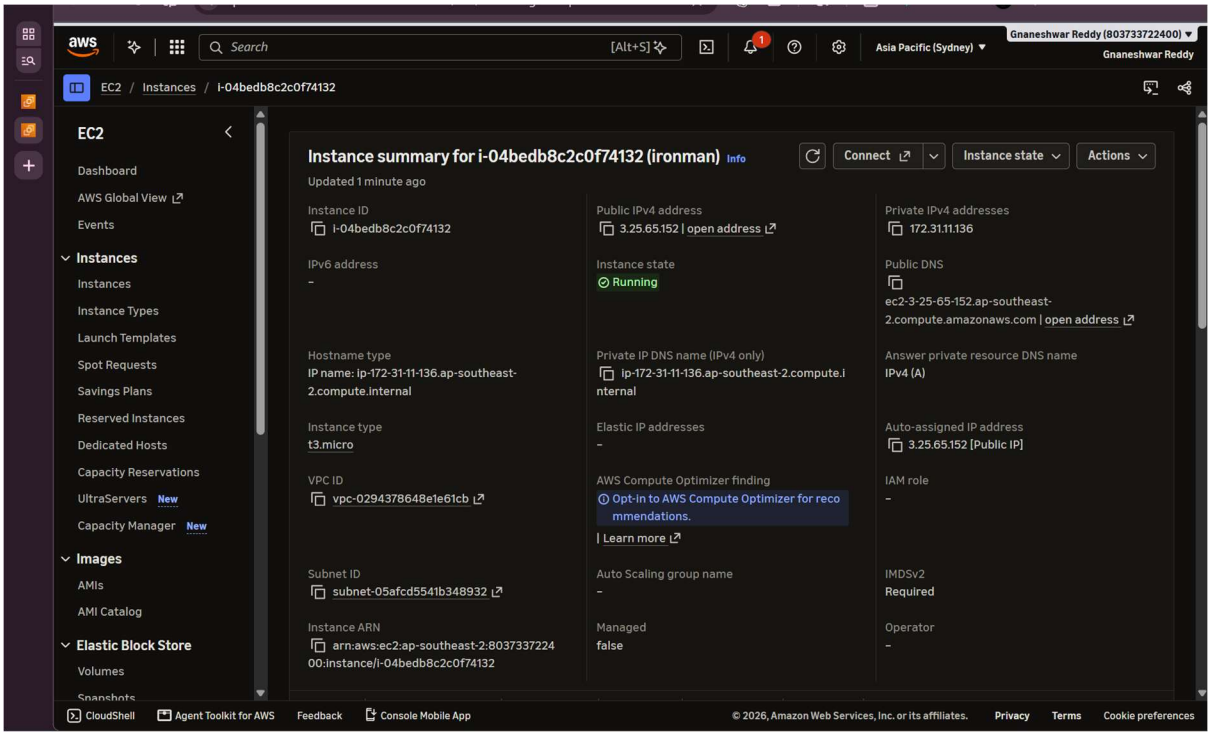


The instance summary page displays the details and current state of the Linux instance.

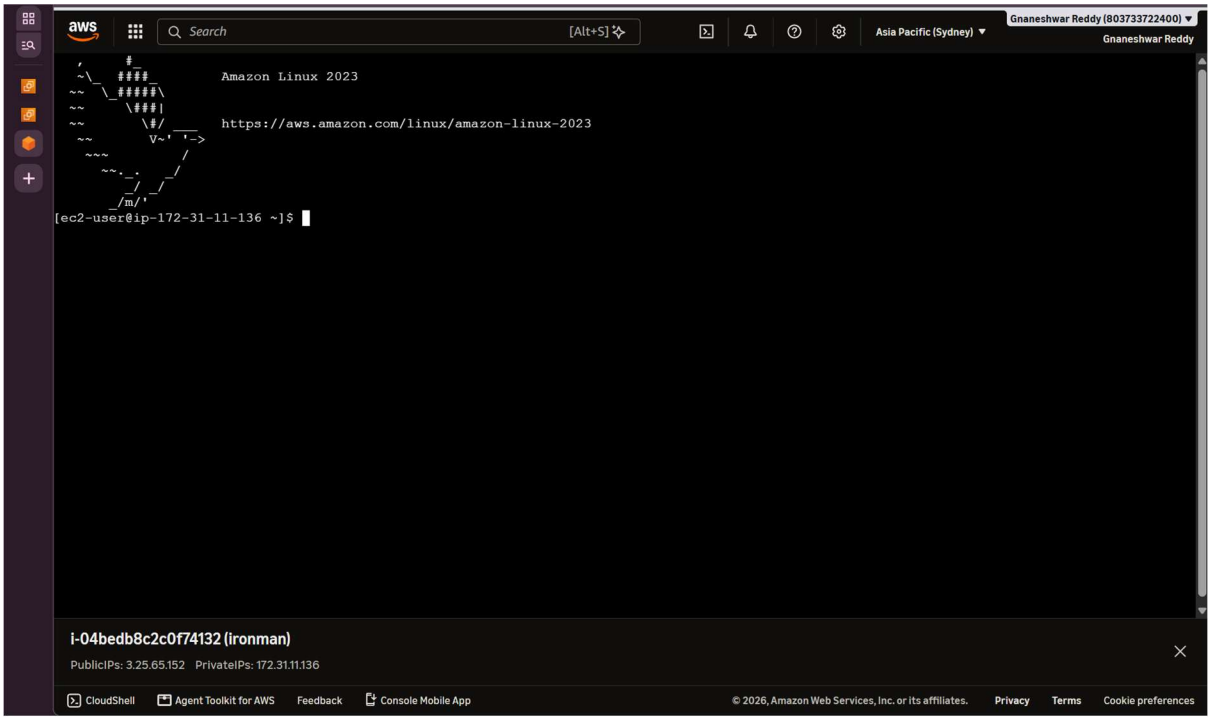


The EC2 instance terminal is opened and the Linux command-line prompt is displayed.

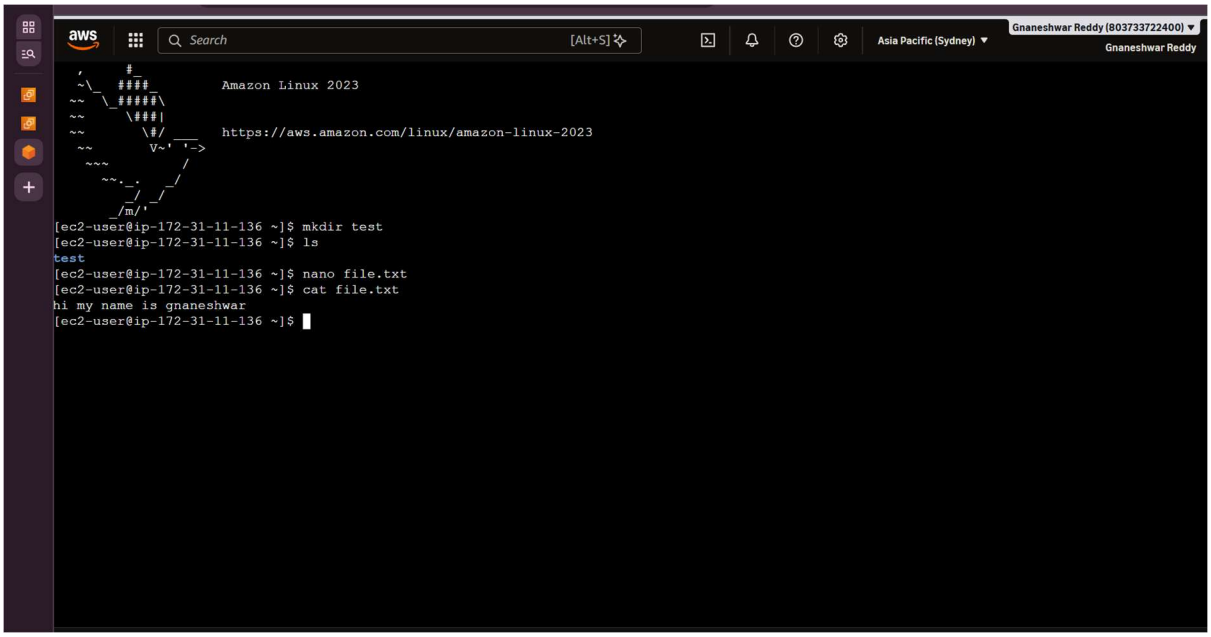


Linux commands are entered in the terminal to create and inspect files.

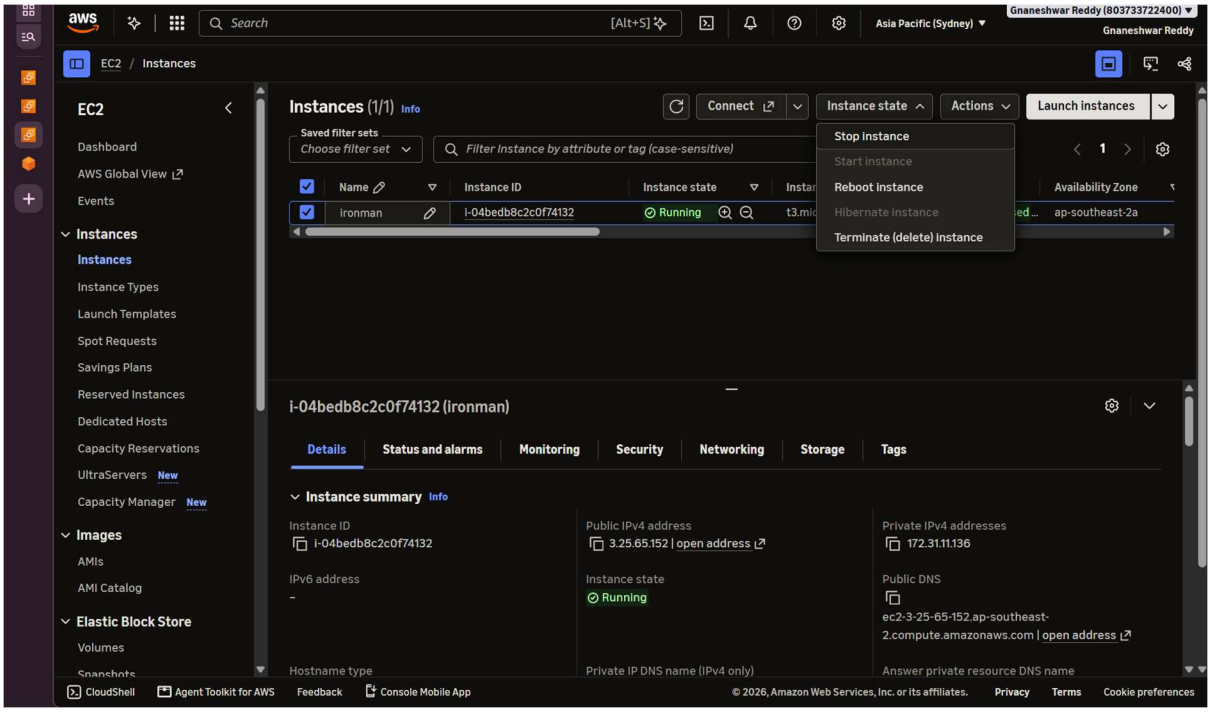

The EC2 Instances page displays the created instance and its available actions.

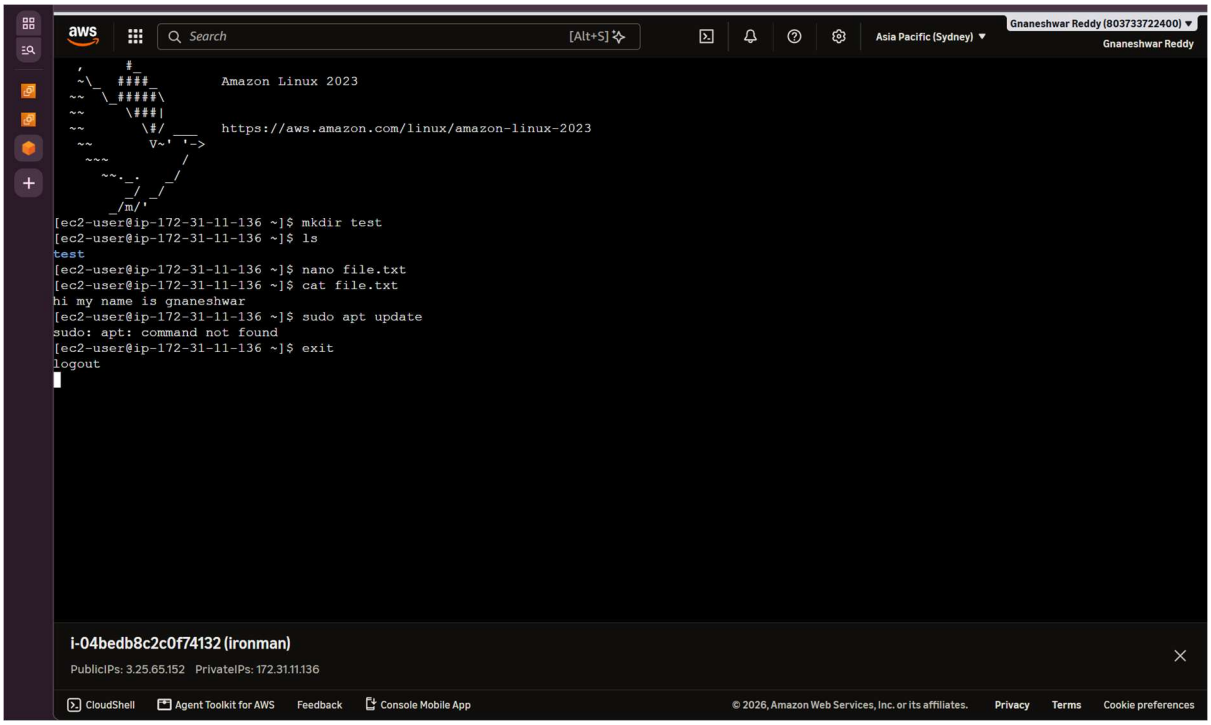

Additional Linux commands are run in the terminal to update package information.

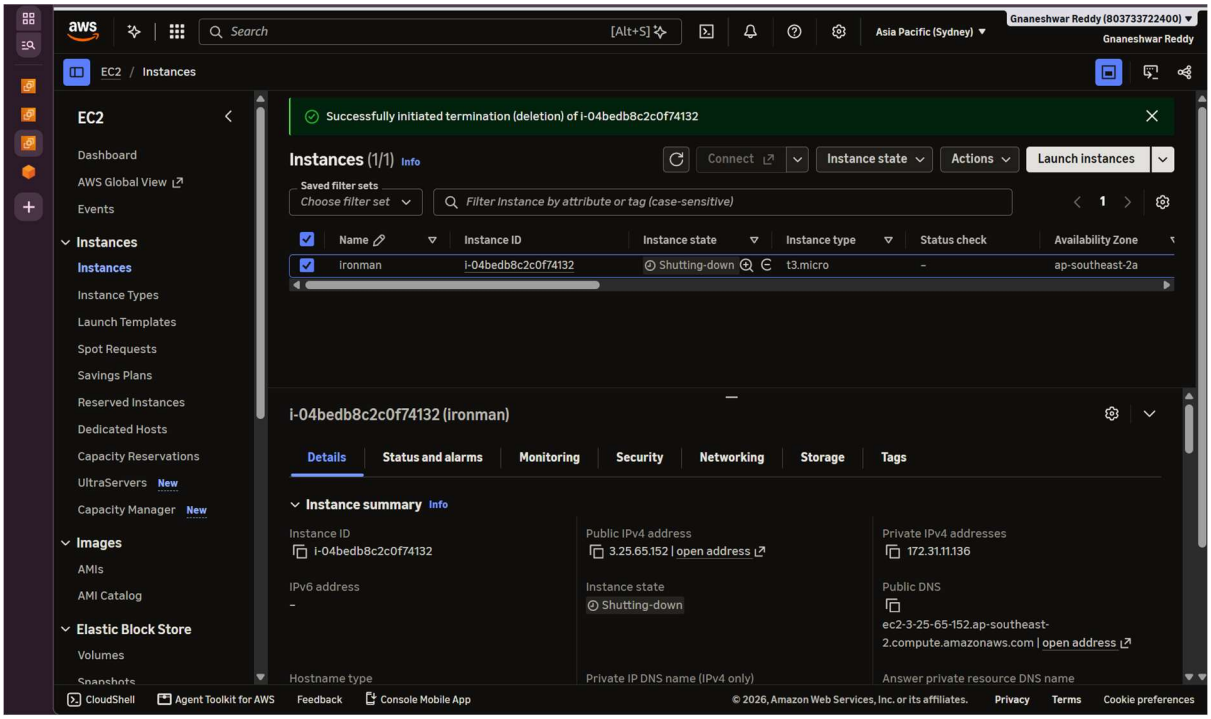


The instance list confirms that the Linux EC2 instance is running.


2 (c) – S3 Bucket Creation and Upload Objects

I. Create an S3 Bucket for file storage.


II. Upload 5 objects with different file extensions.

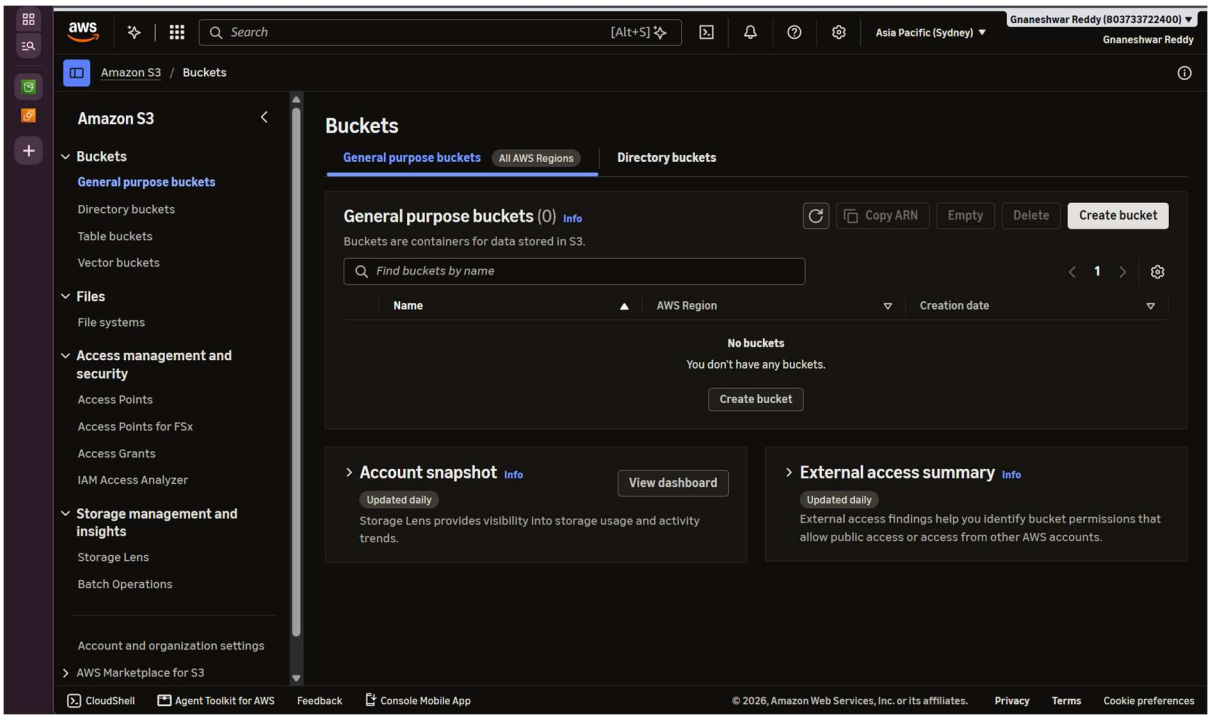


The Amazon S3 Buckets page is opened to create a bucket for file storage.

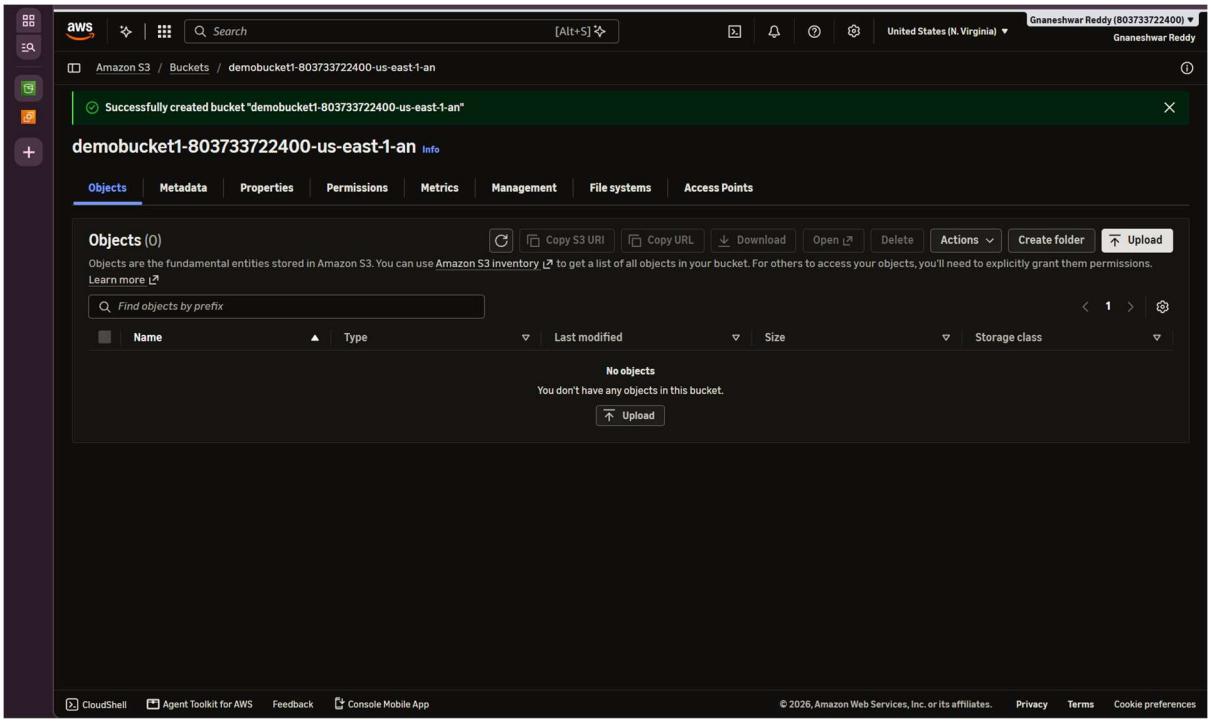


The newly created S3 bucket is opened and its Objects tab is displayed.

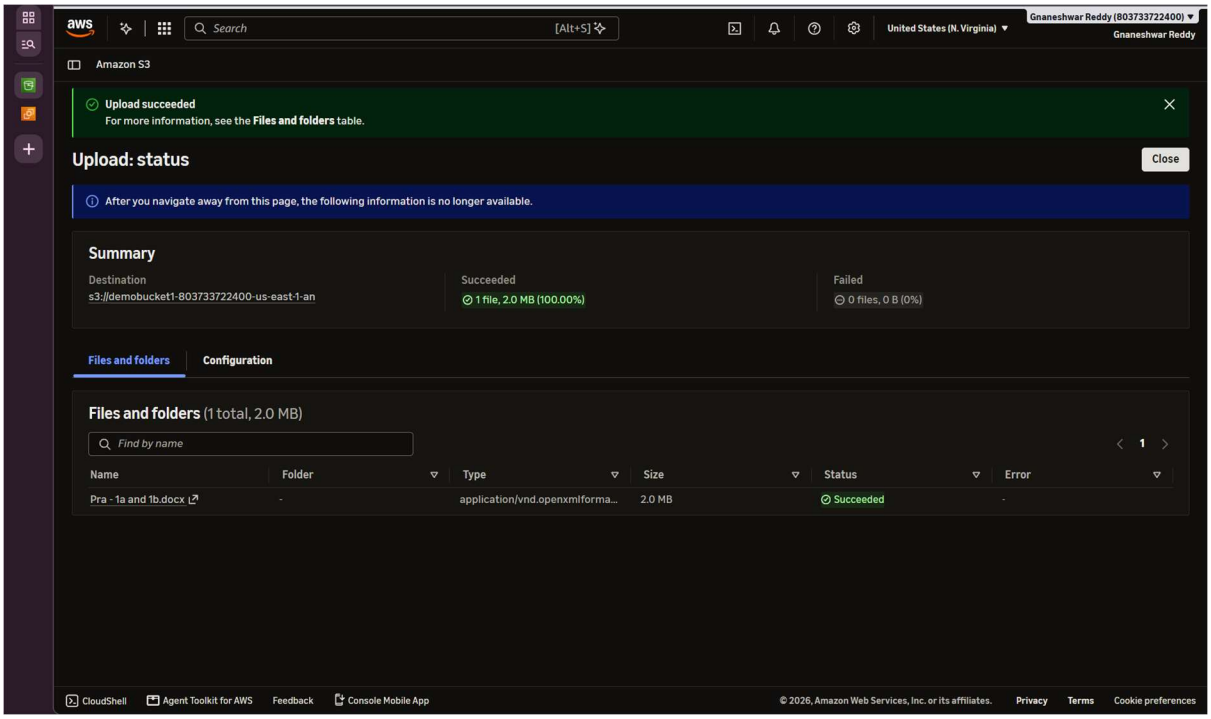


The upload status page confirms that an object was uploaded to the S3 bucket.

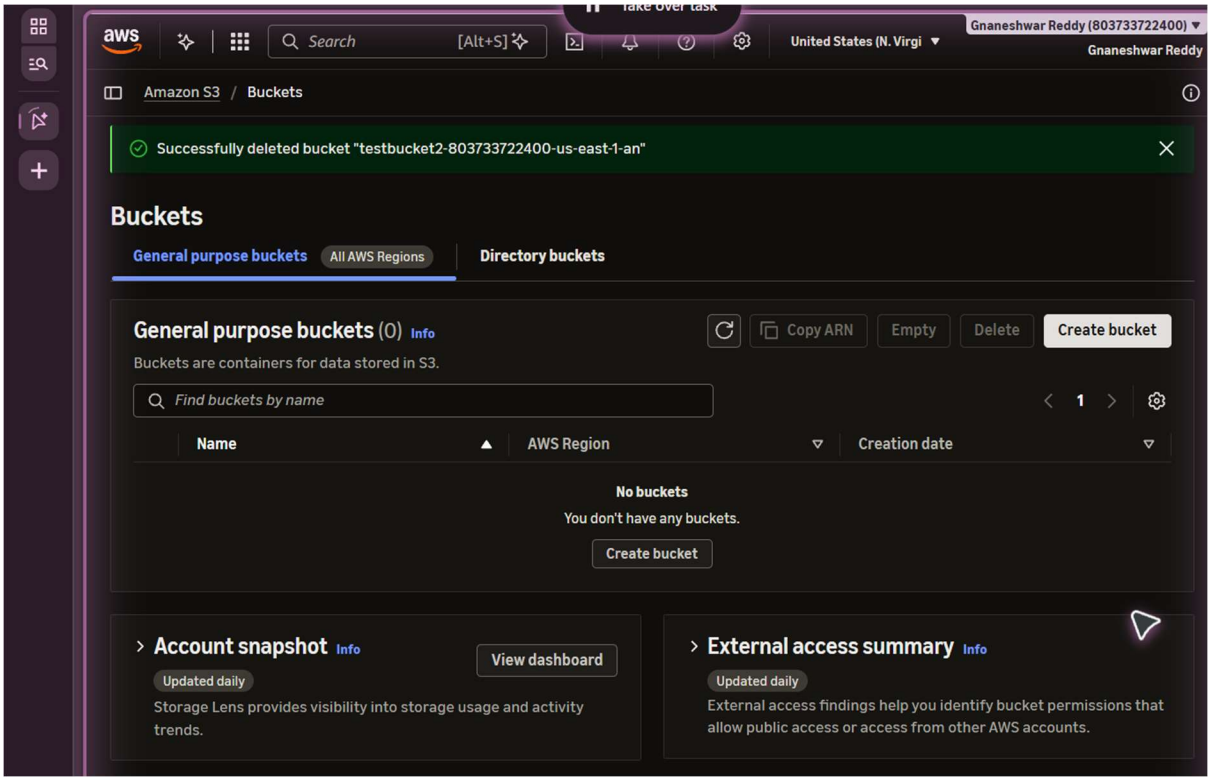


The S3 Buckets page displays the bucket list after the cleanup operation.

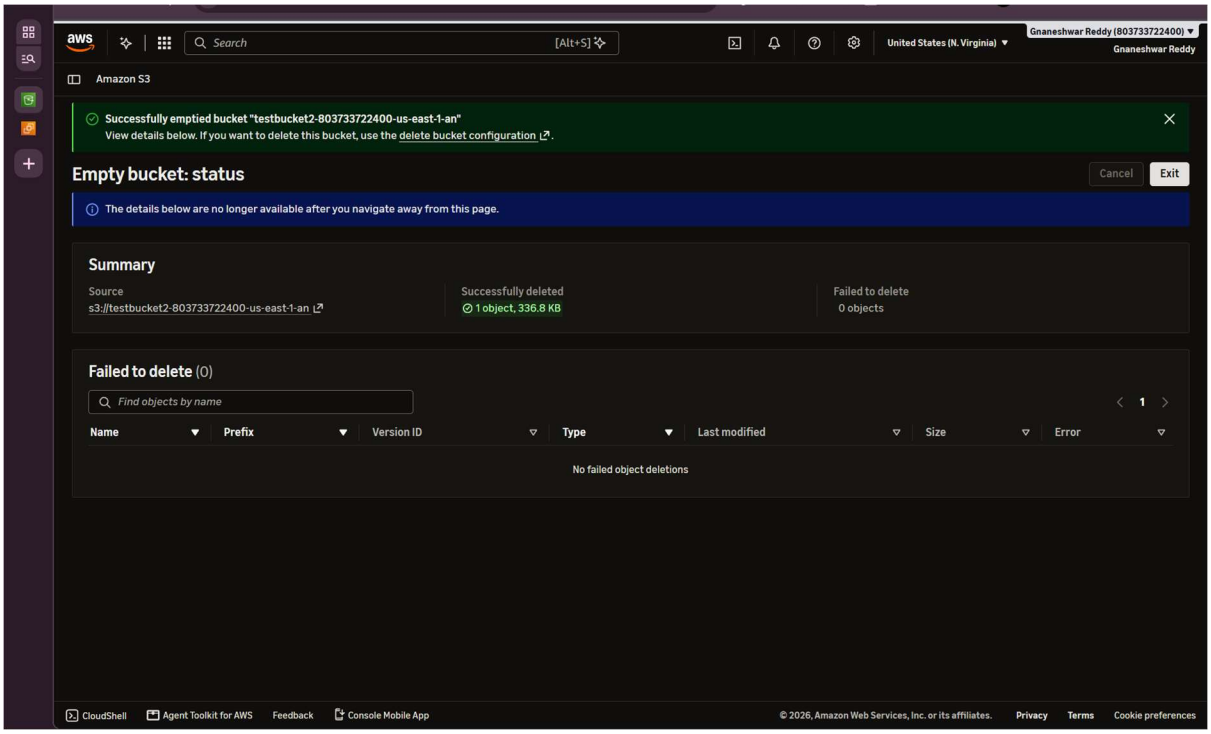


The bucket status page shows the bucket contents after the objects are removed.

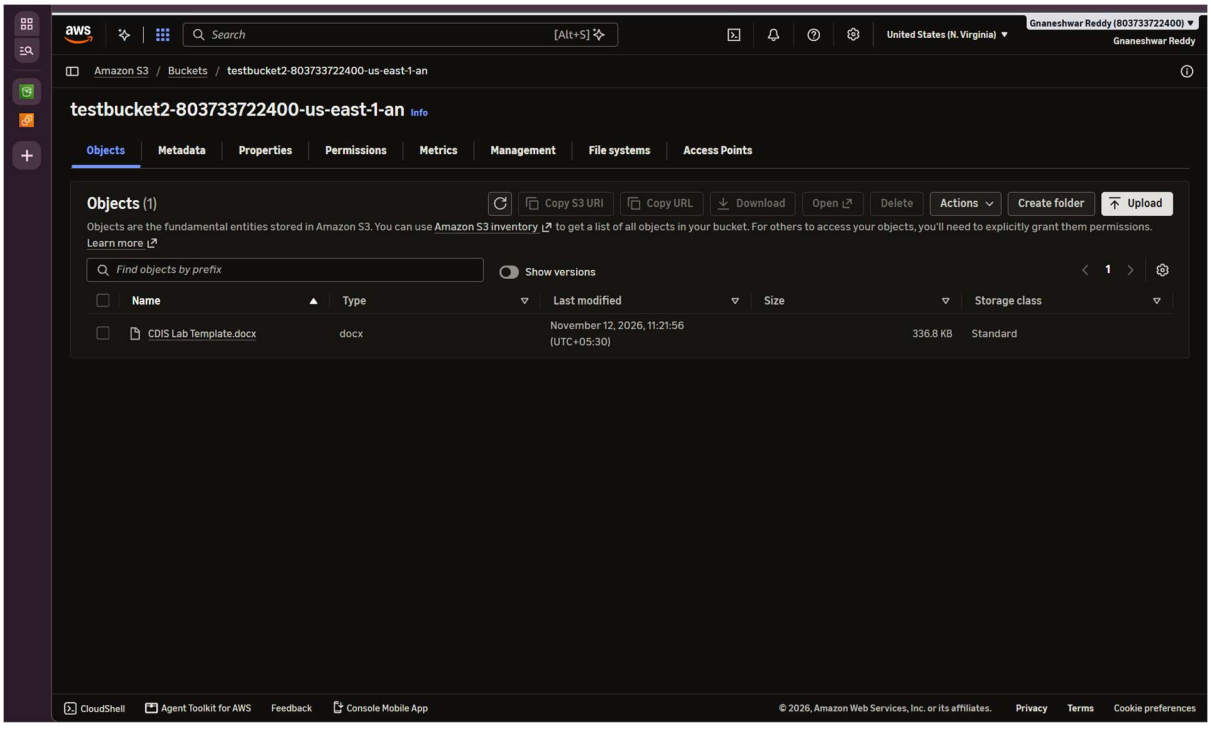

The Objects tab lists the uploaded object and its file details.

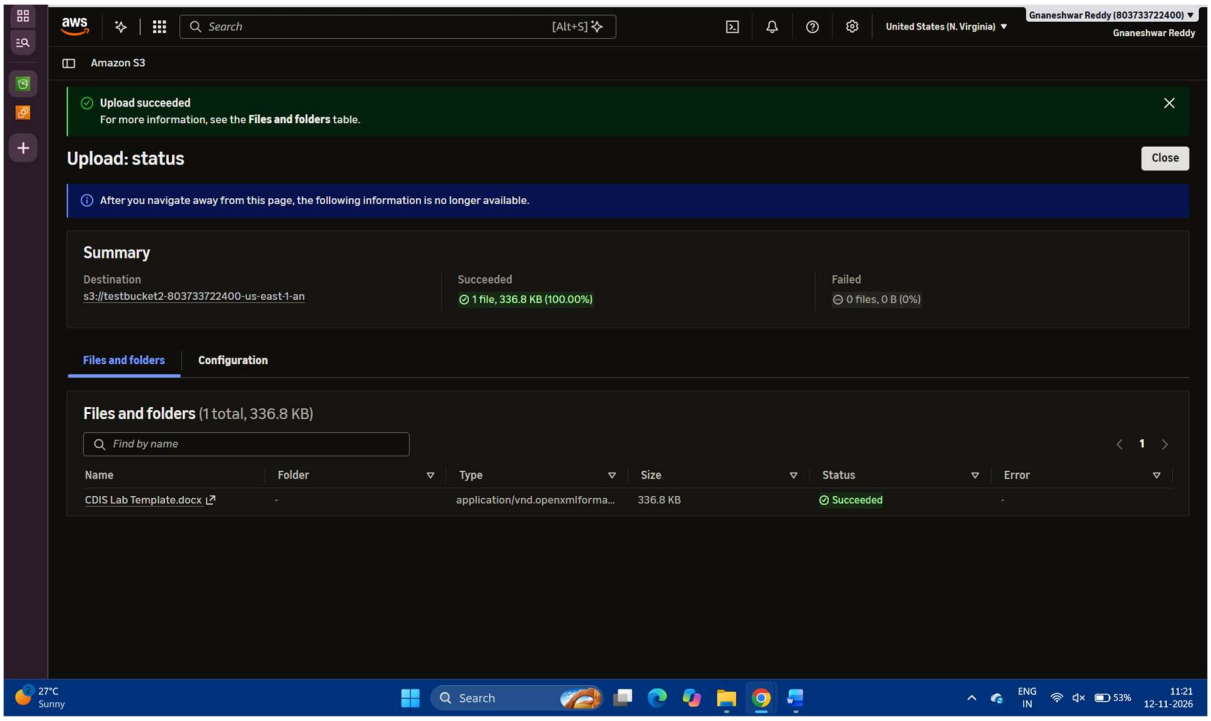

The upload status page confirms another file upload to the bucket.

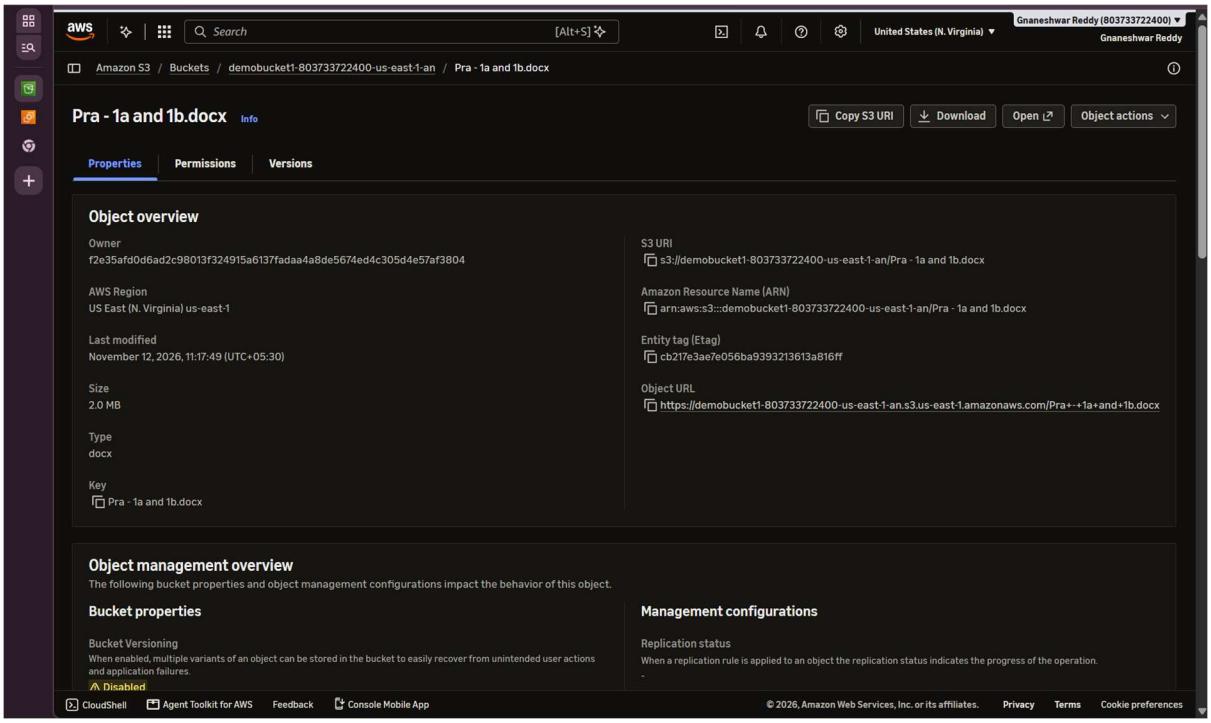

The object properties page displays details of an uploaded file.