


Protecting Online Communities with Azure AI Content Safety


Content Model with Azure AI Safety:

- ➔ System and software requirements :Mac , window or linux and access to azure web portal
- ➔ Azure AI content safety : Microsoft azure Service detects harmful user-generated and AI- Generated Content in applications and services
- ➔ Ai content uses variety of different types of analyse:
- ➔ Analyse text – analysing text for sexual ,violence
- ➔ Analyze images – sexual content , violence , harassment
- ➔ Prompt shields – for protecting user input on large text shield
- ➔ Protected material text detection – check copyright material
- ➔ Groundedness detection – sources is grounded
- ➔ Custom categories
- ➔ We will be working with the first four categories

➔ Demo:Content safety instance :

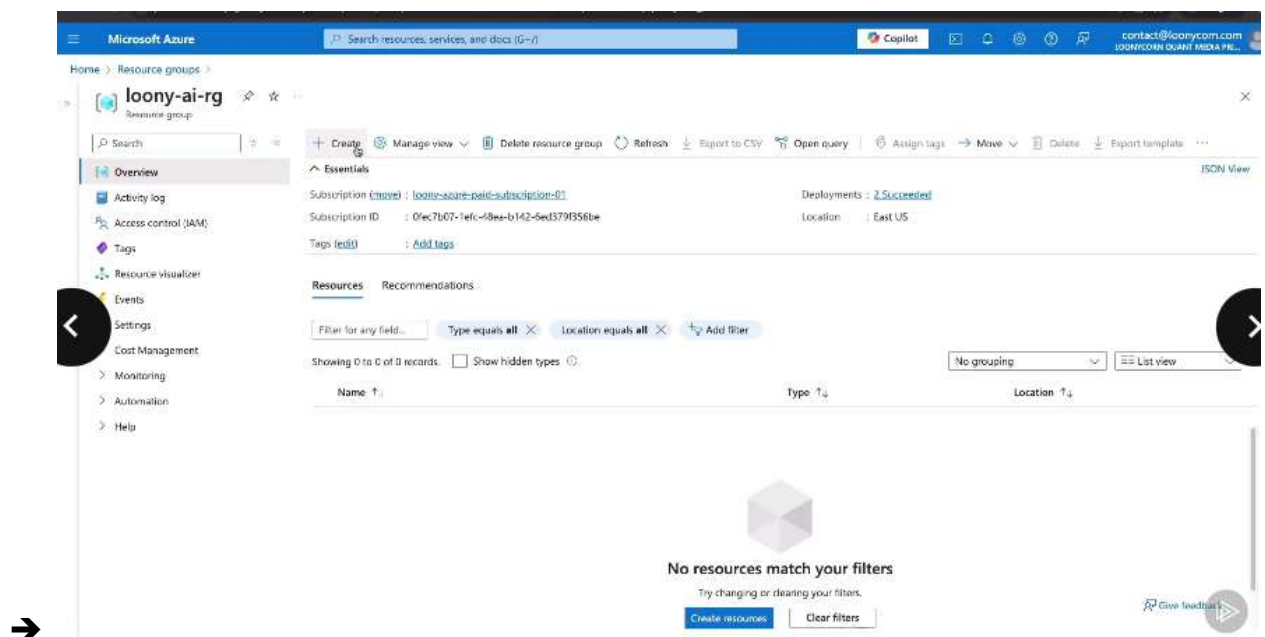


➔ For creation open azure ai content safety

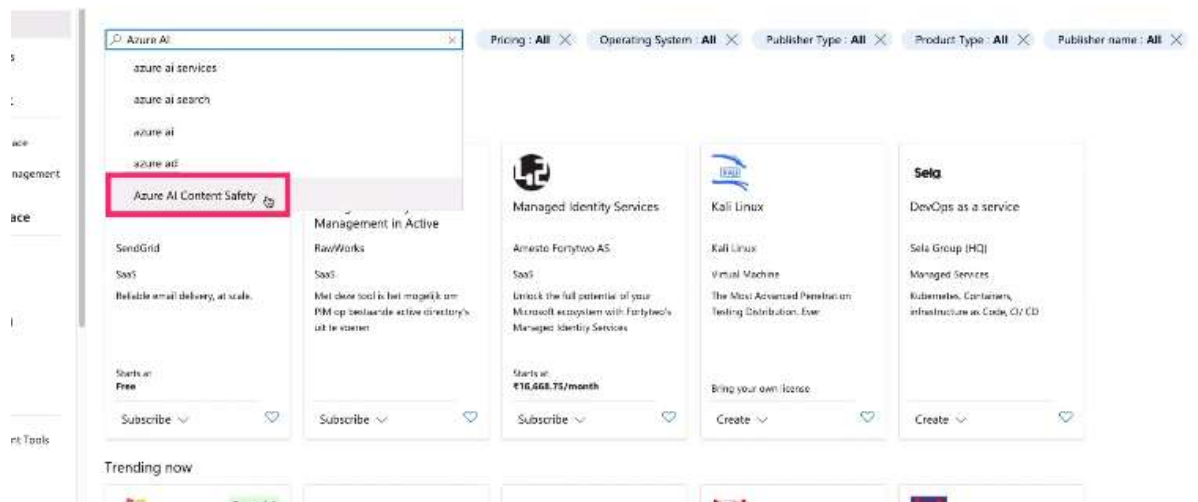

➔

➔ Then create an instance of the service

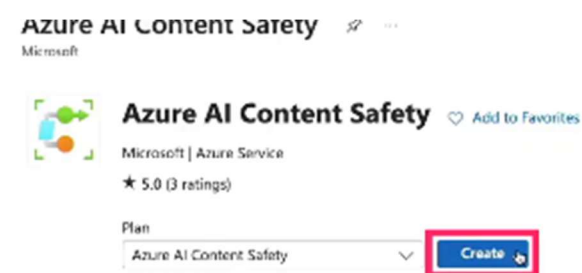

➔

Create Content Safety

Basics Network Identity Tags Review + create

Machine learning assisted moderation APIs that detect material that is potentially offensive, risky, or otherwise undesirable, to assure the contents in community is safe.

[Learn more](#)

Project Details

Subscription *

Resource group *

[Create new](#)

Instance Details

Region

Name *

Pricing tier *


[View full pricing details](#)

[Previous](#) [Next](#) [Review + create](#)



➔ Select the default option for all features

➔ Then add external content safety features by using access IAM:

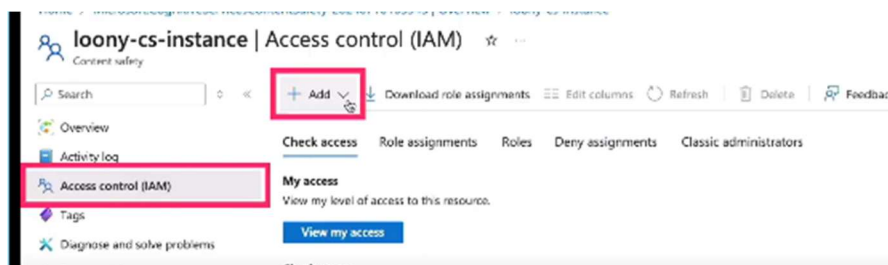


➔ Add role cognitive service user then next and make to assign the access to user




➔ On overview select content safety studio



- ➔ Then make sure you are signed in on azure content safety studio.
- ➔ Start with text moderation with content safety studio
- ➔ Select moderate text content

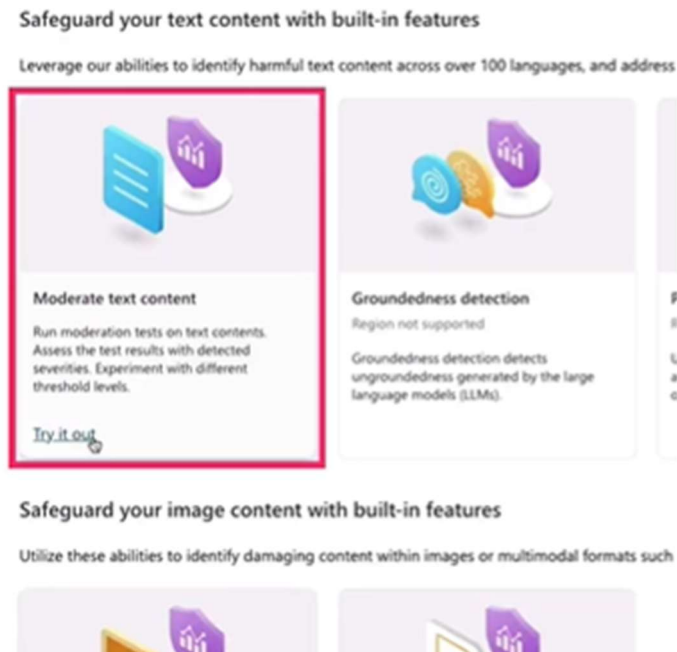

- ➔ After opening the option azure gives you number of types of predefined content
- ➔ But if you have your sample space so select the text area given below

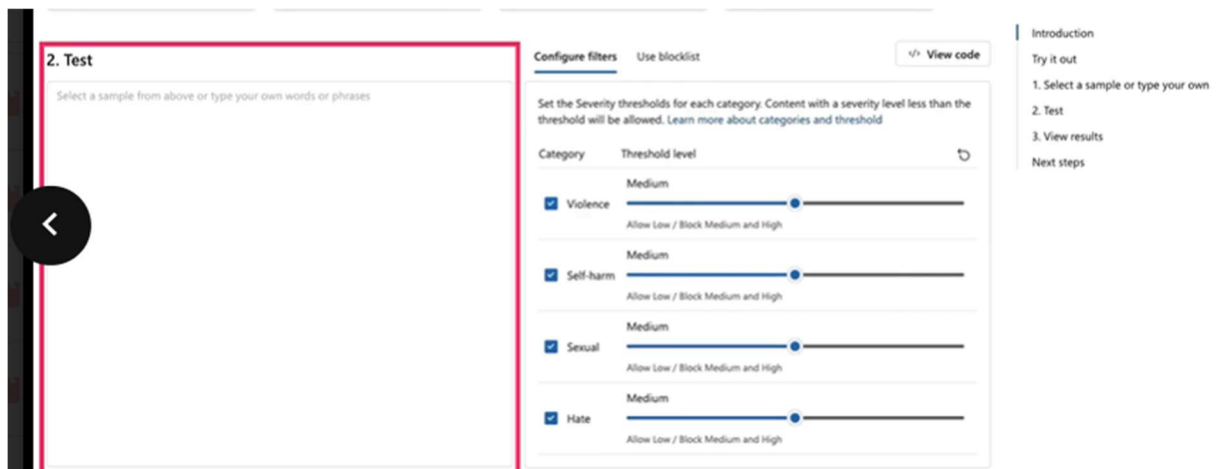

➔ Then you can select the config that helps setting the threshold level

The screenshot shows the 'Configure filters' tab in a web application. It features a table with four categories: Violence, Self-harm, Sexual, and Hate. Each category has a checkbox (all are checked) and a 'Threshold level' slider set to 'Medium'. Below each slider, it says 'Allow Low / Block Medium and High'. A red box highlights the category column. To the right, there is a sidebar with links: 'Introduction', 'Try it out', '1. Select a sa', '2. Test', '3. View resul', and 'Next steps'. At the top right, there is a 'View code' button.

Category	Threshold level
☒ Violence	Medium Allow Low / Block Medium and High
☒ Self-harm	Medium Allow Low / Block Medium and High
☒ Sexual	Medium Allow Low / Block Medium and High
☒ Hate	Medium Allow Low / Block Medium and High

➔ You can use azure api code for local system

The screenshot shows the 'Try it out' section of the Azure API interface. It includes a 'Run a simple test' button and a 'Run a bulk test' button. Below these, there are two sample content boxes: 'Safe content' (Chopping tomatoes and cutting them into cubes or wedges are great ways to practice your knife skills.) and 'Violent content with miss' (The dog was given a eutanase to their severed leg bleeding p deep lacerations to the lower e). The '2. Test' section is active, showing a text input field with the placeholder 'Select a sample from above or type your own words or phrases'. To the right, there is a code editor showing the API code for the local system. The code includes imports for enum, json, requests, and typing, and defines classes for MediaType, Category, and Action. A 'Copy' button is visible at the bottom right of the code editor.

```
# Copyright (c) Microsoft. All rights reserved.
# To learn more, please visit the documentation - Quickstart: A
#

import enum
import json
import requests
from typing import Union

class MediaType(enum.Enum):
    Text = 1
    Image = 2

class Category(enum.Enum):
    Hate = 1
    SelfHarm = 2
    Sexual = 3
    Violence = 4

class Action(enum.Enum):
    Accept = 1
    Reject = 2
```

➔ Enter your prompt

The screenshot shows the Azure AI Content Safety interface. On the left, a text input field contains a recipe prompt: "Cut two boneless, skinless chicken breasts into bite-sized pieces. In a large bowl, combine one cup of plain yogurt, one tablespoon of lemon juice, two teaspoons of ground cumin, two teaspoons of ground coriander, one teaspoon of ground turmeric, one teaspoon of garam masala, one teaspoon of ground paprika, one teaspoon of ground cardamom, and salt to taste. Add the chicken pieces and toss to coat. Marinate for at least one hour, or overnight in the refrigerator. In a large skillet or pot, heat two tablespoons of vegetable oil over medium-high heat. Add one chopped large onion and cook until softened, about 5 minutes. Add three minced garlic cloves and one tablespoon of grated fresh ginger to the skillet and sauté for one to two minutes until fragrant. Add the marinated chicken to the skillet and cook until browned on all sides. Stir in one can (14.5 ounces) of tomatoes and bring to a simmer. Cook for ten to fifteen minutes until the chicken is cooked through. Add one cup of heavy cream and stir to combine. Cook for an additional five minutes until the sauce has thickened. Garnish with fresh cilantro and serve with basmati rice or naan bread." On the right, the "Set the Severity thresholds for each category" panel is visible, showing checkboxes for Violence, Self-harm, and Sexual, all set to Medium severity.

➔ Then under view result option you will be able to see the content level

➔ But content can be rejected as well

The screenshot shows the "View results" page. At the top, a message states: "Your content has been **Blocked** because it was rejected by filter in **Violence** category". Below this, a table titled "Category and risk level detection results" provides a detailed breakdown. The table has four columns: Category, Severity level, Threshold, and Judgement. The 'Violence' category is highlighted with a red box in the 'Judgement' column, showing it is 'Blocked'. The other categories (Safe, Sexual, Self-harm) are marked as 'Allowed'.

Category	Severity level	Threshold	Judgement
Safe	Safe	Medium	Allowed
Violence	Medium	Medium	Blocked
Sexual	Safe	Medium	Allowed
Self-harm	Safe	Medium	Allowed

Below the table, there is a section titled "Next steps" with two options: "Test with a large dataset" and "Other capabilities". The "Test with a large dataset" option is selected, and a description states: "Are you looking to assess how Azure AI Content Safety performs with larger sets of data? The Test with a large dataset option at the top of this page allows you to perform a test on hundreds even thousands of items."

➔ You can uncheck the type of configuration to change the degree severity

➔ You can use blocklist where you can add certain term that you do not want to detect

➔ , I was using block list and was able to block the elements

3. View results

This content has been **Blocked**

- Rejected by blocklist detection

Category and risk level detection results

The content will be annotated as Safe, Low, Medium or High.

category	Severity level	Threshold	Judgement
Hate	Safe	Medium	Allowed
Violence	Safe	Medium	Allowed
Sexual	Safe	Medium	Allowed

Blocklist detection

Terms hit

- violent_words (2)
- butchered
- slaughter

➔ Similar to moderate text content we can also check moderate image content

➔ To validate if your prompt is safe or not by using prompt shields