GitHub Copilot Administration and Deployment

GitHub Copilot Administrative Features and Controls

Matt Allford
Technologist and Content Creator

@mattallford | www.mattallford.com

GitHub Copilot Content Exclusions

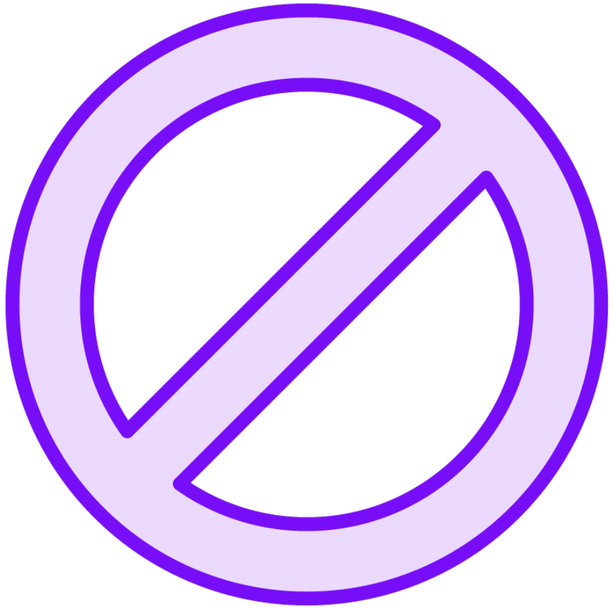

Copilot can be configured to ignore certain files, by excluding paths to content

Exclusion rules can be set at the organization or repository

- If set at the repo, you can only exclude files in that repo
- If set at the organization, you can exclude files in any Git-based repo

Uses the Ruby programming language fnmatch pattern matching notation to specify file paths

Who Is Affected by Content Exclusion Rules?

Someone granted a seat as part of a GitHub Copilot Business or Enterprise subscription

Members of the GitHub organization where the content exclusion is configured

Other users who can access the files will still see code completion and Copilot Chat responses.

```
- "/PATH/TO/DIRECTORY/OR/FILE"
```

Repository Content Exclusions

Use this format in the content exclusions specified at the repository level.

Comments can be included by using a #.

```
- "/src/kernel.rs“
```

◀ Ignore the /src/kernel.rs file in this repository

```
- "env*“
```

◀ Ignore all files whose names begin with env anywhere in this repository

```
- "*.cfg“
```

◀ Ignore files whose names end with .cfg anywhere in this repository

```
- "/scripts/**"
```

◀ Ignore all files in or below the /scripts directory of this repository

```
REPOSITORY-REFERENCE:
  - "/PATH/TO/DIRECTORY/OR/FILE"
  - "/PATH/TO/DIRECTORY/OR/FILE“
  - ...
```

Organization Content Exclusions

Use this format in the content exclusions specified at the organization level.

Comments can be included by using a #.

```
"*":
  - "**/.env"
```

◀ Ignore all .env files at any path, in any repository. This setting applies to all repositories, not just to those on GitHub.com

```
frontend-webappapp:
  - “/pages/index.cshtml"
```

◀ In the frontend-webapp repository in this organization, ignore the /pages/index.cshtml file

```
git@github.com:*/copilot:
  - “/tests/**“
  - “/scripts/*“
```

◀ In the copilot repository of any GitHub organization, ignore any files in or below the /tests directory, and ignore any files in the /scripts directory

GitHub Copilot Audit Logs

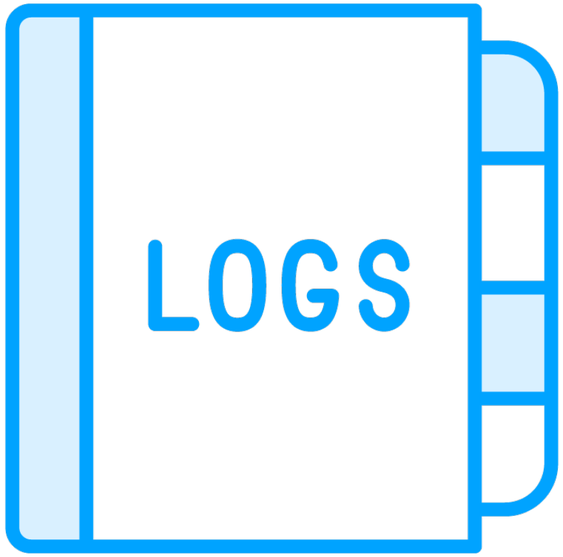

Available for organizations and enterprises with a Copilot Business subscription

Organization owners and enterprise administrators can interact with the audit logs

Enterprise users can query using the API

You can use audit logs to review actions taken by users

- Changes to Copilot settings and policies
- Addition or removal of seats from your Copilot Business subscription

Are retained for 180 days