

 Article marked as read.

Deque in Java

Deque interface present in `java.util` package is a subtype of the `queue` interface. The Deque is related to the double-ended queue that supports the addition or removal of elements from either end of the data structure. It can either be used as a `queue`(first-in-first-out/FIFO) or as a `stack`(last-in-first-out/LIFO). Deque is the acronym for double-ended `queue`.



Dash



All



Articles



Videos



Problems




Quiz




Contest

<< Prev

Next >>

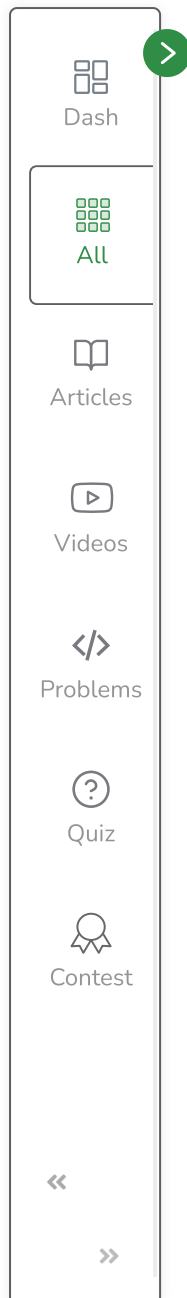

✓ Article marked as read.

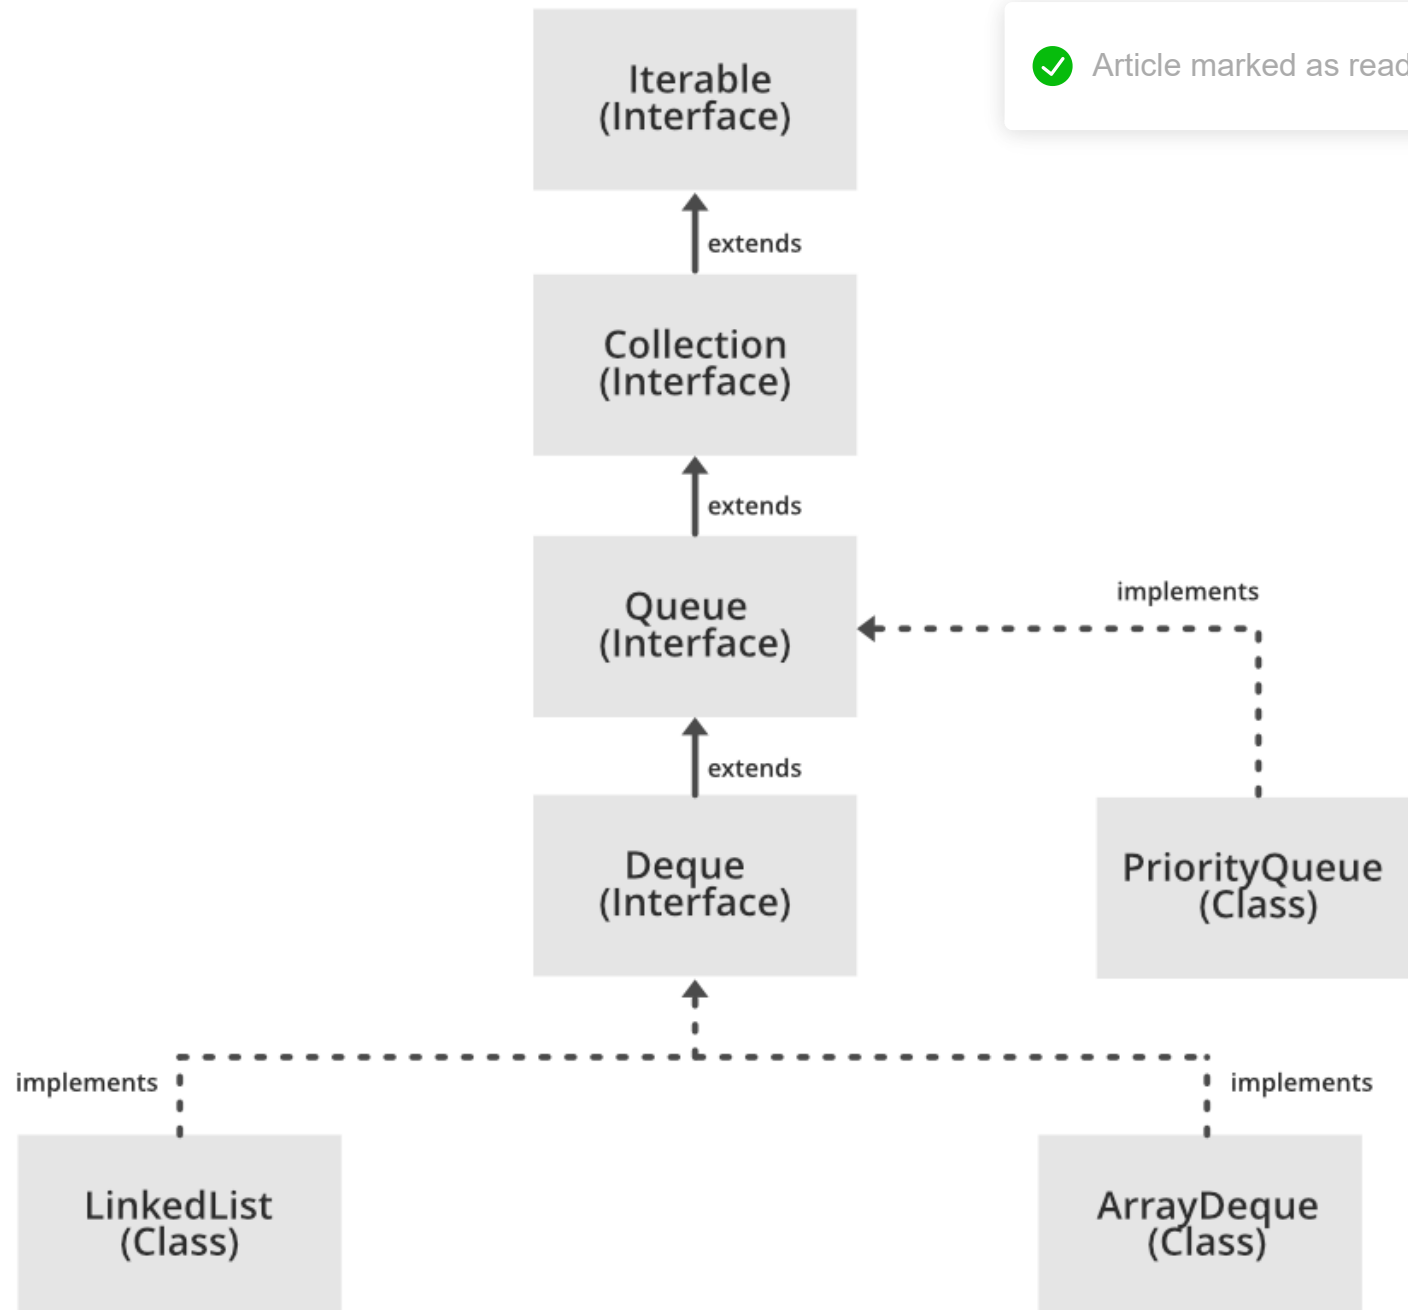

 Article marked as read.

Syntax: The deque interface is declared as:

```
public interface Deque extends Queue
```

Creating Deque Objects Since Deque is an interface, objects cannot be created of the type deque. We always need a class that extends this list in order to create an object. And also, after the introduction of Generics in Java 1.5, it is possible to restrict the type of object that can be stored in the Deque. This type-safe queue can be defined as:

Example: Deque

C++

```
// Java program to demonstrate the working
// of a Deque in Java

import java.util.*;

public class DequeExample {
    public static void main(String[] args)
    {
        Deque<String> deque
            = new LinkedList<String>();

        // We can add elements to the queue
        // in various ways

        // Add at the last
```



Dash



All



Articles



Videos



Problems



Quiz



Contest



 Article marked as read.

Dash



All



Articles



Videos



Problems



Quiz



Contest



```
deque.add("Element 1 (Tail)");

// Add at the first
deque.addFirst("Element 2 (Head)");

// Add at the last
deque.addLast("Element 3 (Tail)");

// Add at the first
deque.push("Element 4 (Head)");

// Add at the last
deque.offer("Element 5 (Tail)");

// Add at the first
deque.offerFirst("Element 6 (Head)");

System.out.println(deque + "\n");

// We can remove the first element
// or the last element.
deque.removeFirst();
deque.removeLast();
System.out.println("Deque after removing "
    + "first and last: "
    + deque);
}
```



Output:[Element 6 (Head), Element 4 (Head), Element 2 (Head), Element 1 (Tail), Element 3 (Tail), Element 5 (Tail)]
Deque after removing first and last: [Element 4 (Head), Element 2 (Head), Element 1 (Tail)]

✓ Article marked as read.

Operations using the Deque Interface and the ArrayDeque class

Let's see how to perform a few frequently used operations on the deque using the ArrayDeque class.

1. Adding Elements: In order to add an element in a deque, we can use the `add()` method. The difference between a queue and a deque is that in deque, the addition is possible from any direction. Therefore, there are other two methods available named `addFirst()` and `addLast()` which are used to add the elements at either end.

Java

```
// Java program to demonstrate the
// addition of elements in deque

import java.util.*;

public class ArrayDequeDemo {
    public static void main(String[] args)
    {
        // Initializing an deque
        Deque<String> dq
            = new ArrayDeque<String>();

        // add() method to insert
        dq.add("For");
        dq.addFirst("Geeks");
        dq.addLast("Geeks");
```

 Article marked as read.

```
        System.out.println(dq);  
    }  
}
```

Output

```
[Geeks, For, Geeks]
```

2. Removing Elements: In order to remove an element from a deque, there are various methods available. Since we can also remove from both the ends, the deque interface provides us with *removeFirst()*, *removeLast()* methods. Apart from that, this interface also provides us with the *poll()*, *pop()*, *pollFirst()*, *pollLast()* methods where *pop()* is used to remove and return the head of the deque. However, *poll()* is used because this offers the same functionality as *pop()* and doesn't return an exception when the deque is empty.

Java

```
// Java program to demonstrate the  
// removal of elements in deque  
  
import java.util.*;  
public class ArrayDequeDemo {  
    public static void main(String[] args)  
    {  
        // Initializing an deque  
        Deque<String> dq  
            = new ArrayDeque<String>();
```

 Dash

 All

 Articles

 Videos

 Problems

 Quiz

 Contest

«

»

 Article marked as read.

Dash



All



Articles



Videos



Problems



Quiz



Contest



```
// add() method to insert
dq.add("For");
dq.addFirst("Geeks");
dq.addLast("Geeks");

System.out.println(dq);

System.out.println(dq.pop());

System.out.println(dq.poll());

System.out.println(dq.pollFirst());

System.out.println(dq.pollLast());

}
```

Output

```
[Geeks, For, Geeks]
Geeks
For
Geeks
null
```



3. Iterating through the Deque: Since a deque can be iterated from both the directions, the iterator method of the deque interface provides us two ways to iterate. One from the first and the other

✓ Article marked as read.



Dash



All



Articles



Videos



Problems



Quiz



Contest



Java

```
// Java program to demonstrate the
// iteration of elements in deque

import java.util.*;

public class ArrayDequeDemo {
    public static void main(String[] args)
    {
        // Initializing an deque
        Deque<String> dq
            = new ArrayDeque<String>();

        // add() method to insert
        dq.add("For");
        dq.addFirst("Geeks");
        dq.addLast("Geeks");
        dq.add("is so good");

        for (Iterator itr = dq.iterator();
             itr.hasNext();) {
            System.out.print(itr.next() + " ");
        }

        System.out.println();
    }
}
```




```
for (Iterator itr = dq.descendingIterator();  
    itr.hasNext();) {  
    System.out.print(itr.next() + " ");  
}  
}
```

✓ Article marked as read.

Output

```
Geeks For Geeks is so good  
is so good Geeks For Geeks
```

The class which implements the Deque interface is **ArrayDeque**.

ArrayDeque: ArrayDeque class which is implemented in the collection framework provides us with a way to apply resizable-array. This is a special kind of array that grows and allows users to add or remove an element from both sides of the queue. Array dequeues have no capacity restrictions and they grow as necessary to support usage. They are not thread-safe which means that in the absence of external synchronization, ArrayDeque does not support concurrent access by multiple threads. ArrayDeque class is likely to be faster than Stack when used as a stack. ArrayDeque class is likely to be faster than LinkedList when used as a queue. Let's see how to create a queue object using this class.

Java

```
// Java program to demonstrate the  
// creation of deque object using the  
// ArrayDeque class in Java
```



Dash



All



Articles



Videos



Problems



Quiz



Contest



 Article marked as read.

Dash



All



Articles



Videos



Problems



Quiz



Contest



```
import java.util.*;

public class ArrayDequeDemo {
    public static void main(String[] args)
    {
        // Initializing an deque
        Deque<Integer> de_que
            = new ArrayDeque<Integer>(10);

        // add() method to insert
        de_que.add(10);
        de_que.add(20);
        de_que.add(30);
        de_que.add(40);
        de_que.add(50);

        System.out.println(de_que);

        // clear() method
        de_que.clear();

        // addFirst() method to insert the
        // elements at the head
        de_que.addFirst(564);
        de_que.addFirst(291);

        // addLast() method to insert the
        // elements at the tail
        de_que.addLast(24);
    }
}
```



 Article marked as read.

```
de_que.addLast(14);

System.out.println(de_que);
}
}
```

Output

```
[10, 20, 30, 40, 50]
[291, 564, 24, 14]
```

Methods of Deque Interface

The following are the methods present in the deque interface:

Method

Description

[add\(element\)](#)

This method is used to add an element at the tail of the queue. If the Deque is capacity restricted and no space is left for insertion, it returns an `IllegalStateException`. The function returns true on successful insertion.

[addFirst\(element\)](#)

This method is used to add an element at the head of the queue. If the Deque is capacity restricted and no space is left for insertion, it returns an `IllegalStateException`. The function returns true on successful insertion.



Dash



All



Articles



Videos



Problems



Get 90% Refund!

Courses

Tutorials

Jobs

Practice

Contests




P



Contest

<<


>>

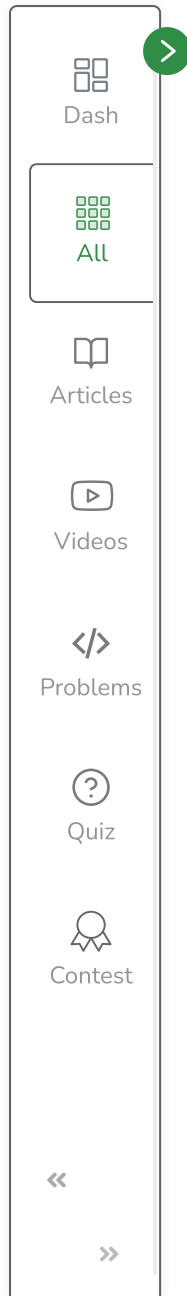

<u>addLast(element)</u>	This method is used to add an element at the tail of the queue. Deque is capacity restricted and no space is left. It throws an <code>IllegalStateException</code> . The function returns true.
<u>contains()</u>	This method is used to check whether the queue contains the given object or not.
<u>descendingIterator()</u>	This method returns an iterator for the deque. The elements will be returned in order from last(tail) to first(head).
<u>element()</u>	This method is used to retrieve, but not remove, the head of the queue represented by this deque.
<u>getFirst()</u>	This method is used to retrieve, but not remove, the first element of this deque.
<u>getLast()</u>	This method is used to retrieve, but not remove, the last element of this deque.
<u>iterator()</u>	This method returns an iterator for the deque. The elements will be returned in order from first (head) to last (tail).
<u>offer(element)</u>	This method is used to add an element at the tail of the queue. This method is preferable to <code>add()</code> method since this method does not throws an exception when the capacity of the container is full since it returns false.
<u>offerFirst(element)</u>	This method is used to add an element at the head of the queue. This method is preferable to <code>addFirst()</code> method since this method does not throws an exception when the capacity of the container is full since it returns false.

✓ Article marked as read.



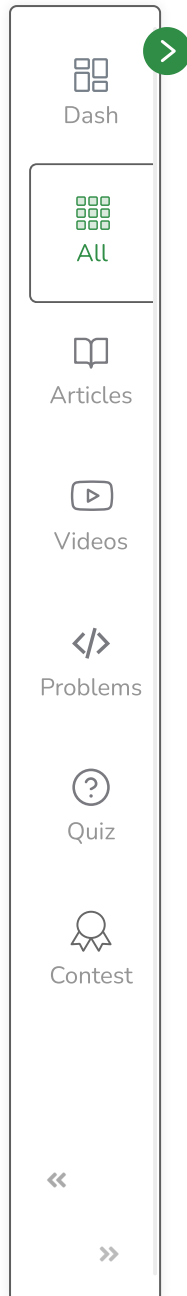

<u>offerLast(element)</u>	This method is used to add an element at the tail of the deque. This method is preferable to add() method since it doesn't throw an exception when the capacity of the container is reached.
peek()	This method is used to retrieve the element at the head of the deque but doesn't remove the element from the deque. This method returns null if the deque is empty.
peekFirst()	This method is used to retrieve the element at the head of the deque but doesn't remove the element from the deque. This method returns null if the deque is empty.
peekLast()	This method is used to retrieve the element at the tail of the deque but doesn't remove the element from the deque. This method returns null if the deque is empty.
poll()	This method is used to retrieve and remove the element at the head of the deque. This method returns null if the deque is empty.
pollFirst()	This method is used to retrieve and remove the element at the head of the deque. This method returns null if the deque is empty.
pollLast()	This method is used to retrieve and remove the element at the tail of the deque. This method returns null if the deque is empty.
pop()	This method is used to remove an element from the head and return it.
push(element)	This method is used to add an element at the head of the queue.
removeFirst()	This method is used to remove an element from the head of the queue.

✓ Article marked as read.



removeLast()	This method is used to remove an element from the end of the queue.
size()	This method is used to find and return the size of the queue.

✓

Article marked as read.

Dash

All

Articles

Videos

Problems

Quiz

Contest

<<

>>

Marked as Read

 Report An Issue

If you are facing any issue on this page. Please let us know.

