
Which import issue deserves the engineer?

Your R17 handoff switched off the new importer. Engineering still needs to repair it. Use the saved logs from when it was running. One account can try an import several times. Pick a platform from the client alerts, then check the server and Support. Could these files tell you how many accounts failed to activate?

Read the unit on the error count

R17 iOS shows 18 client errors and 17 server failures in 100 attempts. Android shows 24 and 1 in 100. Attempts and eligible accounts answer different questions. These files contain no account-level join key.

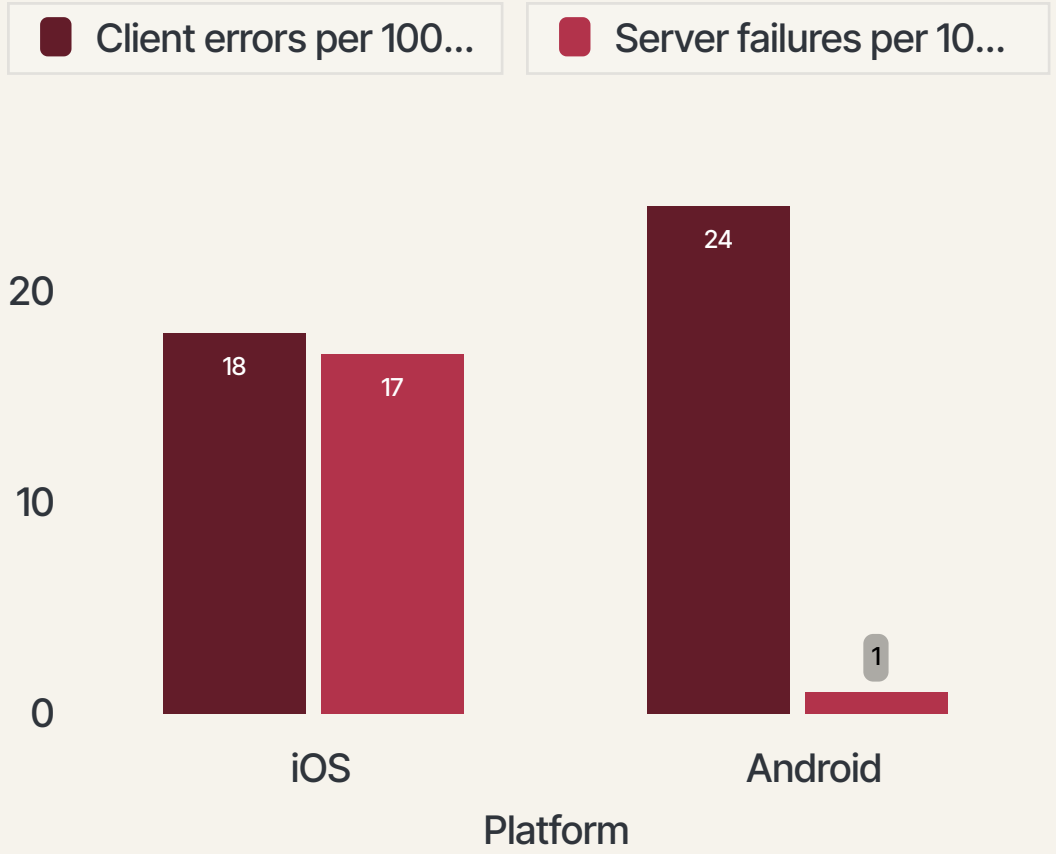

Try to reproduce what the user experienced

On iOS, a valid import times out in S101. On Android, the import completes in S102 and the retry callback increments the client counter. Name the team and next test for each finding.

When someone finds a mistake

1
First find the mistake

2
Have the owner review it

3
Update the shared instructions or test

4
Run it again in a new session

5
Keep one shared version, such as GitHub

6
Reopen the work if the source, definition or tracking changes

Loops back to step 1

Source: Paras Doshi, Agentic Analytics: What to Build First and How to Trust It, slide 15

What would let you close the ticket?

Agree on this before you open R18. You need at least 100 attempts, at most 3% server failures and a passing test on the same path. Put the result in the original ticket so the next engineer can see why you closed it or kept it open.

What should the data agent learn?

Product Data reviews the S102 correction. Recommend a product ticket only at 10% or more server failures plus a matching failed reproduction. A client spike with a successful import goes to telemetry for review. Test the approved rule on a fresh release.

Try it on a release nobody has seen

Open the blind-release files from this lesson. Save the client-only choice, then run the reviewed rule. Count the real issue you kept as well as the false alert you removed.

Would you close the iOS ticket?

First write the call you would make from the R18 server counts and the QA dashboard. Then ask QA where S103 actually ran and how the tester signed in. Tell the incident owner whether to close the ticket, and which test you would accept.