
Both mobile platforms report trouble after R17

Use client errors alone to pick which one you would investigate first. Write down your choice before opening the server and support data.

Read the unit on the error count

R17 iOS shows 18 client errors and 17 server failures in 100 attempts. Android shows 24 and 1 in 100. Attempts and eligible accounts answer different questions. These files contain no account-level join key.

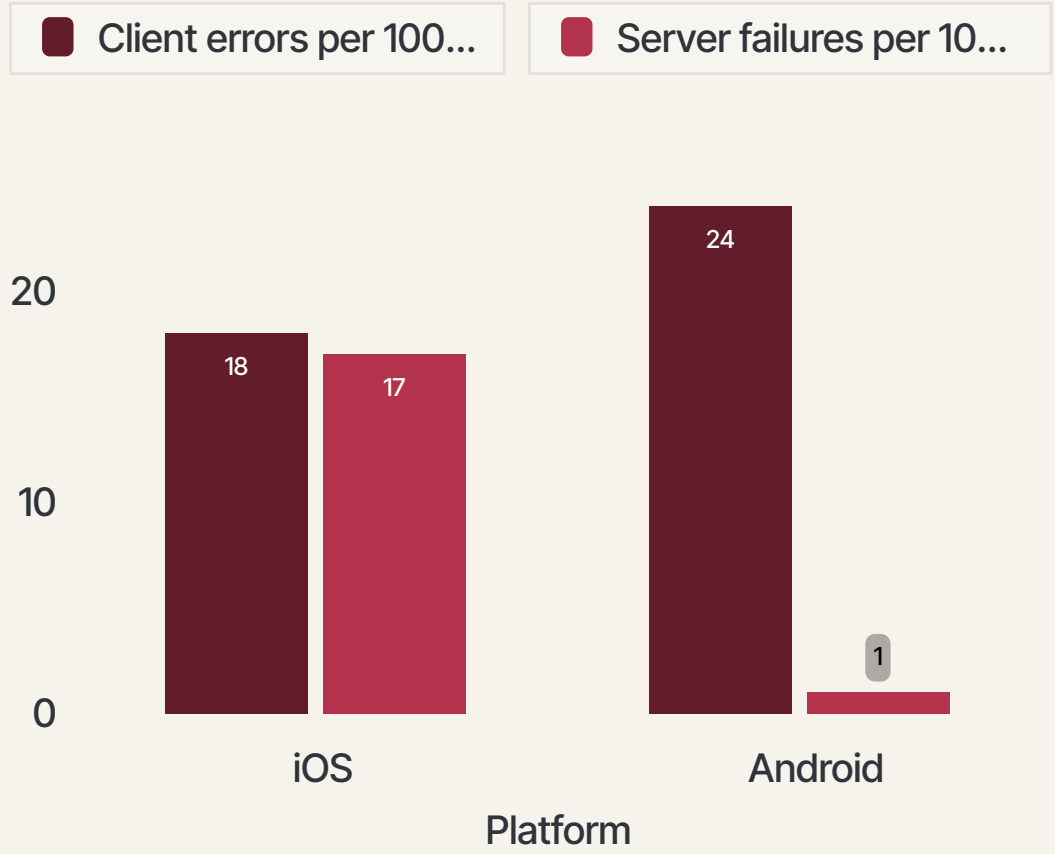

Try to reproduce what the user experienced

On iOS, a valid import times out in S101. On Android, the import completes in S102 and the retry callback increments the client counter. Name the team and next test for each finding.

Agree on 'fixed' before opening R18

Give Import Engineering one local ticket. Agree on at least 100 attempts, a server failure rate of at most 3% and a passing reproduction. Then inspect R18 and append the result to the same ticket.

What should the data agent learn?

The Android alert taught us that client retries can look like product failures. Have a reviewer accept the correction. A fresh session should ask for server evidence and a matching reproduction before recommending a product ticket.

Try it on a release nobody has seen

Open the blind-release files from this lesson. Save the client-only choice, then run the reviewed rule. Count the real issue you kept as well as the false alert you removed.