

Parasoft Findings for SonarQube

In this section:

- Introduction
- Requirements
- Installing the Parasoft Findings Plugin
- Activating Parasoft Profiles
- Setting the Report Path for Static Analysis
- Setting the Report Path for Coverage
- Uploading Project Results
- Viewing Test Execution Results
- Viewing Code Coverage Results
- Unit Test Execution
- Third-party Acknowledgments

View online: <https://docs.parasoft.com/x/Ny1-C>

Introduction

The Parasoft Findings Plugin for SonarQube allows you to view static analysis and code coverage results within SonarQube. It grants SonarQube the ability to analyze data from Parasoft XML reports and use it to report bugs, vulnerabilities, code coverage or code smells from within SonarQube. See [Uploading Project Results](#) for more details. While viewing test execution results is not part of the implementation for Parasoft Findings for SonarQube, see [Unit Test Execution](#) to learn how SonarQube can support that functionality natively.

The plugin can consume the following report types:

- Static analysis, metrics analysis, code coverage, and unit test reports generated by 2022.2+ versions of C/C++test, Jtest, and dotTEST.

Requirements

- For version 10.6.1, a Parasoft product must be installed on the same machine as the SonarQube server since the plugin loads rules from a Parasoft product installation.
 - For C/C++test, the Standard edition must be installed even if you are sending C/C++test Professional reports to SonarQube.
 - This requirement does not apply to version 10.6.2+.
- SonarQube versions 8.9+ are supported.
- SonarQube Developer edition or better is required to process C/C++test reports.
- Language projects versions 2022.2+ are supported.

Installing the Parasoft Findings Plugin


1. Either download the plugin or build it yourself (10.6.2+ only):
 - a. To download the plugin, go to <https://customerportal.parasoft.com/lightningportal/s/marketplace> and download the Parasoft SonarQube plugin jar `parasoft.findings.sonar-<VERSION>.jar`.
 - Be sure to download the version of the plugin that matches the version of your Parasoft product. For example, if you are using Jtest, dotTEST, or C++Test 2022.2, you would download `parasoft.findings.sonar-2022.2.jar`.
 - b. To build the plugin yourself, see [Building Your Own Plugin](#).
2. Copy the plugin jar into the SonarQube `extensions/plugins` directory.
3. Restart the SonarQube server.
4. For version 10.6.1: set the root path to the Parasoft product (see [Setting the Root Path to the Parasoft Product for Version 10.6.1](#)).
 - a. Starting with version 10.6.2, rule files are packaged in the plugin jar, so it is not necessary to set the root path to load rules with version 10.6.2+.

See <https://docs.sonarqube.org/latest/setup/install-plugin/> for more details.

Setting the Root Path to the Parasoft Product for Version 10.6.1

1. In the SonarQube web UI go to **Administration > Configuration > General Settings > External Analyzers**.

2. Locate the **Root Path** setting under the appropriate programming language.

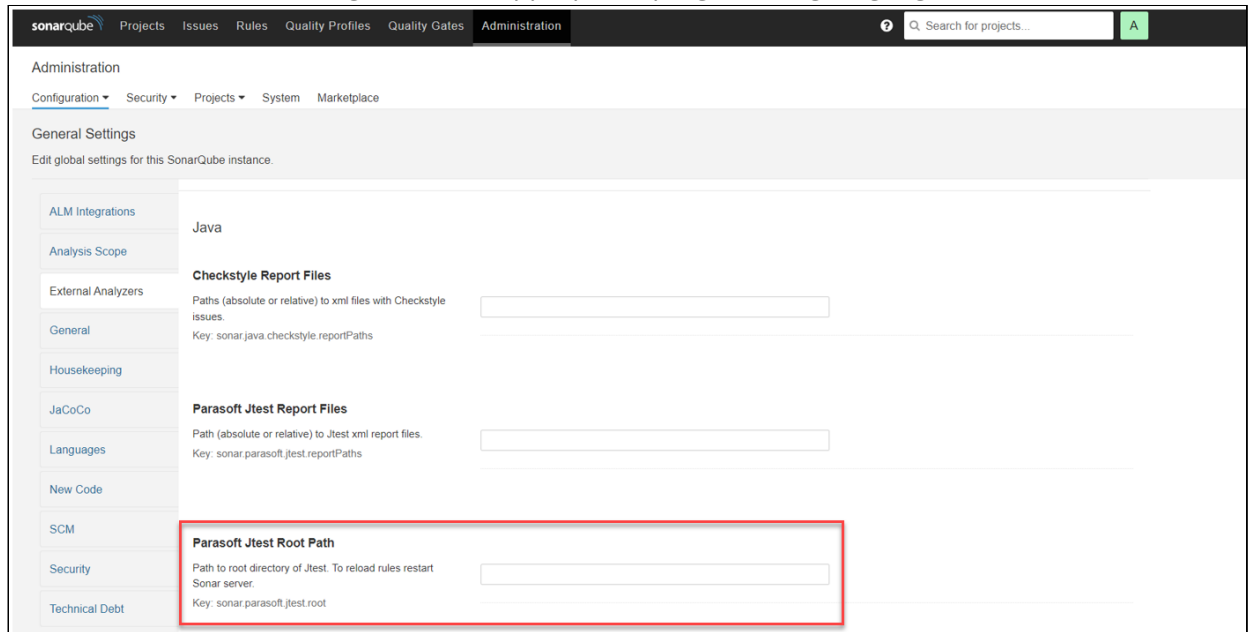

3. In the field enter the absolute path to the Parasoft product installation and click **Save**.
4. Restart the SonarQube server so that the rule definitions are loaded.
5. After the server has restarted, go to **Quality Profiles** in the web UI and select the built-in Parasoft profile under the appropriate supported language. Verify that the rule definitions are loaded successfully under the profile.

If zero or only one rule is loaded, then loading of rules failed. In this case:

- a. Check that the root path is correct.
- b. Review the SonarQube web server logs for any error messages.

Building Your Own Plugin

You can build your own plugin for your Parasoft products. To do so, you will need JDK 11+, Maven 3.3+, and your Parasoft products installed on the same machine.

1. Clone the source code from GitHub found here: <https://github.com/parasoft/parasoft-findings-sonar>.

View online: <https://docs.parasoft.com/x/Ny1-C>

2. Run a Maven package command that is appropriate for the Parasoft products you have installed. The example below includes Jtest, dotTEST, and C++Test; if you don't have one or more of these installed, remove its root path reference:

```
mvn clean package -DjtestRootPath="<JTEST-INSTALL-ROOT-PATH>" -DdottestRootPath="<DOTTEST-INSTALL-ROOT-PATH>" -DcpptestRootPath="<CPPTTEST-INSTALL-ROOT-PATH>"
```

- For C/C++test, the root path must be set to Standard edition, even if you are sending C/C++test Professional reports to SonarQube.

The plugin jar that is created will be in the `<SOURCE-CODE-ROOT-PATH>/target` folder and will include the rule files for your Parasoft product.

Activating Parasoft Profiles


There are two ways to enable the Parasoft profile for your projects:

- To set a Parasoft profile as the default for new projects, go to **Quality Profiles** and select **Set as Default** from the gear menu to the right of the profile.
- To set a Parasoft profile for a given project, go to **Quality Profiles** section in the project settings. Select the **Change Profile** button on the right side of the appropriate language.

Setting the Report Path for Static Analysis

For Parasoft results to be uploaded, the path to the report files must be set. There are several ways to configure this.

- To configure the path globally go to **Administration > Configuration > General Settings > External Analyzers** and find the **Report Files** setting for your Parasoft product.

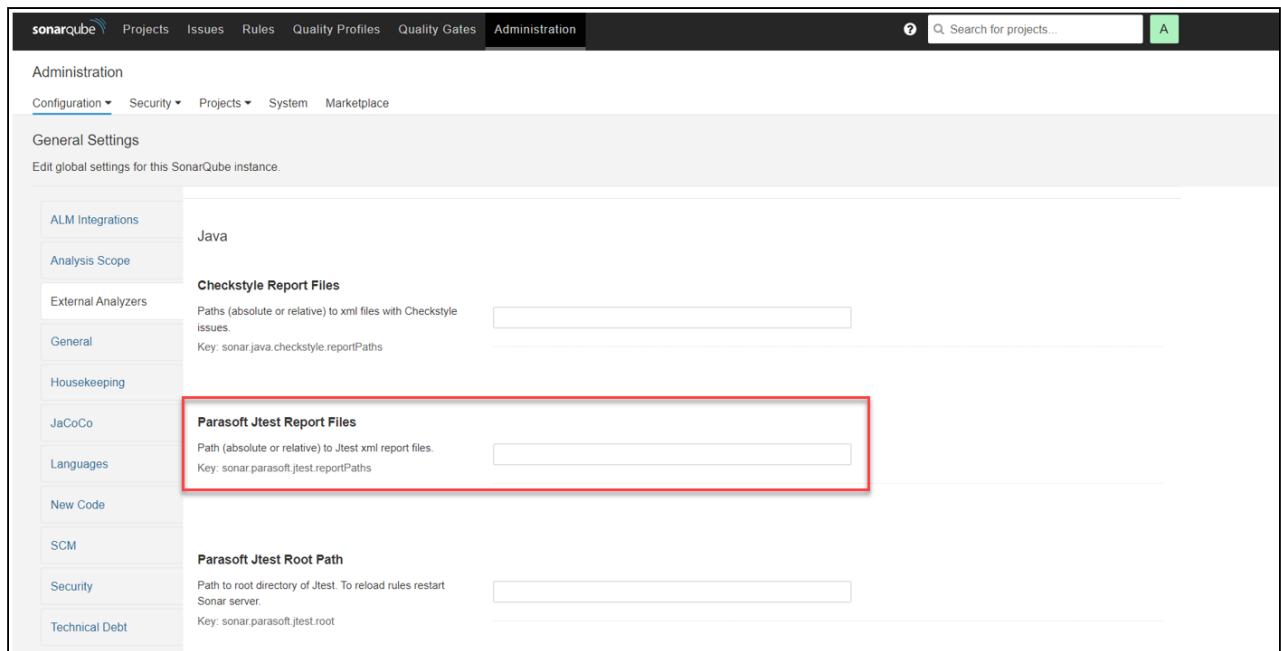

Enter the path to the report.xml file of your project. For example:

```
target/jtest/report.xml
```

You can add multiple paths, each in a separate field. When the Parasoft scanner runs, results will be loaded from each valid report file path.

- To configure the path for a project, go to the **External Analyzers** section in the project's settings.
- To configure the path when running the sonar scanner, include the report path's settings key. For example:
 - Jtest using Maven:

```
mvn sonar:sonar -Dsonar.login=<your sonar key> -Dsonar.host.url="http://  
<your sonar server>:<your sonar server port>/"  
-Dsonar.parasoft.jtest.reportPaths=target/report.xml...<additional sonar  
settings>
```

- Jtest using sonar-scanner:

```
sonar-scanner-<version>-windows/bin/sonar-scanner.bat -Dsonar.login=<your  
sonar key> -Dsonar.host.url="http://<your sonar server>:<your sonar server  
port>/" -Dsonar.parasoft.jtest.reportPaths=target/report.xml...<additional  
sonar settings>
```

- C/C++test using sonar-scanner:

```
build-wrapper-win-x86-64.exe --out-dir  
build_wrapper_output_directory...<your build commands i.e.: make clean all  
"C:/cpptest/examples/FlowAnalysisCpp">
```

```
sonar-scanner-<version>-windows/bin/sonar-scanner.bat -Dsonar.login=<your  
sonar key> -Dsonar.host.url="http://<your sonar server>:<your sonar server  
port>/" -Dsonar.parasoft.cpptest.reportPaths=target/  
report.xml...<additional sonar settings>
```

- dotTEST using .NET's sonar-scanner (**Note:** Sonar-scanner must be installed via the command: `dotnet tool install --global dotnet-sonarscanner`):

```
dotnet sonarscanner begin /k:"<your solution>" /d:sonar.login="<your sonar  
key>" /d:sonar.parasoft.dottest.reportPaths="target/report.xml"...<addition  
al sonar settings>
```

```
dotnet build <your solution>
```

```
dotnet sonarscanner end /d:sonar.login="<your sonar key>"
```

- dotTEST using Sonar's provided sonar-scanner:

```
sonar-scanner-<version>-windows/bin/sonar-scanner.bat -Dsonar.login=<your sonar key> -Dsonar.host.url="http://<your sonar server>:<your sonar server port>/" -Dsonar.parasoft.dottest.reportPaths=target/report.xml...<additional sonar settings>
```


- Sonar-scanner can be downloaded from: <https://docs.sonarqube.org/latest/analyzing-source-code/scanners/sonarscanner/>
- You can include multiple report files:

```
mvn sonar:sonar -Dsonar.parasoft.jtest.reportPaths=target/report.xml -Dsonar.parasoft.jtest.reportPaths=target/report_2.xml...<additional sonar settings>
```

Setting the Report Path for Coverage

For Parasoft results to be uploaded, the path to the report files must be set. There are several ways to configure this.

- To configure the path globally go to **Administration > Configuration > General Settings > Code Coverage** and find the **Parasoft Coverage Report Files** setting for your Parasoft product.

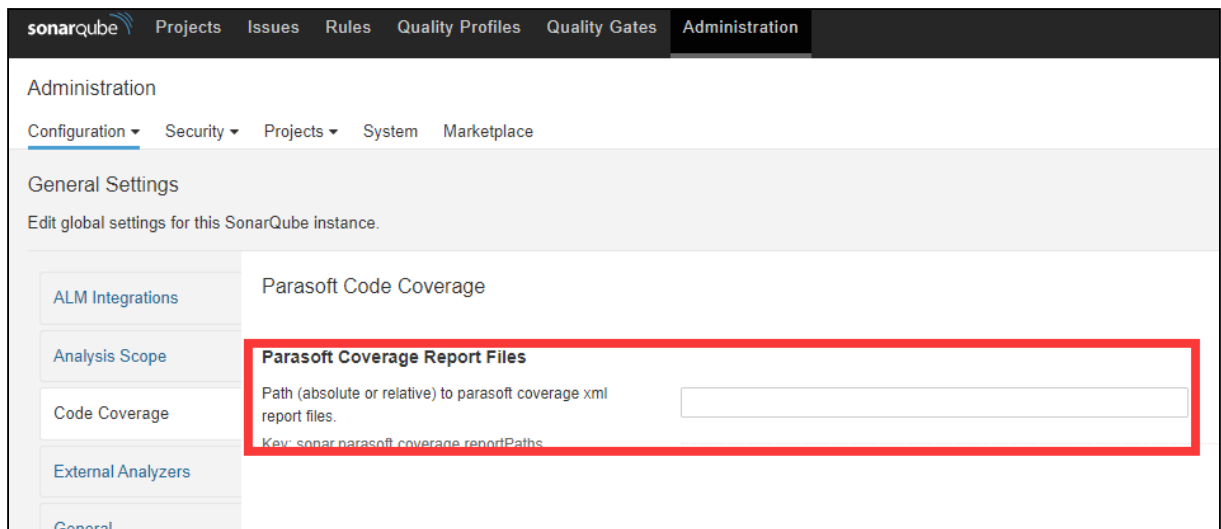

Enter the path to the report.xml file of your project. For example:

`report/coverage.xml`

or

`D:\project\report\coverage.xml`

- To configure the path when running the sonar scanner, include the report path's settings key. For example:
 - Jtest using Maven:

```
mvn sonar:sonar -Dsonar.login=<your sonar key> -Dsonar.host.url="http://<your sonar server>:<your sonar server port>/" -Dsonar.parasoft.coverage.reportPaths=target/coverage.xml...<additional sonar settings>
```
 - Jtest using sonar-scanner:

```
sonar-scanner-<version>-windows/bin/sonar-scanner.bat -Dsonar.login=<your sonar key> -Dsonar.host.url="http://<your sonar server>:<your sonar server port>/" -Dsonar.parasoft.coverage.reportPaths=target/coverage.xml...<additional sonar settings>
```

- C/C++ test using sonar-scanner:

```
build-wrapper-win-x86-64.exe --out-dir  
build_wrapper_output_directory...<your build commands i.e.: make clean all  
"C:/cpptest/examples/FlowAnalysisCpp">
```

```
sonar-scanner-<version>-windows/bin/sonar-scanner.bat -Dsonar.login=<your sonar key> -Dsonar.host.url="http://<your sonar server>:<your sonar server port>/" -Dsonar.parasoft.coverage.reportPaths=target/coverage.xml...<additional sonar settings>
```

- dotTEST using .NET's sonar-scanner (**Note:** Sonar-scanner must be installed via the command: `dotnet tool install --global dotnet-sonarscanner`):

```
dotnet sonarscanner begin /k:"<your solution>" /d:sonar.login="<your sonar key>" /d:sonar.parasoft.coverage.reportPaths="target/coverage.xml"...<additional sonar settings>
```

```
dotnet build <your solution>
```

```
dotnet sonarscanner end /d:sonar.login="<your sonar key>"
```

- dotTEST using Sonar's provided sonar-scanner:

```
sonar-scanner-<version>-windows/bin/sonar-scanner.bat -Dsonar.login=<your sonar key> -Dsonar.host.url="http://<your sonar server>:<your sonar server port>/" -Dsonar.parasoft.coverage.reportPaths=target/coverage.xml...<additional sonar settings>
```

- Sonar-scanner can be downloaded from: <https://docs.sonarqube.org/latest/analyzing-source-code/scanners/sonarscanner/>

Uploading Project Results

To upload Parasoft results for a project, first run the command which generates the report.xml file, and then run the usual Sonar scanner command. For example, with a Maven project setup using Jtest, a single command can be run from the root directory of your project:

```
mvn jtest:jtest sonar:sonar -Dsonar.projectKey=<project key> -Dsonar.host.url=<server url> -Dsonar.login=<login token>
```

See the documentation for your Parasoft product for details on how to run static analysis and generate a report:

- For Jtest: <https://docs.parasoft.com/display/JTEST20231/Running+Static+Analysis+1>
- For dotTEST: <https://docs.parasoft.com/display/DOTTEST20231/Running+Static+Analysis+1>
- For C/C++test: <https://docs.parasoft.com/display/CPPTTEST20231/Running+Static+Analysis+1>

Note: The `report.location_details` property must be set to `true` in order for C/C++test Professional to work properly.

See <https://docs.sonarqube.org/latest/analysis/overview/> for details on how to run the Sonar scanner on projects using different build systems.

Viewing Test Execution Results

After the results are uploaded, they can be viewed in the project in the **Issues** tab.

The screenshot displays the SonarQube web interface for a project named "Demo Project". The top navigation bar includes links for Projects, Issues, Rules, Quality Profiles, Quality Gates, and Administration. A search bar is present on the right. The main header shows the project name, a star icon, and a branch "master". A status bar indicates "Last analysis had 1 warning" on August 8, 2022, at 10:16 AM, with version 1.0.0. Below this, tabs for Overview, Issues (selected), Security Hotspots, Measures, Code, and Activity are visible. The "Issues" tab shows a summary of "1 / 128 issues" and "0 effort". On the left, a "Filters" sidebar allows filtering by Type (BUG, 128), Severity (Blocker: 70, Critical: 22, Major: 36, Minor: 0, Info: 0), Scope, Resolution, Status, Security Category, Creation Date, and Language. The main content area lists issues for two files: `src/.../java/examples/flowanalysis/AlwaysCloseGSS.java` and `src/.../java/examples/flowanalysis/AlwaysCloseImages.java`. Each issue entry includes a checkbox, a bug icon, a severity level (Blocker), a status (Open), and an assigned user (Not assigned). The issues are: "Security context not disposed: GSSManager.getInstance().createContext(tokens)" (L13), "context" may possibly be null (L29), "context" may possibly be null (L29), Image resource not closed: imgReader (L16), Image resource not closed: imgReader (L16), and "imgReader" may possibly be null (L31). Each issue has a "Why is this an issue?" link, a "Comment" link, and a "4 minutes ago" timestamp. The assigned users are listed as "bd.res, parasoft" or "bd.except, parasoft".

Viewing Test Execution Results

The screenshot displays the SonarQube web interface for a project named "Demo Project" (master branch). The top navigation bar includes links for Projects, Issues, Rules, Quality Profiles, Quality Gates, and Administration. A search bar is present on the right. The main content area is divided into three sections: Overview, Issues, and Security Hotspots. The "Issues" tab is active, showing a list of issues on the left and a detailed view of a selected issue on the right.

The left sidebar shows a list of issues for the file `...amples/flowanalysis/AlwaysCloseGSS.java`:

- Security context not disposed: GSSManager.getInstance().createCo... (Bug)
- Security context not disposed: GSSManager.getInstance().createCo... (Bug)
- "context" may possibly be null (Bug)
- "context" may possibly be null (Bug)
- Image resource not closed: imgReader (Bug)
- Image resource not closed: imgReader (Bug)
- "imgReader" may possibly be null (Bug)


The right pane shows the details of a selected issue: "Security context not disposed: GSSManager.getInstance().createContext(tokens)". The issue is categorized as a "Bug" and is marked as a "Blocker". It was reported 5 minutes ago by user "L13". The issue description and the corresponding code snippet are visible:

```
public class AlwaysCloseGSS {  
    public void process(byte[] tokens) {  
        try {  
            byte[] inputBuff = new byte[256];  
            GSSManager.getInstance().createContext(tokens).initSecContext(inputBuff, 0, 256);  
            // ...  
        } catch (Exception ioe) {  
            System.out.println("Exception occurred: " + ioe);  
        }  
    }  
    public void processClose(byte[] tokens) {  
        GSSContext context = null;  
        try {  
            context = GSSManager.getInstance().createContext(tokens);  
            byte[] inputBuff = new byte[256];  
            context.initSecContext(inputBuff, 0, 256);  
            // ...  
        } catch (Exception ioe) {  
            System.out.println("Exception occurred: " + ioe);  
        } finally {  
            try {  
                context.close();  
            }  
        }  
    }  
}
```

View online: <https://docs.parasoft.com/x/Ny1-C>

Viewing Code Coverage Results

After the results are uploaded, they can be viewed in the project in the **Overview** tab.

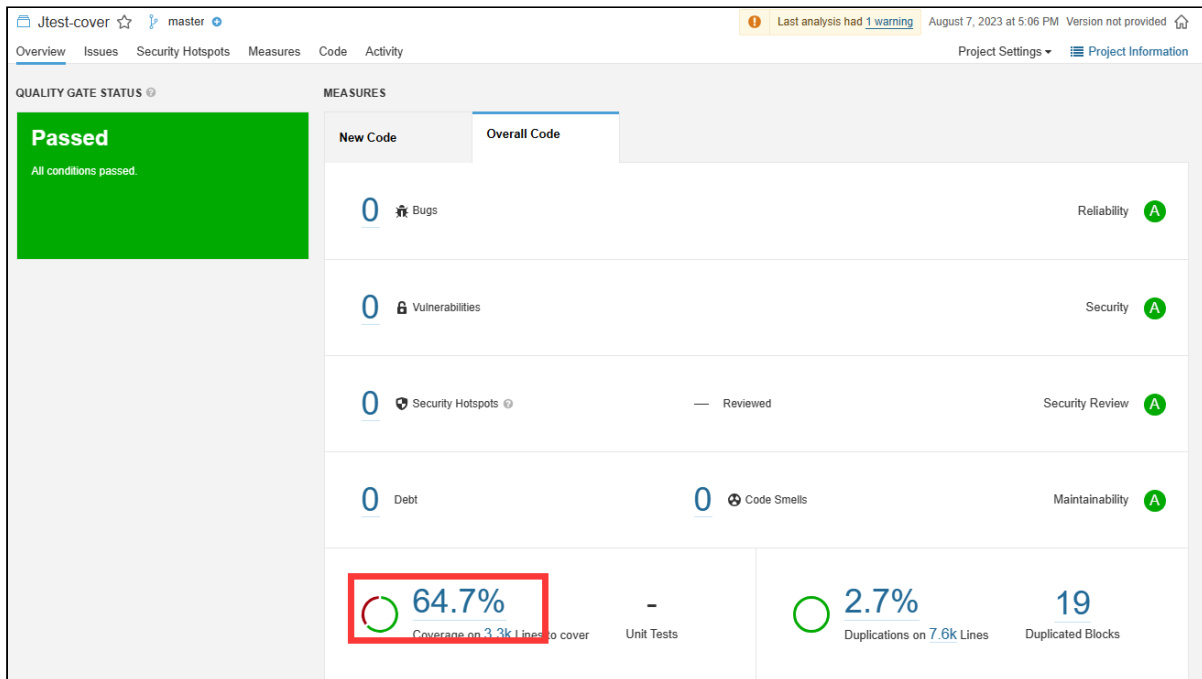

The screenshot shows the JTest-cover Measures tab. On the left, the 'Project Overview' section is expanded, showing 'Coverage' with a value of 64.7%. The main area displays a table of code coverage results for various files. The table has columns for file path, coverage percentage, and line count. The file 'src/main/java/com/parasoft/parabank/web/form/OpenAccountForm.java' is highlighted with a red box.

File Path	Coverage	Lines
src/main/java/com/parasoft/parabank/service/LoanProcessorService.java	0.0%	1
src/main/java/com/parasoft/parabank/service/ParaBankServiceConstants.java	0.0%	25
src/main/java/com/parasoft/parabank/dao/jdbc/internal/SampleJdbcDynamicDataInserter.java	0.0%	3
src/main/java/com/parasoft/parabank/dao/jdbc/SecureJdbcCustomerDao.java	0.0%	6
src/main/java/com/parasoft/parabank/dao/jdbc/SecureJdbcTransactionDao.java	0.0%	11
src/main/java/com/parasoft/parabank/util/Transactions.java	0.0%	5
src/main/java/com/parasoft/parabank/util/AccessModeController.java	4.5%	472
src/main/java/com/parasoft/parabank/web/controller/NewsController.java	6.7%	14
src/main/java/com/parasoft/parabank/web/form/TransferForm.java	10.0%	9
src/main/java/com/parasoft/parabank/util/CustomWadlGenerator.java	12.5%	7
src/main/java/com/parasoft/parabank/web/form/OpenAccountForm.java	14.3%	6
src/main/java/com/parasoft/parabank/web/controller/TransactionController.java	14.8%	23

View online: <https://docs.parasoft.com/x/Ny1-C>

The screenshot displays the Jtest-cover application interface. The top navigation bar includes 'Overview', 'Issues', 'Security Hotspots', 'Measures', 'Code', and 'Activity'. The 'Measures' tab is active, showing a 'Project Overview' sidebar on the left and a code editor on the right.

Project Overview Sidebar:

- Reliability
- Security
- Security Review
- Maintainability
- Coverage** (14.3%)
 - Overview
 - Overall
 - Coverage** 14.3%
 - Lines to Cover: 7
 - Uncovered Lines: 6
 - Line Coverage: 14.3%
 - Tests
 - Errors: 0
 - Failures: 0
 - Skipped: 0
 - Success: 100%
 - Duplications
 - Size

Code Editor:

The code editor shows the file path: `Jtest-cover / src/.../com/parasoft/parabank / web / form / OpenAccountForm.java`. The coverage is 14.3%. The code is as follows:

```
1 sdebr... package com.parasoft.parabank.web.form;
2
3 benke... import com.parasoft.parabank.domain.Account.AccountType;
4 sdebr...
5 /**
6  * Backing class for account creation form
7  */
8 public class OpenAccountForm {
9     private AccountType type;
10     private int fromAccountId;
11
12     public AccountType getType() {
13         return type;
14     }
15
16     public void setType(AccountType type) {
17         this.type = type;
18     }
19
20     public int getFromAccountId() {
21         return fromAccountId;
22     }
23 }
```

A tooltip 'Fully covered by tests.' is visible over line 10.

C/C++test Professional Reports

Code coverage reports for C/C++test Professional are not supported.

Unit Test Execution

Reporting test execution and test coverage should be done using the existing industry standard solutions supported by SonarQube. Other unit test and coverage frameworks are not currently supported.

1. Run unit tests to generate test execution reports.
2. Run SonarQube scanner to upload reports.

See <https://docs.sonarqube.org/latest/analysis/coverage/> for more details.

Third-party Acknowledgments

The Parasoft Findings Plugin for SonarQube uses the following third-party software:

Apache Commons Codec

This software is used under an [Apache License 2.0](#) with this [notice](#).

Apache Commons Collections

This software is used under an [Apache License 2.0](#) with this [notice](#).

Apache HttpClient

This software is used under an [Apache License 2.0](#) with this [notice](#).

Apache HttpClient Fluent API

This software is used under an [Apache License 2.0](#) with this [notice](#).

Apache HttpClient Mime

This software is used under an [Apache License 2.0](#) with this [notice](#).

Apache HttpCore

This software is used under an [Apache License 2.0](#) with this [notice](#).

Dom4j

This software is used under a [BSD License](#).

Jackson-annotations

This software is used under an [Apache License 2.0](#) with this [notice](#).

Jackson-core

This software is used under an [Apache License 2.0](#) with this [notice](#).

jackson-databind

This software is used under an [Apache License 2.0](#) with this [notice](#).

JavaMail

This software is used under a [CDD 1.1 License](#).

JavaBeans

This software is used under a [CDD 1.0 License](#).

JRCS Diff

This software is used under a [LGPL License](#).

Saxon-HE

This software is used under an [MPL 2.0 license](#).

SLF4J API Module

This software is used under an [MIT License](#).

xmlresolver

This software is used under an [Apache License 2.0](#).

zip4j

This software is used under an [Apache License 2.0](#) with this [notice](#).