LU Solver on the GPU

From FP64 kernels to tensor cores, watched by NixNan


Ganesh Gopalakrishnan

SC26 tutorial

Algorithm: LU with partial pivoting, solve $Ax = b$

$$PA = LU, \qquad \underbrace{p = \arg\max_{i \geq k} |U_{ik}|}_{\text{pivot}}, \qquad \underbrace{L_{jk} = \frac{U_{jk}}{U_{kk}}}_{\text{multiplier}}, \qquad \underbrace{U_{jl} \mathrel{-}= L_{jk} U_{kl}}_{\text{eliminate, } j>k,\ l \geq k}$$

$$Ly = Pb \ \text{(forward)}, \qquad Ux = y \ \text{(backward)}$$

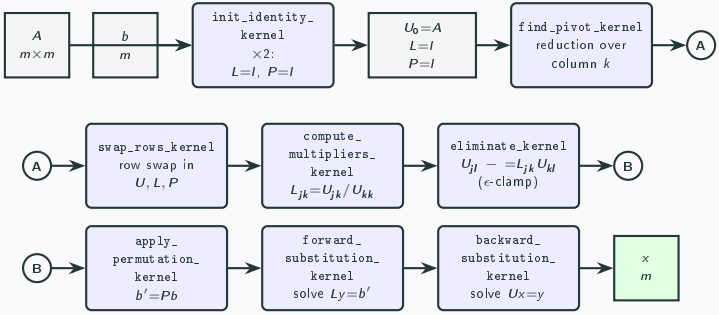

NixNan knobs: environment variables

`INSTR_BEGIN / END`	instr. index window
`TOOL_VERBOSE`	setup diagnostics
`ENABLE_FUN_DETAIL`	name on every rerun
`PRINT_ILL_INSTR`	print culprit SASS
`SAMPLING`	every *N*th launch
`INSTRUMENT_EXCEPTIONS`	master switch
`INSTR_MEM`	also check STG (excn → mem)
`HISTOGRAM`	exponent histogram
`BIN_SPEC_FILE`	ranges to watch

`NIXNAN_TIMEOUT`	self-terminate, secs
`LOGFILE`	redirect output
`LINE_INFO`	source file:line (YMMV)
`LOG_KERNELS`	log launches only
`MAX_ERRORS`	stop after *N* reports
`TIME_KERNELS`	per-kernel time