



서블릿을 만들때 initialization parameter 추가하는 방법

[initialization parameter]항목에서 [Add]버튼을 눌러 표시되면 다음과 같이 값을 입력

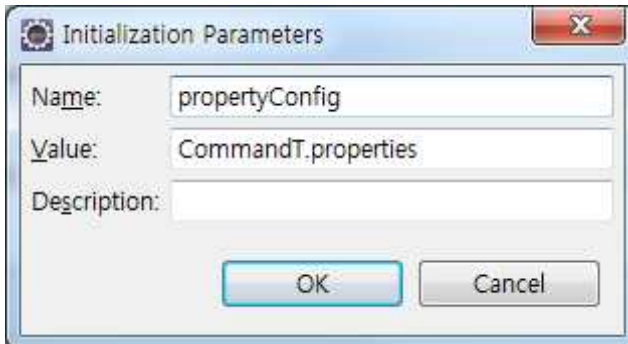

The 'Initialization Parameters' dialog box is shown. It has a title bar with a gear icon and a close button. The main area contains three text input fields: 'Name' with the value 'propertyConfig', 'Value' with the value 'CommandT.properties', and 'Description' which is empty. At the bottom are 'OK' and 'Cancel' buttons.

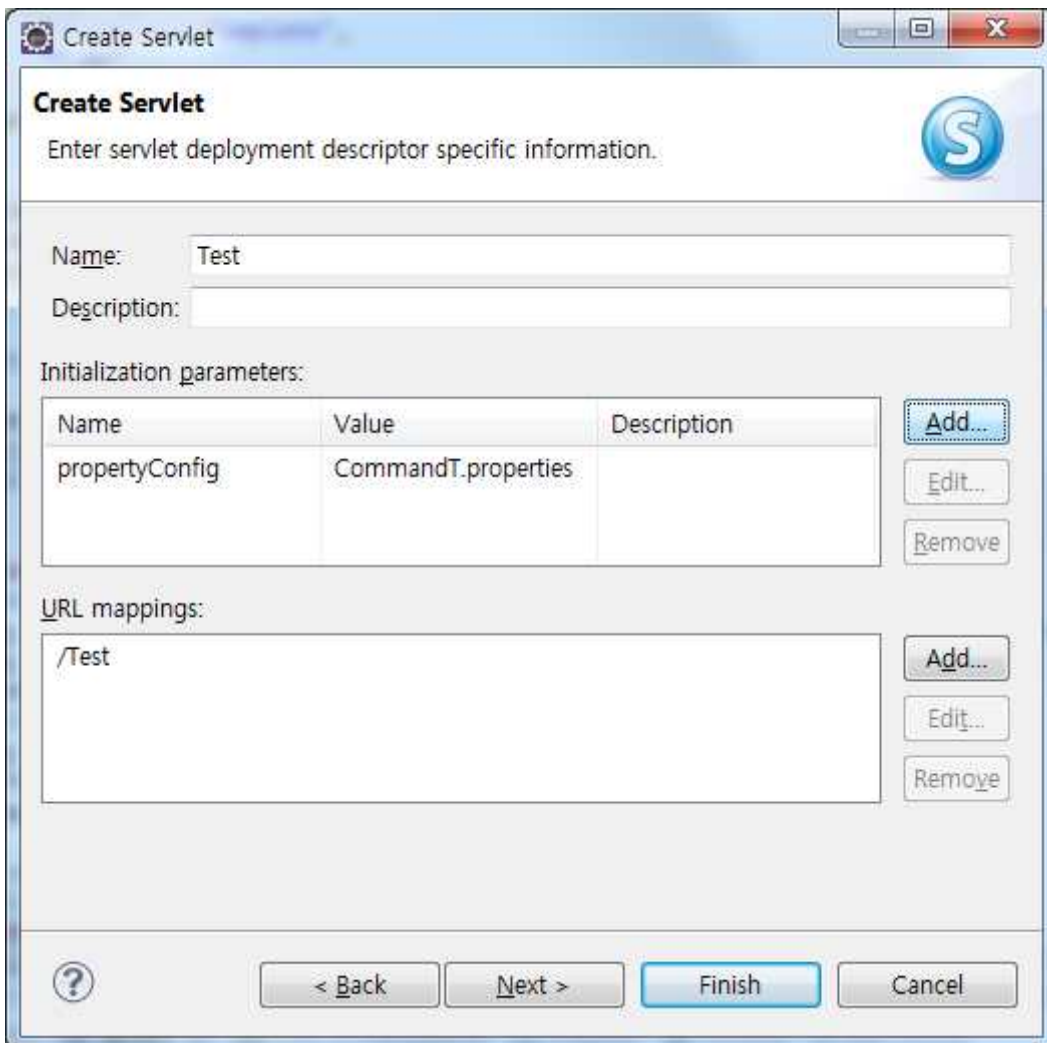

The 'Create Servlet' wizard is shown. It has a title bar with a gear icon and standard window controls. The main area is titled 'Create Servlet' and contains the instruction 'Enter servlet deployment descriptor specific information.' Below this are three sections: 'Name' with the value 'Test', 'Description' which is empty, and 'Initialization parameters:' which contains a table with one row: 'propertyConfig' in the 'Name' column and 'CommandT.properties' in the 'Value' column. To the right of the table are 'Add...', 'Edit...', and 'Remove' buttons. Below the table is the 'URL mappings:' section with a text area containing '/Test' and 'Add...', 'Edit...', and 'Remove' buttons. At the bottom are navigation buttons: '< Back', 'Next >', 'Finish', and 'Cancel'.

Name	Value	Description
propertyConfig	CommandT.properties	