

1. 옵션 메뉴

XML 코드

```
activityMain
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:id="@+id/baseLayout"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:orientation="vertical"
    tools:context=".MainActivity">

    <TextView
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:text="오른쪽 위 메뉴 버튼을 누르세요"
        android:textSize="20sp" />

    <Button
        android:id="@+id/button"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_gravity="center"
        android:gravity="center"
        android:text="이전 버튼" />

</LinearLayout>

menu1
<?xml version="1.0" encoding="utf-8"?>
<menu xmlns:android="http://schemas.android.com/apk/res/android">

    <item
        android:id="@+id/itemRed"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:title="배경 색(빨강)" />
    <item
        android:id="@+id/itemGreen"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:title="배경 색(초록)" />
    <item
        android:id="@+id/itemBlue"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:title="배경 색(파랑)" />
    <item
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:title="버튼 변경" >
    <menu
        android:layout_width="match_parent"
        android:layout_height="match_parent" >
        <item
            android:id="@+id/subRotate"
            android:layout_width="wrap_content"
            android:layout_height="wrap_content"
            android:title="버튼 45도 회전" />
        <item
```

```

android:id="@+id/subSize"
android:layout_width="wrap_content"
android:layout_height="wrap_content"
android:title="버튼2배 확대" />
</menu>
</item>
</menu>

```

Java코드

```

package com.cookandroid.week13_ass1;

import androidx.annotation.NonNull;
import androidx.appcompat.app.AppCompatActivity;

import android.graphics.Color;
import android.os.Bundle;
import android.view.Menu;
import android.view.MenuInflater;
import android.view.MenuItem;
import android.widget.Button;
import android.widget.LinearLayout;

public class MainActivity extends AppCompatActivity {

    LinearLayout baseLayout;
    Button button;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);

        baseLayout = (LinearLayout) findViewById(R.id.baseLayout);
        button = (Button) findViewById(R.id.button);
    }

    @Override
    public boolean onCreateOptionsMenu(Menu menu) {

        MenuInflater mInflater = getMenuInflater();
        mInflater.inflate(R.menu.menu1, menu);

        return true;
    }

    @Override
    public boolean onOptionsItemSelected(@NonNull MenuItem item) {

        if(item.getItemId() == R.id.itemRed) {

            baseLayout.setBackgroundColor(Color.RED);
            return true;

        } else if(item.getItemId() == R.id.itemBlue) {

            baseLayout.setBackgroundColor(Color.BLUE);
            return true;

        } else if(item.getItemId() == R.id.itemGreen) {

            baseLayout.setBackgroundColor(Color.GREEN);
            return true;

        } else if(item.getItemId() == R.id.subRotate) {

```

```

button.setRotation(45);
return true;

} else if(item.getItemId() == R.id.subSize) {

button.setScaleX(2);
return true;
}

return super.onOptionsItemSelected(item);
}
}

```

실행화면



2. 컨텍스트 메뉴

XML 코드

```
activityMain
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:id="@+id/baseLayout"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:orientation="vertical"
    tools:context=".MainActivity">

    <Button
        android:id="@+id/btn1"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_gravity="center"
        android:text="배경 색" />

    <Button
        android:id="@+id/btn2"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_gravity="center"
        android:text="버튼 변경" />
</LinearLayout>

<?xml version="1.0" encoding="utf-8"?>
<menu xmlns:android="http://schemas.android.com/apk/res/android">
    Menu1
    <item
        android:id="@+id/itemRed"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:title="Red" />
    <item
        android:id="@+id/itemGreen"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:title="Green" />
    <item
        android:id="@+id/itemBlue"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:title="Blue" />
</menu>
    Menu2
    <?xml version="1.0" encoding="utf-8"?>
    <menu xmlns:android="http://schemas.android.com/apk/res/android">

        <item
            android:id="@+id/subRotate"
            android:layout_width="wrap_content"
            android:layout_height="wrap_content"
            android:title="45도 회전" />
        <item
            android:id="@+id/subSize"
            android:layout_width="wrap_content"
            android:layout_height="wrap_content"
            android:title="2배 확대" />
    </menu>
```

Java 코드

```
package com.cookandroid.week13_assi2;

import androidx.annotation.NonNull;
import androidx.appcompat.app.AppCompatActivity;

import android.graphics.Color;
import android.os.Bundle;
import android.view.ContextMenu;
import android.view.MenuInflater;
import android.view.MenuItem;
import android.view.View;
import android.widget.Button;
import android.widget.LinearLayout;

public class MainActivity extends AppCompatActivity {
    LinearLayout baseLayout;

    Button btn1, btn2;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);
        setTitle("배경색 바꾸기(컨텍스트 메뉴)");
        baseLayout = (LinearLayout) findViewById(R.id.baseLayout);
        btn1 = (Button) findViewById(R.id.btn1);
        btn2 = (Button) findViewById(R.id.btn2);

        registerForContextMenu(btn1);
        registerForContextMenu(btn2);

    }

    @Override
    public void onCreateContextMenu(ContextMenu menu, View v,
        ContextMenu.ContextMenuInfo menuInfo) {
        super.onCreateContextMenu(menu, v, menuInfo);

        MenuInflater mif = getMenuInflater();
        if (v == btn1) {
            menu.setHeaderTitle("배경색 변경");
            mif.inflate(R.menu.menu, menu);
        }

        if (v == btn2) {
            menu.setHeaderTitle("버튼 변경");
            mif.inflate(R.menu.menu2, menu);
        }
    }

    @Override
    public boolean onContextItemSelected(@NonNull MenuItem item) {

        if(item.getItemId() == R.id.itemRed) {

            baseLayout.setBackgroundColor(Color.RED);
            return true;

        } else if(item.getItemId() == R.id.itemBlue) {

            baseLayout.setBackgroundColor(Color.BLUE);
```


```


return true;
} else if(item.getItemId() == R.id.itemGreen) {
    baseLayout.setBackgroundColor(Color.GREEN);
    return true;
} else if(item.getItemId() == R.id.subRotate) {
    btn2.setRotation(45);
    return true;
} else if(item.getItemId() == R.id.subSize) {
    btn2.setScaleX(2);
    return true;
}
}

return super.onContextItemSelected(item);
}
}

```

실행화면

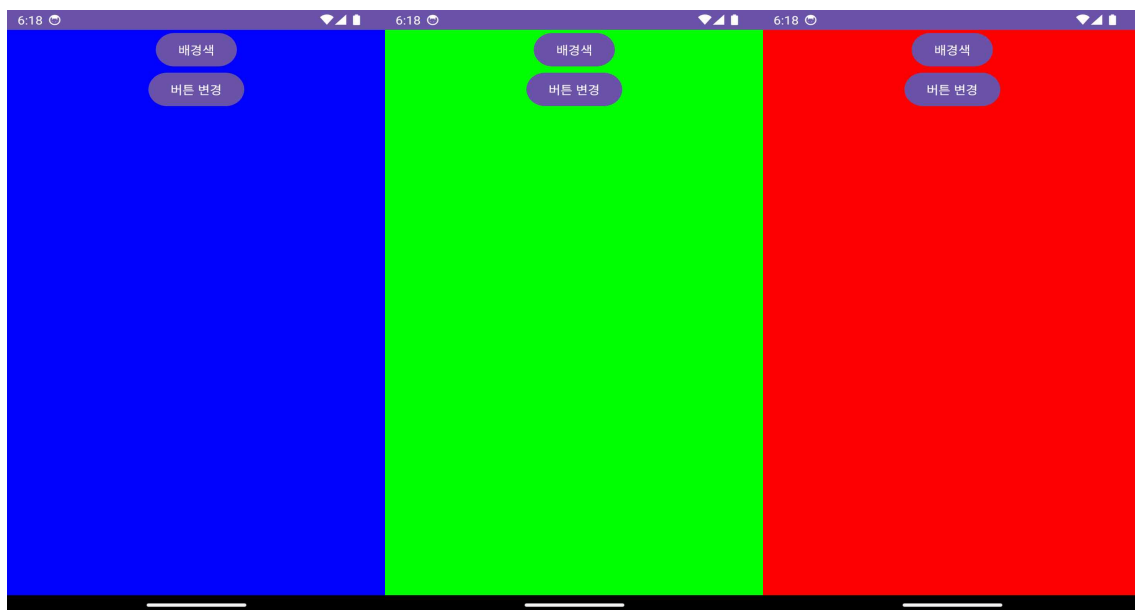

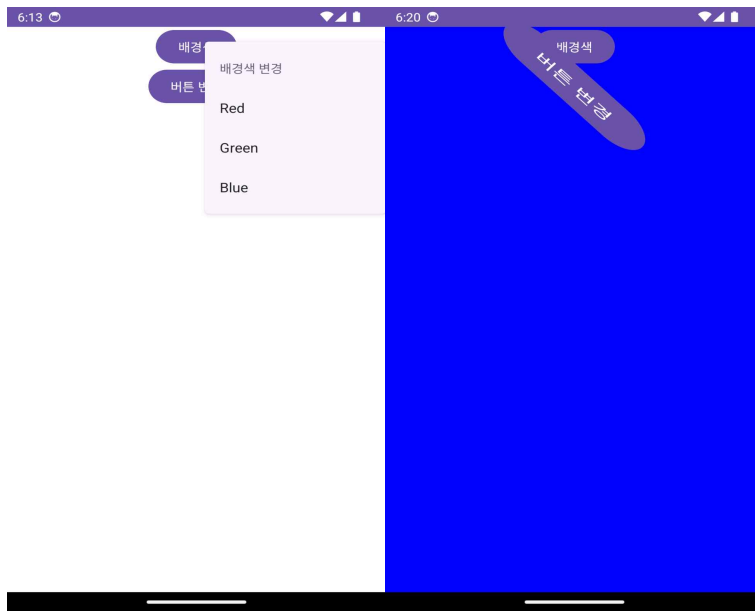

3. 다이얼로그

XML 코드

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="wrap_content"
    android:layout_gravity="center"
    android:orientation="vertical"
    tools:context=".MainActivity">

    <RadioGroup
        android:id="@+id/rbg"
        android:layout_width="match_parent"
        android:layout_height="match_parent">

        <RadioButton
            android:id="@+id/rb1"
            android:layout_width="wrap_content"
            android:layout_height="wrap_content"
            android:text="기본 다이얼로그" />

        <RadioButton
            android:id="@+id/rb2"
            android:layout_width="match_parent"
            android:layout_height="wrap_content"
            android:text="버튼1개 다이얼로그" />

        <RadioButton
            android:id="@+id/rb3"
            android:layout_width="match_parent"
            android:layout_height="wrap_content"
            android:text="다이얼로그 확인 버튼 이벤트" />

        <RadioButton
            android:id="@+id/rb4"
            android:layout_width="match_parent"
```

```

android:layout_height="wrap_content"
android:text="목록 다이얼로그" />

<RadioButton
android:id="@+id/rb5"
android:layout_width="match_parent"
android:layout_height="wrap_content"
android:text="라디오버튼 대화상자" />

<RadioButton
android:id="@+id/rb6"
android:layout_width="match_parent"
android:layout_height="wrap_content"
android:text="체크박스 목록 대화상자" />
</RadioGroup>

<Button
android:id="@+id/btn1"
android:layout_width="match_parent"
android:layout_height="wrap_content"
android:text="대화상자" />
</LinearLayout>

```

2. Java 코드

```

package com.cookandroid.week13_assi3;

import androidx.appcompat.app.AlertDialog;
import androidx.appcompat.app.AppCompatActivity;

import android.content.DialogInterface;
import android.os.Bundle;
import android.view.View;
import android.widget.RadioGroup;
import android.widget.Button;
import android.widget.Toast;

public class MainActivity extends AppCompatActivity {
    Button btn1;

    RadioGroup rbg;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);

        btn1 = (Button) findViewById(R.id.btn1);
        rbg = (RadioGroup) findViewById(R.id.rbg);

        btn1.setOnClickListener(new View.OnClickListener() {
            @Override
            public void onClick(View view) {

                if(rbg.getCheckedRadioButtonId() == R.id.rb1) {
                    AlertDialog.Builder dlg = new AlertDialog.Builder(MainActivity.this);
                    dlg.setTitle("제목입니다.");
                    dlg.setIcon(R.mipmap.ic_launcher);
                    dlg.setMessage("이곳이 내용입니다.");
                    dlg.show();
                }
                else if(rbg.getCheckedRadioButtonId() == R.id.rb2) {
                    AlertDialog.Builder dlg = new AlertDialog.Builder(MainActivity.this);
                    dlg.setTitle("제목입니다.");

```


```


dlg.setIcon(R.mipmap.ic_launcher);
dlg.setMessage("이곳이 내용입니다.");
dlg.setPositiveButton("확인", null);
dlg.show();
}
else if(rgb.getCheckedRadioButtonId() == R.id.rb3) {
AlertDialog.Builder dlg = new AlertDialog.Builder(MainActivity.this);
dlg.setTitle("제목입니다.");
dlg.setIcon(R.mipmap.ic_launcher);
dlg.setMessage("이곳이 내용입니다.");
dlg.setPositiveButton("확인", new DialogInterface.OnClickListener() {
@Override
public void onClick(DialogInterface dialogInterface, int i) {
Toast.makeText(MainActivity.this, "확인 누름", Toast.LENGTH_SHORT).show();
}
});
dlg.show();
}
else if(rgb.getCheckedRadioButtonId() == R.id.rb4) {

final String[] versionArray = new String[] {"쫄면", "떡볶이", "김밥"};
AlertDialog.Builder dlg = new AlertDialog.Builder(MainActivity.this);
dlg.setTitle("좋아하는 간식은?");
dlg.setIcon(R.mipmap.ic_launcher);
dlg.setItems(versionArray, new DialogInterface.OnClickListener() {
@Override
public void onClick(DialogInterface dialogInterface, int i) {
Toast.makeText(MainActivity.this, versionArray[i], Toast.LENGTH_SHORT).show();
}
});
dlg.setPositiveButton("닫기", null);
dlg.show();
}
else if(rgb.getCheckedRadioButtonId() == R.id.rb5) {
final String[] versionArray = new String[] {"쫄면", "떡볶이", "김밥"};
AlertDialog.Builder dlg = new AlertDialog.Builder(MainActivity.this);
dlg.setTitle("좋아하는 간식은?");
dlg.setIcon(R.mipmap.ic_launcher);
dlg.setSingleChoiceItems(versionArray, 2, new DialogInterface.OnClickListener() {
@Override
public void onClick(DialogInterface dialogInterface, int i) {
Toast.makeText(MainActivity.this, versionArray[i], Toast.LENGTH_SHORT).show();
}
});
dlg.setPositiveButton("닫기", null);
dlg.show();
}
else if(rgb.getCheckedRadioButtonId() == R.id.rb6) {
final String[] versionArray = new String[] {"쫄면", "떡볶이", "김밥"};
final boolean[] checkArray = new boolean[] {true, false, false};
AlertDialog.Builder dlg = new AlertDialog.Builder(MainActivity.this);
dlg.setTitle("좋아하는 간식은?");
dlg.setIcon(R.mipmap.ic_launcher);
dlg.setMultiChoiceItems(versionArray, checkArray, new
DialogInterface.OnMultiChoiceClickListener() {
@Override
public void onClick(DialogInterface dialogInterface, int i, boolean b) {
Toast.makeText(MainActivity.this, versionArray[i] + "-" + b,
Toast.LENGTH_SHORT).show();
btn1.setText(versionArray[i]);
}
});
dlg.setPositiveButton("닫기", null);
dlg.show();
}

```

실행화면

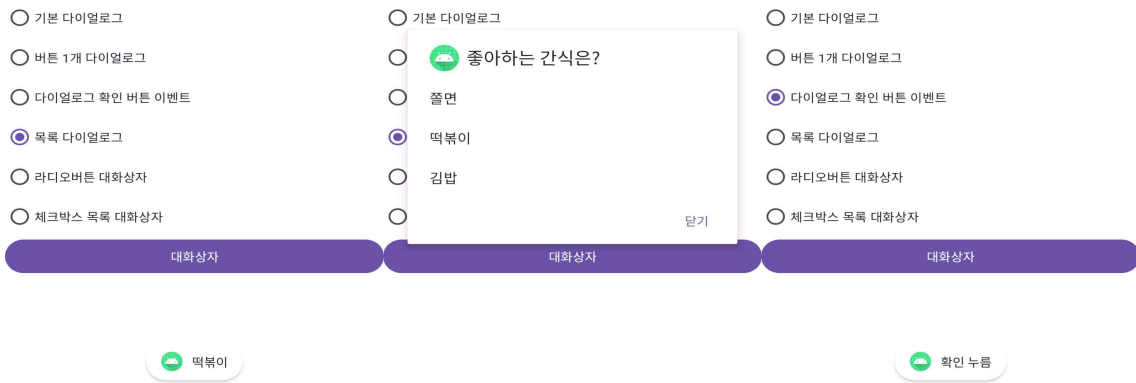

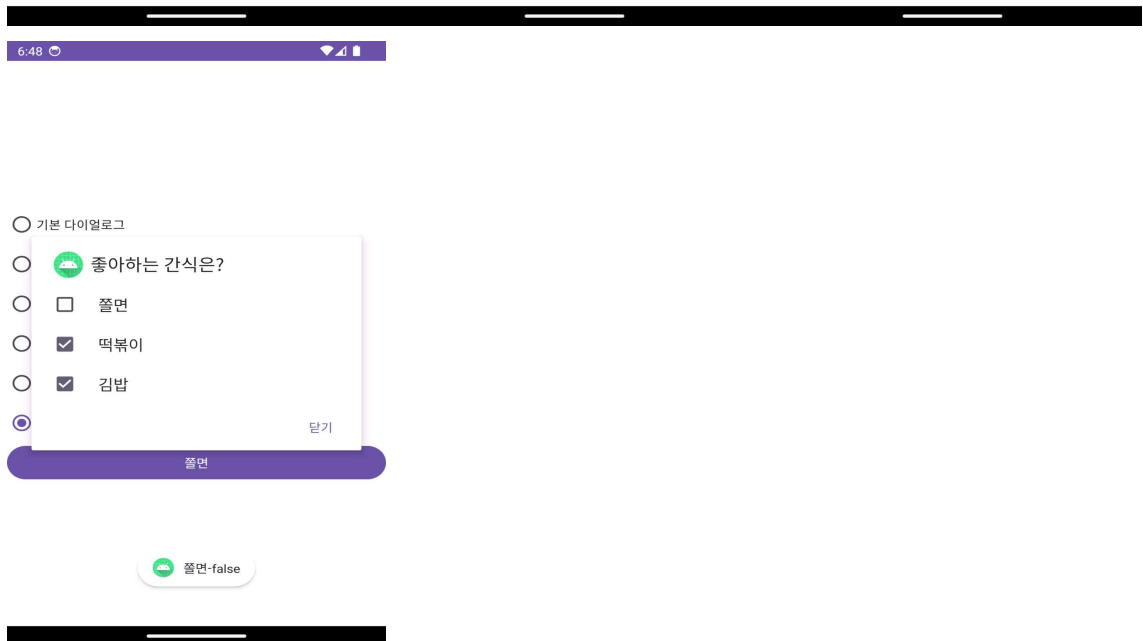

4. 사용자정보입력앱

XML 코드

activity_main.xml

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    xmlns:app="http://schemas.android.com/apk/res-auto"
    xmlns:tools="http://schemas.android.com/tools"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:orientation="vertical"
    tools:context=".MainActivity">

    <TextView
        android:id="@+id/tvName"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_gravity="center"
        android:text="사용자 이름" />

    <TextView
        android:id="@+id/tvEmail"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_gravity="center"
        android:text="이 메 일" />

    <Button
        android:id="@+id/btn"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_gravity="center"
        android:text="여기를 클릭" />
</LinearLayout>
```

dialog1.xml

```
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:background="#FFFFFF"
    android:orientation="vertical">

    <TextView
        android:id="@+id/textView3"
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:text="사용자 이름" />

    <EditText
        android:id="@+id/edit1"
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:ems="10"
        android:inputType="text" />

    <TextView
        android:id="@+id/textView2"
        android:layout_width="match_parent"
        android:layout_height="wrap_content"
        android:text="이 메 일" />

    <EditText
        android:id="@+id/edit2">
```

```

android:layout_width="match_parent"
android:layout_height="wrap_content"
android:ems="10"
android:inputType="text" />
</LinearLayout>

toast1.xml
<?xml version="1.0" encoding="utf-8"?>
<LinearLayout xmlns:android="http://schemas.android.com/apk/res/android"
    android:layout_width="match_parent"
    android:layout_height="match_parent"
    android:background="#FFEB3B"
    android:orientation="vertical">

    <TextView
        android:id="@+id/toastText1"
        android:layout_width="wrap_content"
        android:layout_height="wrap_content"
        android:layout_gravity="center"
        android:text="TextView"
        android:textSize="20sp" />
    </LinearLayout>

```

Java 코드

```

MainActivity
package com.cookandroid.week13_assi4;

import androidx.appcompat.app.AlertDialog;
import androidx.appcompat.app.AppCompatActivity;

import android.content.DialogInterface;
import android.os.Bundle;
import android.view.View;
import android.widget.Button;
import android.widget.EditText;
import android.widget.TextView;
import android.widget.Toast;

public class MainActivity extends AppCompatActivity {

    TextView tvName, tvEmail;
    Button btn;

    EditText dlgEdtName, dlgEdtEmail;
    TextView toastText;

    View dialogView, toastView;

    @Override
    protected void onCreate(Bundle savedInstanceState) {
        super.onCreate(savedInstanceState);
        setContentView(R.layout.activity_main);

        setTitle("사용자 정보 입력");

        tvName = (TextView) findViewById(R.id.tvName);
        tvEmail = (TextView) findViewById(R.id.tvEmail);
        btn = (Button) findViewById(R.id.btn);

        btn.setOnClickListener(new View.OnClickListener() {
            @Override
            public void onClick(View view) {

```

```

dialogView = (View) View.inflate(MainActivity.this, R.layout.dialog1, null);

AlertDialog.Builder dlg = new AlertDialog.Builder(MainActivity.this);
dlg.setTitle("사용자 정보 입력");
dlg.setView(dialogView);

dlg.setPositiveButton("확인", new DialogInterface.OnClickListener() {
    @Override
    public void onClick(DialogInterface dialogInterface, int i) {

        dlgEdtName = (EditText) dialogView.findViewById(R.id.edit1);
        dlgEdtEmail = (EditText) dialogView.findViewById(R.id.edit2);

        tvName.setText(dlgEdtName.getText().toString());
        tvEmail.setText(dlgEdtEmail.getText().toString());
    }
});

dlg.setNegativeButton("취소", new DialogInterface.OnClickListener() {
    @Override
    public void onClick(DialogInterface dialogInterface, int i) {

        Toast toast = new Toast(MainActivity.this);

        toastView = (View) View.inflate(MainActivity.this, R.layout.toast1, null);
        toastText = (TextView) toastView.findViewById(R.id.toastText1);


        toastText.setText("취소했습니다.");

        toast.setView(toastView);
        toast.show();
    }
});

dlg.show();
}
}
}
}

```

실행화면

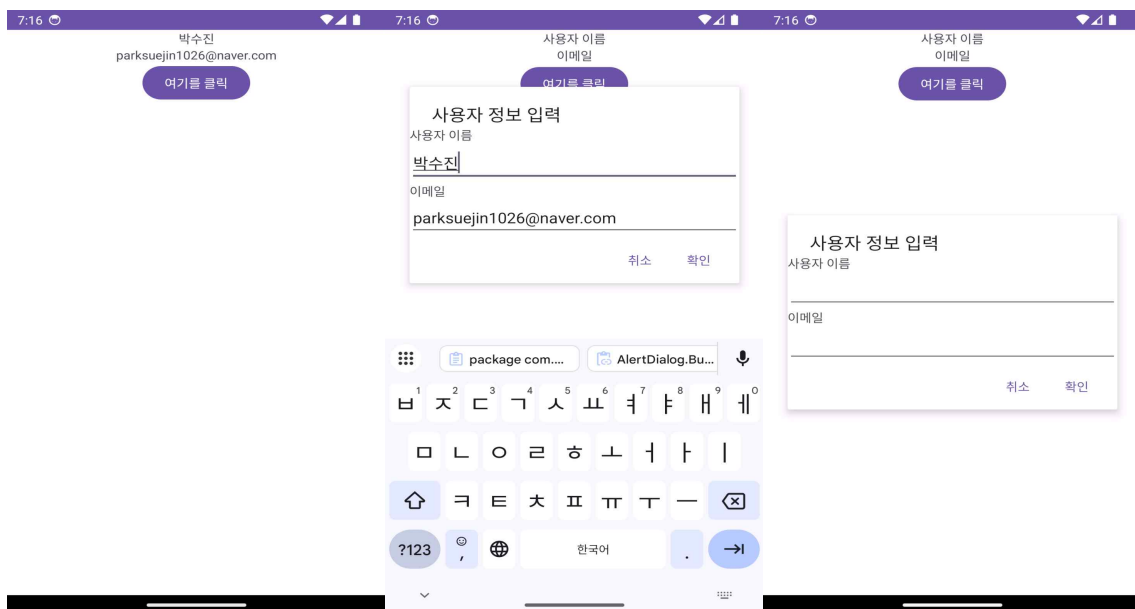

사용자 이름
이메일

여기를 클릭

박수진
parksuejin1026@naver.com

여기를 클릭

취소했습니다.