

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
1	1	How HTTP is a stateless protocol?	Only B & C	0.5		Client and server can relate two consecutive requests	Client and server know each other only during current request	Client and server do not retain information between various requests of web page.	Only B & C
2	1	URL stands for _____	Uniform Resource Locator	0.5		Universal Resource Locator	Uniform Resource Locator	Universal Resource Library	Uniform Resource Library
3	1	Which of the following is the correct sequence to specify URL?	Method://Host:Port/Path	1	[LJU,2022]	Method://Path/Host:Port	Method://Host:Path/Port	Method://Path:Port/Host	Method://Host:Port/Path
4	1	Which of the following is used to read an HTML page and render it?	Web browser	0.5	[LJU,2022]	Web server	Web network	Web browser	Web matrix
5	1	What does DNS stand for?	Domain Name System	0.5	[LJU,2022]	Domain Name Server	Domain Name System	Domain Network System	Domain Node System
6	1	Which of the following points are for designing effective navigation?	ALL	1	[LJU,2022]	Don't make your users guess	Consistency is a key	Add a Home button	ALL
7	1	The first line of HTTP response message is called _____	Status line	0.5	[LJU,2024]	Request line	Header line	Status line	Entity line
8	1	Which of the following is present in both an HTTP request line and a status line?	HTTP version number	0.5	[LJU,2025]	HTTP version number	URL	Method	None of the mentioned
9	1	Why HTTP is stateless?	It does not maintain any connection information on previous transaction	0.5		It has less no of state.	It does not maintain any connection information on previous transaction	It is out of state	It is less efficient
10	1	The first network that planted seeds of internet was _____	ARPANET	0.5	[LJU,2025]	NSFNet	Vnet	ARPANET	interanet
11	1	What does W3C stand for?	World Wide Web Consortium	1		Web Council	Work on Web Council	World Wide Web Consortium	World Wide Web Community
12	1	What is 200 Ok HTTP response code?	request is successful	1		request is unsuccessful	request is successful	request is pending	there is an error
13	1	A piece of icon or image on a web page associated with another webpage is called as _____	Hyperlink	0.5		URL	Hyperlink	Plugin	Extension
14	1	HTTP stands for?	Hyper text transfer protocol	0.5		Hidden text transfer protocol	Hyper text transfer protocol	Hyper text transition protocol	Hidden text transition protocol
15	1	Which organization was founded by Tim Berners Lee?	W3C	0.5		IBM	W3C	Microsoft	Google
16	1	There are the following statements that are given below, which of them are correct about URL? 1)URL stands for Universal Resource Locator. 2)URL is a global address to access resources over the Web. 3)The resources accessed by the URL can be an HTML file, CSS file, etc 4)URL cannot use any protocol to access web resources.	2,3	1		1,2	2,3	1,2,3	3,4
17	1	A web page is located using a _____.	Uniform Resource Locator	0.5	[LJU,2025]	Universal Record Linking	Universal Record Locator	Uniform Resource Locator	Uniformly Reachable Links
18	1	Which protocol is used to send information over the web?	HTTP	1	[LJU,2024]	SMTP	FTP	POP	HTTP
19	1	Which of the following HTTP status codes means “Forbidden – client is authenticated but not allowed”?	403	1		200	301	403	500
20	1	In an HTTP request message, which line specifies the method, resource, and protocol version?	Request Line	1		Status Line	Request Line	Header Line	Entity Body
21	1	Which are the parts of URL? State use of them.		3					
22	1	How browser interacts with the server?		3					
23	1	Which are the symptoms of bad design?		4					
24	1	Differentiate between flexible and fixed page layout.Also justify Use of horizontal scrollbar should be avoided to have effective web design.		5					
25	1	What is navigation? Discuss the characteristics of effective navigation.		5					

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
26	2	Which attribute of <meta> tag is used to automatically refresh the page?	http-equiv	0.5		http-equiv	content	name	refresh
27	2	Which tag is used to display power in expression (A+B) ²	<sup>	0.5		<big>	<sub>	<sup>	<superscript>
28	2	Which is the correct HTML statement to display formula in a paragraph? (C ₂ H ₃ O ₂) ²	(c₂H₃O_{b>2}</sup>²</sup>	1	[LJU,2025]	(c₂H₃O_{b>2}</sup>²</sup>	c₂H₃(</sub>O_{b>2}</sup>²</sup>	(c₂H₃O_{b>2}</sup>²</sup>	(c²H³O^{p>2}</sub></sup></sub></sup>
29	2	In HTML, which attribute is used to create a link that opens in a new window tab?	target="_blank"	0.5	[LJU,2022]	src="_blank"	alt="_blank"	target="_self"	target="_blank"
30	2	Which of the following is way to start an ordered list with capital alphabets C?	<ol type="A" start="3">	1	[LJU,2022]	<ol type="1" start="3">	<ol type="A" start="3">	<ol type="a" new="3">	<ol type="A" begin="4">
31	2	_____attribute is used to defines the space between a table cell's border and the content present in it.	cellpadding	0.5		caption	cellspacing	cellpadding	margin
32	2	Which of the following is way to start an ordered list with capital alphabets with the count of numeric value 4?	<ol type="A" start="4">	1		<ol type="1" start="4">	<ol type="a" new="4">	<ol type="A" start="4">	<ol type="A" begin="4">
33	2	Which of the following type is not supported in tag?	type="\$"	0.5		type="I"	type="A"	type="\$"	type="a"
34	2	Which of the following is the correct specification of <meta> tag?	<meta http-equiv="refresh" content="8"/>	1	[LJU,2025]	<meta name="http-equiv" content="refresh" time="8"/>	<meta http-equiv="refresh" content="8"/>	<meta name="description" value="about full stack"/>	<meta name="keyword" value="Full Stack"/>
35	2	What is the output of following code: blue eyes	blue eyes is written in blue font color having yellow background & font is of 10px size.	0.5		blue eyes is written in blue font color having yellow background & font is of 10px size.	Blue eyes is written as simple word	Blue eyes is written in yellow color having blue background & font is of 10px size.	Blue eyes is written in blue font color having yellow background only.
36	2	Which is allowed attribute value to start numbers from 3 in ordered list?	<ol start="3">	1		<ol start="3">	<ol starting="3">	<ol st="3">	<ol start no="3">

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
37	2	If the image you are loading in the web page is not available, then you want a text to appear in the image placeholder, which attribute lets you define this text?	alt	0.5		src	align	text	alt
38	2	The correct sequence of HTML tags for starting a web page is _____	html, head, title, body	1		head, title, html,body	html, body, title, head	html, head, title, body	html,head,body,title
39	2	Which tag is used to render bold text?	Both B and C	1					Both B and C
40	2	Which tag is used to insert largest heading?	<h1>	0.5		<h1>	<h2>	<h3>	<h4>
41	2	Which of the following is the correct syntax for YouTube video?	<iframe width="500" height="500" src="https://www.youtube.com/embed/Q- qcB_OqKTU"></iframe>	1		<iframe width="500" height="500" src="https://www.youtube.com/Q- qcB_OqKTU"></iframe>	<iframe width="500" height="500" src="https://www.youtube.com/embed/Q- qcB_OqKTU"></iframe>	<video width="500" height="500" src="https://www.youtube.com/embed/Q-qcB_OqKTU"></video>	<iframe width="500" height="500" href="https://www.google.com/embed/Q-qcB_OqKTU"></iframe>
42	2	Which Boolean attribute if specified, will allow video automatically seek back to the start after reaching at the end?	loop	1	[LJU,2022]	controls	autoplay	loop	embed
43	2	Which of the following is/are Non semantic elements?	<div>	0.5	[LJU,2022]	<div>	article	header	footer
44	2	Which of the following element is not a semantic element?	<a>	0.5		<header>	<footer>	<aside>	<a>
45	2	If user want to add multiple media file as audio & video then which element is used for it?	<source>	0.5		<audio>	<canvas>	<svg>	<source>
46	2	If this attribute is present, it will allow the user to control audio playback, including volume, seeking, and pause/resume playback.	controls	1	[LJU,2024]	controls	src	source	autoplay
47	2	Which HTML5 element defines video or movie content?	<video>	1		<video>	<media>	<audio>	<movie>

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
48	2	Which browser does the HTML5 supports?	All the mentioned	1		Firefox	Safari	Internet Explorer	All the mentioned
49	2	The following elements <aside>, <article> are the new elements in HTML5. These elements are called,	Semantic elements	1		Semantic elements	Graphic elements	Control attributes	Multimedia elements
50	2	Which boolean attribute if specified, the audio will automatically begin to play back as soon as it can do so without stopping to finish loading the data?	autoplay	1		loop	preload	autobuffer	autoplay
51	2	_____ is the attribute of video element which mutes the video on loading.	muted	1	[LJU,2025]	mute	muted	audio	voice
52	2	Which value is there for autoplaying the YouTube video?	1	1		0	1	2	Infinite
53	2	Which element is used for YouTube videos?	<iframe>	1		<frame>	<iframe>	<samp>	<small>
54	2	Which value of loop parameter is to be set for looping the YouTube video?	1	1		0	1	2	loop
55	2	Which tag represents a piece of content that is only slightly related to the rest of the page in HTML5?	<aside>	1		<header>	<aside>	<article>	<section>
56	2	Which element represents self-contained composition in document?	<article>	1		<footer>	<header>	<article>	<meter>
57	2	An Article element contains -	ALL the mentioned	1		Image	Video	Text or embedded content	ALL the mentioned
58	2	Which element is used to define a discrete unit of content such as a blogpost, comment, and so on?	article	1		aside	header	article	area

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
59	2	How to create hyperlink in HTML?	 LJ University 	1		 LJ University 	 LJ University 	 LJ University 	<a> LJ University
60	2	Which element renders italic tag?	<i>	0.5		<italic>	<i>	<it>	<pre>
61	2	How to create hyperlink in image?		1					
62	2	Which attribute is used to specify the numbering style (e.g., numbers, letters, roman numerals) of an tag?	type	0.5		index	type	number	position
63	2	Which of the following makes image clickable?		1	[LJU,2025]	Sanfoundry Home Page	Sanfoundry Home Page	Sanfoundry Home Page	
64	2	Which of the following is not a standalone tag?		0.5		<hr>			
65	2	Which is allowed attribute value to render small roman no. in ordered list?	<ol type="i">	1		<ol type="I">	<ol type="i">	<ol type="roman">	<ol type="number">
66	2	<hr> tag in HTML is used for _____	Horizontal Rule	0.5		New line	Vertical rule	New paragraph	Horizontal Rule
67	2	Which of the following is the correct way to create list using lowercase letters?	<ol type="a">	1		<ol alpha="a">	<ol type="a">	<ol letter="a">	None of the mentioned
68	2	Which of the following is way to start an ordered list with the count of numeric value 4?	<ol type="1" start="4">	1		<ol type="1" start="4">	<ol type="1" num="4">	<ol type="1" begin="4">	<ol type="1" initial="4">
69	2	Which is the correct way to comment something in HTML?	Using <!-- and -->	0.5		Using ## and #	Using </-- and -/>	Using <!-- and -->	Using /* and */

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
70	2	Which type attribute value is not allowed in unordered list?	bullet	0.5		disc	circle	square	bullet
71	2	Which tag helps to display underlined text?	<u>	0.5		<underline>	<u>	 	<below-line>
72	2	Which element displays superscript text?	<sup>	0.5		<sup>	<superscript>	<superscripted>	<super>
73	2	Which of the following tags do not require a terminator?	 	1		<u>	 		none
74	2	To get the ordered list we use _____		1		<h1>			<ml>
75	2	for unordered list, we use _____ tag.		1			<tr>	<th>	
76	2	_____ tag is used before beginning of the paragraph text.	<p>	1		<textarea>	<sup>		<p>
77	2	which tag add row in table?	<tr></tr>	1		<td> <td>	<tr></tr>	<th> </th>	<tr></td>
78	2	Which tag is used for numbered list?		1				<list>	none
79	2	choose the HTML tag for smallest size heading.	<h6>	1		<h>	<h1>	<h6>	<h2>
80	2	Which HTML tag is used to insert an image?		1	[LJU,2024]				

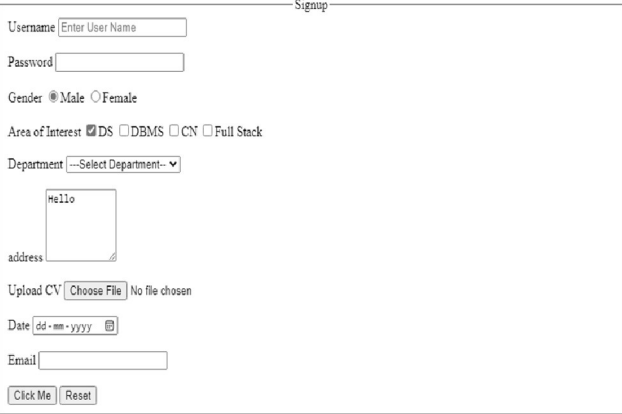
L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD																															
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)																															
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.																															
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)																						
81	2	HTML tags are surrounded by which type of brackets.	< >	1		{ }	[]	()	< >																						
82	2	What does the abbreviation HTML stand for?	HyperText Markup Language	1		HighText Machine Language	HyperText and links Markup Language	HyperText Markup Language	None of these																						
83	2	What is the main purpose of the <meta> tag in HTML?	To provide metadata about the webpage	1		To provide metadata about the webpage	To create hyperlinks	To insert images	To display bold text																						
84	2	Which <meta> attribute is used to define the character encoding of a webpage?	charset	1		http-equiv	charset	name	content																						
85	2	Which of the following statements about inline and block elements in HTML is correct? 1) Block elements always start on a new line and take the full width of their container. 2) Inline elements are always unpaired. 3) is an example of an inline element. 4) <div> is an example of a block-level element. 5) Inline elements cannot have line breaks () before and after them. 6) Block elements cannot contain any other elements inside.	1, 3, 4	1	[LJU,2025]	1, 3, 4	2, 3, 5	1, 2, 4	3, 5, 6																						
86	2	Which element is used inside <figure> to provide a caption or description?	<figcaption>	1		<label>	<legend>	<caption>	<figcaption>																						
87	2	Which of the following correctly represents a figure with a caption?	<figure> <figcaption>HTML Logo</figcaption> </figure>	1		<figure> <figcaption>HTML Logo</figcaption> </figure>	<fig> <caption>HTML Logo</caption> </fig>	<figure> <caption>HTML Logo</caption> </figure>	<figure> <figcaption>HTML Logo</figcaption> </figure>																						
88	2	Write HTML tags to generate the given output. <table><tr><td rowspan="3">A</td><td>B</td><td colspan="2">C</td><td>D</td><td colspan="2" rowspan="2">E</td></tr><tr><td>F</td><td>G</td><td>I</td></tr><tr><td>J</td><td>K</td><td>H</td><td>L</td><td>M</td><td>N</td></tr><tr><td>O</td><td>P</td><td></td><td colspan="3">Q</td></tr></table>	A	B	C		D	E		F	G	I	J	K	H	L	M	N	O	P		Q				5	[LJU,2022]				
A	B	C		D	E																										
	F	G		I																											
	J	K	H	L	M	N																									
O	P		Q																												

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD																																								
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)																																								
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.																																								
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)																															
89	2	Give the code to print given table. <table><tr><td></td><td colspan="2">average</td><td rowspan="2">other category</td></tr><tr><td></td><td>height</td><td>weight</td></tr><tr><td>males</td><td>19</td><td>0.003</td><td>yyy</td></tr><tr><td>females</td><td>17</td><td>0.002</td><td>xxx</td></tr></table>		average		other category		height	weight	males	19	0.003	yyy	females	17	0.002	xxx		5																					
	average		other category																																					
	height	weight																																						
males	19	0.003	yyy																																					
females	17	0.002	xxx																																					
90	2	Write an HTML script to code given table: Table <table><tr><td>A</td><td>B</td><td rowspan="4">D</td><td colspan="2">E</td><td>F</td></tr><tr><td>C</td><td></td><td>G</td><td>H</td><td>I</td></tr><tr><td colspan="2">J</td><td></td><td></td><td></td></tr><tr><td colspan="2">K</td><td>L</td><td colspan="2">M</td></tr></table>	A	B	D	E		F	C		G	H	I	J					K		L	M			5															
A	B	D	E			F																																		
C			G	H		I																																		
J																																								
K			L	M																																				
91	2	Draw table as asked. <table><tr><th colspan="4">Purchased Equipments (June, 2006)</th></tr><tr><th>Item Num#</th><th>Item Picture</th><th>Item Description</th><th>Price</th></tr><tr><td></td><td></td><td>Shipping Handling, Installation, etc</td><td>Expense</td></tr><tr><td>1.</td><td></td><td>IBM Clone Computer.</td><td>\$ 400.00</td></tr><tr><td></td><td></td><td>Shipping Handling, Installation, etc</td><td>\$ 20.00</td></tr><tr><td>2.</td><td></td><td>1GB RAM Module for Computer.</td><td>\$ 50.00</td></tr><tr><td></td><td></td><td>Shipping Handling, Installation, etc</td><td>\$ 14.00</td></tr><tr><th colspan="4">Purchased Equipments (June, 2006)</th></tr></table>	Purchased Equipments (June, 2006)				Item Num#	Item Picture	Item Description	Price			Shipping Handling, Installation, etc	Expense	1.		IBM Clone Computer.	\$ 400.00			Shipping Handling, Installation, etc	\$ 20.00	2.		1GB RAM Module for Computer.	\$ 50.00			Shipping Handling, Installation, etc	\$ 14.00	Purchased Equipments (June, 2006)					5				
Purchased Equipments (June, 2006)																																								
Item Num#	Item Picture	Item Description	Price																																					
		Shipping Handling, Installation, etc	Expense																																					
1.		IBM Clone Computer.	\$ 400.00																																					
		Shipping Handling, Installation, etc	\$ 20.00																																					
2.		1GB RAM Module for Computer.	\$ 50.00																																					
		Shipping Handling, Installation, etc	\$ 14.00																																					
Purchased Equipments (June, 2006)																																								
92	2	Write an HTML script to play a YouTube video looping forever & auto-playing while page load.		2																																				
93	2	Write HTML code to embed a audio in a web document.		3																																				
94	2	Write HTML code to embed a video in a web document.		3																																				
95	2	Write HTML code to play your YouTube video loop forever.		3	[LJU,2024]																																			
96	2	Write HTML code that includes aside & article tags.		4																																				
97	2	Write HTML code having article title and two sections in article by using <article> and <aside> tag.		4																																				
98	2	Differentiate between <div> and tags.		2																																				

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD																																				
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)																																				
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.																																				
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)																											
99	2	Create a simple HTML webpage that demonstrates the use of the <iframe> tag to embed different types of resources. The page should include: A PDF document embedded using an iframe. A Google Map embedded using an iframe. A local HTML file embedded within the main page using an iframe.		4																																
100	2	How <th>, <thead> and <caption> tags differ?		2																																
101	2	Write HTML code to show each letter of word RAINBOW with new color, giving a rainbow effect.		3																																
102	2	How <meta> tag is helpful for Search Engine Optimization(SEO)?		2																																
103	2	How to display ordered list and unordered list using HTML? Give Example.		2																																
104	2	Create HTML Page for following features: 1) Use various bullet styles 2)Created nested lists		5																																
105	2	What is structure/Layout of HTML? Explain with figure.		5																																
106	2	Write an HTML script to code following table: Time Table <table><tr><th colspan="3">Header 1</th><th colspan="2">Header 2</th></tr><tr><td rowspan="3">Food Items</td><td>Pizza</td><td>Burger</td><td colspan="2">Fries</td></tr><tr><td>Maggie</td><td>Pasta</td><td>Rolls</td><td rowspan="2">Sticks</td></tr><tr><td colspan="2">Grill</td><td>Non-Grill</td></tr><tr><td>Cold Drinks</td><td colspan="4">Coca Cola</td></tr><tr><td colspan="5">Confirm Order</td></tr></table>	Header 1			Header 2		Food Items	Pizza	Burger	Fries		Maggie	Pasta	Rolls	Sticks	Grill		Non-Grill	Cold Drinks	Coca Cola				Confirm Order						5	[LJU,2024]				
Header 1			Header 2																																	
Food Items	Pizza	Burger	Fries																																	
	Maggie	Pasta	Rolls	Sticks																																
	Grill		Non-Grill																																	
Cold Drinks	Coca Cola																																			
Confirm Order																																				
107	2	Write an HTML code to create the table as shown in the figure given alongside. <table><tr><th>Category</th><th>Product</th><th>Details</th><th>Quantity</th><th>Price</th></tr><tr><td rowspan="3">Electronics</td><td rowspan="2">Laptop</td><td>E. Brand A IX. Intel i5 VIII. 8GB RAM F. Brand B - Intel i7 16GB RAM </td><td>5</td><td>\$500</td></tr><tr><td>3</td><td>\$600</td><td></td></tr><tr><td></td><td>Smartphone</td><td colspan="2">Brand C</td><td>\$300</td></tr><tr><td rowspan="2">Accessories</td><td>Mouse & Keyboard</td><td colspan="2">Wireless</td><td>\$50</td></tr><tr><td>Headphones</td><td colspan="2">Over-ear, Noise-cancelling</td><td>\$80</td></tr></table>	Category	Product	Details	Quantity	Price	Electronics	Laptop	E. Brand A IX. Intel i5 VIII. 8GB RAM F. Brand B - Intel i7 16GB RAM	5	\$500	3	\$600			Smartphone	Brand C		\$300	Accessories	Mouse & Keyboard	Wireless		\$50	Headphones	Over-ear, Noise-cancelling		\$80		5	[LJU,2025]				
Category	Product	Details	Quantity	Price																																
Electronics	Laptop	E. Brand A IX. Intel i5 VIII. 8GB RAM F. Brand B - Intel i7 16GB RAM	5	\$500																																
		3	\$600																																	
		Smartphone	Brand C		\$300																															
Accessories	Mouse & Keyboard	Wireless		\$50																																
	Headphones	Over-ear, Noise-cancelling		\$80																																

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
108	3	Which of the following statement is correct to render a description field filled up with some content initially, which we have to erase manually to fill up our description?	<textarea rows="5" cols="15">Enter data</textarea>	1	[LJU,2025]	<textarea rows="5" cols="15">Enter data</textarea>	<textarea rows="5" cols="15" value="Enter data"></textarea>	<textarea rows="5" cols="15" placeholder="Enter data"></textarea>	<textarea rows="5" cols="15" text="Enter data"></textarea>
109	3	Which of the following is the correct code to design a dropdown menu with two contents"Surat", "Rajkot" as items and"Gujarat" as a category?	<select> <optgroup label="Gujarat"> <option>Surat</option> <option>Rajkot</option> </optgroup> </select>	1		<select> <optgroup>Gujarat</optgroup> <option>Surat</option> <option>Rajkot</option> </select>	<select> <optgroup value="Gujarat"></optgroup> <option>Surat</option> <option>Rajkot</option> </select>	<select label="Gujarat"> <option>Surat</option> <option>Rajkot</option> </select>	<select> <optgroup label="Gujarat"> <option>Surat</option> <option>Rajkot</option> </optgroup> </select>
110	3	Which amongst the following is the correct HTML code for creating a dropdown list?	<select>	0.5	[LJU,2022]	<input type= "dropdown">	<input type= "list">	<input type= "drop">	<select>
111	3	_____ attribute is used to group two or more radio button in form.	name	0.5		name	option	radio	id
112	3	To display multiline textfield which tag will you use?	<textarea rows="5" cols="20"></textarea>	1		<input type="textarea" row="5" col="5"/>	<input type="textarea" rows="5" cols="5"/>	<textarea rows="5" cols="20"></textarea>	<textarea type="text" row="5" col="6"/></textarea>
113	3	To create a combo box (drop down box) which tag will you use?	<select>	1		<select>	<list>	<input type="dropdown">	<option type="dropdown">
114	3	Which of following is correct to specify optgroup tag?	<optgroup label="india">	1		<optgroup text="india">	<optgroup "india">	<optgroup id="india">	<optgroup label="india">
115	3	How to create a checkbox in HTML Form?	<input type="checkbox">	1		<input type="text">	<input type="textarea">	<input type="checkbox">	<input type="button">
116	3	Which of the following correct for display drop down list?	<select><option>Apple</option></select>	1		<select><option1>Apple</option1></select>	<option><select>Apple</select></option>	<select><option>Apple</option></select>	<option1><select1>Apple</select1></option1>
117	3	An HTML form is to be designed to enable the purchase of office stationery. The required items are selected (checked), credit card details are to be entered, and the submit button is pressed. Which one of the given options would suit sending the data to the sever? Assume that security is handled in a transparent way to the form design.	Only POST	1		Either GET or POST	Only GET	Only POST	Neither GET nor POST
118	3	Which of the following are correct input types?	submit, reset, checkbox, password	1		text, password, reset, list	submit, reset, list, password	radio, reset, list, password	submit, reset, checkbox, password
119	3	Which of the following is used to render textarea?	<textarea></textarea>	1		<text></text>		<input type="textarea"/>	<textarea></textarea>
120	3	Which attribute of <optgroup> is used to specify its value?	label	1		value	label	placeholder	content
121	3	Which attribute of tag is used to define its coordinates and mapping?	usemap	0.5		src	shape	coords	usemap
122	3	Identify correct code to draw a rounded rectangle with green border and red inner color.	<svg width="400" height="700"> <rect width="100" height="200" stroke="green" stroke-width="4" rx="12" ry="22" fill="red"/> </svg>	1	[LJU,2024]	<svg width="400" height="700"> <rect width="100" height="200" stroke="green" stroke-width="4" rx="12" ry="22" fill="red"/> </svg>	<svg width="400" height="700"> <rect width="100" height="200" stroke="green" stroke-width="4" fill="red"/> </svg>	<svg width="400" height="700"> <rect stroke="green" border-width="4" rx="12" ry="22" fill="red"/> </svg>	<svg width="400" height="700"> <rect width="100" height="200" stroke="green" border-width="4" rx="12" ry="22" fill="red"/>
123	3	Which of following is correct to draw a square in SVG ?	<rect x="50" y="50" width="100" height="100" stroke="red" fill="green" />	1		<square x="50" y="50" height="100" width="200" stroke="red"/>	<rect x="50" y="50" width="100" height="100" stroke="red" fill="green" />	<rects x="50" y="50" height="100" width="200" stroke="red"/>	<square height="100" width="200" stroke="red" fill="green"/>
124	3	SVG stands for:	Scalable Vector Graphics	0.5		Scalable Vector Group	Scalable Vast Graphics	Scalable Vector Graphics	Scale Vector Group

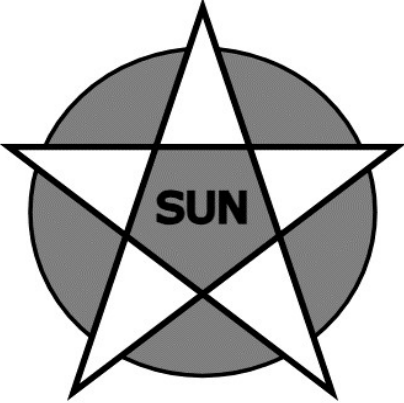
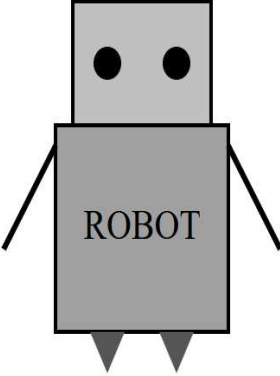
L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
125	3	Which of the following is the correct combination of <area>, <map> & tags?	 <map name="abc"> <area coords="3,55,66,77" href="coffee.jpg" shape="rect" target="_blank"/> </map>	1		 <map name="abc"> <area coords="3,55,66,77" src="coffee.jpg" shape="rect" destination="_blank"/> </map>	 <map name="abc"> <area coords="3,55,66,77" src="coffee.jpg" shape="rect"/> </map>	 <map name="abc"> <area coords="3,55,66,77" href="coffee.jpg" shape="rect" target="_blank"/> </map>	 <map name="abc"> <area coords="3,55,66,77" src="coffee.jpg"/> </map>
126	3	Consider the following code: <svg height="500" width="500" > <rect x="40" y="30" rx="20" ry="30" width="200" height="200" fill="red" stroke="orange" stroke-width="20"/> </svg> When would you use the above code?	while embedding a rounded rectangle using SVG	1	[LJU,2025]	while defining an image map	while referring to world map	while embedding a rounded rectangle using SVG	while aligning an image on web page using SVG
127	3	The rx and the ry attributes _____ the corners of the rectangle	rounds	1		bends	rounds	clears	sharps
128	3	Which of the following is attribute of SVG line?	All the mentioned	1		x2	y2	x1	All the mentioned
129	3	Which of the following is used to pass values to draw a polygon?	points	1		d	points	path	None of the mentioned
130	3	Which element is used to create a circle?	circle	1	[LJU,2024]	round	circle	cir	ellipse
131	3	The x1 attribute defines the _____ of the line on the x-axis	start	1		start	middle	end	Some point
132	3	Which is true about SVG?	All the mentioned	1		SVG images supports interactivity and animation.	SVG is intended to display images over the web.	Being vector images, SVG image never loses quality no matter how they are zoomed out or resized.	All the mentioned
133	3	Which of the following represents x-axis co-ordinate of top left of the rectangle?	x	1		rx	x	width	None of the mentioned
134	3	Which of the following is/are the property of SVG images?	All the mentioned	1		SVG is an open standard	SVG images are scalable	SVG images are zoomable	All the mentioned
135	3	<area> tag is used in HTML document_____	to map a portion of an image to make it clickable by the end-user.	1		to draw graphics, on the fly, via scripting.	to map a portion of an image to make it clickable by the end-user.	to define an image map.	to defines the title of a creative work.
136	3	Which attribute is used to specifies the coordinates of the area?	coords	1	[LJU,2025]	coordinates	coordinate	coord	coords
137	3	Which attribute is used to specifies an alternate text for the area?	alt	1		text	alter	alt	alttext
138	3	<map> tag is used _____	to define an image map.	1		to draw graphics, on the fly, via scripting.	to map a portion of an image to make it clickable by the end-user.	to define an image map.	to defines the title of a creative work.
139	3	How many area tag can contain by map tag?	n	1		1	2	3	n

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
140	3	What is the purpose of the fill attribute in SVG?	It defines the color inside a shape	1	[LJU,2024]	It sets the border color of an element	It defines the color inside a shape	It defines the stroke color of a shape	It sets the opacity of the shape
141	3	How do you create a polygon in SVG?	<polygon points="50,150 75,200 100,150" />	1	[LJU,2024]	<polyline points="50,150 75,200 100,150" />	<polygon vertices="50,150 75,200 100,150" />	<polygon coords="50,150 75,200 100,150" />	<polygon points="50,150 75,200 100,150" />
142	3	Which <input> type is used to enter a telephone number?	<input type="tel">	1		<input type="tel">	<input type="number">	<input type="text">	<input type="call">
143	3	What is the purpose of <input type="hidden">?	To store data that should not be visible but still sent with the form	1		To hide the form completely	To store data that should not be visible but still sent with the form	To hide passwords while typing	To disable user input
144	3	Which <input> type provides a calendar UI for selecting a date?	<input type="date">	1		<input type="time">	<input type="month">	<input type="date">	<input type="datetime">
145	3	Which attribute is commonly used with <input type="range"> to set the minimum and maximum values?	min and max	1	[LJU,2025]	min and max	step	limit and bound	start and end
146	3	Which <input> type provides a color picker tool in HTML forms?	<input type="color">	1		<input type="rgb">	<input type="palette">	<input type="text">	<input type="color">
147	3	Write a form to collect details of a user such as name, password, address, radio button to choose subject of book he wants to buy, Dropdown to choose favorite author by providing categories like novel, story book, comics and comments for the last book he read. Give title to form with outline, submit and reset buttons.		5					
148	3	Write an HTML code to design following Form. 		5	[LJU,2022, 2025]				
149	3	Design a simple form to register student including name,rollno, semester, email, mobile number, gender, hobbies and feedback also create two buttons submit and reset.		2					

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD																																			
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)																																			
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.																																			
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)																										
150	3	Write HTML code to display following form. (Use of table tags for proper formatting is not mandatory) Registration form <table><tr><td>Enter your first name</td><td> </td></tr><tr><td>Enter your last name</td><td> </td></tr><tr><td>Enter your password</td><td> </td></tr><tr><td>ReEnter your password</td><td> </td></tr><tr><td>Enter your email</td><td> </td></tr><tr><td>Enter your mobile</td><td> </td></tr><tr><td>Enter your address</td><td> </td></tr><tr><td>Select your gender</td><td>male ☐ female ☐</td></tr><tr><td>Select your hobbies</td><td>hobby1 ☐ hobby2 ☐ hobby3 ☐</td></tr><tr><td>Select your DOB</td><td>dd-mm-yyyy </td></tr><tr><td>Select your Country</td><td>Select your country </td></tr><tr><td>Upload your pic</td><td>Choose File No file chosen</td></tr><tr><td colspan="2"> Save My DataReset Data </td></tr></table>	Enter your first name		Enter your last name		Enter your password		ReEnter your password		Enter your email		Enter your mobile		Enter your address		Select your gender	male ☐ female ☐	Select your hobbies	hobby1 ☐ hobby2 ☐ hobby3 ☐	Select your DOB	dd-mm-yyyy	Select your Country	Select your country	Upload your pic	Choose File No file chosen	Save My DataReset Data			5					
Enter your first name																																			
Enter your last name																																			
Enter your password																																			
ReEnter your password																																			
Enter your email																																			
Enter your mobile																																			
Enter your address																																			
Select your gender	male ☐ female ☐																																		
Select your hobbies	hobby1 ☐ hobby2 ☐ hobby3 ☐																																		
Select your DOB	dd-mm-yyyy																																		
Select your Country	Select your country																																		
Upload your pic	Choose File No file chosen																																		
Save My DataReset Data																																			
151	3	Design an HTML form to demonstrate the usage of various HTML5 form input types, attributes, and controls. The form should collect different kinds of user information. The form must include: Phone Number Field Gender Selection using radio buttons Hobbies Selection using checkboxes File Upload option Date Picker for entering Date of Birth Color Picker to select a favorite color Range Slider to set a numeric value for age (range slider restricted between 18 and 28) Datalist to suggest browser names while typing Submit button		5																															
152	3	Make a dropdown to have a selected disabled hidden item "--select--"		3																															
153	3	Design a login page in HTML. Page must have fields like username, password, Remember me and login button.		3																															
154	3	Design a simple form to register for new user information and use fieldset and legend to differentiate personal details and educational details. Personal Details should contain Full Name, Email, Mobile number, Gender, Birth Date and Hobbies. and Educational Details should contain SSC Percentage, HSC Percentage, Branch(dropdown-CE,IT,CSE,CST,AIML). Add Submit and reset buttons.		5																															
155	3	Write a form to collect details of a user such as name, address, radio button to choose subject of book he wants to buy, Dropdown to choose favorite author and comments for the last book he read. What is the use of <fieldset>?		5																															

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD																													
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)																													
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.																													
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)																				
156	3	Write a code to prepare Food Review form as shown in image given below. Customer Detail Name: Enter your Name Number: Enter your Number Email: Enter your Email Pizza Name: ☐ Simple. veg ☐ 7 Cheeze Outlet City: --List of Area-- Order date: dd - mm - yyyy Comment: Scale Ordered Pizza <table><tr><th>Scale</th><th>Good</th><th>Avg.</th><th>Bad</th></tr><tr><td>Quality</td><td>☒</td><td>☐</td><td>☐</td></tr><tr><td>Quantity</td><td>☒</td><td>☐</td><td>☐</td></tr><tr><td>Freshness</td><td>☐</td><td>☒</td><td>☐</td></tr><tr><td>Overall Rating</td><td colspan="3"> 0 10 </td></tr></table> Submit	Scale	Good	Avg.	Bad	Quality	☒	☐	☐	Quantity	☒	☐	☐	Freshness	☐	☒	☐	Overall Rating	0 10				5	[LJU,2023]				
Scale	Good	Avg.	Bad																										
Quality	☒	☐	☐																										
Quantity	☒	☐	☐																										
Freshness	☐	☒	☐																										
Overall Rating	0 10																												
157	3	Write an HTML script to render a combined image of a brand-ambassador of a product advertising some product. If user clicks on image of product, then the website of that product should be opened and if user click on brand-ambassador, then separate full image of that personality should be opened.		3																									
158	3	Write an HTML script to draw a tricolor according to indian national flag with Ashok Chakra as a simple circle in between.		3																									
159	3	Write an HTML script to render a combined image of traffic light signal from traffic.jpg. After clicking the individual signal, it should open different single pictures of red, green and yellow from red.jpg, green.jpg and yellow.jpg respectively.		3																									
160	3	Write an HTML script to render a combined image of HTML,CSS and JS from info.jpg. After clicking individual name as HTML,CSS and JS, it should open different single picture of HTML info page,CSS info page and JS info page from HTML.jpg, CSS.jpg and JS.jpg respectively.		3																									
161	3	Draw SVG circle, fill that with blue color, and make 8px red stroke width.		3	[LJU,2022]																								

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
162	3	Write an HTML code to display an image given below . after clicking individual shape ,it should open different single picture of circle, triangle, square and polygon from circle.jpg,triangle.jpg,square.jpg and polygon.jpg respectively. Click on a shape to see how it works: 		3					
163	3	Draw a rectangle using HTML5 SVG. Fill that rectangle with blue color, and make 4px black stroke width. Also draw circle inside rectangle, fill that circle with yellow color, and make 3px red stroke width.		3					
164	3	Write HTML document to map a three different portion of an image to make it clickable by the end-user.		4					
165	3	Draw a line and rectangle with use of SVG tag.		3					
166	3	Draw a rounded rectangle using HTML5 SVG, fill that rounded rectangle with green color, and make 4px black stroke width.		2					
167	3	Write an HTML script to render a combined image of mother, father and child from family.jpg. After clicking individual person, it should open different single picture of mother or father or child from mother.jpg, father.jpg & child.jpg respectively.		3					
168	3	Create rainbow using SVG shape with seven different color’s arcs.		4					
169	3	What is SVG tag? Discuss it with appropriate example.		4					
170	3	Draw a rounded rectangle using HTML5 SVG, fill that rounded rectangle with yellow color, and make 6px blue stroke width and also draw star with black color with 6 border width in red color.		4					
171	3	Draw an SVG circle with red color and blue border of 15px.		3					
172	3	Write HTML document to map a five different portion of an image to make it clickable by the end-user.		4					
173	3	Draw Indian flag with border black of 2 px and all three tricolors. Also add circle (Ashok chakra) with blue color and black border.		5	[LJU,2024]				

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
174	3	Draw SVG Logo on a circle filled with orange color (shaded part) as shown in figure below. 		5	[LJU,2023]				
175	3	Write a code to prepare Bank Login Form as shown in image given below. 		5	[LJU,2024]				
176	3	Write HTML code to create a ROBOT as shown in the figure given alongside. 		5	[LJU,2025]				

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
177	4	In the below code snippet, in what order will the margins be added? p {margin: 25px 50px 75px 100px; }	Top, Right, Bottom, Left	0.5		Top, left, right, bottom	Top, Right, Bottom, Left	Top, bottom, right, Left	Left, Right, Bottom, top
178	4	Which CSS selectors are used to specify a group of elements?	class	0.5		id	class	tag	attribute
179	4	Which of the following is/are not a pseudo element?	Only (A) and (C)	0.5		::first-word	::first-letter	::select	Only (A) and (C)
180	4	_____property renders 1st letters of all words capital.	text-transform	0.5		text-decoration	text-transform	text-variant	text-capitalize
181	4	Which CSS property is used to make the text bold?	font-weight: bold	0.5		text-align: bold	text-decoration: bold	font-weight: bold	font-style: bold
182	4	What will be the output of below mentioned code snippet? p strong {background-color: yellow;}	Strong element within a p element have a yellow background	0.5		Strong element within a p element have a yellow background	Strong element out side p element have yellow background	Both p and strong have yellow background	both (a) and (c) are true
183	4	Which of the following selectors select direct descendants?	OL>B	0.5		OL<B	OL B	OL ~ B	OL>B
184	4	Which one is the correct syntax to link an external style sheet in the HTML file?	<link href="demo.css" rel="stylesheet"/>	1		<link src="demo.css" type="stylesheet"/>	<style src="demo.css" type="stylesheet"/>	<link href="demo.css" rel="stylesheet"/>	<style href="demo.css" rel="stylesheet"/>
185	4	The CSS property that is primarily used for giving a line over a text would be:	text-decoration:underline;	1	[LJU,2025]	text-rule:underline;	text-decoration:overline;	text-rule:overline;	text-decoration:underline;
186	4	Which is the correct inline CSS for p tag to define paragraph's text and background colors?	<p style="color: red; background-color: yellow;">	1	[LJU,2022]	<p css="color: red; background-color: yellow;">	<p type="color: red; background-color: yellow;">	<p inline="color: red; background-color: yellow;">	<p style="color: red; background-color: yellow;">
187	4	If you want to use a green dotted border around an image, which CSS property is used for that?	Both A and B	0.5	[LJU,2022]	border-style	border-color	border-decoration	Both A and B
188	4	What does 'padding: 50px 20px;' specifies?	Both A and C	1	[LJU,2022]	top padding is 50px	bottom padding is 20px	right padding is 20px	Both A and C
189	4	What is CSS?	All the mentioned	0.5		CSS is a style sheet language	CSS is the language used to style the HTML documents	CSS is designed to separate the presentation and content, including layout, colors, and fonts	All the mentioned
190	4	Which has introduced text, list, box, margin, border, color, and background properties?	CSS	0.5		PHP	CSS	HTML	Ajax
191	4	Select the CSS property that sets the width of an element’s bottom border.	border-bottom-width	0.5		border-width-down	border-bottom-width	border-width	border-bottom
192	4	Which CSS property sets the color of an element’s all borders?	border-color	0.5		border-color	border-background	border-background-color	border-bgcolor
193	4	Which is not the property of the CSS box model?	color	0.5		margin	padding	color	border
194	4	Which property adds padding to the top of an element?	padding-top	0.5		padding-height	height	padding-top	top

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
195	4	Which property sets a consistent margin on all four sides of the affected element?	margin	0.5		padding	border	margin	none of the mentioned
196	4	Which of the following are parts of the CSS box model?	All of the mentioned	0.5		Padding	Borders	Margin	All of the mentioned
197	4	Which of the following are valid ways to represent a colour in CSS?	All of the mentioned	0.5		RGB Values	HEX Values	A valid color name	All of the mentioned
198	4	Which of the following property sets an element’s background color?	background-color	0.5		background-position	background-image	background-color	background-colors
199	4	Which CSS property sets what kind of line decorations are added to an element, such as underlines, overlines, etc?	text-decoration	0.5		text-decoration-link	text-decoration	text-line	text-style
200	4	How can we specify the spacing between each letter in a text in CSS?	letter-spacing	0.5	[LJU,2025]	letter-spacing	alpha-spacing	character-spacing	None of the mentioned
201	4	What type of CSS is the following code snippet? A Blue Heading	Inline	0.5		Inline	Internal	External	None of the mentioned
202	4	Which HTML tag is used to declare internal CSS?	<style>	0.5		<link>	<script>	<style>	None of the mentioned
203	4	Which CSS property sets the font size of text?	font-size	0.5		text-size	font-size	size	text
204	4	Which CSS Property controls how an element is positioned?	position	0.5		position	static	set	fix
205	4	Which of the following are valid CSS position property values?	All of the mentioned	0.5		relative	static	fixed	All of the mentioned
206	4	What type of selector is used in this case? p {line-height: 150%;}	element Selector	0.5		id Selectors	Attribute Selector	class Selectors	element Selector
207	4	How can we select an element with a specific ID in CSS?	#	0.5		.	#	^	None of the mentioned
208	4	How can we select an element with a specific Class in CSS?	.	0.5		.	#	^	None of the mentioned
209	4	Which of the following CSS selector is used to specify a rule to bind a particular unique element?	id	0.5		id	class	tag	bind
210	4	Which of the following CSS style property is used to specify an italic text?	font-style	0.5		Fonts	style	font-style	font-weight

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
211	4	Which is the correct way to apply CSS Styles?	All the mentioned	0.5		inside an HTML element	as an external CSS file	inside the <head> section of an HTML page	All the mentioned
212	4	Setting an inline-block in CSS requires which one of the following properties?	display	0.5		position	display	visibility	text-align
213	4	_____ syntax helps to put an image before the content starts?	content:url(“e:/image/17.jpg”);	0.5	[LJU,2022]	content: (“e:/image/17.jpg”);	content:url(“e:/image/17.jpg”);	background:url (“e:/image/17.jpg”);	image:url(“e:/image/17.jpg”);
214	4	Which of the following collection of statements are used to render bold, italic and verdana fonts.	font-family:verdana; font-style:italic; font-weight:bold;	1		font:verdana; font-style:bold; font-weight:italic;	font-style:verdana; font-family:italic; font-style: bold;	font-family:verdana; font-style:bold; font-weight:italic;	font-family:verdana; font-style:italic; font-weight:bold;
215	4	Consider following statements and their interpretations. Which is/are true? (1)margin-right:40px; This assigns margin from right side only. (2) margin:10px 30px: This assigns 10px margin from left-right and 30px margin from top-bottom. (3) margin:auto; This arranges entire element at center horizontally including its border.	Only 1 & 3	1		Only 1	Only 2	Only 3	Only 1 & 3
216	4	The following example inserts an image after the content of each <h1> element.	h1::after {content: url(smiley.gif);}	1	[LJU,2023, 2025]	h1:after {content: src(smiley.gif);}	h1::after {content: url(smiley.gif);}	h1::after {content: src(smiley.gif);}	h1.:after {content: url(smiley.gif);}
217	4	What will be the output of the following CSS code? div { border-width:5px; border-style:dotted solid double dashed; }	Box having dotted top outline, solid right outline, double bottom outline and dashed left outline	1		Box having dotted top outline, solid left outline, double bottom outline and dashed right outline	Box having dotted top outline, solid right outline, double bottom outline and dashed left outline	Box having dotted bottom outline, solid left outline, double top outline and dashed left outline	Box having dotted bottom outline, solid right outline, double top outline and dashed left outline
218	4	What will be the output of following CSS code snippet? h1 {color: red text-decoration: underline; font-style: italic;}	only font-style: italic works	1	[LJU, 2023]	text-decoration: underline and font-style: italic works	color: red, text-decoration: underline works	only font-style: italic works	color: red, text-decoration: underline and font-style: italic all works
219	4	How do you select all p elements inside a div element?	div p	1		div	div +p	div .p	div p
220	4	How will you make all paragraph elements “BLUE” in color?	p {color:blue;}	1	[LJU,2023. 2025]	p.all {color:rgb(255,0,0);}	p.all {color:#ff0000;}	p {color:blue;}	all.p {color: rgb(255,0,0);}
221	4	In CSS, “font-size” can be called as?	property-name	1		selector	rule	class	property-name
222	4	Which property is used to change the font of an element?	font-family	1		font-style	font-weight	font-bold	font-family
223	4	What are the uses of CSS pseudo-elements?	All are correct	1		Style specified parts of an element.	Style first line of an element.	Content can be inserted before & after an element.	All are correct
224	4	Which of the right syntax for text-transform?	<p style=”text-transform:uppercase;”>hello</p>	1	[LJU,2022]	<p style=”transform:caps;”>hello</p>	<p style=”text-transform:uppercase;”>hello</p>	<p style=”text-transform:bold;”>hello</p>	<p style=”text-transform:line-through;”>hello</p>
225	4	Which of the following is the correct syntax to display the hyperlinks without any underline?	gmail	1	[LJU,2022]	gmail	gmail	gmail	gmail

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
226	4	Which of the following is correct syntax for vertically repeated background-image in web page with pink background color?	background: pink url(“img_tree.png”) repeat-y;	1	[LJU,2023]	background: pink url(“img_tree.png”) repeat-x;	background: pink content(“img_tree.png”) repeat-x;	background: pink url(“img_tree.png”) repeat-y;	background: pink content(“img_tree.png”) norepeat;
227	4	Which of the following property defines in a shorthand form the width, style, and color for the top border of an element?	border-top	1	[LJU,2025]	border-top	border-width	border-height	border-style
228	4	What will be the output of the following code. <style> p{ border-color:black orange; border-style: double solid; } </style> hello	paragraph having double top & bottom border in black color, solid left & right border in orange color	1	[LJU, 2023]	paragraph having solid top & bottom border in black color, double left & right border in orange color	paragraph having double top & bottom border in black color, solid left & right border in orange color	paragraph having double top & bottom border in orange color, solid left & right border in black color	paragraph having solid top & bottom border in orange color, double left & right border in black color
229	4	What will be the total width of the div element given below? div { width: 310px; padding: 20px; border: 5px solid blue; margin: 0; }	360px	1	[LJU, 2023,2025]	310px	320px	340px	360px
230	4	What does the CSS box-shadow property do?	Adds one or more shadows around an element’s box	1		Adds padding to an element	Adds one or more shadows around an element’s box	Sets the border color of an element	Applies a gradient background
231	4	Which is the correct syntax for a descendant selector in CSS?	.container p	1		.container > p	.container p	.container + p	p.container
232	4	How do you select elements that are not of a specific class, for example, elements not having the class inactive?	*:not(.inactive)	1	[LJU,2024, 2025]	:not(inactive)	:not(:inactive)	.not(.inactive)	*:not(.inactive)
233	4	Identify the correct code to apply 20px vertical margin & centering the element horizontally within its block.	div {margin: 20px auto;}	1	[LJU,2024]	div {margin: auto;}	div {margin: auto 20px;}	div {margin: 20px auto;}	div {margin-top: auto; margin-left: 20px;}
234	4	Which of the correct syntax for horizontally repeated background-image in web page?	body {background-image:url(“o.jpg”); background-repeat:repeat-x;}	1	[LJU,2022, 2025]	body { background-imag:url(“o.jpg”); }	body {background-image:url(“o.jpg”); repeat-x;}	body {background-image:url(“o.jpg”); repeat-img:repeat-y;}	body {background-image:url(“o.jpg”); background-repeat:repeat-x;}
235	4	Which CSS property controls the space between lines of text?	line-height	1	[LJU,2025]	text-indent	word-spacing	line-height	letter-spacing
236	4	Write CSS to get following formatting for the paragraph. i) text-color-green ii) text-indentation-2cm iii) font-courier iv) font-style-italic v) text-case-Uppercase		2	[LJU,2022]				
237	4	Write down HTML/CSS code to create table with 5 rows and 3 columns. Even no. of rows display in green color and odd no. of rows display in yellow color. Use External CSS file.		2					

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
238	4	How can a style rule be defined with an id red heading that gives red color to heading h1 with text of heading right aligned?		2					
239	4	Write a code to demonstrate the use of text-indent,word-spacing,letter-spacing properties.		4					
240	4	Write a code to demonstrate use of CSS margin property.		3					
241	4	Write an External CSS with following rules. i) To make all the headers with normal font and having size 150%. ii) To display the paragraphs in arial font with bold style. Show the use of above css with html file by linking it.		3					
242	4	Define a class which defines a text alignment style to be left. Show how this same style can be applied to multiple tags?		3					
243	4	Write a code to demonstrate the use of text-transform and text-decoration properties.		3					
244	4	Write following style in separate CSS file. 1)write one paragraph using <p> tag..color of first line of paragraph should be green and text is italic. 2)when you select any text of heading ,background color of selected text will become grey. create one ordered list which is start with capital roman letters. color of list should be green and font-size should be 30px.		4					
245	4	Write HTML/CSS script to display 2 sections of 40% width using <div> tag. Both these sections are having title & description. Both these <div> should be horizontally adjacent to each other.		4					
246	4	Write HTML/CSS code for the following: i) Set the background color for the hover and active link states to "Yellow". ii) Set "paper.jpg" as the background image of the page.		4					
247	4	Write HTML/CSS code having <div> element styled as a perfect circle. Then, using CSS, apply a lightblue shadow around it.		4					
248	4	Write HTML & CSS code to design registration form having fields like Name, Password, Contact Number, Gender, Submit button & Reset Button. Follow below requirements: •While clicking on Name text, background-color of its input field change to light-green. •While hovering on password & Contact number text, font-size of its input fields will increase respectively. •While clicking on gender fields, background-color of the text should change to blue. •Both submit & reset button text should bold & italic, while hovering.		5					

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
249	4	Write HTML & CSS script to design a signup form having fields like Username, password, choices of sports like Cricket, Hockey, Badminton & Tennis. Include gender field, submit and reset buttons. Follow below requirements: i) While hovering username & password, its background should turn yellow color and pink color respectively. ii) While clicking sports and gender fields, text should turn to red color. iii) Both submit and reset button text should turn blue, while hovering. iv) Use appropriate selectors.		5	[LJU,2022]				
250	4	Write the following styles in separate CSS file and also show how to link this CSS file in HTML file and show use of styles. i) The headings should have normal font style and font's size should be 120%. ii) Define class arial for paragraph which defines font family arial and font style bold having 3cm spacing for paragraph initialization. iii) Apply background color orange and apply a background image "nature.jpg" and it should be repeated horizontaly only.		5	[LJU,2025]				
251	4	Write the HTML/CSS code to design a web page that contains a <div> element with a border, some padding, and a background image. The background should appear only within the content and padding area of the element, and it must not extend into the border space.		5					
252	4	Write the HTML/CSS code to create a simple 3-column product grid. Each column should display a smartwatch with a product name below it. All images should have the same height and fit the width of their columns.		5					
253	4	Write the following styles in separate CSS file and also show how to link this CSS file in HTML file and show use of styles. i)The headings should have normal font style and font's size should be 240% also right aligned. ii)Define a class container for paragraph which defines font family times new roman and font style bold with green color text having 2cm spacing for paragraph initialization. iii)Apply background image "nature.jpg" and it should be repeated vertically only.		5	[LJU,2023]				

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
254	5	The CSS property used to specify the transparency of an element is –	opacity	0.5		overlay	hover	clearfix	opacity
255	5	Which is the correct way to stretch a section half horizontally & double vertically.	scale(0.5,2)	0.5	[LJU,2025]	scale(2,0.5)	scale(0.5,2)	scaleX(2);scaleY(0.5)	both (a) and(c)
256	5	_____ is the valid syntax to execute rounded image.	img{border-radius:5px;}	0.5	[LJU,2022]	img{border-type:5px;}	img{border:5px;}	img{border-radius:5px;}	img{border-width:5px;}
257	5	_____ is the valid statement to fadeout more than one colors from a center point of a circle.	background-image:radial-gradient(circle,red,yellow,green)	1		background-color:radial-gradient(red,yellow,green)	background-color:radial-gradient(circle,red,yellow,green)	background-image:radial-gradient(circle,red,yellow,green)	background-image:conic-gradient(circle,red,yellow,green)
258	5	Add a 2 second transition effect for width and height changes of the <div> element. <style> div { width: 100px; height: 100px; background-color: red; } div:hover { width: 300px; height: 300px; } </style> <body> <div>This is a div</div> </body>	transition: width 2s, height 2s;	1		transition: width 2s, height 2s;	transition-transform: width 2s, height 2s;	transition: width:2s, height:2s;	transform: width 2s, height 2s;
259	5	Which is correct syntax from following, to set a linear gradient, transitioning from “blue” to "yellow"?	background-image: linear-gradient(blue,yellow);	1		background-image: linear-gradient(blue,yellow);	backgroundimage: linear-gradient(blue,yellow);	background-image: lineargradient(blue,yellow);	background-image: linear-gradient (from blue, to yellow);
260	5	Set a linear gradient background for the <div> element gradient that starts at top left (and goes to bottom right), transitioning from "white" to "green". <style> div { _____ } </style> <body> <div style="height:200px"></div> </body>	background-image: linear-gradient(to bottom right, white, green);	1		background-image: linear-gradient(to right, white, green);	background-color:linear-gradient(to left right, white, green);	background-image: linear-gradient(to bottom right, white, green);	background-image: linear-gradient(to bottom right, green, white);
261	5	How to set a background for the <div> element, which rotate color around a center point?	background-image:conic-gradient(red,yellow,green,blue);	1		background-color:linear-gradient(red,yellow,green,blue);	background-image:linear-gradient(red,yellow,green,blue);	background-color:conic-gradient(red,yellow,green,blue);	background-image:conic-gradient(red,yellow,green,blue);
262	5	Which of the following property defines the style of the rule between columns in a multicolumn text flow?	column-rule-style	1		column-style	column-style-gap	column-rule-style	column-rule-flow
263	5	The <div> element has specified a transition effect for the width property within 8 seconds. Give the correct syntax for the same.	div {transition: width 8s;}	1	[LJU,2022]	div {transition-dealy: width 8s;}	div {transition-type: width; transition-delay:8s;}	div {transition: width; transition-delay:8s;}	div {transition: width 8s;}
264	5	_____ is the correct way to divide a paragraph in columns like newspaper.	column-count:3; column-gap:30px; column-rule-style: dashed;	1	[LJU,2022, 2025]	column-no:3; column-space:30px; column-rule-style: dashed;	column:3; column-space:30px; column-line: dashed;	column-no:3; column-spacing:30px; column-rule-style: dashed;	column-count:3; column-gap:30px; column-rule-style: dashed;

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
265	5	Set a radial gradient background for the <div> element, transitioning from "white" to "green", in a circle shape. <style> div { background-image: radial-gradient(__ , ____ , ____); } </style> <body> <div style="height:200px"></div> </body>	circle, white, green	1		radial, white, green	circle, white, green	circle, green, white	radial, green, white
266	5	What are the names of different gradients in CSS?	Linear Gradients, Radial Gradients, and Conic Gradients	1		Linear Gradients, Radial Gradients, and Conic Gradients	Linear Gradients, Vertical Gradients, and Corner Gradients	Horizontal Gradients, Vertical Gradients, and Conic Gradients	Linear Gradients, Radial Gradients, Vertical Gradients, and Conic Gradients
267	5	Which of the following css property is used to define the time it takes one iteration of an animation to play?	animation-duration	1		control	animation-duration	transition-time	all of the mentioned
268	5	Which of the following css property is used to indicate if an animation plays in reverse or repeats itself every other iteration?	animation-direction	1		animation-iteration	animation-check	animation-direction	animation-state
269	5	Which of the following css property allows elements to be rotated, scaled, and skewed in a variety of different ways?	transform	1		transform-3D	transform-origin	transform	transition
270	5	Which of the following property defines the number of columns in a multicolumn text flow?	column-count	1		column	column-flow	column-number	column-count
271	5	Which of the following property defines the gap between columns in a multicolumn text flow?	column-gap	1		column-rule-flow	column-gap	column-rule	None
272	5	Which of the following transform property value defines a 2D translation?	translate(x,y)	1		translate(x,y)	translate2D(x,y)	translate3D(x,y)	all of the mentioned
273	5	Which of the following is NOT a valid value for the CSS property transition-timing-function?	smooth	1		ease	linear	step-end	smooth
274	5	Which of the following is a valid value for transition-timing-function?	ease-in-out	1		smooth	fast-slow	ease-in-out	step-linear
275	5	What function is used to insert values of a CSS variable?	var()	0.5		var()	rand()	varchar()	calc()
276	5	What will the following CSS code do when the <div> element is hovered? div { height:200px; width:200px; border:1px solid black; transition: transform 0.3s; } div:hover { transform: scale(1.2); }	The <div> will grow to 1.2 times its original size over 0.3 seconds.	1	[LJU,2024]	The <div> will rotate 1.2 degrees vertically over 0.3 seconds.	The <div> will grow to 1.2 times its original size over 0.3 seconds.	The <div> will move horizontally by 1.2 times its width over 0.3 seconds.	The <div> will rotate 1.2 degrees vertically & horizontally over 0.3 seconds.
277	5	How to rotate a div with id mydiv by 30deg?	#mydiv{transform:rotate(30deg);}	1	[LJU,2022, 2025]	#mydiv{ rotate:30deg;}	#mydiv{transform:30deg;}	#mydiv{transform:rotate(30deg);}	#mydiv{transform:rotation(30deg);}
278	5	Write down HTML/CSS code that use the border property to create thumbnail images.		2					
279	5	Write down HTML/CSS code that use the border-radius property to create rounded images.		2					
280	5	Write down HTML/CSS code that flip an image as you move the mouse over the image.		2					
281	5	Write down HTML/CSS code that shows a linear gradient that starts at top left (and goes to bottom right). It starts red, transitioning to yellow.		2					

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
282	5	Write down HTML/CSS code that show how to create a linear gradient (from left to right) with the color of the rainbow and some text like "Rainbow".		2					
283	5	Write HTML/CSS code to make a circle with a conic gradient divided into three equal parts: red, yellow, and blue.		2					
284	5	Write HTML/CSS code that the animation will last for 4 seconds, and it will gradually change the background-color from "red" to "yellow".		2					
285	5	Write an HTML & CSS script to divide a paragraph in 3 columns having 5px spacing in between with dashed border.		3					
286	5	Write down HTML & CSS code to increase the <div> element to be two times of its original width and three times of its original height with transition effect.		3					
287	5	Design the use of the var() function to declare & access the variable globally, inside the :root selector.		3					
288	5	Write down HTML/CSS code to move the <div> element 50 pixels to the right, and 100 pixels down from its current position		3					
289	5	Write down HTML/CSS code to rotates the <div> element clockwise with 20 degrees.		3					
290	5	Write down HTML/CSS code to rotates the <div> element counter - clockwise with 20 degrees.		3					
291	5	Write down HTML/CSS code to decreases the <div> element to be half of its original width and height.		3					
292	5	Write down HTML/CSS code to increases the <div> element to be two times of its original width, and five times of its original height		3					
293	5	Write down HTML/CSS code that changes the background-color to blue if the viewport is 250 pixels wide or wider (if the viewport is less than 250 pixels, the background-color will be pink)		3					
294	5	Write down HTML/CSS code that add some text to an image in the bottom right corner and top left corner along with use of opacity property of image.		3					
295	5	Write HTML and CSS code to animate a square that moves up and down continuously, with the animation running forever in alternate direction.		3					
296	5	Write HTML and CSS script to design one table having 3 columns and 5 rows. Add random data. While hovering, it should be expanded around 50% horizontally, background-color and font color will become red and white respectively. Expansion should take place in 2 seconds		4					
297	5	Write HTML & CSS code to design one banner using any heading tag. That heading should move in counter-clockwise and complete its iteration then return back in clockwise on its starting position. Use blue text color. And effect should begin after 3 second of loading page.		4					
298	5	Write an HTML & CSS script to design two tables having 3 rows & 3 columns of 50% width each horizontally adjacent to each other. They have blue and green background colors respectively. If page turns to portrait mode, then background colors of tables should be swapped. Responsive concept must be observed while shrinking width of page.		5					

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
299	5	Write an HTML and CSS script to design 3 sections having 20% height and full width. Apply following requirements: i)Each section has a title and a paragraph. By hovering each section, it should be enclosed by a red border. ii) By hovering title of each section, it should be converted to red color. iii)By hovering paragraph of each section, it should take a 2cm of beginning space and letter of each word capital. iv) Store all CSS properties in global CSS variables.		5	[LJU, 2023]				
300	5	Write HTML & CSS to make a div change its background color from red to yellow in 3 seconds when hovered, using ease-in timing.		3					
301	5	Create a button that increases its width from 100px to 200px on hover in 1 second with ease-out.		3					
302	5	Create a webpage with a square box that meets the following requirements: 1. The box is 100px by 100px and initially blue. 2. On hover, the box should: a. Change its background color to green smoothly in 2 seconds. b. Double its size using scaling. c. Move 50px to the right. 3. The animation should use ease-in-out timing function. Write the HTML and CSS code.		5					
303	5	Write HTML & CSS code to design one <div> tag which grows in size while rotating 1200 degrees with 2 different background color and again back to its original size and background color. An effect should begin after 3 second of loading page and it is continuing forever.		5	[LJU,2024]				
304	5	Write HTML & CSS script to design one banner of advertisement using <p> tag. That text of advertise should move continuously from left end to right end, then return back from right to left end. Use red and huge fonts for text. Advertise should begin after 1 second of loading page.		5					
305	5	Create a webpage with a bouncing box and animated text that meet the following requirements: Box Animation: i)Create a square box of 150px × 150px, with an orange background. ii)The box should move up and down (bounce) continuously between 0px and 100px vertically. iii)The motion should take 2 seconds, repeat infinitely and use the ease-in-out timing function. Text Animation: i)Place a text element (e.g., <p>) below the box. ii)The text should fade in from transparent to purple and scale up by 1.5times (1.5x). iii)The effect runs once when the page loads, takes 3 seconds and use the ease-in-out timing function.		5	[LJU, 2025]				
306	5	Create a CSS-based pie chart that meets the following requirements: i)The chart should be displayed inside a square <div> of 200px × 200px ii)The gradient should represent the following data segments which start from 20degree: Red: 0% – 40%, Blue: 40% – 70%, Green: 70% – 90%, Yellow: 90% – 100%. iii)The chart should have a thin black solid border (2px). Add a heading above the chart — “CSS Pie Chart using Conic Gradient”. Use appropriate selectors.		5	[LJU, 2025]				

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
307	6	What is the purpose of the following tag in a Bootstrap page?<meta name="viewport" content="width=device-width, initial-scale=1">	Ensures responsive scaling on mobile devices	1		Enables dark mode	Ensures responsive scaling on mobile devices	Loads Bootstrap faster	Centers the container
308	6	.container in Bootstrap 5 is:	A fixed-width container with breakpoint-based max-widths	1		Always 100% width	A fixed-width container with breakpoint-based max-widths	Only for nesting .row	Deprecated in v5
309	6	.container-fluid is:	100% width at all breakpoints	1		100% width at all breakpoints	100% width only on mobile	Fixed width on xl and above	Auto width, never full width
310	6	What does .container-lg do?	Fluid until lg, then fixed max-width from lg up	1		Fixed width at all sizes	Fluid until lg, then fixed max-width from lg up	Fixed until lg, then fluid above	Same as .container-fluid
311	6	Which class provides the widest fixed breakpoint in Bootstrap 5?	.container-xxl	1		.container-xl	.container-md	.container-xxl	.container-sm
312	6	Which utility class adds margin top = 3 units?	mt-3	1		mt-3	pt-3	ml-3	mb-3
313	6	Which class makes an element behave like an inline-block?	d-inline-block	1		d-inline	d-block	d-inline-block	d-flex
314	6	Which class applies a Bootstrap background color?	bg-primary	1		text-primary	bg-primary	color-primary	background-primary
315	6	To change the text color to success (green), which is correct?	text-success	1		bg-success	color-success	text-success	txt-green
316	6	Which class makes an element take 100% width?	w-100	1		w-auto	w-100	max-w-100	full-width
317	6	Which class applies a border only on top?	border-top	1		border-all	border-top	border-1	border-only-top
318	6	Which class converts text to uppercase?	text-uppercase	1		text-lowercase	text-uppercase	text-capitalize	text-transform
319	6	Which class applies a large shadow?	shadow-lg	1		shadow-sm	shadow-md	shadow-lg	shadow-big
320	6	Which class makes background transparent?	bg-transparent	1		bg-white	bg-transparent	bg-light	bg-none
321	6	Which class aligns text to the center?	text-center	1		align-center	text-align-center	text-center	center-text
322	6	Which utility sets auto left and right margins (centers block)?	mx-auto	1		m-0	mx-auto	ml-auto	my-auto
323	6	Which class applies padding left & right = 5 units?	px-5	1		p-5	px-5	py-5	pt-5
324	6	Which class places flex items horizontally with space between?	justify-content-between	1		justify-content-around	justify-content-evenly	justify-content-between	align-items-between
325	6	Which class adds equal margin on left & right?	mx-*	1		mx-*	my-*	mt-*	ml-*
326	6	Which class adds vertical padding only?	py-*	1		px-*	py-*	pt-*	pl-*
327	6	Which class makes an element 50% width?	w-50	1		w-50	w-half	width-50	max-w-50
328	6	Which class makes an element relative positioned?	position-relative	1		pos-relative	position-relative	relative	d-relative
329	6	Which class gives a warning (yellow) background?	bg-warning	1		bg-alert	bg-warning	background-warning	bg-yellow
330	6	Which class arranges flex items in a column?	flex-column	1		d-flex-column	flex-col	flex-column	d-column
331	6	Which class applies the Bootstrap danger red color to text?	text-danger	1		bg-danger	text-danger	color-danger	danger-text
332	6	Which class turns an image into a perfectly circular avatar (assuming the image is square)?	rounded-circle	1		rounded	rounded-pill	rounded-circle	img-circle
333	6	Which class adds a thin border and padding to an image to make it look like a photo print?	img-thumbnail	1	[LJU,2025]	img-frame	img-bordered	img-thumbnail	img-card

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
334	6	Which class gives an element slightly rounded corners (small border-radius)?	rounded	1		rounded-sm	rounded	rounded-all	rounded-corner
335	6	Which table class makes a Bootstrap table have zebra-stripping on rows?	table-striped	1		table-striped	table-bordered	table-hover	table-sm
336	6	Which class will highlight a table row on hover (pointer-like effect)?	table-hover	1		table-active	table-highlight	table-hover	table-pointer
337	6	In Bootstrap grid, which class makes a column take up 6 of 12 columns on medium (≥768px) screens?	col-md-6	1		col-md-6	col-6-md	col-lg-6	col-sm-6
338	6	Which alert class gives an alert the standard success (green) appearance?	alert-success	1		alert-info	alert-success	alert-primary	alert-successful
339	6	How do you make a Bootstrap 5 alert dismissible (show a close button and allow it to be closed)?	Add alert-dismissible class and include a close button with data-bs-dismiss="alert"	1		Add dismissible attribute to <div class="alert">	Add alert-dismissible class and include a close button with data-bs-dismiss="alert"	Add data-dismiss="alert" only on the alert div	Set role="alert-close" on the alert
340	6	Which class gives a Bootstrap button the large size variant?	btn-lg	1		btn-lg	btn-large	btn-size-lg	btn-big
341	6	Which class creates a growing spinner?	spinner-grow	0.5		spinner-ring	spinner-grow	spinner-loader	spinner-fill
342	6	Which class is used for an outline primary button?	btn-outline-primary	0.5		btn-outline-primary	btn-primary-outline	btn-border-primary	btn-outline
343	6	Which utility makes a spinner centered ?	d-flex align-items-center justify-content-center	1		spinner-center	d-flex align-items-center justify-content-center	spinner-fixed	full-center
344	6	Which class is used to create a border spinner in Bootstrap 5?	spinner-border	0.5		spinner-grow	spinner-border	spinner-ring	spinner
345	6	Which of the following class we have to add for vertical navigation?	flex-column	0.5	[LJU,2023]	flex-row	flex-column	flex-tuple	Both A and B
346	6	which of the following will be used If you want your form elements to appear side by side?	class="row",class="col"	1		class="row",class="col"	class="row"	class="col"	None of these
347	6	Dropdown will not expand without _____ class or attribute.	data-bs-toggle	1	[LJU,2024]	data-bs-toggle	dropdown-toggle	data-target	aria-expanded
348	6	Which of the following class/es will be used to put a divider between two nav items in a dropdown?	dropdown-divider	1	[LJU,2024]	dropdown-header	dropdown-footer	dropdown-divider	dropdown-group
349	6	Which of the following valid classes are used to change the alignment of flex items?	justify-content-around	1	[LJU,2024]	justify-items-center	justify-content-around	justify-flex-start	justify-align-center
350	6	Which of the following is correct method to add a close button in alert box (that will dismiss the alert box).	<button type="button" class="btn-close" data-bs-dismiss="alert"></button>	1	[LJU,2024]	<button type="button" class="btn-close" data-bs-dismiss="alert"></button>	<button class="close" data-dismiss="alert">×</button>	<button id="close" data-dismissible="alert">×</button>	<button class="btn-close" dismiss="alert">&time;</button>
351	6	Which of the following is the correct option to display a small table with zebra stripes, no borders, scrollable on small screens?	<div class="table-responsive"><table class="table table-striped table-borderless table-sm"></table></div>	1	[LJU,2025]	<div class="table-responsive"><table class="table table-striped table-borderless table-sm"></table></div>	<div class="table-responsiveness "><table class="table table-stripe table-bordered"></table></div>	<table class="table table-striped table-borderless table-responsive"></table>	<div class="table-scrollable"><table class="table table-striped table-borderless table-sm"></table></div>
352	6	Add only top and bottom dark thick borders to div. Which of the below option(s) is/are correct?	<div class="p-5 m-5 border-5 border-dark border-start-0 border-end-0"></div>	1	[LJU,2025]	<div class="p-5 m-5 border border-5 border-dark border-start-1 border-end-1"></div>	<div class="p-5 m-5 border-5 border-dark border-start-0 border-end-0"></div>	<div class="p-5 m-5 border border-5 border-dark border-left-0 border-right-0"></div>	<div class="p-5 m-5 border border-5 border-dark border-top-0 border-bottom-0"></div>

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
353	6	Which of the following is correct option to display small white rotating spinner inside a green link with text "Loading" after the spinner? The link is disabled.	Loading	1	[LJU,2025]	Loading	Loading	Loading	Loading
354	6	Match the following. 1.Makes the element a flex container with width only as wide as its content. 2.Aligns flex items horizontally at the center of the main axis. 3.Creates equal-width columns that automatically adjust. 4.Creates a 3-column layout starting from screens ≥576px. ----- a.d -flex b.justify-content-center c.col d.col-sm-4 e.col-4 f.d-inline-flex g.align-items-center h.col-md-6 i.row -----	1-f,2-b,3-c,4-d	1	[LJU,2025]	1-f,2-b,3-c,4-h	1-f,2-b,3-c,4-d	1-f,2-b,3-i,4-d	1-f,2-g,3-c,4-h
355	6	Write a script to create two sections having table column enter random data in table that data should have font size in rem unit. Shrink the width of table to observe the responsive behaviour of all tables should be display vertically on sm device, compulsory using classes of tables.		2					
356	6	Write html/css script using bootstrap to create two sections using div tag first section as heading and second section as its description. Heading should be center align and description should be left align in that section includes responsive web page concepts.		5					
357	6	Write html/css script using bootstrap to take four sections using div. first section has text related componets like paragarp abbr and pre tag.second section has a table having three rows first is lowercase , second uppeercase and third capitalize. third div has simple directcase in justify manner and last div has blockquote all div width are 25%.		5					
358	6	Write a program to apply text properties to heading text tag, p tag , pre tag, and check which are working with which tag also verify display property to heading tag.		5					
359	6	Write bootstrap script to have two sections of image and image discription, left div description and right div should have photo. give appropriate partition classes and observe responsive concepts.		5					
360	6	Write a script to create four sections having table coulmn enter random data in table that data should have font size in rem unit. Shrink the width of table to observe the responsive behaviour all four table should be display vertically on sm device(try various class of table).		5					
361	6	Write html/css script using bootstrap to set four images of some product horizonatlly and show their price , features and available quantity in grid system, responsive effect must be observed.		5					
362	6	Make a table using following classes. - table-striped, table bordered, table-hover and table-sm.		3					

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
363	6	Write html/css script using bootstrap to create three sections using div tag first section as heading and second section as its description and third section has respective links to search that image. Show responsive web page concepts.		5					
364	6	Write html/css script using bootstrap to take two sections using div. Use any three typography classes in 1st section. Second section has a table. Observe responsive concepts and use table oriented classes in 2nd section.		5					
365	6	Write a program to apply text properties to heading text tag, p tag , pre tag. Apply color classes to these text.		5					
366	6	Write bootstrap to create a simple collapse button and open/close one section of paragraph by clicking that button.		5					
367	6	Write a script to create four sections having table coulumn. Enter random data in table. Table should have different color classes for different rows. Shrink the width of table to observe the responsive behaviour all four table should be display vertically on sm device(try various class of table).		5					
368	6	Write html/css script using bootstrap to set four images of some product horizonatly and show their price , features and available quntity in grid system, responsive effect must be observed. Sections should be responsive by shrinking width of 1400px.		5					
369	6	What is the importance of <meta> tag in Bootstrap grid system. What happens if it is not there?		3					
370	6	Write an HTML script using bootstrap to design a page of essay having three titles by showing only titles initially. Script should enable a render to open a particular essay by viewing and clicking its title and close it by clicking it again.if render opens any other title then previous title should disappear.		5					
371	6	What happens in Bootstrap grid system, if no. of columns are not specified to set partition?		3					
372	6	Create responsive flexbox which wraps the content according to screensize.		3					
373	6	Create a responsive webpage using Bootstrap 5 that includes a navigation bar and a carousel. The navigation bar should include a brand name(image not mandatory), a collapsible menu, and only 3 links for "Home," "About," and "Contact." The menu should collapse into a toggle button on smaller screens. Below the navigation bar, implement a carousel with 2 slides only, each containing an image and a caption. The carousel should automatically cycle through the slides. (No need to create any buttons) Write the complete HTML structure required to achieve this layout, ensuring proper use of Bootstrap 5 classes and attributes only.		5	[LJU,2025]				
374	6	Write an HTML script using bootstrap to design a page of newspaper having three articles by showing only titles initially. Script should enable a render to open a particular article viewing and clicking its title and close it by clicking it again. If render opens any other article, then previous article should disappear		5	[LJU,2023,2025]				
375	6	Write a script to design 3 FAQs with question and answer. Initially it shows all 3 questions only. By clicking particular question, it should display answer of that question only. If user clicks any other question, then respective answer should be opened and previous answer should disappear.		5	[LJU,2023]				
376	6	Design one web-page for “online-shopping of beauty products”. Use Bootstrap concept for display images of different beauty products in proper alignment.		5	[LJU,2023]				

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
377	7	Which of the following class is used to style a select menu in Bootstrap 5?	form-select	0.5		form-control	form-dropdown	form-select	form-option
378	7	which of the following set of classes denotes bootstrap carousel next button?	carousel-control-next, carousel-control-next-icon	1		carousel-control-icon, carousel-control-previous, carousel-control-inner	carousel-control-next, carousel-control-next-icon	carousel-inner, carousel-control-icon, carousel-control-next	carousel-control-previous, carousel-control-next-icon
379	7	Which of the following set of classes denotes bottom indicators, slide show and arrow buttons for Bootstrap carousel respectively?	carousel-indicators, carousel-inner, carousel-control-prev-icon	1	[LJU,2023]	carousel-control-indicators, carousel-inner, carousel-control-prev-icon	carousel-indicators, carousel-control-inner, carousel-control-next-icon	carousel-indicators, carousel-inner, carousel-control-prev-icon	carousel-indicators, carousel-item-slide, carousel-control-icon
380	7	Which of the following is correct code to render toggle switch in Bootstrap form?	<div class="form-check form-switch"><label><input type="checkbox" class="form-check-input" checked/>ON/OFF</label></div>	1	[LJU,2025]	<div class="form-check form-switch"><label><input type="checkbox" class="form-check-input" checked/>ON/OFF</label></div>	<div class="form-check form-toggle"><label><input type="checkbox" class="form-check-input" checked/>ON/OFF</label></div>	<div class="form-check form-switch"><label><input type="radio" class="form-check-input" checked/>ON/OFF</label></div>	<div class="form-check form-switch"><label><input type="checkbox" class="form-check" checked/>ON/OFF</label></div>
381	7	Which of the following class is used to create a navbar with icon	navbar-brand	1	[LJU,2023, 2025]	navbar-brand	nav-img	navbar-img	navbar-icon
382	7	Which attribute is used in <button> or <a> to create dialog box?	data-bs-toggle="modal"	0.5		data-bs-toggle="modal"	data-toggle="modal"	data-bs-toggle="dialog"	data-toggle="dialog"
383	7	Which of the following class be used to put a header between two items in a dropdown?	dropdown-header	0.5		dropdown_header	dropdown-border	dropdown-header	drop-header
384	7	Bootstrap 5 often specifies fonts and border sizes in terms of REMs. What is a REM equal to?	16 pixels	1	[LJU,2025]	12 pixels	16 pixels	1 pixel	.01 sievert
385	7	Which of the following class we have to add in a code for creating link as navigation item in bootstrap-5?	nav-link	1		nav-item	nav	nav-link	None of these
386	7	Which of the following is an attribute in bootstrap-5?	data-bs-toggle	1		nav-item	data-bs-toggle	data-ds-toggle	nav
387	7	Which class will be used to add white text colors to all links in navbar?	navbar-dark	1		navbar-dark	navbar-light	dark-navbar	light-navbar
388	7	Which class will be used to add black text colors to all links in navbar?	navbar-light	1		navbar-dark	navbar-light	dark-navbar	light-navbar
389	7	Which of the following class will be used for get proper form styling for textual <input> and <textarea>	form-control	1		form-style	form-control	form-divider	None of these
390	7	If you want your checkbox to be styled as a toggle switch, then which class will be used with which container?	form-switch,form-check	1		form-switch,form-check	form-switched,form-checked	Both A and B	None of these
391	7	Which of the following class will be used with form to show what is missing before submitting the form?	was-validated	1		needs-validated	was-validated	valid-feedback	None of these
392	7	Which of the following are components of Modal?	All of these	1		modal-header	modal-footer	modal-body	All of these

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
393	7	The plugin used to create a cycle through elements as a slideshow is -	carousel	1		slideshow	scrollspy	carousel	None of these
394	7	Which of the following class is used to create a carousel?	carousel	1		carousel	carousel-indicators	carousel-extern	None of these
395	7	Which attribute should be mentioned for the element that should be used as a scrollable area.	data-bs-spy="scroll"	1	[LJU,2025]	data-bs-spy="scroll"	data-bs-spy="dropdown"	data-bs-toggle="scroll"	None of these
396	7	Which of the following valid classes are used to change the alignment of flex items?	All of these	1		justify-content-center	justify-content-between	justify-content-around	All of these
397	7	How many grid tiers, over which Bootstrap's layout system can adapt, are available in version 5?	6	1		4	5	6	12
398	7	In Bootstrap 5, floating labels are used with which type of form elements?	<input> and <textarea>	0.5		Only <input type="text">	Only <textarea>	<input> and <textarea>	<select> only
399	7	Which Bootstrap 5 class is required to create a floating label inside a form control?	.form-floating	0.5		.form-floating	.form-label	.floating-label	.form-control-floating
400	7	Which of the following input types does NOT support floating labels in Bootstrap 5?	file	0.5		text	password	file	email
401	7	When using floating labels in Bootstrap 5, what is the correct structure?	<div class="form-floating"> <input> <label>... </label> </div>	1		<div class="form-floating"> <label>... </label> <input> </div>	<div class="form-floating"> <input> <label>... </label> </div>	<div class="floating-label"> <label>... </label> <input> </div>	<form-floating> <input> <label>... </label> </form-floating>
402	7	To align a Bootstrap 5 pagination component to the center horizontally, which correct utility class should be applied?	.justify-content-center on <ul class="pagination">	1		.pagination-center on	.justify-content-center on <ul class="pagination">	.text-center on <nav>	.align-center on
403	7	If you want to highlight the current pagination page in Bootstrap 5, which is the correct method?	Add .active class to <li class="page-item">	1	[LJU,2025]	Add .active class to 	Add .active class to <li class="page-item">	Add selected attribute to	Add .current class to
404	7	In Bootstrap 5, which attribute is mandatory on the trigger element to open an offcanvas sidebar?	data-bs-toggle="offcanvas"	1		data-bs-trigger="offcanvas"	data-bs-toggle="offcanvas"	data-bs-open="sidebar"	data-bs-sidebar="true"
405	7	Which Bootstrap 5 class is used to make a sidebar offcanvas slide from the right side of the screen?	.offcanvas-end	1		.offcanvas-right	.offcanvas-end	.offcanvas-rightside	.offcanvas-next
406	7	In the offcanvas component structure, which of the following is the correct placement of the close button?	Inside <div class="offcanvas-header"> with .btn-close and data-bs-dismiss="offcanvas"	1		Inside <div class="offcanvas-body"> only	Inside <div class="offcanvas-header"> with .btn-close and data-bs-dismiss="offcanvas"	Anywhere inside the offcanvas, no attribute required	Outside the offcanvas component with data-bs-dismiss="offcanvas"
407	7	_____ is a correct set of classes/attributes to handle collapsing mechanism of navbar with collapsible icon.	navbar-toggler, data-bs-toggle, data-bs-target, navbar-toggler-icon	1	[LJU,2024]	navbar-toggle, data-bs-toggle, data-bs-target, navbar-toggle-icon	nav-toggle, data-bs-toggle, data-bs-target, navbar-toggle-icon	navbar-toggler, data-bs-toggle, data-bs-target, navbar-toggler-icon	navbar-toggler, data-bs-toggler, data-bs-target, navbar-toggler-icon
408	7	Identify the statement to show a collapsible section initially on loading a page.	<div id="section" class="collapse show">	1	[LJU,2024]	<div id="section" class="collapse-show">	<div id="section" class="collapse show">	<div id="section" class="collapse">	<div id="section" class="accordion">

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
409	7	write a bootstrap-5 code to create build hidden sidebar into your application.		3					
410	7	write a bootstrap-5 code to create simple form labels that float over your input fields.		2					
411	7	Write a bootstrap-5 code to create pagination shown as in image. Previous 1 2 3 Next		3					
412	7	Write a script to pop up a dialog box on clicking a button. Dialog box must have a title, a message of "Submitted successfully", X button in header to close dialog and one separate "Close" button in footer to close it.		5					
413	7	Write HTML script using bootstrap to create an image slide show having arrow button to move on previous and next slides. Also put links to jump on random slides.		4					
414	7	Design a following form using bootstrap. Once user click on a submit button one dialog box should open with confirmation message like "Do you want to login?" with close button. Dialog box contain header, body & footer part.		5					
415	7	Write an HTML code using bootstrap to implement carousel.		5					
416	7	Write an HTML script using bootstrap-5 to validate a form after clicking the submit button. Username: Password: SubmitReset		3					
417	7	Write an HTML code using bootstrap-5 to create a dark navigation bar with white color navigation link and center aligned.		3					
418	7	Write an HTML code using bootstrap-5 to create a navbar in which one of the navigation item has dropdown menu		5					
419	7	create horizontal flex box in which item will be displayed in reverse order.		2					
420	7	Create responsive flexbox which wraps the content according to screensize.		1					
421	7	Write a script to design a login form with basic validations. Form has fields for email, password, remember me option, submit & reset buttons. Email and password must not be blank and print valid/invalid message while entering inputs using Bootstrap classes.		3	[LJU,2023]				

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
422	7	Design a form with following fields: Username,password,Address,Gender,toggle switch also validate the form before submitting the form and each and every field is mandatory.		5					
423	7	Write an HTML Script using bootstrap to automatically update links in a navigation list based on a scroll position.		5					
424	7	How to make a navbar collapsible, so that it hides itself once width goes less than specified width.		5					
425	7	Design a web page with Bootstrap to make a set of advertisements moving like a slide show. It must have buttons to jump on next/previous slides and to jump on random slides.		5					
426	7	Write an HTML script using bootstrap-5 to validate a form before clicking the submit button.		3					
427	7	How to set image of brand/logo in navbar? Write script for it.		5					
428	7	Describe in detail how you would use Bootstrap 5 ONLY to create this form with a modal that opens upon clicking SEND button. Include the necessary HTML structure and Bootstrap5 classes and attributes only. The form should include the following fields with all necessary BOOTSTRAP 5 CLASSES for form elements: • Name (text input, required) • Email (email input, required) • Message (textarea, required) • Send button • Reset button The form should be validated, ensuring that all fields are filled in correctly before the form can be submitted. When the SEND button is clicked, a modal should appear with a confirmation message. The modal should be designed as below and clicking on x(cross) button the modal should be closed: Send Message Your message is sent successfully! We will get back to you soon.		5	[LJU,2024]				
429	7	Write a Bootstrap 5 program that demonstrates the use of both an offcanvas and a modal component. Add "Add to Cart" button. When the user clicks the "Add to Cart" button, an offcanvas should open from the right side of the page. The offcanvas must display the messages: •"Product has been added to your cart successfully." •"Would you like to proceed to checkout?" Inside the offcanvas, include a "Checkout" button. When this button is clicked, a modal should open. The modal must display the confirmation message: •"Are you sure you want to proceed with the checkout?" The modal should also contain a Close button to dismiss it. No need to add modal header. Just add modal body with content and modal footer with button to close the modal.		5	[LJU,2025]				

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
430	8	Which of the following is the correct output for the following JavaScript code: <script> var x=3; var y=2; var z=0; if(x==y) document.write(x); else if(y==z) document.write(y); else document.write(z); </script>	0	0.5		compilation error	runtime error	0	1
431	8	What will be the output of the following code snippet? <script type="text/javascript"> a = 5 + "9"; document.write(a); </script>	59	0.5		compilation error	runtime error	0	59
432	8	Which one of the following is correct output for the following given code: const number = undefined + 11; if (number === NaN) { console.log("NaN"); } else if (number === 11) { console.log("11"); } else { console.log("other"); }	other	1		11	NAN	other	error
433	8	what will be the output of following Javascript code? <script> a="This"+50+80+"Is"+"Demo"+"of"+100; document.write(a); </script>	This5080IsDemoof100	1		This50IsDemoof100	This5080Demoof100	This5080IsDemo100	This5080IsDemoof100
434	8	what will be the output of following JS code? <script> s1=10+20+"javascript"+40+50+"example"+60; document.write(s1); </script>	30javascript4050example60	1		1020javascript4050example60	1020javascript90example60	30javascript90example60	30javascript4050example60
435	8	What is the output of the following JavaScript code? console.log(2+2+"2" + 2 + 2)	4222	1		22222	2224	10	4222
436	8	Identify output, if a=20 and b=3 is entered while prompting values. a=prompt("Enter first value"); b=prompt("Enter second value"); console.log(a%b);	2	1		null	NaN	2	undefined
437	8	What will be the output of the following code snippet? var a = true + true + true * 3; console.log(a)	5	0.5		3	0	error	5

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
438	8	Which one of the following is correct output for the following given code: <script> var a=3; var b=a++; var c=++a; document.write(a,b,c); </script>	535	1		452	453	535	error
439	8	What will be logged? console.log(a); var a = 5; let b = 10;	undefined	0.5		5	undefined	ReferenceError	10
440	8	Which of the following code snippets will throw a `ReferenceError`?	console.log(d); let d = 20;	1		console.log(d); let d = 20;	const c = 15; console.log(c);	console.log(b); var b = 10;	var a = 5; console.log(a);
441	8	A developer writes the following code: 'let x = 10; { let x = 20; console.log(x); } console.log(x);' What will be the output?	20 then 10	1		10 then 10	20 then 10	10 then 20	20 then 20
442	8	What will console.log print: const obj = { val: 100 }; obj.val = 200; console.log(obj.val);	200	1		100	200	Error	undefined
443	8	A web developer is creating a string to display a dynamic user greeting. They use the following code: const name = 'Alice'; const message = 'Hello, \${name}!'; What will the value of "message" be?	Hello, \${name}!	1		A 'SyntaxError' will be thrown.	Hello, undefined!	Hello, Alice!	Hello, \${name}!
444	8	A developer uses const to declare an array: const myArr = [1, 2, 3];. Which of the following operations is valid?	myArr.push(4);	1		myArr = [4, 5, 6];	myArr.push(4);	myArr = "hello";	const myArr = [1, 2, 3];
445	8	What is the output: let name = "Alice"; let age = 25; console.log(`\${name} is \${age + 5} years old`);	Alice is 30 years old	1	[LJU, 2025]	Alice is 25 years old	Alice is 30 years old	Alice is age + 5 years old	Alice is undefined years old
446	8	What is the length: let greeting = `Hello\nWorld`; console.log(greeting.length);	11	1		5	10	11	Error

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
447	8	What will be logged: const price = 50; const message = `The price is \${price > 30 ? "high" : "low"}`; console.log(message);	The price is high	1		The price is high	The price is low	The price is 50	Error
448	8	What will be logged: let arr = [1,2,3]; let res = arr.push(4,5); console.log(res, arr);	5 [1,2,3,4,5]	1		[1,2,3,4,5] 5	5 [1,2,3,4,5]	[1,2,3,4,5] undefined	Error
449	8	Which of the following returns true? let arr = [10, 20, 30];	arr.includes(20)	1		arr.includes(25)	arr.includes(20,2)	arr.includes("20")	arr.includes(20)
450	8	What will console.log print: let nums=[1,2,3]; let out=nums.pop(); console.log(out, nums);	3 [1,2]	1		[1,2] 3	3 [1,2]	[1,2,3] 2	Error
451	8	A developer writes: let arr=[2,4,6]; let mapped=arr.map((x,i)=>x+i); console.log(mapped);	[2,5,8]	1		[2,4,6]	[2,5,8]	[3,6,9]	[undefined,undefined,undefined]
452	8	What will be the output: let arr=[1,2,3,4]; let f=arr.filter(x=>x%2===0); console.log(f);	[2,4]	1		[1,3]	[2,4]	[1,2,3,4]	[]
453	8	What will console.log print: let arr=[1,2,3]; let res=arr.forEach(x=>x*2); console.log(res);	undefined	1		[2,4,6]	undefined	[1,2,3]	Error

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
454	8	Given an array const numbers = [1, 2, 3, 4, 5];, what will numbers.pop() return and what will the array's new state be?	Returns 5, array becomes [1, 2, 3, 4].	1		Returns [1, 2, 3, 4], array becomes [1, 2, 3, 4].	Returns 5, array becomes [1, 2, 3, 4].	Returns 1, array becomes [2, 3, 4, 5].	Returns undefined, array becomes [1, 2, 3, 4, 5].
455	8	Given const data = [{id: 1, value: 10}, {id: 2, value: 20}];, which method should a developer use to find the object with id: 2?	data.find(item => item.id === 2)	1		data.includes({id: 2, value: 20})	data.filter(item => item.id === 2)	data.find(item => item.id === 2)	data.forEach(item => item.id === 2)
456	8	What does the filter() method return if no elements in the array satisfy the condition provided in the callback function?	An empty array ([])	1		undefined	null	An empty array ([])	The original array.
457	8	Given const products = ['apple', 'banana', 'orange']; , what is the outcome of products.includes('Apple')?	FALSE	1		TRUE	FALSE	undefined	A TypeError is thrown.
458	8	What is the output of the following code snippet? <script> var arr = ['a', 'b', 'c']; for(var i = 0; i < arr.length; i++) { document.write(arr[i]); } </script>	abc	0.5	[LJU,2023]	abc	cba	acb	bac
459	8	The following web page is loaded into a web server: <html> <head><title>JavaScript question</title></head> <body> <script language="JavaScript"> book = new Array(1,2,3,4,5,6,7,8); document.write(book[1]+" "); book[10]=10; document.write(book[10]); </script> </body> </html> Once the above web page is loaded what will its body contain?	2 10	0.5	[LJU,2023]	2 10	1 10	110	Only print 10
460	8	What happens? for(let i=0;i<2;i++){ for(let j=0;j<2;j++){ if(i===j) continue; console.log(i,j); } }	0 1 and 1 0	1		0 0 1 1	0 1 and 1 0	Nothing	Infinite loop
461	8	What will be output? let obj={a:1,b:2}; for(let k in obj){ console.log(k); }	a b	1		1 2	a b	Error	undefined

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
462	8	Consider a while loop with a condition that always evaluates to true. What is the most likely outcome of running this code?	An infinite loop will occur, potentially crashing the program.	0.5		A SyntaxError will be thrown.	An infinite loop will occur, potentially crashing the program.	The loop will execute once and then stop.	The code inside the loop will be ignored.
463	8	A developer uses a for...of loop to iterate over a string const str = "hello";. What will the loop's output be?	The loop will iterate over the characters 'h', 'e', 'l', 'l' and 'o'	1		The loop will iterate over the indices 0, 1, 2, etc.	The loop will throw a TypeError.	The loop will iterate over the characters 'h', 'e', 'l', 'l' and 'o'	The loop will treat the string as a single value.
464	8	Choose the correct snippet from the following to check if the variable "a" is not equal the "NULL":	if(a!==null)	1		if(a!==null)	if (a!)	if(a!null)	none of above
465	8	See the given code of JavaScript and choose the correct output from the following: function comparing() { x=9; y=9; if(x==y) return true; else return false; } console.log(comparing());	TRUE	1		compilation error	FALSE	runtime error	TRUE
466	8	What will be the output of the following JavaScript code? function comparison() { number=10; if(number=="10") return true; else return false; } console.log(comparison());	TRUE	1		TRUE	FALSE	runtime error	compilation error
467	8	What will happen, if the following JavaScript code is executed? var count =0; while (count <10) { console.log(count); count++; }	The value of count from 0 to 9 is displayed in the console	1		An error is displayed	An exception is thrown	The values of count variable are logged or stored in a particular location or storage	The value of count from 0 to 9 is displayed in the console

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
468	8	What will be the output of the following code snippet? <script> for(var i = 10; i > 0; i--) { document.write(i+" "); } </script>	10 9 8 7 6 5 4 3 2 1	1	[LJU,2023]	0 1 2 3 4 5 6 7 8 9 10	10 9 8 7 6 5 4 3 2 1	1 2 3 4 5 6 7 8 9 10	0
469	8	What will be the output of the following code snippet? <script> var i = 1; while (i <= 5) { document.write(i * 2+" "); i += 2; } </script>	2, 6, 10	1	[LJU,2023]	2, 4, 6, 8, 10	1, 3, 5, 7, 9	2, 6, 10	1, 2, 3, 4, 5
470	8	What will be the output of the following code? function fun(1e) { a=2; for(i=0;i<1e;i++) { document.write(a); } } fun(3);	222	0.5		2	3	22	222
471	8	What will be logged? console.log(foo()); function foo(){ return "hi"; }	hi	1		Error	undefined	hi	Nothing
472	8	What happens? function f(x=10,y=x+5){ return y; } console.log(f());	15	1		10	15	undefined	Error
473	8	What is the value of result after this code runs? var a = 10; (function() { var a = 20; })(); var result = a;	10	1		20	undefined	null	10
474	8	Given the code: function outer() { let x = 10; function inner() { return x; } return inner(); }. What is the value returned by outer() and why?	10, due to closure.	1		undefined, because x is out of scope for inner.	10, due to closure.	null, as the function is self-contained.	A ReferenceError is thrown.

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
475	8	What will be the output of the following code? (function(a) { return (function() { document.write(a); a=5; }) () })(10);	10	1		5	10	15	NaN
476	8	What is a key difference in the behavior of the this keyword between a regular function and an arrow function?	In a regular function, this is dynamically scoped, while in an arrow function, this is lexically scoped.	1		In a regular function, this is dynamically scoped, while in an arrow function, this is lexically scoped.	In a regular function, this is always the window object, while in an arrow function, it refers to the parent object.	In a regular function, this refers to the global object, while in an arrow function, it refers to the object it is attached to.	In a regular function, this is always undefined, while in an arrow function, it refers to the global object.
477	8	What happens when calling: function demo(a,b=5){ return a+b; } console.log(demo(3,undefined));	8	1		3	8	NaN	Error
478	8	A developer writes: function f(a,...rest){ return rest.length; } console.log(f(1,2,3,4)); What is the output?	3	1		4	3	1	Error
479	8	Given the function function sum(x, y = 10, ...rest) { return x + y + rest.length; }, what is the result of sum(5)?	15	1		15	16	5	undefined
480	8	In the function function myFunc(first, ...others) { console.log(first, others); }, what is the value of others when myFunc(10, 20, 30, 40) is called?	[20, 30, 40]	1		[10, 20, 30, 40]	[20, 30, 40]	10	A TypeError is thrown.
481	8	Which of the following is an invalid use of the spread operator?	Using the spread operator to convert an object into an array directly, e.g., [...obj].	1		Spreading a string into an array of its characters, e.g., [...'hello'].	Spreading an object into another object, e.g., {...obj1, ...obj2}.	Spreading an array inside a function call, e.g., Math.max(...arr).	Using the spread operator to convert an object into an array directly, e.g., [...obj].

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
482	8	Which of the following statements about prompt, alert, and confirm is correct?	All three are synchronous and block code execution until the user responds.	1		Only alert is synchronous, others are asynchronous.	All three are asynchronous.	Only confirm is synchronous, others are asynchronous.	All three are synchronous and block code execution until the user responds.
483	8	What is the value of result after a user clicks "Cancel" on a JavaScript prompt box?	null	0.5		false	An empty string ("")	undefined	null
484	8	Consider the following code: alert('Step 1'); console.log('Step 2');. What is the order of execution?	The alert pop-up will appear, and Step 2 will only be logged after the user closes the alert box.	1		'Step 2' will be logged immediately, then 'Step 1' will be alerted.	The alert pop-up will appear, and Step 2 will only be logged after the user closes the alert box.	The alert and console.log will execute simultaneously.	A TypeError will be thrown because alert blocks execution.
485	8	What is a key difference in the return value of a confirm box and an alert box?	A confirm box returns true or false, while an alert box returns undefined.	0.5		A confirm box returns a string, while an alert box returns a boolean.	A confirm box returns true or false, while an alert box returns undefined.	Both return the same value depending on the user's action.	A confirm box returns true or false, while an alert box returns null.
486	8	A programmer needs to get the user's name and store it in a variable. Which pop-up box is the correct choice, and what is its behavior if the user types their name and clicks "OK"?	prompt is the correct choice, and it will return the user's input as a string.	0.5		confirm is the correct choice, and it will return a boolean true.	alert is the correct choice, and it will return the user's input.	prompt is the correct choice, and it will return the user's input as a string.	prompt is the correct choice, and it will return an empty string ("").
487	8	What will be the output of following code of JS,if cancel button is pressed after entering some integer value? <script type="text/javascript"> ret=prompt("enter your input"); document.write(ret); </script>	null	1		NaN	Entered integer	null	0
488	8	What will be the output of the following ES6 code on console? <script> const calculate = () => { let numbers1 = [10, 10, 20, 30, 40]; let numbers2 = [50, 60]; let combinedNumbers = [...numbers1, 30, ...numbers2]; let total = 0, total1 = 0; for (let index of numbers1) { total += index; } for (let index of combinedNumbers) { total1 += index; } console.log(`\${total1-total}`); }; calculate(); </script>	140	1	[LJU,2024]	140	250	110	30
489	8	What will be the output of the following ES6 code on console? <script> numbers = ['1', '2', '3']; for (const [x, y] of numbers.entries()) { result = x+y; } console.log(`\${result}`); </script>	23	1.5	[LJU,2024]	3	6	9	23
490	8	What will be the output of the following ES6 code on console? <script>script2=(a,...values)=> { return values.length; } console.log(`Total = \${script2(1, 2, 3, 4, 5, 6, 7)}`); </script>	Total = 6	1.5	[LJU,2024]	Total = 1, 6	Total = 6	Total = 27	Total = NaN
491	8	Which method adds one or more elements to the end of an array and returns the new length of the array?	push()	1	[LJU,2025]	push()	pop()	map()	filter()

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
492	8	For <script> let a = [1, 2]; let b = [1, 2]; let c = a; console.log(a === b); console.log(a === c); console.log(b === c); </script> Which of the following statement(s) is/are correct? 1.The first comparison returns false. 2.The second comparison returns true. 3.The third comparison returns true.	1,2	1.5	[LJU,2025]	1,2	2,3	1,3	1,2,3
493	8	Which keyword prevents reassignment of a variable but does not make objects or arrays immutable.	const	1	[LJU,2025]	var	const	let	none of above
494	8	Create a function that takes an array of objects (groceries) which calculates the total price and returns it as a number. A grocery object has a product, a quantity and a price.		5					
495	8	Write java script program to check occurrence of a given character in to string entered by user. (For ex., If you check the number of occurrences of 'o' in the string 'school', the result is 2.)		4					
496	8	Write java script function to find factorial of number entered by user.		4					
497	8	Write a javascript to accept a number to check whether it is greater than 100 or not?		3					
498	8	Write a JavaScript to take 2 digit number and then separate these 2 digits, then multiply first digit by itself for second digit times.(for example, 23 should be separated as 2 and 3. 2 should multiply with itself 3 times).		3					
499	8	State true or false and justify your answer : “Java Script is untyped language.		3					
500	8	Write a JavaScript to print characters of a string at odd positions.(for example for the string India, I, d and a should get printed).		4					
501	8	Write Java Script for find first 10 prime numbers		3					
502	8	Write a program using Java Script, which sorts elements of an array in descending order.		5					
503	8	Write a JavaScript program to print first N odd numbers divisible by 7		5					

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
504	8	Write a function that takes 3 parameters, price, tax rate, balance, and prints yes in an alert box if someone has adequate balance to purchase an item at the specified price with the given tax rate. Otherwise, print out no in an alert box		3					
505	8	Write a JavaScript to check input string is palindrome or not.		5					
506	8	Write java script function to find maximum value among three different value entered by user		4					
507	8	Write a JS to print all number from 1-100 by adhering following condition: print only those number whose reverse of square and square of reverse are same. For ex. Square(12)=144, Reverse(144)=441 and Reverse(12)=21,Square(21)=441 . so, final results of both the cases are same.Print all numbers following these cases between 1-100.		5					
508	8	Write a JS to find that given no. is lucky number or not. i.e. Given no is lucky if sum of all its digit is equal to 1. for ex. $7777 = 7+7+7+7 = 28 \Rightarrow 2+8=10 \Rightarrow 1+0=1$		5					
509	8	Write a JS to check that given no. is perfect no. or not. For ex. 6 is a perfect no., bcoz the factors of 6 are 1,2,3 & 6. So addition of all factors excluding no. itself is 6. So it is a perfect no. Likewise 28 is also a perfect no.		5					
510	8	You are given an array of objects representing products. Each object has name, price, and category properties. const products = [{ name: 'Laptop', price: 1200, category: 'Electronics' }, { name: 'T-shirt', price: 25, category: 'Apparel' }, { name: 'Keyboard', price: 75, category: 'Electronics' }, { name: 'Jeans', price: 60, category: 'Apparel' }]; Write a code to return an array of just the names of the products that are in the 'Electronics' category and have a price less than \$1000.		3					
511	8	Write a single function calculateDiscount that meets the following requirements: It takes a basePrice as its first parameter. It accepts an optional discount percentage as a second parameter, which should default to 10. It uses a Rest Parameter to accept any number of additional prices to be included in the calculation. The function should return the sum of all prices passed to it (including the basePrice and additional prices), after applying the discount to the total.		3					

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
512	8	You have a user object with a name and an age property. Write a single template literal that generates a message. The message should display the user's name and their age. However, if the user's age is less than 18, the message should also include the phrase " (Minor)". For example, John is 25. and Jane is 16 (Minor).		3					
513	8	You are given an array of strings and an object with key-value pairs. const colors = ['red', 'green', 'blue']; const car = { make: 'Toyota', model: 'Camry', year: 2022 }; Write two loops. The first loop should iterate over the colors array and print each value. The second loop should iterate over the car object and print each key-value pair in the format "key: value".		3					
514	8	You are given a dataset of student test scores. const students = [{ name: 'Alice', scores: { math: 85, science: 90, history: 78 } }, { name: 'Bob', scores: { math: 92, science: 88, history: 95 } }, { name: 'Charlie', scores: { math: 70, science: 75, history: 80 } }, { name: 'Diana', scores: { math: 95, science: 98, history: 93 } }]; Write code to perform the following tasks: 1. Find the student with the highest average score across all subjects. 2. Return a new object containing only that student's name and their average score, formatted to two decimal places. You must calculate the average score for each student to find the highest, and your final result should be a single object.		3					
515	8	Write a function gradeStudents that takes an array of student objects (each with a name and FSD marks property). The function should: 1. Iterate through the student array. 2. For each student, it should use the prompt() pop-up box to ask the user to enter FSD marks. The prompt message should clearly state the student's name (e.g., "Enter FSD marks for Alice:"). 3. It should validate the user input. If the input is not a valid number (use isNaN()), display an alert() message "Invalid grade. Please enter a number." and continue to the next student without updating the current one. 4. If the input is valid, update the student's FSD marks property with the new value. 5.Finally, after the loop finishes, it should use alert() to display a summary of the FSD marks for all students in a clear, multi-line format using template literals.		5					

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
516	8	Create a function registerUser() that uses pop-up boxes to gather and validate user input for a new user registration. The function should: 1. Use a while loop to repeatedly prompt the user for a username using the prompt() pop-up box. The loop should continue to run as long as the user's input is an empty string, null, or undefined. 2. Once a valid username is provided, use another while loop to prompt the user for a password. This loop should continue until the user provides a password that is at least 8 characters long. 3. After a valid password is entered, use the confirm() pop-up box to ask the user, "Are you sure you want to register with this username and password?". 4. If the user clicks "Cancel" on the confirmation box, use alert() to display a message "Registration canceled." and end the function. 5. If the user clicks "OK", use a template literal to display a final alert() message confirming the successful registration, showing both the username and the password.		5					
517	8	You have a dataset of transactions. Each transaction object has a category, amount, and date. Your task is to process this data and summarize the total amount for each unique category, using only the transactions from a specific month. <pre>const transactions = [{ category: 'Groceries', amount: 50, date: '2023-11-05' }, { category: 'Bills', amount: 200, date: '2023-10-28' }, { category: 'Groceries', amount: 75, date: '2023-11-12' }, { category: 'Entertainment', amount: 40, date: '2023-11-20' }, { category: 'Bills', amount: 150, date: '2023-11-15' }];</pre> Write a function summarizeMonthlyTransactions(data, month) that: 1. Creates a new array containing only the transactions from the specified month (e.g., '11' for November). 2. Iterates over the array to calculate the total amount for each category. You must store these totals in a new object where the keys are the category names and the values are the total amounts. 3. Returns the final summary object. The expected output for the data above with the month '11' is { Groceries: 125, Entertainment: 40, Bills: 150 }.		5					
518	8	Write a JavaScript program that first uses the alert box to display a welcome message to the user (Example: Welcome User). Then, use the confirm box to ask the user if they want to continue. 1. If the user clicks "OK", proceed to ask for their name using the prompt box and display a personalized greeting (Example: If user enters "Jack", then display "Hello Jack"). After displaying the greeting using alert box, prompt the user to enter their age. Based on the user's age, use a conditional statement to check if they are 18 or older. If the user is 18 or older, display an alert saying "You are an adult!". If the user is under 18, display an alert saying "You are a minor!". 2. If the user clicks "Cancel" in the confirm box at the beginning, display an alert saying "Goodbye".		5	[LJU,2024,2025]				

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
519	9	const els=document.querySelectorAll(".test"); els.forEach(e=>e.remove()); console.log(document.querySelectorAll(".test").length); What is output?	0	1		undefined	0	Throws Error	Old count remains
520	9	let nodes=document.getElementsByClassName("a"); document.body.innerHTML="<div class='a'></div>"; console.log(nodes.length); What is output?	1	1		0	1	undefined	Throws
521	9	<p id="a">Hi</p><script>console.log(document.getElementById("b"));</script> > What is output?	null	1		null	undefined	Error	""
522	9	<div class="x"></div><div class="x"></div><script>console.log(document.getElementsByClassName("x").length);</script> What is output?	2	1		2	0	undefined	null
523	9	<script>console.log(document.getElementsByClassName("y").length);</script> What is output?	0	1		0	undefined	null	Error
524	9	<script>console.log(document.querySelectorAll("div").length);</script> What is output?	2	1		2	1	0	undefined
525	9	<script>console.log(document.querySelectorAll("span").length);</script> What is output?	0	1		0	1	undefined	null
526	9	<div id="d">HelloJS</div><script>console.log(document.getElementById("d").innerHTML);</script> What is output?	HelloJS	1		HelloJS	Hello JS	Hello	undefined
527	9	<div id="d">HelloJS</div><script>console.log(document.getElementById("d").innerText);</script> What is output?	HelloJS	1		HelloJS	Hello JS	Hello	JS
528	9	<div id="d"></div><script>document.getElementById("d").setAttribute("title","demo");console.log(document.getElementById("d").title);</script> What is output?	demo	1		demo	""	null	undefined
529	9	<div id="d" data-x="5"></div><script>console.log(document.getElementById("d").getAttribute("data-x"));</script> What is output?	5	1		5	undefined	null	""

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
530	9	<div id="d" style="color:red"></div><script>console.log(document.getElementById("d").style.color);</script> What is output?	red	1	[LJU, 2025]	red	""	null	undefined
531	9	What will be the output of the following JavaScript code by clicking button? <body><script> function getmethod() { num=document.getElementById("p1").value; alert(Math.pow((num*num*num),2)); </script> <form> Enter No:<input type="text" id="p1" value="2" name="number"/> <input type="button" value="Click" onclick="getmethod()"/> </form></body>	64	1		8	48	2	64
532	9	Consider one <table> object named “t1” in DOM and following function: check() function is called on a button click. What happens after button click? function check() { t1.innerHTML="Thanks"; t1.bgColor="red"; t1.style.border="20px solid blue"; }	All previous cells disappear and only one cell remains having text “Thanks”, border turns blue and background also turns to red	1		All cells of table will be as it is, border turns blue and background turns red	All previous cells disappear and only one cell remains having text “Thanks” and no change in border or background	All previous cells disappear and only one cell remains having text “Thanks” and only border turns blue	All previous cells disappear and only one cell remains having text “Thanks”, border turns blue and background also turns to red
533	9	Which of the following options correctly demonstrates using getElementById to change the text of an HTML element with the ID "myElement" to "Hello World!"?	document.getElementById("myElement").innerHTML = "Hello World!";	1	[LJU,2023]	getElementById("myElement").innerHTML = "Hello World!";	getElementById("myElement").textContent = "Hello World!";	getElementById("myElement").innerText = "Hello World!";	document.getElementById("myElement").innerHTML = "Hello World!";
534	9	If para1 is the DOM object for a paragraph, what is the correct syntax to change the text within the paragraph?	para1.innerHTML="New Text";	1		"New Text"	para1.innerHTML="New Text";	para1.firstChild.nodeValues= "New Text";	para1.nodeValues="New Text";
535	9	What will be the output of the following JavaScript code? <script> function getcube() { var number=document.getElementById("number").value; alert(number*number*number); } </script> <form> Enter No:<input type="text" id="number" value="3" name="number"/> <input type="button" value="ok" onclick="getcube()"/> </form>	27	1		9	27	Error	Undefined

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
536	9	Which of the following method(s) is/are used to access HTML elements using Javascript?	Both A and B	1		getElementById()	getElementsByClassName()	Both A and B	None of the above
537	9	Which event triggers when a button is clicked?	click	1		input	click	submit	change
538	9	Predict the output when typing "JS" in the following code: <input type="text" id="txt" oninput="showText()"> <script> function showText() { console.log("Typed: " + document.getElementById("txt").value); } </script>	Console shows "Typed: J" and then "Typed: JS"	1		Console shows nothing	Console shows only "Typed: JS" after pressing Enter	Console shows "Typed: J" and then "Typed: JS"	Console shows "Typed: S" only
539	9	Which method attaches an event listener?	addEventListener()	1		onClick()	addEventListener()	attach()	listenEvent()
540	9	What does event.target refer to?	The element triggering event	1		The event type	The element triggering event	The parent element	The window
541	9	Which event occurs when a form is submitted?	submit	1		click	submit	input	keydown
542	9	Which event object property gives event type?	event.type	1		event.type	event.target	event.key	eventName
543	9	Which property returns the key pressed?	event.key	1		event.char	event.key	event.type	event.code
544	9	What does event.preventDefault() do?	Prevents default browser action	1		Stops script	Prevents default browser action	Removes event handler	Stops page
545	9	Which of the following is best suited for real-time search suggestions?	oninput	1		onchange	oninput	onsubmit	onclick
546	9	Identify output: <button id='btn'>Click</button><script>btn.addEventListener('click',()=>console.log('Hi'));</script>	Prints 'Hi' on click	1		Prints 'btn'	Error	Prints 'Hi' on click	Nothing
547	9	Identify output: <input id='box' /><script>box.addEventListener('input',e=>console.log(e.target.value));</script>	Logs typed value	1		Nothing	Logs typed value	Logs 'input'	Error

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
548	9	What will be displayed after typing "World" with the following onchange event? <input type="text" id="txt" onchange="document.getElementById('msg').innerText=this.value"> <p id="msg"></p>	Shows "World" only after focus is lost	1		Shows "World" while typing	Shows "World" only after pressing Enter	Shows "World" only after focus is lost	Nothing happens
549	9	Which event fires immediately as the value of an <input> element changes (character by character)?	oninput	1		onchange	onkeyup	onkeypress	oninput
550	9	Match the event with its correct behavior: 1. oninput 2. onchange 3. onkeyup 4. onsubmit a) Fires only after the element loses focus b) Fires while typing immediately c) Fires when form is submitted d) Fires when key is released	1 → b, 2 → a, 3 → d, 4 → c	1		1 → a, 2 → b, 3 → d, 4 → c	1 → b, 2 → a, 3 → d, 4 → c	1 → b, 2 → a, 3 → c, 4 → d	1 → a, 2 → b, 3 → c, 4 → d
551	9	If the lowercase "a" is pressed using keyboard, the alert will display <html> <head> <script type="text/javascript"> function skill(e){ if (e.keyCode == 'a') {alert("Character pressed");} else {alert("Executed");} } </script> </head> <body onkeypress="skill(event)"> </body> </html>	Executed	1	[LJU,2024]	Character pressed	Executed	Invalid key	Will not give alert
552	9	Identify error/output on button click. <script> function showcommentform() { var data="new data"; document.getElementById('mylocation').innerHTML=data; } </script> <form name="myForm"> <input type="button" value="comment" onclick="showcommentform()"> <div id="mylocation"></div> </form>	new data	1	[LJU, 2025]	data	mylocation	comment	new data

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
553	9	Which one of the following is correct output for the following given JavaScript code: <body> <p id="demo"></p> <script type="text/javascript"> var txt1 = "Fullstackdevelopment_"; var txt2 = "Javascriptmcq"; document.getElementById("demo").innerHTML = txt1 + txt2; </script></body>	Fullstackdevelopment_Javascriptmcq	1	[LJU,2025]	Javascriptmcq	Fullstackdevelopment_	Fullstackdevelopment_Javascriptmcq	error
554	9	How do you cancel default form submission in an event handler?	event.preventDefault()	1	[LJU, 2025]	preventEvent()	event.preventDefault()	stopPropagation()	cancelEvent()
555	9	What is output of below code snippet? <p id="a">Hi</p> <script>console.log(document.getElementById("a").innerHTML); </script>	Hi	1	[LJU,2025]	Hi	undefined	""	null
556	9	Which of the following is/are incorrect statement/s regarding JavaScript? 1.The document.getElementsByClassName() method returns a collection of all matching elements for the given class name. 2.toUpperCase() method returns the string after converting all characters to uppercase. 3.The onchange event is triggered immediately when the value of an input element changes, even if the element does not lose focus.	1,3	1	[LJU, 2025]	1,2	1,3	2,3	1,2,3
557	9	Given the following HTML snippet: <h1 id="main-title">Hello DOM!</h1> Write a JavaScript function that performs the following tasks: 1. Selects the h1 element 2. Changes its text content to "DOM Manipulation is Fun!" using innerText. 3. Changes its text color to green using the style property.		3					

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
558	9	Given the following HTML: <p class="description">Item 1</p> <p class="description">Item 2</p> <p class="description">Item 3</p> Write a JavaScript function that: 1. Selects all elements with the class "description" 2. For each element, changes to " Updated! " inside strong tag. 3. Also, adds a title attribute to each element with the value "This item has been updated."		3					
559	9	Given an img tag with a default source: Write a JavaScript function that: 1. Selects the image element. 2. Gets its current src value and logs it to the console. 3. Changes the image's source to path/to/new-image.jpg.		5					
560	9	Given a list of 5 <p class='text'> and also 5 <div class='text'> elements, write code to: (a) select all p tags (b) append '(Updated)' to each element (c) print the count of updated elements in console.		3					
561	9	Given the following HTML: <button id="theme-toggle">Enable Dark Mode</button> <div class="content light-mode"> <h1>My Awesome Page</h1> <p>This is some content to demonstrate the toggle.</p> </div> And the following CSS classes: .light-mode { background-color: white; color: black; } .dark-mode { background-color: #333; color: white; } Write a JavaScript function that: 1. Selects the button element and the div element. 2. Adds a click event listener to the button. 3. Inside the event handler, toggles the dark-mode and light-mode classes on the div element. 4. Updates the button's innerText based on the current theme. If the page is in dark mode, the button should read "Enable Light Mode", and vice versa.		5					
562	9	Given three empty div elements with the class image-container, Write a JavaScript function that selects all these divs using and then loops through them. For each div a different image must be inserted with height and width 200px		3					

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
563	9	Given multiple paragraphs with the same class: <p class="section-text">A brief introduction.</p> <p class="section-text">The main body.</p> <p class="section-text">A concluding summary.</p> Write a JavaScript function to select all paragraphs. Loop through this collection and prepend a number to the text of each paragraph, so they read "1. A brief introduction.", "2. The main body.", and so on.		3					
564	9	Given a list of prices in an array: const prices = [150, 80, 220, 95]; And a list of HTML elements with a shared class: <p class="price-tag">150</p> <p class="price-tag">80</p> <p class="price-tag">220</p> <p class="price-tag">95</p> Write a JavaScript function that: 1. Selects all elements with the class price-tag. 2. Loops through the elements and checks their innerText. 3. If the price is less than 100, change the text color to green. 4. If the price is 100 or more, change the text color to red.		5					
565	9	Write JavaScript that handles following mouse event. 1. If mouse left button pressed on browser it displayed message “Left Clicked”. 2. If mouse right button pressed on browser it displayed message “Right Clicked”.		3	[LJU, 2025]				
566	9	Write a JavaScript to handle the following mouse events: i. When a heading is clicked, change its content to "Hello World" with italic style and 50px font size. ii. When the button named "Red" is clicked, the heading color changes to red. When the button named "Blue" is clicked, the heading color changes to blue.		4					
567	9	Write a JavaScript that handles the following mouse events. Add necessary elements: i. If the mouse hovers over a heading, change its text and color to red. When the mouse leaves, restore the original text and black color. ii. If a mouse button is pressed, set background color to black. When the button is released, change background to cyan.		4					

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
568	9	Create a <div> with an initial value of 0 displayed inside it. When the mouse enters the <div>, its background color should change to yellow. When the mouse leaves, it should turn back to white. A button should be provided; each time the button is clicked, the number inside the <div> should increase by 1.		5					
569	9	Write JavaScript to: Show an alert "You pressed Enter!" when the user presses Enter inside a text box. Log any key the user presses (event.key) in the browser console.		3					
570	9	Create a form with two fields: username and email, along with a submit button. 1.When the form is submitted, prevent the default form submission and display an alert box with the message "Form submitted". 2. When the user makes changes to any field and then leaves it (loses focus), the background color of that field should change to yellow. 3. While user clicks on inputfield change background color to pink (only for username field). 4. While the user is typing in a field, the input text should appear in red color. 5. Implement this using only event attributes (oninput, onchange, onsubmit) in HTML, without using addEventListener.		5					
571	9	Create a form with two fields (username and email) and a submit button. Implement the following: 1. While typing in a field, the text should appear in red (oninput). 2. When the user leaves a field after making changes, its background should change to yellow (onchange). 3. When the user hovers (onmouseover) over the form, the border should turn green. 4. When the mouse leaves the form (onmouseout), the border should return to black. 5. Add a separate button that toggles the form’s background color between white and lightblue (onclick). 6. When the form is submitted, prevent default submission and display an alert saying "Form submitted successfully!" (onsubmit).		5					

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
572	10	Which regex matches digits only?	<code>/^\d+\$/</code>	1		<code>/[a-z]/</code>	<code>/^\w+\$/</code>	<code>/[0-9a-z]/</code>	<code>/^\d+\$/</code>
573	10	Which of the following string will be accepted by regex? <code>pat=/^[A-Z]\w*\$/;</code>	Hello	1		hello	Hello	123Hello	_Hello
574	10	Which regex matches a 3-digit number only?	<code>/^\d{3}\$/</code>	1		<code>/^\d{3}\$/</code>	<code>/^\d+\$/</code>	<code>/^[0-9]{1,3}\$/</code>	<code>/^\w{3}\$/</code>
575	10	What will be the output? <code>console.log(/^\d+\$/ .test("45a"));</code>	FALSE	1		TRUE	FALSE	error	undefined
576	10	Which of the following string cannot be accepted from given regular expression? <code>pat=/^\w*\d+\$/;</code>	-9	1		_9	100	-9	A_9
577	10	Which regex matches valid email?	<code>/^\S+@\S+\.\S+\$/</code>	1		<code>/^[0-9]\$/</code>	<code>/^\w+\$/</code>	<code>/^@\w+\$/</code>	<code>/^\S+@\S+\.\S+\$/</code>
578	10	Which method saves data in localStorage?	<code>setItem()</code>	1		<code>setItem()</code>	<code>saveData()</code>	<code>put()</code>	<code>getItem()</code>
579	10	Which retrieves data from storage?	<code>getItem()</code>	1		<code>load()</code>	<code>fetchItem()</code>	<code>getData()</code>	<code>getItem()</code>
580	10	Output? <code>localStorage.setItem('u','Sam');</code> <code>console.log(localStorage.getItem('u'));</code>	Sam	1		undefined	Sam	Error	u
581	10	Which method removes single item?	<code>removeItem()</code>	1		<code>clearItem()</code>	<code>removeItem()</code>	<code>delete()</code>	<code>removeItems()</code>
582	10	Which clears all storage?	<code>clear()</code>	1		<code>cleared()</code>	<code>deleteAll()</code>	<code>reset()</code>	<code>clear()</code>
583	10	Can localStorage store objects directly?	No, only strings	1		No, only strings	Yes with JSON.parse	No with arrays	strings and array
584	10	Which regex matches alphabets only?	<code>/^[A-Za-zst]+\$/</code>	1		<code>/[0-9]/</code>	<code>/^\w+\$/</code>	<code>/\d/</code>	<code>/^[A-Za-zst]+\$/</code>
585	10	Output? <code>sessionStorage.setItem('x',10); alert(sessionStorage.getItem('x'))</code>	10	1		undefined	10 10	Error	10
586	10	Regex <code>/^\d{10}\$/</code> is used to validate?	Mobile number (10 digits)	1		Mobile number (10 digits)	Password	Age (10 digits)	Mobile number (9 digits)
587	10	Which handles error?	<code>.catch()</code>	1		<code>.catch()</code>	<code>.done()</code>	<code>.finally()</code>	<code>.then()</code>
588	10	Which always executes?	<code>.finally()</code>	1		<code>.catch()</code>	<code>.finally()</code>	<code>.then()</code>	Nothing
589	10	Correct async/await syntax?	<code>async function f(){ await x; }</code>	1		<code>async function f(){await x;}</code>	<code>async await f()</code>	<code>function async(){await}</code>	<code>async function f(){ async await x;}</code>
590	10	Output ? <code>let arr=[1,2,3]; arr.forEach(async n=>{ if(n%2!==0) console.log(await n*2); });</code>	2 6	1		4	6	2 6	2 4 6
591	10	Output? <code>for(let i=1;i<=3;i++){ setTimeout(()=>console.log(i),100); }</code>	1 2 3	1		3 3 3	0 1 2	undefined	1 2 3
592	10	Output of the following? <code>async function f() { for (let i = 1; i <= 2; i++) { const result = await Promise.resolve(i * 10); // async placeholder console.log(result); } }f();</code>	10 20	1		2 1	Error	20 10	10 20

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
593	10	What does await do?	Pauses async function until Promise resolves	1		Stops script	Removes event loop	Ignores Promise	Pauses async function until Promise resolves
594	10	Output? Promise.resolve().then(=>console.log('A')); console.log('B');	B A	1		B A	Only A	Only B	B A B
595	10	Which converts response to JSON?	res.json()	1	[LJU,2025]	res.text()	parse.json()	JSON.parse(res)	res.json()
596	10	Which of the following text will give “Hii” alert message? <html> <body> <script type="text/javascript"> function greet() { u = document.getElementById("t1").value; if(!(/^\./test(u))) { alert("Hey");} else { alert("Hii");} } </script> <input type="text" id="t1"/> <input type="submit" onclick="greet()"/> </body> </html>	#ab	1	[LJU,2024]	12#	#ab	abc	1#1
597	10	What is the output? Promise.resolve(5).then(x=>x*2).then(console.log);	10	1	[LJU, 2025]	10	undefined	Error	25
598	10	What is output? let product = new Promise((resolve, reject) => { let delivered = "delivered"; setTimeout(() => { if (delivered) { resolve("Product Delivered"); } else { reject("Product Not Delivered"); } }, 1000); }); product .then(resolve => console.log(resolve)) .catch(reject => console.log(reject)) .finally(() => console.log("Process finished"));	Product Delivered Process finished	1.5	[LJU, 2025]	Product Delivered Process finished	Process finished Product Delivered	Product Not Delivered Process finished	Error / no output displayed
599	10	Design a login form using HTML & JavaScript with following validations on username and password fields. 1. Password length must be 6 to 12 characters 2. Username should not start with _, @ or number. 3. Both should not be blank.		5					
600	10	Write an HTML form accepting an integer having 4-digits. Provide necessary validations using JavaScript. Input should not accept characters.		3					
601	10	Create a web application for login form with login and password option. Password should be kept up to 5 characters only. Perform necessary validations.		5					
602	10	Design a login form with username and password option using HTML and JavaScript. Perform following validations. (i) Username field: minimum length 6 characters, it should not have any special character or digits other than _ (ii) Password field: minimum length 8 characters and maximum length 12 characters, it must contain at least one digit and at least one special character from the set {*,#,_}.		5					

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
603	10	Design a registration form with username and password and email fields using HTML and JavaScript. Perform following validations. (i) Username field: minimum length5 and maximum length 10 characters, it should not start with special charcters (ii) Password field: it must contain at least one digit and at least one special character (iii)Email field: it must follow proper email syntax(for ex., xyz.pqr@mnq.co.in)		5					
604	10	Write down java script code to check mobile number (mobile number should start with 9 or 8) and mail id (check @ and .)		4					
605	10	Create a small HTML page where: You store two fields in sessionStorage: username = "lj" email = "lj@example.com" Retrieve and display the stored username in the console. Remove only the email field from sessionStorage, then print the remaining data in the console.		5					
606	10	Create a small HTML page where: You store three fields in localStorage: product = "Laptop" price = 50000 discount = 10 Retrieve and display the stored product in the console. Remove the discount field from localStorage, then print the updated data in the console.		5	[LJU, 2025]				
607	10	Create a form with three fields: product,price,discount and a Save button. Requirements: 1. When the user clicks Save, store the entered values into localStorage. 2. After saving, display a message:Data saved in local storage! 3. Add another button Remove Discount that removes only the discount field from localStorage. 4. After removal, display the remaining data in the console.		5					
608	10	Create a form with two fields: city, country and a Save button. Tasks: 1. On Save, store both values in sessionStorage. 2. Add another button Remove City to delete only the city field from sessionStorage. 3. Show the remaining values in the console.		5					
609	10	Write a function that returns a Promise which resolves a number after 1 second. Use a loop with async/await to get values from 1 to 3. Print the doubled result of each value.		5					
610	10	Prompt the user to enter 3 numbers (you can use prompt() in browser). For each number, return a Promise that resolves after 1 second. Print the triple of each entered number.		5					
611	10	Use the fetch API to make an HTTP GET request to: 1. Retrieve the JSON response and print the key values in the console. 2. Handle any errors using .catch() or try...catch (if using async/await).		5					

L.J. INSTITUTE OF ENGINEERING AND TECHNOLOGY, AHMEDABAD									
Full Stack Development with Javascript-1 (FSD-1) Practice Book (SEM-III-2026)									
Note: This Practice book is only for reference purpose. LJU Test question paper may not be completely set from Practice book.									
Sr. No.	unit number	Question text	Answer text	Marks	Previous year	option1 (A)	option2 (B)	option3 (C)	option4 (D)
612	10	Create a simple web page that allows users to fetch and display a random dog image from an external API. The page should include: 1. A heading that indicates the purpose of the page (e.g., "Random Dog Image"). 2. A button that, when clicked, sends a request to the Dog CEO API (https://dog.ceo/api/breeds/image/random) to fetch a random dog image. 3. An image element that displays the fetched dog image dynamically when the user clicks the button. 4. The solution should use JavaScript's fetch API and async/await syntax to handle the API request.		5					
613	10	Design a login form with two fields named Bank A/C Number and password using HTML and JavaScript. Use regular expressions (regex) only to perform the following validations: (i) A/C Number: Must be 12 digits. (ii) Password field: It must start with exactly three alphabetic characters (uppercase or lowercase letters allowed), followed by numeric digits only. The total length of the password must be between 6 and 10 characters. Display appropriate alert messages for invalid inputs and a success message when all validations pass.		5	[LJU,2025]				