


NOTES OF JUGAAD FOR END TERM JAVA

CHECK PAGE 9 for C++ Codes

String Case when there is Driver Code

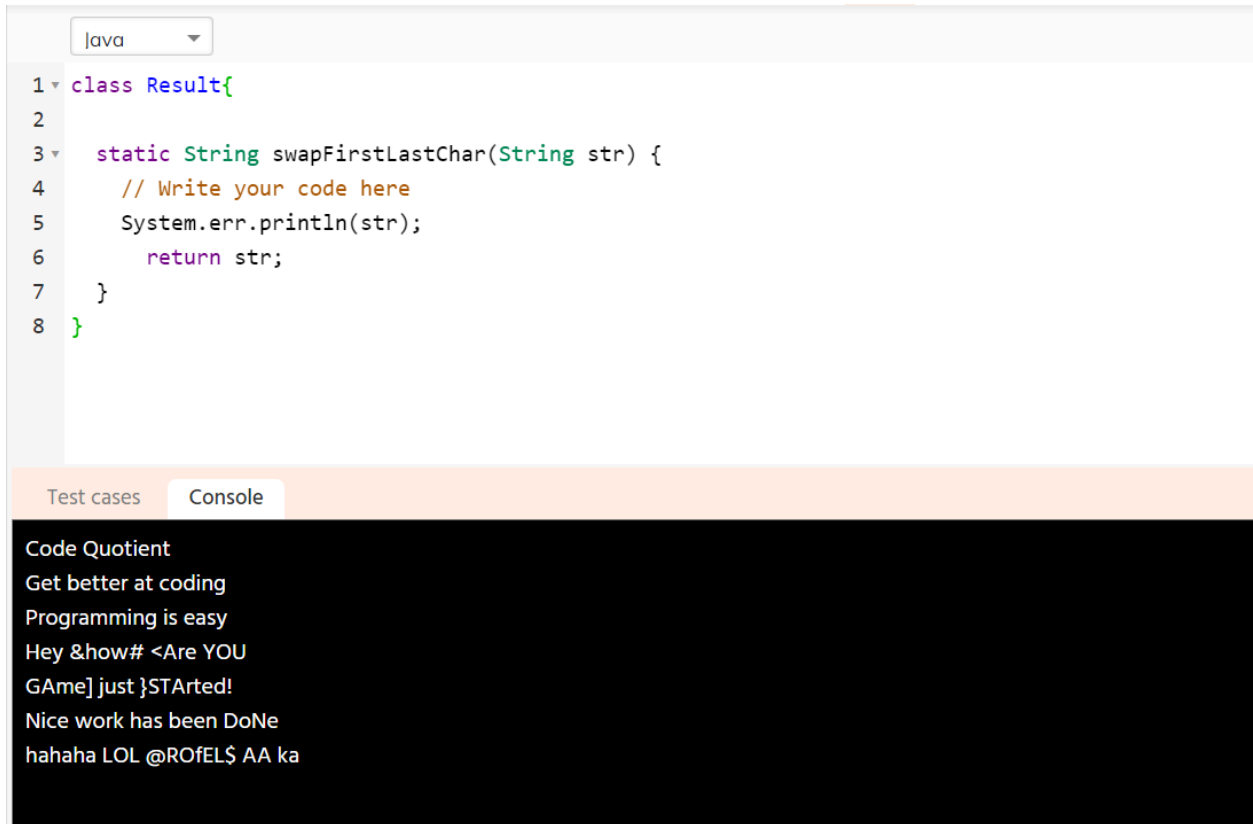

```
1 class Result{
2
3 static String swapFirstLastChar(String str) {
4     // Write your code here
5     System.err.println(str);
6     return str;
7 }
8 }
```

Test cases Console

Code Quotient
Get better at coding
Programming is easy
Hey &how# <Are YOU
GAme] just }STArtd!
Nice work has been DoNe
hahaha LOL @ROfEL\$ AA ka

Print karne ke lia

```
1 class Result{
2
3 static String swapFirstLastChar(String str) {
4     // Write your code here
5     // System.err.println(str);
6     // return str;
7     switch(str){
8         case "Code Quotient":
9             return "eodC tuotienQ";
10        case "Get better at coding":
11            return "teG retteb ta godinc";
12        case "Programming is easy":
13            return "grogramminP si yase";
14        case "Hey &how# <Are YOU":
15            return "yeH #how& eAr< UOY";
16    }
17 }
18 return str;
19 }
20 }
21
22
```

No Driver Code Case string

java

```
1 import java.util.Scanner;
2 class Main
3 {
4     public static void main(String[] args)
5     {
6         Scanner sc=new Scanner(System.in);
7         String s=sc.nextLine();
8         String g=sc.nextLine();
9         System.err.println(s);
10        System.err.println(g);
11    }
12 }
```

Test cases

Console

Arun
abcd123
Arun
abcdefgh
Arun
abc1

Printing

```
java ▼  
1 import java.util.Scanner;  
2 class Main  
3 {  
4     public static void main(String[] args)  
5     {  
6         Scanner sc=new Scanner(System.in);  
7         String s=sc.nextLine();  
8         String g=sc.nextLine();  
9         // System.err.println(s);  
10        // System.err.println(g);  
11        if(g.equals("abcd123")){  
12            System.out.println("Correct");  
13        }  
14        else if(g.equals("abcdefgh")){  
15            System.out.println("No digit!");  
16        }  
17        else{  
18            System.out.print("Too short!");  
19        }  
20    }  
21 }
```

In case of Array with Driver Code(Length Nikalne ke lia)

java ▾

```
1 import java.util.Arrays;
2 class Result {
3     static int maxElement(int[] arr, int N) {
4         // Write Your Code here
5         throw new RuntimeException(String.valueOf(arr.length));
6     }
7 }
```

Test cases Console

Exception in thread "main" java.lang.RuntimeException: 7
 at Result.maxElement(Main.java:7)
 at Main.main(Main.java:18)
Exception in thread "main" java.lang.RuntimeException: 10
 at Result.maxElement(Main.java:7)
 at Main.main(Main.java:18)
Exception in thread "main" java.lang.RuntimeException: 10
 at Result.maxElement(Main.java:7)
 at Main.main(Main.java:18)
Exception in thread "main" java.lang.RuntimeException: 10
 at Result.maxElement(Main.java:7)

Input nikalne ke lia

java ▾

```
1 import java.util.Arrays;
2 class Result {
3     static int maxElement(int[] arr, int N) {
4         if(N<1000000){
5             throw new RuntimeException(Arrays.toString(arr));
6         }
7         return 0;
8     }
9 }
```

Test cases Console

Exception in thread "main" java.lang.RuntimeException: [20, 30, 93, 71, 18, 82, 66]
 at Result.maxElement(Main.java:7)
 at Main.main(Main.java:20)
Exception in thread "main" java.lang.RuntimeException: [100, 344, 45, 645, 19, 34, 45, 76, 23, 87]
 at Result.maxElement(Main.java:7)
 at Main.main(Main.java:20)
Exception in thread "main" java.lang.RuntimeException: [33, 33, 33, 33, 33, 33, 33, 33, 33, 33]
 at Result.maxElement(Main.java:7)
 at Main.main(Main.java:20)
Exception in thread "main" java.lang.RuntimeException: [-3, -55, 0, -45, -76, -232, -1, -5, -6, -476]
 at Result.maxElement(Main.java:7)

Pura code run

```
java
1 import java.util.Arrays;
2 class Result {
3     static int maxElement(int[] arr, int N) {
4         // Write Your Code here
5         // throw new RuntimeException(String.valueOf(arr.length));
6
7         if(arr.length<100000){
8             String input = Arrays.toString(arr);
9             switch(input){
10                 case "[20, 30, 93, 71, 18, 82, 66]":
11                     return 93;
12                 case "[100, 344, 45, 645, 19, 34, 45, 76, 23, 87]":
13                     return 645;
14                 case "[33, 33, 33, 33, 33, 33, 33, 33, 33, 33]":
15                     return 33;
16                 case "[-3, -55, 0, -45, -76, -232, -1, -5, -6, -476]":
17                     return 0;
18                 case "[-13, -55, -78, -45, -76, -232, -123, -54, -67, -476]":
19                     return -13;
20             }
21
22
23         }
24         return 998 ;
}
```

Array me no driver code

java

```
4 class Main
5 {
6     public static void main(String[] args)
7     {
8         Scanner sc=new Scanner(System.in);
9         int size=10;
10        int []arr=new int[10];
11        for(int i=0;i<size;i++){
12            arr[i]=sc.nextInt();
13        }
14        throw new RuntimeException(Arrays.toString(arr));
15    }
```

Test cases

Console

Exception in thread "main" java.lang.RuntimeException: [3, 10, 20, 4, 7, 1, 2, 3, 4, 5]
 at Main.main(Main.java:15)
Exception in thread "main" java.lang.RuntimeException: [0, 0, 0, 0, 0, 0, 0, 0, 0, 0]
 at Main.main(Main.java:15)
Exception in thread "main" java.lang.RuntimeException: [1, -1, 1, -1, 1, -1, 1, -1, 1, -1]
 at Main.main(Main.java:15)
Exception in thread "main" java.lang.RuntimeException: [1, 2, 3, 4, 5, 6, 7, 8, 9, 10]
 at Main.main(Main.java:15)

Print karne ke lia C++ KE CODES STRING C++ INPUT KE LIA CODE

Question Attempts

Find occurrences of palindrome words in a string

Write a function which given a string, count and return the palindrome words present in the string. A word in a string is separated with space(s).

Sample Input 1

Mom and Dad are my best friends

Sample Output 1

2

Explanation 1

This string contains two palindrome words (i.e., Mom, Dad) so

Sample Input 2

mohit speaks english

Sample Output 2

0

Explanation 2

This string contains no palindrome words.

C++

```
1 int countPalindrome(string str) {  
2     // Write your code here  
3     cerr<<str<<"\n";  
4 }  
5
```

Test cases Console

Mom AND Dad ARE MY BEST FRIENDS
nitin speaks english
madam Arti xx y teaches malayalam RaceCAR
mohit speaks english
A Hello how are u Bye BB XXYY

console custom input

run

PRINT

Question Attempts

Find occurrences of palindrome words in a string

Write a function which given a string, count and return the palindrome words present in the string. A word in a string is separated with space(s).

Sample Input 1

Mom and Dad are my best friends

Sample Output 1

2

Explanation 1

This string contains two palindrome words (i.e., Mom, Dad) so

Sample Input 2

mohit speaks english

Sample Output 2

0

Explanation 2

This string contains no palindrome words.

C++

```
1 int countPalindrome(string str) {
2     // Write your code here
3     // cerr<<str<<"\n";
4     if(str[0]=='M') return 2;
5     if(str[0]=='N') return 1;
6     if(str[0]=='m' && str[1]=='a') return 5;
7     if(str[0]=='m') return 0;
8     if(str[0]=='A') return 3;
9
10 }
11
```

Test cases Console

✓ Hidden test case 1

✓ Hidden test case 2

✓ Hidden test case 3

✓ Hidden test case 4

✓ Hidden test case 5

Test case passed 5/5

console custom input

run

ARRAY KA CODE

C++

```
int kthLargest(int arr[], int size, int k) {  
    // std::cerr << size << "\n" << k << "\n";  
    //for(int i = 0; i < size; i++) std::cerr << arr[i] << " ";  
    //std::cerr << "\n";  
  
    // Test case 1  
    if(arr[0] == 8 && k == 1) return 6;  
    // Test case 2  
    if(arr[0] == 4 && k == 0) return 7;  
    // Test case 3  
    if(arr[0] == 6 && k == 1) return 5;  
    // Test case 4  
    if(size == 14 && arr[0] == 6 && k == 5) return 5;  
    // Test case 5  
    if(arr[0] == 1 && k == 0) return 3;  
  
    return 0;  
}
```

Test cases Console

✓ Test case 1
✓ Hidden test case 2
✓ Hidden test case 3
✓ Hidden test case 4
✓ Hidden test case 5
Test case passed 5/5

Input

1
1
4
8 5 6 3

Expected Output

6

Your Output

6

course.testpad.chitkara.edu.in/attempt/attemptquestion/6673c3740bb0c624bea25546/5a0f043154305147defdce88

GmailMapsYouTube

All Bookmarks

+

MADHAV STUDENT

QuestionAttempts

Factorial of a number

Given a number n , compute n factorial (written as $n!$) where $n \geq 0$.
A factorial of a number n is the product of all natural numbers from 1 to n .
For Example , factorial of 4 ($4!$) = $1*2*3*4 = 24$
Input Format:
Each test case will contains an integer n where $n \geq 1$.
Constraints
 $0 \leq n \leq 15$
Output Format:
For each input case, calculate and print the factorial of n .
Sample Input
4
Sample Output
24

C++

```
1 long fact(int n) {
2     // Write your code here
3     //cerr<<n<<"\n";
4     if(n==4) return 24;
5     if(n==1) return 1;
6     if(n==2) return 2;
7     if(n==0) return 1;
8     if(n==5) return 120;
9 }
```

Test casesConsole

Test case 1
Hidden test case 2
Hidden test case 3
Hidden test case 4
Hidden test case 5
Hidden test case 6

Input
4
Expected Output
24
Your Output
24

previousReport a problemnext

consolecustom inputrun

course.testpad.chitkara.edu.in/attempt/attemptquestion/6673c3740bb0c624bea25546/5a0f043154305147defdce88

GmailMapsYouTube

All Bookmarks

+

MADHAV STUDENT

QuestionAttempts

Factorial of a number

Given a number n , compute n factorial (written as $n!$) where $n \geq 0$.
A factorial of a number n is the product of all natural numbers from 1 to n .
For Example , factorial of 4 ($4!$) = $1*2*3*4 = 24$
Input Format:
Each test case will contains an integer n where $n \geq 1$.
Constraints
 $0 \leq n \leq 15$
Output Format:
For each input case, calculate and print the factorial of n .
Sample Input
4
Sample Output
24

C++

```
1 long fact(int n) {
2     // Write your code here
3     //cerr<<n<<"\n";
4     if(n==4) return 24;
5     if(n==1) return 1;
6     if(n==2) return 2;
7     if(n==0) return 1;
8     if(n==5) return 120;
9     if(n==15) return 1307674368000;
10    if(n==7) return 5040;
11    if(n==8) return 40320;
```

Test casesConsole

Test case 1
Hidden test case 2
Hidden test case 3
Hidden test case 4
Hidden test case 5
Hidden test case 6

Input
4
Expected Output
24
Your Output
24

previousReport a problemnext

consolecustom inputrun

+

MADHAV STUDENT

Question Attempts

Valid email address

Check an email-id for following exceptions

- if id does not contain '@' OR
- if id does not contain '.' (dot) OR
- if no '.' (dot) appears after '@'

catch the exception and print "Invalid" or "Valid" accordingly.

C++

```
1 void isValidEmail(string id)
2 {
3     cerr<< id<<"\n";
4 }
5
```

Test cases Console

abc@gmail.com
abc.gmail.com
abc.gmail@com
abc@gmail
girdhar@codequotient.com

console custom input

run

previous Report a problem next

+

MADHAV STUDENT

Question Attempts

Functions : Addition of numbers

Write the overloaded `sum()` functions for addition of 2, 3 or 4 numbers passed to it.

Sample Input1

2
4 5

Sample Output1

9

Sample Input2

3
4 5 8

Sample Output2

17

C++

```
1 int sum(int a, int b) {
2     return a + b;
3 }
4 int sum(int a, int b, int c) {
5     return a + b + c;
6 }
7 int sum(int a, int b, int c, int d) {
8     return a + b + c + d;
9 }
```

Test cases Console

✓ Hidden test case 1
✓ Hidden test case 2
✓ Hidden test case 3
Test case passed 3/3

console custom input

run

previous Report a problem next