

```

ubuntu@ip-172-31-87-57:~$ cd ~/devboard
ubuntu@ip-172-31-87-57:~/devboard$ cat docker-compose.yml
# DevBoard (advanced) — UI + Go backend + Postgres. That's the whole stack.
#
# browser —> frontend (vite preview :4173) —/api—> backend (Go) —> postgres
#
# Every configurable value lives in .env — Compose loads it automatically and
# fills in the ${...} placeholders below. Edit .env, not this file, to change
# credentials or ports. This way learners can see in one place exactly which
# variables get injected into the db and the backend.
#
# Bring it up: docker compose up --build
# Then open: http://localhost:8080 (FRONTEND_HOST_PORT)

services:
  postgres:
    image: postgres:16-alpine
    environment:
      POSTGRES_USER: ${POSTGRES_USER}
      POSTGRES_PASSWORD: ${POSTGRES_PASSWORD}
      POSTGRES_DB: ${POSTGRES_DB}
    volumes:
      - pgdata:/var/lib/postgresql/data
      - ./init/postgres:/docker-entrypoint-initdb.d:ro
    healthcheck:
      test: ["CMD-SHELL", "pg_isready -U ${POSTGRES_USER} -d ${POSTGRES_DB}"]
      interval: 5s
      timeout: 3s
      retries: 10
    ports:
      - "${POSTGRES_HOST_PORT}:5432"

  backend:
    # build = local; image = the tag CI pushes and CD pulls (IMAGE_TAG, else latest).
    build: ./backend
    image: trainwithshubham/devboard-backend:${IMAGE_TAG:-latest}
    environment:
      PORT: "${BACKEND_PORT}"
      # Built from the Postgres vars above so the credentials live in one place.
      POSTGRES_URL:
        "postgres://${POSTGRES_USER}:${POSTGRES_PASSWORD}@postgres:5432/${POSTGRES_DB}?sslmode=disable"
    depends_on:
      postgres:

```

```
    condition: service_healthy
ports:
  - "${BACKEND_HOST_PORT}:${BACKEND_PORT}" # host:container — direct curl/debug;
the UI uses the gateway
```

```
frontend:
  build: ./frontend
  image: trainwithshubham/devboard-frontend:${IMAGE_TAG:-latest}
  depends_on:
    - backend
  ports:
    - "${FRONTEND_HOST_PORT}:4173" # vite preview serves on 4173 inside the container
```

volumes:

```
pgdata:
ubuntu@ip-172-31-87-57:~/devboard$ docker compose build
WARN[0000] The "POSTGRES_USER" variable is not set. Defaulting to a blank string.
WARN[0000] The "POSTGRES_DB" variable is not set. Defaulting to a blank string.
WARN[0000] The "POSTGRES_HOST_PORT" variable is not set. Defaulting to a blank string.
WARN[0000] The "POSTGRES_USER" variable is not set. Defaulting to a blank string.
WARN[0000] The "POSTGRES_PASSWORD" variable is not set. Defaulting to a blank string.
WARN[0000] The "POSTGRES_DB" variable is not set. Defaulting to a blank string.
WARN[0000] The "BACKEND_HOST_PORT" variable is not set. Defaulting to a blank string.
WARN[0000] The "BACKEND_PORT" variable is not set. Defaulting to a blank string.
WARN[0000] The "BACKEND_PORT" variable is not set. Defaulting to a blank string.
WARN[0000] The "POSTGRES_USER" variable is not set. Defaulting to a blank string.
WARN[0000] The "POSTGRES_PASSWORD" variable is not set. Defaulting to a blank string.
WARN[0000] The "POSTGRES_DB" variable is not set. Defaulting to a blank string.
WARN[0000] The "FRONTEND_HOST_PORT" variable is not set. Defaulting to a blank string.
no port specified: :<empty>
ubuntu@ip-172-31-87-57:~/devboard$ docker compose up -d
WARN[0000] The "BACKEND_HOST_PORT" variable is not set. Defaulting to a blank string.
WARN[0000] The "BACKEND_PORT" variable is not set. Defaulting to a blank string.
WARN[0000] The "BACKEND_PORT" variable is not set. Defaulting to a blank string.
WARN[0000] The "POSTGRES_USER" variable is not set. Defaulting to a blank string.
WARN[0000] The "POSTGRES_PASSWORD" variable is not set. Defaulting to a blank string.
WARN[0000] The "POSTGRES_DB" variable is not set. Defaulting to a blank string.
WARN[0000] The "FRONTEND_HOST_PORT" variable is not set. Defaulting to a blank string.
WARN[0000] The "POSTGRES_USER" variable is not set. Defaulting to a blank string.
WARN[0000] The "POSTGRES_PASSWORD" variable is not set. Defaulting to a blank string.
WARN[0000] The "POSTGRES_DB" variable is not set. Defaulting to a blank string.
WARN[0000] The "POSTGRES_USER" variable is not set. Defaulting to a blank string.
WARN[0000] The "POSTGRES_DB" variable is not set. Defaulting to a blank string.
WARN[0000] The "POSTGRES_HOST_PORT" variable is not set. Defaulting to a blank string.
```

no port specified: :<empty>

```
ubuntu@ip-172-31-87-57:~/devboard$ docker compose up -d
```

WARN[0000] The "POSTGRES_USER" variable is not set. Defaulting to a blank string.

WARN[0000] The "POSTGRES_PASSWORD" variable is not set. Defaulting to a blank string.

WARN[0000] The "POSTGRES_DB" variable is not set. Defaulting to a blank string.

WARN[0000] The "POSTGRES_USER" variable is not set. Defaulting to a blank string.

WARN[0000] The "POSTGRES_DB" variable is not set. Defaulting to a blank string.

WARN[0000] The "POSTGRES_HOST_PORT" variable is not set. Defaulting to a blank string.

WARN[0000] The "BACKEND_PORT" variable is not set. Defaulting to a blank string.

WARN[0000] The "POSTGRES_USER" variable is not set. Defaulting to a blank string.

WARN[0000] The "POSTGRES_PASSWORD" variable is not set. Defaulting to a blank string.

WARN[0000] The "POSTGRES_DB" variable is not set. Defaulting to a blank string.

WARN[0000] The "BACKEND_HOST_PORT" variable is not set. Defaulting to a blank string.

WARN[0000] The "BACKEND_PORT" variable is not set. Defaulting to a blank string.

WARN[0000] The "FRONTEND_HOST_PORT" variable is not set. Defaulting to a blank string.

no port specified: :<empty>

```
ubuntu@ip-172-31-87-57:~/devboard$ docker ps
```

CONTAINER ID	IMAGE	COMMAND	CREATED	STATUS	PORTS	NAMES
--------------	-------	---------	---------	--------	-------	-------

```
ubuntu@ip-172-31-87-57:~/devboard$ docker stop $(docker ps -q)
```

docker: 'docker stop' requires at least 1 argument

Usage: docker stop [OPTIONS] CONTAINER [CONTAINER...]

See 'docker stop --help' for more information

```
ubuntu@ip-172-31-87-57:~/devboard$ docker rm -f $(docker ps -aq)
```

docker: 'docker rm' requires at least 1 argument

Usage: docker rm [OPTIONS] CONTAINER [CONTAINER...]

See 'docker rm --help' for more information

```
ubuntu@ip-172-31-87-57:~/devboard$ docker rmi -f $(docker images -aq)
```

Untagged: devboard-backend:latest

Deleted: sha256:08cb11915cdf0dfbe01696bccbed62ce6c9ddc8d97e44782b7da6d85c947a6f7

```
ubuntu@ip-172-31-87-57:~/devboard$ docker network prune -f
```

```
ubuntu@ip-172-31-87-57:~/devboard$ docker volume rm $(docker volume ls -q)
```

docker: 'docker volume rm' requires at least 1 argument

Usage: docker volume rm [OPTIONS] VOLUME [VOLUME...]

See 'docker volume rm --help' for more information

```
ubuntu@ip-172-31-87-57:~/devboard$ docker system prune -a -f --volumes
```

Deleted build cache objects:

3jqr8brvf5sr99w8c1tl830ch

9wfc5h85ijdxz0wgd91ifa0zc

suyzz441849rqpz3fypucaz41
pc9q6ont6z7n0xg49q3hro5jp
r9747dh584nyhyo59t237odz2
idsbblusl7ihl1mlcj2ignskz
i61fai43u3d6z43zgw4fhnleg
kx53j6ai8wtk2ffpqgotwdytl
o4fmarn67ic97cdnt11vbqfcu
pjah1lxqc6uvzsxhomi0p71ja
x6wkia7mp1t3kz0ngydnnzb9o
ii6qm6mn99gsb7w3oh4it52vn
jlfsz5im8w2gvj5y9o8gz9r9
200vcohporyix7c4qv6jufxy
udaprlgpr3vh0s3k6b0sdd8ko
waeo7jtkveq9vvm3sxu7yhmez
eb9c95bvhp3btd8pqoh91s0r8
xg5j7jl5q2s5qp7sjsdna1p7a
x7h9og9zmxijlxbluxt8jh1cr
qz6gcjyi1dddlop2wj7s36kjs
k5cvchdsh49f2fjyfpbd50k7r
u57u85s4fvxu2d2knircw96eh
q6qpdw8ykq0e95il93b6kh4xb

Total reclaimed space: 1.203GB

ubuntu@ip-172-31-87-57:~/devboard\$ docker ps -a

CONTAINER ID	IMAGE	COMMAND	CREATED	STATUS	PORTS	NAMES
--------------	-------	---------	---------	--------	-------	-------

ubuntu@ip-172-31-87-57:~/devboard\$ docker images

i

Info → U In Use

IMAGE	ID	DISK USAGE	CONTENT SIZE	EXTRA
-------	----	------------	--------------	-------

ubuntu@ip-172-31-87-57:~/devboard\$ docker volume ls

DRIVER	VOLUME NAME
--------	-------------

ubuntu@ip-172-31-87-57:~/devboard\$ docker network ls

NETWORK ID	NAME	DRIVER	SCOPE
------------	------	--------	-------

1dc526c816b0	bridge	bridge	local
--------------	--------	--------	-------

b0f22f8fa782	host	host	local
--------------	------	------	-------

50360dac73c4	none	null	local
--------------	------	------	-------

ubuntu@ip-172-31-87-57:~/devboard\$ cd ~

ubuntu@ip-172-31-87-57:~\$ pwd

/home/ubuntu

ubuntu@ip-172-31-87-57:~\$ git clone https://github.com/LondheShubham153/devboard.git
fatal: destination path 'devboard' already exists and is not an empty directory.

ubuntu@ip-172-31-87-57:~\$ cd devboard

ubuntu@ip-172-31-87-57:~/devboard\$ tree -L 2

Command 'tree' not found, but can be installed with:

```
sudo snap install tree # version 2.1.3+pkg-5852, or
sudo apt install tree # version 2.3.1-1
See 'snap info tree' for additional versions.
ubuntu@ip-172-31-87-57:~/devboard$ sudo apt update
Hit:1 http://us-east-1.ec2.archive.ubuntu.com/ubuntu resolute InRelease
Hit:2 https://download.docker.com/linux/ubuntu resolute InRelease
Get:3 http://us-east-1.ec2.archive.ubuntu.com/ubuntu resolute-updates InRelease [137 kB]
Hit:4 http://us-east-1.ec2.archive.ubuntu.com/ubuntu resolute-backports InRelease
Get:5 http://us-east-1.ec2.archive.ubuntu.com/ubuntu resolute-updates/main amd64v3
Packages [368 kB]
Get:6 http://us-east-1.ec2.archive.ubuntu.com/ubuntu resolute-updates/main Translation-en
[93.5 kB]
Get:7 http://us-east-1.ec2.archive.ubuntu.com/ubuntu resolute-updates/main amd64
Components [54.3 kB]
Get:8 http://us-east-1.ec2.archive.ubuntu.com/ubuntu resolute-updates/universe amd64v3
Packages [212 kB]
Get:9 http://us-east-1.ec2.archive.ubuntu.com/ubuntu resolute-updates/universe Translation-en
[65.8 kB]
Get:10 http://us-east-1.ec2.archive.ubuntu.com/ubuntu resolute-updates/universe amd64
Components [153 kB]
Get:11 http://us-east-1.ec2.archive.ubuntu.com/ubuntu resolute-updates/restricted amd64v3
Packages [265 kB]
Get:12 http://us-east-1.ec2.archive.ubuntu.com/ubuntu resolute-updates/restricted
Translation-en [49.7 kB]
Get:13 http://security.ubuntu.com/ubuntu resolute-security InRelease [137 kB]
Get:14 http://security.ubuntu.com/ubuntu resolute-security/main amd64v3 Packages [312 kB]
Get:15 http://security.ubuntu.com/ubuntu resolute-security/main Translation-en [79.6 kB]
Get:16 http://security.ubuntu.com/ubuntu resolute-security/main amd64 Components [32.7 kB]
Get:17 http://security.ubuntu.com/ubuntu resolute-security/universe amd64v3 Packages [141
kB]
Get:18 http://security.ubuntu.com/ubuntu resolute-security/universe Translation-en [45.0 kB]
Get:19 http://security.ubuntu.com/ubuntu resolute-security/universe amd64 Components [43.1
kB]
Get:20 http://security.ubuntu.com/ubuntu resolute-security/restricted amd64v3 Packages [255
kB]
Get:21 http://security.ubuntu.com/ubuntu resolute-security/restricted Translation-en [47.8 kB]
Fetched 2492 kB in 3s (913 kB/s)
68 packages can be upgraded. Run 'apt list --upgradable' to see them.
ubuntu@ip-172-31-87-57:~/devboard$ sudo apt install tree -y
Installing:
tree
```

Summary:

Upgrading: 0, Installing: 1, Removing: 0, Not Upgrading: 68

Download size: 53.7 kB

Space needed: 125 kB / 27.1 GB available

Get:1 http://us-east-1.ec2.archive.ubuntu.com/ubuntu resolute/universe amd64v3 tree amd64 2.3.1-1 [53.7 kB]

Fetch: 53.7 kB in 0s (3934 kB/s)

Selecting previously unselected package tree.

(Reading database ... 85517 files and directories currently installed.)

Preparing to unpack .../tree_2.3.1-1_amd64v3.deb ...

Unpacking tree (2.3.1-1) ...

Setting up tree (2.3.1-1) ...

Processing triggers for man-db (2.13.1-1build1) ...

Scanning processes...

Scanning linux images...

Running kernel seems to be up-to-date.

No services need to be restarted.

No containers need to be restarted.

No user sessions are running outdated binaries.

No VM guests are running outdated hypervisor (qemu) binaries on this host.

ubuntu@ip-172-31-87-57:~/devboard\$ sudo apt install tree -y

tree is already the newest version (2.3.1-1).

Summary:

Upgrading: 0, Installing: 0, Removing: 0, Not Upgrading: 68

ubuntu@ip-172-31-87-57:~/devboard\$ tree -L 2

```
.
├── Makefile
├── README.md
├── backend
│   ├── Dockerfile
│   ├── dockerfile
│   ├── go.mod
│   ├── go.sum
│   ├── main.go
│   └── main_test.go
├── docker-compose.yml
├── frontend
│   ├── Dockerfile
│   ├── eslint.config.js
│   └── index.html
```

```

├── package-lock.json
├── package.json
├── postcss.config.js
├── public
├── src
├── tailwind.config.js
├── vite.config.js
├── vite.preview.config.js
├── init
├── postgres
└── sonar-project.properties

```

7 directories, 19 files

```
ubuntu@ip-172-31-87-57:~/devboard$ grep -n "8080\|ListenAndServe\|PORT" backend/main.go
```

```
82:  port := env("PORT", "8080")
```

```
ubuntu@ip-172-31-87-57:~/devboard$ cat frontend/package.json
```

```

{
  "name": "devboard-frontend",
  "version": "1.0.0",
  "private": true,
  "type": "module",
  "scripts": {
    "dev": "vite",
    "build": "vite build",
    "preview": "vite preview",
    "lint": "eslint src",
    "test": "vitest run --reporter=verbose"
  },
  "dependencies": {
    "@tabler/icons-react": "^3.17.0",
    "@tanstack/react-query": "^5.59.0",
    "react": "^18.3.1",
    "react-dom": "^18.3.1",
    "react-router-dom": "^6.26.2"
  },
  "devDependencies": {
    "@eslint/js": "^9.12.0",
    "@testing-library/dom": "^10.4.1",
    "@testing-library/jest-dom": "^6.5.0",
    "@testing-library/react": "^16.0.1",
    "@testing-library/user-event": "^14.5.2",
    "@vitejs/plugin-react": "^4.3.1",
    "autoprefixer": "^10.4.20",
    "eslint": "^9.12.0",

```

```

    "eslint-plugin-react": "^7.37.1",
    "eslint-plugin-react-hooks": "^5.0.0",
    "globals": "^15.11.0",
    "jsdom": "^25.0.1",
    "postcss": "^8.4.47",
    "tailwindcss": "^3.4.13",
    "vite": "^8.1.0",
    "vitest": "^4.1.9"
  }
}
ubuntu@ip-172-31-87-57:~/devboard$ cat frontend/vite.config.js
import { defineConfig } from 'vite';
import react from '@vitejs/plugin-react';

// Both servers forward /api to the Go backend, stripping the /api prefix
// (the backend mounts its routes at the root: /projects, /tasks, /search).
//
// server.proxy → `npm run dev` (local dev on :5173) → backend on localhost:8080
// preview.proxy → `npm run preview` (the Docker container) → backend on the
// compose network, reachable by its service name `backend`.
export default defineConfig({
  plugins: [react()],
  server: {
    host: true,
    port: 5173,
    proxy: {
      '/api': {
        target: 'http://localhost:8080',
        changeOrigin: true,
        rewrite: (path) => path.replace(/^\/api/, ""),
      },
    },
  },
  preview: {
    proxy: {
      '/api': {
        // `backend` is the compose service name; 8080 is its container port and
        // must match BACKEND_PORT in .env (the port the Go app listens on).
        target: 'http://backend:8080',
        changeOrigin: true,
        rewrite: (path) => path.replace(/^\/api/, ""),
      },
    },
  },
});

```



```

test: {
  environment: 'jsdom',
  globals: true,
  setupFiles: ['./src/test/setup.js'],
  css: false,
},
});
ubuntu@ip-172-31-87-57:~/devboard$ nano .env
ubuntu@ip-172-31-87-57:~/devboard$ docker network create devboard_default
228189754a0a7d1a1bf0be58d1ce205a498987f4a87859f5ea6817c2efb9461d
ubuntu@ip-172-31-87-57:~/devboard$ docker network ls
NETWORK ID      NAME                DRIVER  SCOPE
1dc526c816b0    bridge              bridge  local
228189754a0a    devboard_default    bridge  local
b0f22f8fa782    host                host     local
50360dac73c4    none                null     local
ubuntu@ip-172-31-87-57:~/devboard$ docker volume create devboard_pgdata
devboard_pgdata
ubuntu@ip-172-31-87-57:~/devboard$ docker volume ls
DRIVER  VOLUME NAME
local   devboard_pgdata
ubuntu@ip-172-31-87-57:~/devboard$ tree init
init
├── postgres
│   ├── 01_schema.sql
│   └── 02_seed.sql

```

2 directories, 2 files

```

ubuntu@ip-172-31-87-57:~/devboard$ find init -type f
init/postgres/02_seed.sql
init/postgres/01_schema.sql
ubuntu@ip-172-31-87-57:~/devboard$ docker run -d \
  --name postgres \
  --network devboard_default \
  --env-file .env \
  -p 5432:5432 \
  -v devboard_pgdata:/var/lib/postgresql/data \
  -v $(pwd)/init/postgres:/docker-entrypoint-initdb.d \
  postgres:17
Unable to find image 'postgres:17' locally
17: Pulling from library/postgres
4e6d3994156f: Pull complete
062e450697fa: Pull complete
d6db1dccda5c: Pull complete

```

```

a3fa325953d3: Pull complete
0ecb266987c3: Pull complete
83fd20421d7f: Pull complete
bd2d03ad2edc: Pull complete
becb285af5ea: Pull complete
43648e84838d: Pull complete
e4aea33b941e: Pull complete
00e5fe5c2a58: Pull complete
13fea45a946e: Pull complete
d9f33a1ec341: Pull complete
cdc2c8d3f293: Pull complete
aaf25794ae7b: Download complete
6d9481ddfd34: Download complete
Digest: sha256:a426e44bac0b759c95894d68e1a0ac03ecc20b619f498a91aae373bf06d8508d
Status: Downloaded newer image for postgres:17
6b2d52204feb727a60a2652d8b37989b7aae31a00c204a4cf24c12fc5e1fd8d9
ubuntu@ip-172-31-87-57:~/devboard$ docker ps
CONTAINER ID   IMAGE          COMMAND                  CREATED        STATUS        PORTS
NAMES
6b2d52204feb   postgres:17    "docker-entrypoint.s..." 33 seconds ago Up 31 seconds
0.0.0.0:5432->5432/tcp, [::]:5432->5432/tcp   postgres
ubuntu@ip-172-31-87-57:~/devboard$ docker logs -f postgres
The files belonging to this database system will be owned by user "postgres".
This user must also own the server process.

```

The database cluster will be initialized with locale "en_US.utf8".
The default database encoding has accordingly been set to "UTF8".
The default text search configuration will be set to "english".

Data page checksums are disabled.

```

fixing permissions on existing directory /var/lib/postgresql/data ... ok
creating subdirectories ... ok
selecting dynamic shared memory implementation ... posix
selecting default "max_connections" ... 100
selecting default "shared_buffers" ... 128MB
selecting default time zone ... Etc/UTC
creating configuration files ... ok
running bootstrap script ... ok
performing post-bootstrap initialization ... ok
initdb: warning: enabling "trust" authentication for local connections
initdb: hint: You can change this by editing pg_hba.conf or using the option -A, or --auth-local
and --auth-host, the next time you run initdb.
syncing data to disk ... ok

```

Success. You can now start the database server using:

```
pg_ctl -D /var/lib/postgresql/data -l logfile start
```

waiting for server to start....2026-07-22 12:15:36.819 UTC [47] LOG: starting PostgreSQL 17.10 (Debian 17.10-1.pgdg13+1) on x86_64-pc-linux-gnu, compiled by gcc (Debian 14.2.0-19) 14.2.0, 64-bit

2026-07-22 12:15:36.821 UTC [47] LOG: listening on Unix socket

"/var/run/postgresql/.s.PGSQL.5432"

2026-07-22 12:15:36.829 UTC [50] LOG: database system was shut down at 2026-07-22 12:15:36 UTC

2026-07-22 12:15:36.835 UTC [47] LOG: database system is ready to accept connections
done

server started

CREATE DATABASE

/usr/local/bin/docker-entrypoint.sh: running /docker-entrypoint-initdb.d/01_schema.sql

CREATE TABLE

CREATE TABLE

CREATE INDEX

CREATE INDEX

CREATE FUNCTION

psql:/docker-entrypoint-initdb.d/01_schema.sql:38: NOTICE: trigger "tasks_touch_updated_at" for relation "tasks" does not exist, skipping

DROP TRIGGER

CREATE TRIGGER

/usr/local/bin/docker-entrypoint.sh: running /docker-entrypoint-initdb.d/02_seed.sql

INSERT 0 2

INSERT 0 10

setval

2

(1 row)

2026-07-22 12:15:37.108 UTC [47] LOG: received fast shutdown request

waiting for server to shut down....2026-07-22 12:15:37.110 UTC [47] LOG: aborting any active transactions

```
2026-07-22 12:15:37.115 UTC [47] LOG: background worker "logical replication launcher" (PID 53) exited with exit code 1
2026-07-22 12:15:37.115 UTC [48] LOG: shutting down
2026-07-22 12:15:37.117 UTC [48] LOG: checkpoint starting: shutdown immediate
2026-07-22 12:15:37.160 UTC [48] LOG: checkpoint complete: wrote 948 buffers (5.8%); 0 WAL file(s) added, 0 removed, 0 recycled; write=0.026 s, sync=0.010 s, total=0.045 s; sync files=313, longest=0.003 s, average=0.001 s; distance=4324 kB, estimate=4324 kB; lsn=0/1926898, redo lsn=0/1926898
2026-07-22 12:15:37.165 UTC [47] LOG: database system is shut down
done
server stopped
```

PostgreSQL init process complete; ready for start up.

```
2026-07-22 12:15:37.235 UTC [1] LOG: starting PostgreSQL 17.10 (Debian 17.10-1.pgdg13+1) on x86_64-pc-linux-gnu, compiled by gcc (Debian 14.2.0-19) 14.2.0, 64-bit
2026-07-22 12:15:37.235 UTC [1] LOG: listening on IPv4 address "0.0.0.0", port 5432
2026-07-22 12:15:37.235 UTC [1] LOG: listening on IPv6 address ":::", port 5432
2026-07-22 12:15:37.241 UTC [1] LOG: listening on Unix socket "/var/run/postgresql/.s.PGSQL.5432"
2026-07-22 12:15:37.247 UTC [67] LOG: database system was shut down at 2026-07-22 12:15:37 UTC
2026-07-22 12:15:37.254 UTC [1] LOG: database system is ready to accept connections
^Cubuntu@ip-172-31-87-57:~/devboard$ go run .
Command 'go' not found, but can be installed with:
sudo snap install go      # version 1.26.5, or
sudo apt install golang-go # version 2:1.26~1
sudo apt install gccgo-go  # version 2:1.26~1
See 'snap info go' for additional versions.
ubuntu@ip-172-31-87-57:~/devboard$ rm docker-compose.yml
ubuntu@ip-172-31-87-57:~/devboard$ rm frontend/Dockerfile
ubuntu@ip-172-31-87-57:~/devboard$ rm backend/Dockerfile
ubuntu@ip-172-31-87-57:~/devboard$ rm backend/dockerfile
ubuntu@ip-172-31-87-57:~/devboard$ tree -L 2
```

```
.
├── Makefile
├── README.md
├── backend
│   ├── go.mod
│   ├── go.sum
│   ├── main.go
│   └── main_test.go
├── frontend
└── eslint.config.js
```

```

|   |— index.html
|   |— package-lock.json
|   |— package.json
|   |— postcss.config.js
|   |— public
|   |— src
|   |— tailwind.config.js
|   |— vite.config.js
|   |— vite.preview.config.js
|   |— init
|   |   |— postgres
|   |— sonar-project.properties

```

7 directories, 15 files

ubuntu@ip-172-31-87-57:~/devboard\$ cd backend

ubuntu@ip-172-31-87-57:~/devboard/backend\$ nano Dockerfile

ubuntu@ip-172-31-87-57:~/devboard/backend\$ docker build -t devboard-backend:v1 .

[+] Building 74.5s (12/12) FINISHED

docker:default

=> [internal] load build definition from Dockerfile

0.0s

=> => transferring dockerfile: 300B

0.0s

=> [internal] load metadata for docker.io/library/golang:1.24

0.4s

=> [internal] load .dockerignore

0.0s

=> => transferring context: 60B

0.0s

=> [1/7] FROM

docker.io/library/golang:1.24@sha256:d2d2bc1c84f7e60d7d2438a3836ae7d0c847f4888464e7e
c9ba3a1339a1ee804 13.8s

=> => resolve

docker.io/library/golang:1.24@sha256:d2d2bc1c84f7e60d7d2438a3836ae7d0c847f4888464e7e
c9ba3a1339a1ee804 0.0s

=> => sha256:4f4fb700ef54461cfa02571ae0db9a0dc1e0cdb5577484a6d75e68dc38e8acc1

32B / 32B 0.0s

=> => sha256:50a27cd32f8983e7e43777ec65195fb6594ea877f31993fd555513c261ffc054

126B / 126B 0.1s

=> => sha256:f7bdfd728ac2ad72d43b82689890dc698260d3a1049845f48fb3fb942df6c581

79.13MB / 79.13MB 2.8s

=> => sha256:b2b04fcbcd4bf6e5373e2607d2705704ec5b220f1d1306e06ab8fe9471b2f86a

102.14MB / 102.14MB 3.6s

=> => sha256:954d6059ca7bdbb9ceb566ca2239e01ef312165659d656753d7dbace7771a591
25.61MB / 25.61MB 1.2s
=> => sha256:b5e2021c4c8bd1a46b34d9608a9381afdc333600ee1ef3c94306ecf7373e1956
67.79MB / 67.79MB 2.6s
=> => sha256:ef235bf1a09a237b896b69935c8c8d917c9c6a78b538724911414afc0a96763c
49.29MB / 49.29MB 1.6s
=> => extracting
sha256:ef235bf1a09a237b896b69935c8c8d917c9c6a78b538724911414afc0a96763c
1.5s
=> => extracting
sha256:954d6059ca7bdbb9ceb566ca2239e01ef312165659d656753d7dbace7771a591
0.7s
=> => extracting
sha256:b5e2021c4c8bd1a46b34d9608a9381afdc333600ee1ef3c94306ecf7373e1956
2.2s
=> => extracting
sha256:b2b04fcbed4bf6e5373e2607d2705704ec5b220f1d1306e06ab8fe9471b2f86a
2.7s
=> => extracting
sha256:f7bdfd728ac2ad72d43b82689890dc698260d3a1049845f48fb3fb942df6c581
3.7s
=> => extracting
sha256:50a27cd32f8983e7e43777ec65195fb6594ea877f31993fd555513c261ffc054
0.0s
=> => extracting
sha256:4f4fb700ef54461cfa02571ae0db9a0dc1e0cdb5577484a6d75e68dc38e8acc1
0.0s
=> [internal] load build context
0.0s
=> => transferring context: 19.01kB
0.0s
=> [2/7] WORKDIR /app
1.5s
=> [3/7] COPY go.mod .
0.0s
=> [4/7] COPY go.sum .
0.0s
=> [5/7] RUN go mod download
4.1s
=> [6/7] COPY . .
0.1s
=> [7/7] RUN go build -o devboard-backend .
32.7s

```

=> exporting to image
21.5s
=> => exporting layers
17.1s
=> => exporting manifest
sha256:3a48f5df434fc602f5850c87c3339f5e58535d0233014de78726f3ce106e2280
0.0s
=> => exporting config
sha256:8ad4e29c82988f5263374c80c3c20359ee24dc504592792d6ff4b8f076427271
0.0s
=> => exporting attestation manifest
sha256:012aa025d9551b4ace37ef78472e4f1edffaa5a4236b95f4075871cb91fd796e
0.0s
=> => exporting manifest list
sha256:753b057a2c05f073bdb1a0068ac06ba1372219d4be8b26e47f3e0164a78e77b1
0.0s
=> => naming to docker.io/library/devboard-backend:v1
0.0s
=> => unpacking to docker.io/library/devboard-backend:v1
4.2s
ubuntu@ip-172-31-87-57:~/devboard/backend$ docker images

```

i

```

Info → U In Use
IMAGE          ID          DISK USAGE  CONTENT SIZE  EXTRA
devboard-backend:v1  753b057a2c05  1.89GB      474MB
postgres:17      a426e44bac0b  645MB       167MB  U
ubuntu@ip-172-31-87-57:~/devboard/backend$ grep -n "env(" main.go
47:  dsn := env("POSTGRES_URL",
"postgres://devboard:devboard@localhost:5432/devboard?sslmode=disable")
82:  port := env("PORT", "8080")
323:func env(key, fallback string) string {
324:  if v := os.Getenv(key); v != "" {
ubuntu@ip-172-31-87-57:~/devboard/backend$ nano .env
ubuntu@ip-172-31-87-57:~/devboard/backend$ nano .env
ubuntu@ip-172-31-87-57:~/devboard/backend$ rm ir .env
rm: cannot remove 'ir': No such file or directory
ubuntu@ip-172-31-87-57:~/devboard/backend$ rm -r .env
rm: cannot remove '.env': No such file or directory
ubuntu@ip-172-31-87-57:~/devboard/backend$ ls
Dockerfile go.mod go.sum main.go main_test.go
ubuntu@ip-172-31-87-57:~/devboard/backend$ nano .env
ubuntu@ip-172-31-87-57:~/devboard/backend$ cd ..
ubuntu@ip-172-31-87-57:~/devboard$ nano .env
ubuntu@ip-172-31-87-57:~/devboard$ cd backend

```

```
ubuntu@ip-172-31-87-57:~/devboard/backend$ docker run -d \
```

```
--name backend \
```

```
--network devboard_default \
```

```
--env-file ../env \
```

```
-p 8081:8080 \
```

```
devboard-backend:v1
```

```
65cb781ff702e508e3e3cefd94f52b74847c230ff6eeeff06c580c0a46892450
```

```
ubuntu@ip-172-31-87-57:~/devboard/backend$ docker ps
```

CONTAINER ID	IMAGE	COMMAND	CREATED	STATUS
65cb781ff702	devboard-backend:v1	"/devboard-backend"	8 seconds ago	Up 7 seconds
0.0.0.0:8081->8080/tcp, [::]:8081->8080/tcp	backend			
6b2d52204feb	postgres:17	"docker-entrypoint.s..."	19 minutes ago	Up 19 minutes
0.0.0.0:5432->5432/tcp, [::]:5432->5432/tcp	postgres			

```
ubuntu@ip-172-31-87-57:~/devboard/backend$ docker logs backend
```

```
2026/07/22 12:35:26 [backend] connected to postgres
```

```
2026/07/22 12:35:26 [backend] listening on :8080
```

```
[GIN-debug] [WARNING] Creating an Engine instance with the Logger and Recovery  
middleware already attached.
```

```
[GIN-debug] [WARNING] Running in "debug" mode. Switch to "release" mode in production.
```

```
- using env: export GIN_MODE=release
```

```
- using code: gin.SetMode(gin.ReleaseMode)
```

```
[GIN-debug] GET    /health          --> main.main.func1 (3 handlers)
```

```
[GIN-debug] GET    /projects        --> main.listProjects (3 handlers)
```

```
[GIN-debug] POST   /projects        --> main.createProject (3 handlers)
```

```
[GIN-debug] GET    /tasks          --> main.listTasks (3 handlers)
```

```
[GIN-debug] POST   /tasks          --> main.createTask (3 handlers)
```

```
[GIN-debug] PATCH  /tasks/:id       --> main.updateTask (3 handlers)
```

```
[GIN-debug] GET    /search          --> main.searchTasks (3 handlers)
```

```
[GIN-debug] [WARNING] You trusted all proxies, this is NOT safe. We recommend you to set a  
value.
```

```
Please check https://pkg.go.dev/github.com/gin-gonic/gin#readme-don-t-trust-all-proxies for  
details.
```

```
[GIN-debug] Listening and serving HTTP on :8080
```

```
ubuntu@ip-172-31-87-57:~/devboard/backend$ curl http://localhost:8081/health
```

```
{"service":"backend","status":"ok"}ubuntu@ip-172-31-87-57:~/devboard/backend$ curl
```

```
http://localhost:8081/projects
```

```
{"projects":[{"id":1,"name":"DevBoard MVP","description":"Ship the v1 task  
tracker","owner_id":1,"created_at":"2026-07-22T12:15:37Z"}, {"id":2,"name":"Marketing  
Site","description":"Landing page + launch
```

```
blog","owner_id":1,"created_at":"2026-07-22T12:15:37Z"}]}ubuntu@ip-172-31-87-57:~/devboard  
/backend$ curl http://localhost:8081/tasks
```



```
{"error":"project_id is required"}ubuntu@ip-172-31-87-57:~/devboard/backend$ cd ..
ubuntu@ip-172-31-87-57:~/devboard$ cd frontend
ubuntu@ip-172-31-87-57:~/devboard/frontend$ nano Dockerfile
ubuntu@ip-172-31-87-57:~/devboard/frontend$ docker build -t devboard-frontend:v1 .
[+] Building 27.3s (8/9)
docker:default
=> [internal] load build definition from Dockerfile
0.0s
=> => transferring dockerfile: 172B
0.0s
=> [internal] load metadata for docker.io/library/node:22
0.5s
=> [internal] load .dockerignore
0.0s
=> => transferring context: 73B
0.0s
=> [1/5] FROM
docker.io/library/node:22@sha256:5647be709086c696ff32edaaf1c70cd26d1da6ab2b39c32f3c7
b4c4a31957e37 21.2s
=> => resolve
docker.io/library/node:22@sha256:5647be709086c696ff32edaaf1c70cd26d1da6ab2b39c32f3c7
b4c4a31957e37 0.0s
=> => sha256:6388e211ae0837ddb63647fe486f08ffb6a1bcaefb1293fbc01ee47a7932d27
445B / 445B 0.1s
=> => sha256:c407e94c769928626565b2c2572ba062346adc3a0c8ab77aaf5db12abffdb165
1.25MB / 1.25MB 0.1s
=> => sha256:1d16e26333c51d432a005b1249d1dd1a284f6a5c90d0a790faee640b80beebf6
3.32kB / 3.32kB 0.1s
=> => sha256:24b38de57cf509d14c53bccd577892919f7781e2ef0e95732a37a21f72a7fee5
58.56MB / 58.56MB 2.0s
=> => sha256:34e7f1cb7a296e8a2f35401d96a0c2fc030894e200451ae74437bdb7a4b2cb43
211.63MB / 211.63MB 5.8s
=> => sha256:bd0ec93c9c52acfa7f522ce201898ba8ebdf67a6d01c6a4ea70e8d413dbc534a
24.04MB / 24.04MB 1.0s
=> => sha256:2dd2dd4f152bd44fe5b02de3e47483f6cdf32bf3d7ea1c7cc70d57b075f2eebd
64.41MB / 64.41MB 2.3s
=> => sha256:c4013e1e38341061b49f51c4b44f2e534c25135d7ed5b75af8b2094766bb5519
44.04MB / 48.50MB 25.2s
=> => extracting
sha256:c4013e1e38341061b49f51c4b44f2e534c25135d7ed5b75af8b2094766bb5519
3.4s
=> => extracting
sha256:bd0ec93c9c52acfa7f522ce201898ba8ebdf67a6d01c6a4ea70e8d413dbc534a
0.7s
```

```
=> => extracting
sha256:2dd2dd4f152bd44fe5b02de3e47483f6cdf32bf3d7ea1c7cc70d57b075f2eebd
2.8s
=> => extracting
sha256:34e7f1cb7a296e8a2f35401d96a0c2fc030894e200451ae74437bdb7a4b2cb43
8.1s
=> => extracting
sha256:1d16e26333c51d432a005b1249d1dd1a284f6a5c90d0a790faee640b80beebf6
0.3s
=> => extracting
sha256:24b38de57cf509d14c53bccd577892919f7781e2ef0e95732a37a21f72a7fee5
2.9s
=> => extracting
sha256:c407e94c769928626565b2c2572ba062346adc3a0c8ab77aaf5db12abffdb165
0.1s
=> => extracting
sha256:6388e211ae0837ddb63647fe486f08ffbf6a1bcaefb1293fbc01ee47a7932d27
0.0s
=> [internal] load build context
0.1s
=> => transferring context: 307.55kB
0.0s
=> [2/5] WORKDIR /app
1.5s
=> [3/5] COPY package*.json ./
0.1s
=> ERROR [4/5] RUN npm install
3.8s
-----
> [4/5] RUN npm install:
3.556 npm error code ERESOLVE
3.556 npm error ERESOLVE could not resolve
3.556 npm error
3.556 npm error While resolving: @vitejs/plugin-react@4.7.0
3.556 npm error Found: vite@8.1.0
3.556 npm error node_modules/vite
3.556 npm error   dev vite@"^8.1.0" from the root project
3.556 npm error   peerOptional vite@"^6.0.0 || ^7.0.0 || ^8.0.0" from @vitest/mocker@4.1.9
3.556 npm error   node_modules/@vitest/mocker
3.556 npm error     @vitest/mocker@"4.1.9" from vitest@4.1.9
3.556 npm error     node_modules/vitest
3.556 npm error       dev vitest@"^4.1.9" from the root project
3.556 npm error 1 more (vitest)
3.556 npm error
```

```
3.556 npm error Could not resolve dependency:
3.556 npm error peer vite@"^4.2.0 || ^5.0.0 || ^6.0.0 || ^7.0.0" from @vitejs/plugin-react@4.7.0
3.556 npm error node_modules/@vitejs/plugin-react
3.556 npm error   dev @vitejs/plugin-react@"^4.3.1" from the root project
3.556 npm error
3.556 npm error Conflicting peer dependency: vite@7.3.6
3.556 npm error node_modules/vite
3.556 npm error   peer vite@"^4.2.0 || ^5.0.0 || ^6.0.0 || ^7.0.0" from @vitejs/plugin-react@4.7.0
3.556 npm error   node_modules/@vitejs/plugin-react
3.556 npm error     dev @vitejs/plugin-react@"^4.3.1" from the root project
3.556 npm error
3.556 npm error Fix the upstream dependency conflict, or retry
3.556 npm error this command with --force or --legacy-peer-deps
3.556 npm error to accept an incorrect (and potentially broken) dependency resolution.
3.556 npm error
3.556 npm error
3.556 npm error For a full report see:
3.556 npm error /root/.npm/_logs/2026-07-22T12_40_05_932Z-eresolve-report.txt
3.556 npm notice
3.556 npm notice New major version of npm available! 10.9.8 -> 12.0.1
3.556 npm notice Changelog: https://github.com/npm/cli/releases/tag/v12.0.1
3.556 npm notice To update run: npm install -g npm@12.0.1
3.556 npm notice
3.556 npm error A complete log of this run can be found in:
/root/.npm/_logs/2026-07-22T12_40_05_932Z-debug-0.log
```

Dockerfile:7

```
-----
5 | COPY package*.json ./
6 |
7 | >>> RUN npm install
8 |
9 | COPY . .
-----
```

ERROR: failed to build: failed to solve: process "/bin/sh -c npm install" did not complete successfully: exit code: 1

ubuntu@ip-172-31-87-57:~/devboard/frontend\$ package-lock.json

package-lock.json: command not found

ubuntu@ip-172-31-87-57:~/devboard/frontend\$ ls

Dockerfile eslint.config.js index.html package-lock.json package.json postcss.config.js public
src tailwind.config.js vite.config.js vite.preview.config.js

ubuntu@ip-172-31-87-57:~/devboard/frontend\$ nano Dockerfile

ubuntu@ip-172-31-87-57:~/devboard/frontend\$ cd ~/devboard/frontend

```
docker build -t devboard-frontend:v1 .
[+] Building 57.5s (19/19) FINISHED
docker:default
=> [internal] load build definition from Dockerfile
0.0s
=> => transferring dockerfile: 515B
0.0s
=> [internal] load metadata for docker.io/library/node:22-alpine
0.5s
=> [internal] load metadata for docker.io/library/node:22
0.3s
=> [internal] load .dockerignore
0.0s
=> => transferring context: 73B
0.0s
=> [builder 1/6] FROM
docker.io/library/node:22@sha256:5647be709086c696ff32edaaf1c70cd26d1da6ab2b39c32f3c7
b4c4a31957e37 0.0s
=> => resolve
docker.io/library/node:22@sha256:5647be709086c696ff32edaaf1c70cd26d1da6ab2b39c32f3c7
b4c4a31957e37 0.0s
=> [internal] load build context
0.0s
=> => transferring context: 2.54kB
0.0s
=> [stage-1 1/7] FROM
docker.io/library/node:22-alpine@sha256:16e22a550f3863206a3f701448c45f7912c6896a62de4
3add43bb9c86130c3e2 3.4s
=> => resolve
docker.io/library/node:22-alpine@sha256:16e22a550f3863206a3f701448c45f7912c6896a62de4
3add43bb9c86130c3e2 0.0s
=> => sha256:d10ff586f6bdbdd6000a70a914e56bf05bedc78de3311d08a953643982d84e23
446B / 446B 0.1s
=> => sha256:1d4d101ceaad39fb56dcac0bb6cc291e6cdec3b711786f0c82b050b5b5b85690
1.26MB / 1.26MB 0.1s
=> => sha256:3f4c164634d251a8b256151a9e1c1d3e5c5b21f1974f00a213875e66e3fa0801
52.31MB / 52.31MB 0.9s
=> => sha256:55afa1ecc21d2bb5e5045f32dafee56272ffd89860bac26f6c32123439af26a4
3.85MB / 3.85MB 0.1s
=> => extracting
sha256:55afa1ecc21d2bb5e5045f32dafee56272ffd89860bac26f6c32123439af26a4
0.3s
```

=> => extracting
sha256:3f4c164634d251a8b256151a9e1c1d3e5c5b21f1974f00a213875e66e3fa0801
2.2s
=> => extracting
sha256:1d4d101ceaad39fb56dcac0bb6cc291e6cdec3b711786f0c82b050b5b5b85690
0.1s
=> => extracting
sha256:d10ff586f6bdbdd6000a70a914e56bf05bedc78de3311d08a953643982d84e23
0.0s
=> CACHED [builder 2/6] WORKDIR /app
0.0s
=> CACHED [builder 3/6] COPY package*.json ./
0.0s
=> [builder 4/6] RUN npm install --legacy-peer-deps
19.0s
=> [stage-1 2/7] WORKDIR /app
0.6s
=> [stage-1 3/7] COPY package*.json ./
0.1s
=> [stage-1 4/7] RUN npm install --legacy-peer-deps
19.7s
=> [builder 5/6] COPY . .
0.4s
=> [builder 6/6] RUN npm run build
3.0s
=> [stage-1 5/7] RUN npm install -g vite
6.1s
=> [stage-1 6/7] COPY --from=builder /app/dist ./dist
0.0s
=> [stage-1 7/7] COPY vite.config.js ./
0.0s
=> exporting to image
26.7s
=> => exporting layers
19.2s
=> => exporting manifest
sha256:0d1ef14ee6fedb20a9cb5967a92a54aafe261da9820210dbf438bf8a1ba843a8
0.0s
=> => exporting config
sha256:a5c0848f9f397e6e9616c97d4b370db7289dc3199cb3f5fee2d8d83000a4d8f6
0.0s
=> => exporting attestation manifest
sha256:61a9f7a3a642a216ae2e68efb1299985c787283a4859e256176e34199fc28efb
0.0s

```

=> => exporting manifest list
sha256:6a7ee5f85bb6145163769ec3e72cc1d2de4183e0495fa8c8e284d309273290ba
0.0s
=> => naming to docker.io/library/devboard-frontend:v1
0.0s
=> => unpacking to docker.io/library/devboard-frontend:v1
7.4s
ubuntu@ip-172-31-87-57:~/devboard/frontend$ ^C
ubuntu@ip-172-31-87-57:~/devboard/frontend$ docker images

```

i

Info → U In Use

IMAGE	ID	DISK USAGE	CONTENT SIZE	EXTRA
devboard-backend:v1	753b057a2c05	1.89GB	474MB	U
devboard-frontend:v1	6a7ee5f85bb6	863MB	188MB	
postgres:17	a426e44bac0b	645MB	167MB	U

```

ubuntu@ip-172-31-87-57:~/devboard/frontend$ nano ~/devboard/frontend/vite.config.js
ubuntu@ip-172-31-87-57:~/devboard/frontend$ cat ~/devboard/frontend/vite.config.js
import { defineConfig } from 'vite';
import react from '@vitejs/plugin-react';

// Both servers forward /api to the Go backend, stripping the /api prefix
// (the backend mounts its routes at the root: /projects, /tasks, /search).
//
// server.proxy → `npm run dev` (local dev on :5173) → backend on localhost:8080
// preview.proxy → `npm run preview` (the Docker container) → backend on the
//                compose network, reachable by its service name `backend`.
export default defineConfig({
  plugins: [react()],
  server: {
    host: true,
    port: 5173,
    proxy: {
      '/api': {
        target: 'http://localhost:8080',
        changeOrigin: true,
        rewrite: (path) => path.replace(/^\/api/, ''),
      },
    },
  },
  preview: {
    proxy: {
      '/api': {
        // `backend` is the compose service name; 8080 is its container port and
        // must match BACKEND_PORT in .env (the port the Go app listens on).

```

```

    target: 'http://backend:8080',
    changeOrigin: true,
    rewrite: (path) => path.replace(/^\/api/, ""),
  },
},
},
test: {
  environment: 'jsdom',
  globals: true,
  setupFiles: ['./src/test/setup.js'],
  css: false,
},
});

```

ubuntu@ip-172-31-87-57:~/devboard/frontend\$ docker logs frontend

Error response from daemon: No such container: frontend

ubuntu@ip-172-31-87-57:~/devboard/frontend\$ docker run -d \

--name frontend \

--network devboard_default \

-p 5173:5173 \

devboard-frontend:v1

73c61fbd1c2d5a77fceb4c54806c31a16be7a3fd5301e1bb2fbd748a8ad3f7b4

ubuntu@ip-172-31-87-57:~/devboard/frontend\$ docker ps

CONTAINER ID	IMAGE	COMMAND	CREATED	STATUS
73c61fbd1c2d	devboard-frontend:v1	"docker-entrypoint.s..."	8 seconds ago	Up 8 seconds
0.0.0.0:5173->5173/tcp, [::]:5173->5173/tcp	frontend			
65cb781ff702	devboard-backend:v1	"./devboard-backend"	27 minutes ago	Up 27 minutes
0.0.0.0:8081->8080/tcp, [::]:8081->8080/tcp	backend			
6b2d52204feb	postgres:17	"docker-entrypoint.s..."	47 minutes ago	Up 47 minutes
0.0.0.0:5432->5432/tcp, [::]:5432->5432/tcp	postgres			

ubuntu@ip-172-31-87-57:~/devboard/frontend\$ docker logs frontend

> devboard-frontend@1.0.0 preview

> vite preview --host 0.0.0.0 --port 5173

1:02:29 PM [vite] warning: `esbuild` option was specified by "vite:react-babel" plugin. This option is deprecated, please use `oxc` instead.

`optimizeDeps.rollupOptions` / `ssr.optimizeDeps.rollupOptions` is deprecated. Use `optimizeDeps.rollupOptions` instead. Note that this option may be set by a plugin. Set VITE_DEPRECATION_TRACE=1 to see where it is called.


[vite:react-babel] We recommend switching to `@vitejs/plugin-react-oxc` for improved performance. More information at <https://vite.dev/rolldown>

➔ Local: http://localhost:5173/

➔ Network: http://172.18.0.4:5173/

ubuntu@ip-172-31-87-57:~/devboard/frontend\$

Restarted application-ec2 instance

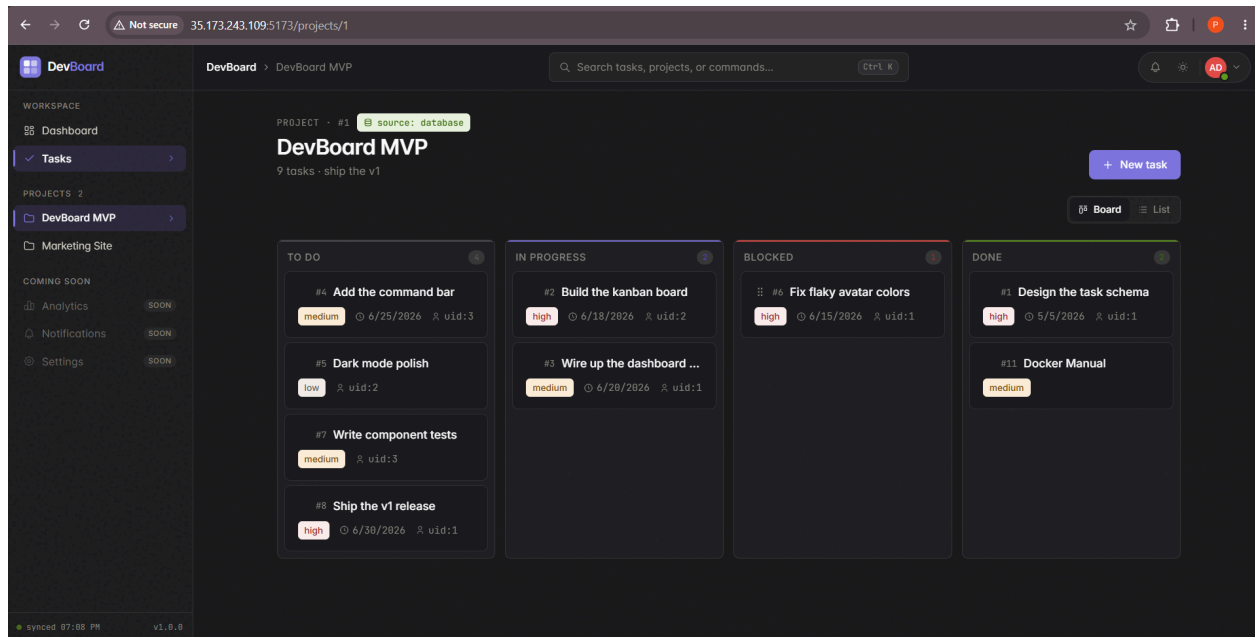

id updated_at	title	description	project_id	assignee_id	status	priority	due_date	created_at	
1 22 12:15:37.102053+00	Design the task schema	projects, tasks, statuses	1	1	done	high	2026-05-05	2026-07-22 12:15:37.102053+00	2026-07-
2 22 12:15:37.102053+00	Build the kanban board	drag and drop columns	1	2	in_progress	high	2026-06-18	2026-07-22 12:15:37.102053+00	2026-07-
3 22 12:15:37.102053+00	Wire up the dashboard hero	velocity + chip stats	1	1	in_progress	medium	2026-06-20	2026-07-22 12:15:37.102053+00	2026-07-
4 22 12:15:37.102053+00	Add the command bar	global search	1	3	todo	medium	2026-06-25	2026-07-22 12:15:37.102053+00	2026-07-
5 22 12:15:37.102053+00	Dark mode polish	grain + gradients	1	2	todo	low		2026-07-22 12:15:37.102053+00	2026-07-
6 22 12:15:37.102053+00	Fix flaky avatar colors	hash collision on initials	1	1	blocked	high	2026-06-15	2026-07-22 12:15:37.102053+00	2026-07-
7 22 12:15:37.102053+00	Write component tests	Vitest + testing-library	1	3	todo	medium		2026-07-22 12:15:37.102053+00	2026-07-
8 22 12:15:37.102053+00	Ship the v1 release	tag and announce	1	1	todo	high	2026-06-30	2026-07-22 12:15:37.102053+00	2026-07-
11 22 13:39:22.981823+00	Docker Manual		1	1	done	medium		2026-07-22 13:39:17.713155+00	2026-07-
9 22 13:39:42.109576+00	Draft the launch blog post		2	2	todo	medium	2026-06-22	2026-07-22 12:15:37.102053+00	2026-07-
10 22 13:39:43.302189+00	Hero illustration		2	3	todo	low		2026-07-22 12:15:37.102053+00	2026-07-
(11 rows)									
(END)									

i-0778679ba26f928e2 (Web-server)

PublicIPs: 35.173.243.109 PrivateIPs: 172.31.87.57

ubuntu@ip-172-31-87-57:~\$ cd devboard

ubuntu@ip-172-31-87-57:~/devboard\$ docker ps

CONTAINER ID	IMAGE	COMMAND	CREATED	STATUS	PORTS	NAMES
--------------	-------	---------	---------	--------	-------	-------

ubuntu@ip-172-31-87-57:~/devboard\$ docker start postgres backend frontend

postgres

backend

frontend

ubuntu@ip-172-31-87-57:~/devboard\$ docker logs postgres --tail 20

2026-07-22 12:15:37.254 UTC [1] LOG: database system is ready to accept connections
2026-07-22 12:20:37.340 UTC [65] LOG: checkpoint starting: time
2026-07-22 12:20:41.964 UTC [65] LOG: checkpoint complete: wrote 49 buffers (0.3%); 0 WAL file(s) added, 0 removed, 0 recycled; write=4.616 s, sync=0.003 s, total=4.625 s; sync files=13, longest=0.002 s, average=0.001 s; distance=269 kB, estimate=269 kB; lsn=0/196A0D8, redo lsn=0/196A080
2026-07-22 13:08:19.677 UTC [1] LOG: received fast shutdown request
2026-07-22 13:08:19.682 UTC [1] LOG: aborting any active transactions
2026-07-22 13:08:19.690 UTC [1] LOG: background worker "logical replication launcher" (PID 70) exited with exit code 1
2026-07-22 13:08:19.712 UTC [130] FATAL: terminating connection due to administrator command
2026-07-22 13:08:19.723 UTC [65] LOG: shutting down
2026-07-22 13:08:19.725 UTC [65] LOG: checkpoint starting: shutdown immediate
2026-07-22 13:08:19.747 UTC [65] LOG: checkpoint complete: wrote 1 buffers (0.0%); 0 WAL file(s) added, 0 removed, 0 recycled; write=0.001 s, sync=0.002 s, total=0.025 s; sync files=1, longest=0.002 s, average=0.002 s; distance=0 kB, estimate=243 kB; lsn=0/196A188, redo lsn=0/196A188
2026-07-22 13:08:19.781 UTC [1] LOG: database system is shut down

PostgreSQL Database directory appears to contain a database; Skipping initialization

2026-07-22 13:34:32.717 UTC [1] LOG: starting PostgreSQL 17.10 (Debian 17.10-1.pgdg13+1) on x86_64-pc-linux-gnu, compiled by gcc (Debian 14.2.0-19) 14.2.0, 64-bit
2026-07-22 13:34:32.722 UTC [1] LOG: listening on IPv4 address "0.0.0.0", port 5432
2026-07-22 13:34:32.722 UTC [1] LOG: listening on IPv6 address ":::", port 5432
2026-07-22 13:34:32.733 UTC [1] LOG: listening on Unix socket "/var/run/postgresql/.s.PGSQL.5432"
2026-07-22 13:34:32.744 UTC [28] LOG: database system was shut down at 2026-07-22 13:08:19 UTC
2026-07-22 13:34:32.773 UTC [1] LOG: database system is ready to accept connections
ubuntu@ip-172-31-87-57:~/devboard\$ docker logs backend --tail 20
[GIN] 2026/07/22 - 13:06:45 | 200 | 867.388µs | 172.18.0.4 | GET "/tasks?project_id=1"
2026/07/22 13:34:32 [backend] waiting for postgres (1)..
2026/07/22 13:34:34 [backend] connected to postgres
[GIN-debug] [WARNING] Creating an Engine instance with the Logger and Recovery middleware already attached.

[GIN-debug] [WARNING] Running in "debug" mode. Switch to "release" mode in production.

- using env: export GIN_MODE=release
- using code: gin.SetMode(gin.ReleaseMode)

2026/07/22 13:34:34 [backend] listening on :8080

[GIN-debug] GET /health --> main.main.func1 (3 handlers)

```
[GIN-debug] GET    /projects          --> main.listProjects (3 handlers)
[GIN-debug] POST   /projects          --> main.createProject (3 handlers)
[GIN-debug] GET    /tasks            --> main.listTasks (3 handlers)
[GIN-debug] POST   /tasks            --> main.createTask (3 handlers)
[GIN-debug] PATCH  /tasks/:id        --> main.updateTask (3 handlers)
[GIN-debug] GET    /search           --> main.searchTasks (3 handlers)
[GIN-debug] [WARNING] You trusted all proxies, this is NOT safe. We recommend you to set a
value.
Please check https://pkg.go.dev/github.com/gin-gonic/gin#readme-don-t-trust-all-proxies for
details.
[GIN-debug] Listening and serving HTTP on :8080
ubuntu@ip-172-31-87-57:~/devboard$ docker logs frontend --tail 20
```

```
> devboard-frontend@1.0.0 preview
> vite preview --host 0.0.0.0 --port 5173
```

```
1:02:29 PM [vite] warning: `esbuild` option was specified by "vite:react-babel" plugin. This option
is deprecated, please use `oxc` instead.
`optimizeDeps.rollupOptions` / `ssr.optimizeDeps.rollupOptions` is deprecated. Use
`optimizeDeps.rolldownOptions` instead. Note that this option may be set by a plugin. Set
VITE_DEPRECATION_TRACE=1 to see where it is called.
[vite:react-babel] We recommend switching to `@vitejs/plugin-react-oxc` for improved
performance. More information at https://vite.dev/rolldown
  → Local: http://localhost:5173/
  → Network: http://172.18.0.4:5173/
```

```
> devboard-frontend@1.0.0 preview
> vite preview --host 0.0.0.0 --port 5173
```

```
1:34:34 PM [vite] warning: `esbuild` option was specified by "vite:react-babel" plugin. This option
is deprecated, please use `oxc` instead.
`optimizeDeps.rollupOptions` / `ssr.optimizeDeps.rollupOptions` is deprecated. Use
`optimizeDeps.rolldownOptions` instead. Note that this option may be set by a plugin. Set
VITE_DEPRECATION_TRACE=1 to see where it is called.
[vite:react-babel] We recommend switching to `@vitejs/plugin-react-oxc` for improved
performance. More information at https://vite.dev/rolldown
  → Local: http://localhost:5173/
  → Network: http://172.18.0.4:5173/
```

```
ubuntu@ip-172-31-87-57:~/devboard$ curl http://localhost:8081/health
{"service":"backend","status":"ok"}ubuntu@ip-172-31-87-57:~/devboard$ curl
http://localhost:8081/projects
{"projects":[{"id":1,"name":"DevBoard MVP","description":"Ship the v1 task
tracker","owner_id":1,"created_at":"2026-07-22T12:15:37Z"}, {"id":2,"name":"Marketing
Site","description":"Landing page + launch
```

```

blog","owner_id":1,"created_at":"2026-07-22T12:15:37Z"}}ubuntu@ip-172-31-87-57:~/devboard
$ curl "http://localhost:8081/tasks?project_id=1"
{"source":"database","tasks":[{"id":1,"title":"Design the task schema","description":"projects,
tasks,
statuses","project_id":1,"assignee_id":1,"status":"done","priority":"high","due_date":"2026-05-05"
,"created_at":"2026-07-22T12:15:37Z","updated_at":"2026-07-22T12:15:37Z"},{"id":2,"title":"Buil
d the kanban board","description":"drag and drop
columns","project_id":1,"assignee_id":2,"status":"in_progress","priority":"high","due_date":"2026-
06-18","created_at":"2026-07-22T12:15:37Z","updated_at":"2026-07-22T12:15:37Z"},{"id":3,"title
":"Wire up the dashboard hero","description":"velocity + chip
stats","project_id":1,"assignee_id":1,"status":"in_progress","priority":"medium","due_date":"2026-
06-20","created_at":"2026-07-22T12:15:37Z","updated_at":"2026-07-22T12:15:37Z"},{"id":4,"title
":"Add the command bar","description":"global
search","project_id":1,"assignee_id":3,"status":"todo","priority":"medium","due_date":"2026-06-2
5","created_at":"2026-07-22T12:15:37Z","updated_at":"2026-07-22T12:15:37Z"},{"id":5,"title":"D
ark mode polish","description":"grain +
gradients","project_id":1,"assignee_id":2,"status":"todo","priority":"low","due_date":null,"created_
at":"2026-07-22T12:15:37Z","updated_at":"2026-07-22T12:15:37Z"},{"id":6,"title":"Fix flaky
avatar colors","description":"hash collision on
initials","project_id":1,"assignee_id":1,"status":"blocked","priority":"high","due_date":"2026-06-15
","created_at":"2026-07-22T12:15:37Z","updated_at":"2026-07-22T12:15:37Z"},{"id":7,"title":"Wri
te component tests","description":"Vitest +
testing-library","project_id":1,"assignee_id":3,"status":"todo","priority":"medium","due_date":null,"
created_at":"2026-07-22T12:15:37Z","updated_at":"2026-07-22T12:15:37Z"},{"id":8,"title":"Ship
the v1 release","description":"tag and
announce","project_id":1,"assignee_id":1,"status":"todo","priority":"high","due_date":"2026-06-30
","created_at":"2026-07-22T12:15:37Z","updated_at":"2026-07-22T12:15:37Z"}}ubuntu@ip-172
-31-87-57:~/devboard$ curl "http://localhost:8081/tasks?project_id=2"
{"source":"database","tasks":[{"id":9,"title":"Draft the launch blog
post","description":"","project_id":2,"assignee_id":2,"status":"in_progress","priority":"medium","du
e_date":"2026-06-22","created_at":"2026-07-22T12:15:37Z","updated_at":"2026-07-22T12:15:3
7Z"},{"id":10,"title":"Hero
illustration","description":"","project_id":2,"assignee_id":3,"status":"todo","priority":"low","due_dat
e":null,"created_at":"2026-07-22T12:15:37Z","updated_at":"2026-07-22T12:15:37Z"}}ubuntu@i
p-172-31-87-57:~/devboard$ docker exec -it postgres psql -U posdocker exec -it postgres psql
-U postgres -d devboard
psql (17.10 (Debian 17.10-1.pgdg13+1))
Type "help" for help.

```

```
devboard=# \dt
```

```
List of relations
```

```
Schema | Name | Type | Owner
```

```

-----+-----+-----+-----
public | projects | table | postgres
public | tasks   | table | postgres
(2 rows)

```

devboard=# SELECT * FROM projects;

```

id |   name   |      description      | owner_id |      created_at
-----+-----+-----+-----+-----
 1 | DevBoard MVP | Ship the v1 task tracker |         1 | 2026-07-22 12:15:37.100358+00
 2 | Marketing Site | Landing page + launch blog |         1 | 2026-07-22 12:15:37.100358+00
(2 rows)

```

devboard=# SELECT COUNT(*) FROM projects;

count

```

-----
      2
(1 row)

```

devboard=# SELECT COUNT(*) FROM tasks;

count

```

-----
     11
(1 row)

```

devboard=# SELECT * FROM tasks;

devboard=# \q

ubuntu@ip-172-31-87-57:~/devboard\$

Making backend multistage

Before multistage

IMAGE	ID	DISK USAGE	CONTENT SIZE	EXTRA
devboard-backend:v1	753b057a2c05	1.89GB	474MB	U
devboard-frontend:v1	6a7ee5f85bb6	863MB	188MB	U
postgres:17	a426e44bac0b	645MB	167MB	U

ubuntu@ip-172-31-87-57:~\$ cd ~/devboard/backend

ubuntu@ip-172-31-87-57:~/devboard/backend\$ nano Dockerfile

ubuntu@ip-172-31-87-57:~/devboard/backend\$ docker build -t devboard-backend:v1 .

[+] Building 41.4s (15/15) FINISHED

docker:default

=> [internal] load build definition from Dockerfile

0.0s

=> => transferring dockerfile: 398B
0.0s
=> [internal] load metadata for docker.io/library/golang:1.24
0.2s
=> [internal] load metadata for docker.io/library/alpine:latest
0.5s
=> [internal] load .dockerignore
0.0s
=> => transferring context: 60B
0.0s
=> [builder 1/6] FROM
docker.io/library/golang:1.24@sha256:d2d2bc1c84f7e60d7d2438a3836ae7d0c847f4888464e7e
c9ba3a1339a1ee804 0.0s
=> => resolve
docker.io/library/golang:1.24@sha256:d2d2bc1c84f7e60d7d2438a3836ae7d0c847f4888464e7e
c9ba3a1339a1ee804 0.0s
=> [internal] load build context
0.0s
=> => transferring context: 570B
0.0s
=> [stage-1 1/3] FROM
docker.io/library/alpine:latest@sha256:28bd5fe8b56d1bd048e5babf5b10710ebe0bae67db8691
6198a6eec434943f8b 0.1s
=> => resolve
docker.io/library/alpine:latest@sha256:28bd5fe8b56d1bd048e5babf5b10710ebe0bae67db8691
6198a6eec434943f8b 0.0s
=> CACHED [builder 2/6] WORKDIR /app
0.0s
=> [stage-1 2/3] WORKDIR /app
0.0s
=> [builder 3/6] COPY go.mod go.sum ./
0.1s
=> [builder 4/6] RUN go mod download
4.6s
=> [builder 5/6] COPY . .
0.1s
=> [builder 6/6] RUN CGO_ENABLED=0 GOOS=linux go build -o devboard-backend .
34.7s
=> [stage-1 3/3] COPY --from=builder /app/devboard-backend .
0.1s
=> exporting to image
1.1s
=> => exporting layers
0.8s

```

=> => exporting manifest
sha256:6dfd87739cfb02ca17ec3a03b49c85a90c470eef482d67b37d12e931e5018736
0.0s
=> => exporting config
sha256:356c94f6c65edcd11975da72d7de5e231864a61fd8d5808f6c324b7cc8efa983
0.0s
=> => exporting attestation manifest
sha256:290a8118142e3d3f27c0a568821c0b34c61423d3c858906068b7145e0f34fbba
0.0s
=> => exporting manifest list
sha256:b785cb403417c10ef5f2e9bbaf0719180858bec36589b6e0864297f0e0b6a21b
0.0s
=> => naming to docker.io/library/devboard-backend:v1
0.0s
=> => unpacking to docker.io/library/devboard-backend:v1
0.1s
ubuntu@ip-172-31-87-57:~/devboard/backend$ docker stop backend
backend
ubuntu@ip-172-31-87-57:~/devboard/backend$ docker rm backend
backend
ubuntu@ip-172-31-87-57:~/devboard/backend$ docker run -d \
--name backend \
--network devboard_default \
--env-file ../.env \
-p 8081:8080 \
devboard-backend:v1
43b81f8b26db153c64cd46bcdcf38e9bb967cf80a2743f8d0b46e8b06b891a6e7
ubuntu@ip-172-31-87-57:~/devboard/backend$ docker ps
CONTAINER ID   IMAGE                      COMMAND                  CREATED        STATUS
PORTS         NAMES
43b81f8b26db   devboard-backend:v1       "./devboard-backend"    11 seconds ago Up 10
seconds      0.0.0.0:8081->8080/tcp, [::]:8081->8080/tcp   backend
73c61fbd1c2d   devboard-frontend:v1      "docker-entrypoint.s..." 57 minutes ago Up 12
minutes      0.0.0.0:5173->5173/tcp, [::]:5173->5173/tcp   frontend
6b2d52204feb   postgres:17                "docker-entrypoint.s..." 2 hours ago    Up 12 minutes
0.0.0.0:5432->5432/tcp, [::]:5432->5432/tcp   postgres
ubuntu@ip-172-31-87-57:~/devboard/backend$ docker logs backend
[GIN-debug] [WARNING] Creating an Engine instance with the Logger and Recovery
middleware already attached.

[GIN-debug] [WARNING] Running in "debug" mode. Switch to "release" mode in production.
- using env:  export GIN_MODE=release
- using code: gin.SetMode(gin.ReleaseMode)

```

```

[GIN-debug] GET    /health          --> main.main.func1 (3 handlers)
[GIN-debug] GET    /projects        --> main.listProjects (3 handlers)
[GIN-debug] POST   /projects        --> main.createProject (3 handlers)
[GIN-debug] GET    /tasks          --> main.listTasks (3 handlers)
[GIN-debug] POST   /tasks          --> main.createTask (3 handlers)
[GIN-debug] PATCH  /tasks/:id       --> main.updateTask (3 handlers)
[GIN-debug] GET    /search         --> main.searchTasks (3 handlers)
[GIN-debug] [WARNING] You trusted all proxies, this is NOT safe. We recommend you to set a
value.
Please check https://pkg.go.dev/github.com/gin-gonic/gin#readme-don-t-trust-all-proxies for
details.
[GIN-debug] Listening and serving HTTP on :8080
2026/07/22 14:00:03 [backend] connected to postgres
2026/07/22 14:00:03 [backend] listening on :8080
ubuntu@ip-172-31-87-57:~/devboard/backend$ curl http://localhost:8081/health
{"service":"backend","status":"ok"}ubuntu@ip-172-31-87-57:~/devboard/backend$

```

After backend multistage

IMAGE	ID	DISK USAGE	CONTENT SIZE	EXTRA
devboard-backend:v1	b785cb403417	33.9MB	11.2MB	U
devboard-frontend:v1	6a7ee5f85bb6	863MB	188MB	U
postgres:17	a426e44bac0b	645MB	167MB	U

Now frontend and backend are multistage

Now compose

Welcome to Ubuntu 26.04 LTS (GNU/Linux 7.0.0-1008-aws x86_64)

- * Documentation: <https://docs.ubuntu.com>
- * Management: <https://landscape.canonical.com>
- * Support: <https://ubuntu.com/pro>

System information as of Wed Jul 22 14:48:12 UTC 2026

```

System load: 0.39          Processes:           125
Usage of /:  30.4% of 27.95GB  Users logged in:    0
Memory usage: 10%          IPv4 address for enX0: 172.31.87.57

```

Swap usage: 0%

* Ubuntu Pro delivers the most comprehensive open source security and compliance features.

<https://ubuntu.com/aws/pro>

Expanded Security Maintenance for Applications is not enabled.

27 updates can be applied immediately.

To see these additional updates run: `apt list --upgradable`

Enable ESM Apps to receive additional future security updates.

See <https://ubuntu.com/esm> or run: `sudo pro status`

Last login: Wed Jul 22 13:46:54 2026 from 18.206.107.28

`ubuntu@ip-172-31-87-57:~$ cd devboard`

`ubuntu@ip-172-31-87-57:~/devboard$ nano docker-compose.yml`

`ubuntu@ip-172-31-87-57:~/devboard$ cat .env`

`POSTGRES_USER=postgres`

`POSTGRES_PASSWORD=postgres123`

`POSTGRES_DB=devboard`

`POSTGRES_PORT=5432`

`PORT=8080`

`POSTGRES_URL=postgres://postgres:postgres123@postgres:5432/devboard?sslmode=disable`

`ubuntu@ip-172-31-87-57:~/devboard$ docker compose up --build -d`

`[+] Building 8.0s (37/37) FINISHED`

`=> [internal] load local bake definitions`

`0.0s`

`=> => reading from stdin 951B`

`0.0s`

`=> [frontend internal] load build definition from Dockerfile`

`0.0s`

`=> => transferring dockerfile: 515B`

`0.0s`

`=> [backend internal] load build definition from Dockerfile`

`0.0s`

`=> => transferring dockerfile: 398B`

`0.0s`


```
=> [backend internal] load metadata for docker.io/library/alpine:latest
0.2s
=> [backend internal] load metadata for docker.io/library/golang:1.24
0.2s
=> [frontend internal] load metadata for docker.io/library/node:22-alpine
0.2s
=> [frontend internal] load metadata for docker.io/library/node:22
0.2s
=> [frontend internal] load .dockerignore
0.0s
=> => transferring context: 73B
0.0s
=> [backend internal] load .dockerignore
0.0s
=> => transferring context: 60B
0.0s
=> [backend builder 1/6] FROM
docker.io/library/golang:1.24@sha256:d2d2bc1c84f7e60d7d2438a3836ae7d0c847f4888464e7e
c9ba3a1339a1ee804                                0.1s
=> => resolve
docker.io/library/golang:1.24@sha256:d2d2bc1c84f7e60d7d2438a3836ae7d0c847f4888464e7e
c9ba3a1339a1ee804                                0.1s
=> [backend stage-1 1/3] FROM
docker.io/library/alpine:latest@sha256:28bd5fe8b56d1bd048e5babf5b10710ebe0bae67db8691
6198a6eec434943f8b                                0.0s
=> => resolve
docker.io/library/alpine:latest@sha256:28bd5fe8b56d1bd048e5babf5b10710ebe0bae67db8691
6198a6eec434943f8b                                0.0s
=> [backend internal] load build context
0.0s
=> => transferring context: 196B
0.0s
=> [frontend builder 1/6] FROM
docker.io/library/node:22@sha256:5647be709086c696ff32edaaf1c70cd26d1da6ab2b39c32f3c7
b4c4a31957e37                                    0.1s
=> => resolve
docker.io/library/node:22@sha256:5647be709086c696ff32edaaf1c70cd26d1da6ab2b39c32f3c7
b4c4a31957e37                                    0.0s
=> [frontend internal] load build context
0.0s
=> => transferring context: 3.28kB
0.0s
```

```
=> [frontend stage-1 1/7] FROM
docker.io/library/node:22-alpine@sha256:16e22a550f3863206a3f701448c45f7912c6896a62de4
3add43bb9c86130c3e2          0.1s
=> => resolve
docker.io/library/node:22-alpine@sha256:16e22a550f3863206a3f701448c45f7912c6896a62de4
3add43bb9c86130c3e2          0.0s
=> CACHED [frontend stage-1 2/7] WORKDIR /app
0.0s
=> CACHED [frontend stage-1 3/7] COPY package*.json ./
0.0s
=> CACHED [frontend stage-1 4/7] RUN npm install --legacy-peer-deps
0.0s
=> CACHED [frontend stage-1 5/7] RUN npm install -g vite
0.0s
=> CACHED [frontend builder 2/6] WORKDIR /app
0.0s
=> CACHED [frontend builder 3/6] COPY package*.json ./
0.0s
=> CACHED [frontend builder 4/6] RUN npm install --legacy-peer-deps
0.0s
=> CACHED [frontend builder 5/6] COPY . .
0.0s
=> CACHED [frontend builder 6/6] RUN npm run build
0.0s
=> CACHED [frontend stage-1 6/7] COPY --from=builder /app/dist ./dist
0.0s
=> CACHED [frontend stage-1 7/7] COPY vite.config.js ./
0.0s
=> [frontend] exporting to image
7.5s
=> => exporting layers
0.0s
=> => exporting manifest
sha256:226648e7de4b162f1ccb0ba3efb557542c8ad515c0b58780ce3699ff97f71860
0.0s
=> => exporting config
sha256:708207e6c9c2d4a836c7b838f7ad1c9b14048096ba585ba4cd01f112fd99a8e5
0.0s
=> => exporting attestation manifest
sha256:304a13527c97c834f0879e4289e9873bb066105e1ff4e93be6d54eee262dc366
0.0s
=> => exporting manifest list
sha256:6730f1f337c7eaab655d79ab4efaf763d02a38f41317e2bf8105f48a9ce5cc6e
0.0s
```

=> => naming to docker.io/library/devboard-frontend:latest
0.0s
=> => unpacking to docker.io/library/devboard-frontend:latest
7.4s
=> CACHED [backend stage-1 2/3] WORKDIR /app
0.0s
=> CACHED [backend builder 2/6] WORKDIR /app
0.0s
=> CACHED [backend builder 3/6] COPY go.mod go.sum ./
0.0s
=> CACHED [backend builder 4/6] RUN go mod download
0.0s
=> CACHED [backend builder 5/6] COPY . .
0.0s
=> CACHED [backend builder 6/6] RUN CGO_ENABLED=0 GOOS=linux go build -o
devboard-backend . 0.0s
=> CACHED [backend stage-1 3/3] COPY --from=builder /app/devboard-backend .
0.0s
=> [backend] exporting to image
0.4s
=> => exporting layers
0.0s
=> => exporting manifest
sha256:4da16daa7cb8a3facccab0fd8f941f8eb75067fb692c418401d24755c9918df8
0.0s
=> => exporting config
sha256:8b883fad9970735bdacfec697495bb1c64e6c430920ca9fe22c45a81f073ea5a
0.0s
=> => exporting attestation manifest
sha256:e96bd26de6a7dcb564ed89fc33c4bd11ad6db8fd92225b0d31649eb06b79472
0.0s
=> => exporting manifest list
sha256:20b79ef0d6017f9dac79d90f52b3941625f4bb8bebefd2ac0a48f573d46a7dcb
0.0s
=> => naming to docker.io/library/devboard-backend:latest
0.0s
=> => unpacking to docker.io/library/devboard-backend:latest
0.2s
=> [backend] resolving provenance for metadata file
0.0s
=> [frontend] resolving provenance for metadata file
0.0s
[+] up 7/7

```

✓ Image devboard-backend      Built
8.1s
✓ Image devboard-frontend      Built
8.1s
✓ Network devboard_devboard-network Created
0.0s
✓ Volume devboard_devboard_pgdata Created
0.0s
✓ Container postgres           Started
2.3s
✓ Container backend            Started
0.6s
✓ Container frontend           Started
0.7s
ubuntu@ip-172-31-87-57:~/devboard$ docker compose ps
NAME          IMAGE          COMMAND          SERVICE  CREATED          STATUS
PORTS
backend       devboard-backend  "./devboard-backend"  backend  About a minute ago  Up
About a minute  0.0.0.0:8081->8080/tcp, [::]:8081->8080/tcp
frontend       devboard-frontend  "docker-entrypoint.s..."  frontend  About a minute ago  Up
About a minute  0.0.0.0:5173->5173/tcp, [::]:5173->5173/tcp
postgres       postgres:17      "docker-entrypoint.s..."  postgres  About a minute ago  Up About
a minute  0.0.0.0:5432->5432/tcp, [::]:5432->5432/tcp
ubuntu@ip-172-31-87-57:~/devboard$ docker compose logs backend --tail 20
backend | 2026/07/22 14:54:28 [backend] waiting for postgres (1)...
backend | [GIN-debug] [WARNING] Creating an Engine instance with the Logger and Recovery
middleware already attached.
backend |
backend | [GIN-debug] [WARNING] Running in "debug" mode. Switch to "release" mode in
production.
backend | - using env:      export GIN_MODE=release
backend | - using code:      gin.SetMode(gin.ReleaseMode)
backend |
backend | [GIN-debug] GET    /health          --> main.main.func1 (3 handlers)
backend | [GIN-debug] GET    /projects        --> main.listProjects (3 handlers)
backend | [GIN-debug] POST   /projects        --> main.createProject (3 handlers)
backend | [GIN-debug] GET    /tasks          --> main.listTasks (3 handlers)
backend | [GIN-debug] POST   /tasks          --> main.createTask (3 handlers)
backend | [GIN-debug] PATCH  /tasks/:id       --> main.updateTask (3 handlers)
backend | [GIN-debug] GET    /search          --> main.searchTasks (3 handlers)
backend | [GIN-debug] [WARNING] You trusted all proxies, this is NOT safe. We recommend
you to set a value.
backend | Please check
https://pkg.go.dev/github.com/gin-gonic/gin#readme-don-t-trust-all-proxies for details.

```

```

backend | [GIN-debug] Listening and serving HTTP on :8080
backend | 2026/07/22 14:54:30 [backend] connected to postgres
backend | 2026/07/22 14:54:30 [backend] listening on :8080
ubuntu@ip-172-31-87-57:~/devboard$ docker compose logs postgres --tail 20
postgres |
postgres |
postgres | waiting for server to shut down...2026-07-22 14:54:29.855 UTC [47] LOG: received
fast shutdown request
postgres | .2026-07-22 14:54:29.856 UTC [47] LOG: aborting any active transactions
postgres | 2026-07-22 14:54:29.858 UTC [47] LOG: background worker "logical replication
launcher" (PID 53) exited with exit code 1
postgres | 2026-07-22 14:54:29.861 UTC [48] LOG: shutting down
postgres | 2026-07-22 14:54:29.863 UTC [48] LOG: checkpoint starting: shutdown immediate
postgres | 2026-07-22 14:54:29.923 UTC [48] LOG: checkpoint complete: wrote 948 buffers
(5.8%); 0 WAL file(s) added, 0 removed, 0 recycled; write=0.032 s, sync=0.019 s, total=0.063 s;
sync files=313, longest=0.005 s, average=0.001 s; distance=4324 kB, estimate=4324 kB;
lsn=0/1926898, redo lsn=0/1926898
postgres | 2026-07-22 14:54:29.929 UTC [47] LOG: database system is shut down
postgres | done
postgres | server stopped
postgres |
postgres | PostgreSQL init process complete; ready for start up.
postgres |
postgres | 2026-07-22 14:54:29.986 UTC [1] LOG: starting PostgreSQL 17.10 (Debian
17.10-1.pgdg13+1) on x86_64-pc-linux-gnu, compiled by gcc (Debian 14.2.0-19) 14.2.0, 64-bit
postgres | 2026-07-22 14:54:29.986 UTC [1] LOG: listening on IPv4 address "0.0.0.0", port
5432
postgres | 2026-07-22 14:54:29.986 UTC [1] LOG: listening on IPv6 address ":::", port 5432
postgres | 2026-07-22 14:54:29.996 UTC [1] LOG: listening on Unix socket
"/var/run/postgresql/.s.PGSQL.5432"
postgres | 2026-07-22 14:54:30.007 UTC [67] LOG: database system was shut down at
2026-07-22 14:54:29 UTC
postgres | 2026-07-22 14:54:30.014 UTC [1] LOG: database system is ready to accept
connections
ubuntu@ip-172-31-87-57:~/devboard$ docker compose logs frontend --tail 20
frontend |
frontend | > devboard-frontend@1.0.0 preview
frontend | > vite preview --host 0.0.0.0 --port 5173
frontend |
frontend | 2:54:29 PM [vite] warning: `esbuild` option was specified by "vite:react-babel" plugin.
This option is deprecated, please use `oxc` instead.
frontend | `optimizeDeps.rollupOptions` / `ssr.optimizeDeps.rollupOptions` is deprecated. Use
`optimizeDeps.rollupOptions` instead. Note that this option may be set by a plugin. Set
VITE_DEPRECATION_TRACE=1 to see where it is called.

```

```

frontend | [vite:react-babel] We recommend switching to `@vitejs/plugin-react-oxc` for improved
performance. More information at https://vite.dev/rolldown
frontend | → Local: http://localhost:5173/
frontend | → Network: http://172.19.0.4:5173/
ubuntu@ip-172-31-87-57:~/devboard$ curl http://localhost:8081/health
{"service":"backend","status":"ok"}ubuntu@ip-172-31-87-57:~/devboard$ curl
http://localhost:8081/projects
{"projects":[{"id":1,"name":"DevBoard MVP","description":"Ship the v1 task
tracker","owner_id":1,"created_at":"2026-07-22T14:54:29Z"},{"id":2,"name":"Marketing
Site","description":"Landing page + launch
blog","owner_id":1,"created_at":"2026-07-22T14:54:29Z"}]}ubuntu@ip-172-31-87-57:~/devboard
$ curl "http://localhost:8081/tasks?project_id=1"
curl
"http://localhost:8081/tasks?project_id=1"
{"source":"database","tasks":[{"id":1,"title":"Design the task schema","description":"projects,
tasks,
statuses","project_id":1,"assignee_id":1,"status":"done","priority":"high","due_date":"2026-05-05"
,"created_at":"2026-07-22T14:54:29Z","updated_at":"2026-07-22T14:54:29Z"},{"id":2,"title":"Buil
d the kanban board","description":"drag and drop
columns","project_id":1,"assignee_id":2,"status":"in_progress","priority":"high","due_date":"2026-
06-18","created_at":"2026-07-22T14:54:29Z","updated_at":"2026-07-22T14:54:29Z"},{"id":3,"title
":"Wire up the dashboard hero","description":"velocity + chip
stats","project_id":1,"assignee_id":1,"status":"in_progress","priority":"medium","due_date":"2026-
06-20","created_at":"2026-07-22T14:54:29Z","updated_at":"2026-07-22T14:54:29Z"},{"id":4,"title
":"Add the command bar","description":"global
search","project_id":1,"assignee_id":3,"status":"todo","priority":"medium","due_date":"2026-06-2
5","created_at":"2026-07-22T14:54:29Z","updated_at":"2026-07-22T14:54:29Z"},{"id":5,"title":"D
ark mode polish","description":"grain +
gradients","project_id":1,"assignee_id":2,"status":"todo","priority":"low","due_date":null,"created_
at":"2026-07-22T14:54:29Z","updated_at":"2026-07-22T14:54:29Z"},{"id":6,"title":"Fix flaky
avatar colors","description":"hash collision on
initials","project_id":1,"assignee_id":1,"status":"blocked","priority":"high","due_date":"2026-06-15
","created_at":"2026-07-22T14:54:29Z","updated_at":"2026-07-22T14:54:29Z"},{"id":7,"title":"Wri
te component tests","description":"Vitest +
testing-library","project_id":1,"assignee_id":3,"status":"todo","priority":"medium","due_date":null,"
created_at":"2026-07-22T14:54:29Z","updated_at":"2026-07-22T14:54:29Z"},{"id":8,"title":"Ship
the v1 release","description":"tag and
announce","project_id":1,"assignee_id":1,"status":"todo","priority":"high","due_date":"2026-06-30
","created_at":"2026-07-22T14:54:29Z","updated_at":"2026-07-22T14:54:29Z"}]}ubuntu@ip-172
-31-87-57:~/devboard$
ubuntu@ip-172-31-87-57:~/devboard$ docker volume ls
DRIVER VOLUME NAME
local devboard_devboard_pgdata
local devboard_pgdata
ubuntu@ip-172-31-87-57:~/devboard$ docker exec -it postgres psql -U postgres -d devboard

```

```
psql (17.10 (Debian 17.10-1.pgdg13+1))
Type "help" for help.
```

```
devboard=# SELECT COUNT(*) FROM tasks;
```


```
SELECT id, title, status
FROM tasks
ORDER BY id;
count
```

```
-----
      11
(1 row)
```

```
id |      title      | status
---+-----+-----
 1 | Design the task schema | done
 2 | Build the kanban board  | in_progress
 3 | Wire up the dashboard hero | in_progress
 4 | Add the command bar    | todo
 5 | Dark mode polish       | todo
 6 | Fix flaky avatar colors | blocked
 7 | Write component tests   | todo
 8 | Ship the v1 release     | todo
 9 | Draft the launch blog post | in_progress
10 | Hero illustration      | todo
11 | docker compose         | todo
(11 rows)
```

```
devboard=#
```

Docker compose

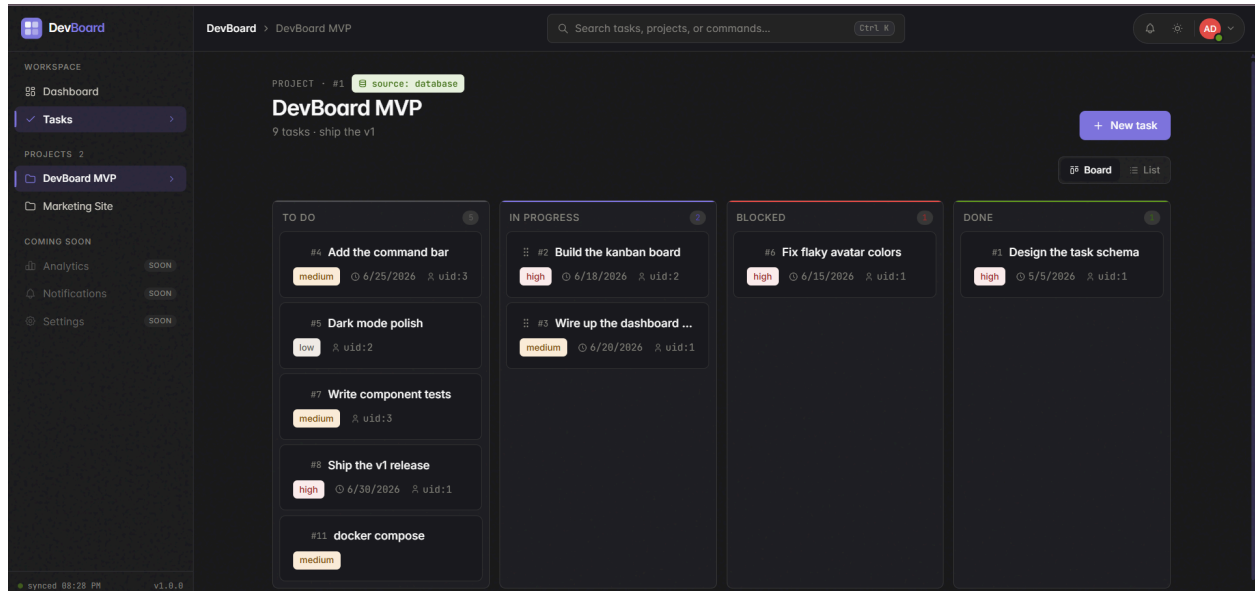

```
local devboard_devboard_pgdata
local devboard_pgdata
ubuntu@ip-172-31-87-57:~/devboard$ docker exec -it postgres psql -U postgres -d devboard
psql (17.10 (Debian 17.10-1.pgdg13+1))
Type "help" for help.

devboard=# SELECT COUNT(*) FROM tasks;
SELECT id, title, status
FROM tasks
ORDER BY id;
count
-----
11
(1 row)

id | title | status
---|---|---
1 | Design the task schema | done
2 | Build the kanban board | in progress
3 | Wire up the dashboard hero | in progress
4 | Add the command bar | todo
5 | Dark mode polish | todo
6 | Fix flaky avatar colors | blocked
7 | Write component tests | todo
8 | Ship the v1 release | todo
9 | Draft the launch blog post | in progress
10 | Hero illustration | todo
11 | docker compose | todo
(11 rows)

devboard=#
```