


How a labelled corpus is built — and why the join is verified

Labels are written before the traffic happens, into a separate file, so the detection path cannot accidentally read the answer key.

GENERATORS · LABEL AT THE POINT OF GENERATION

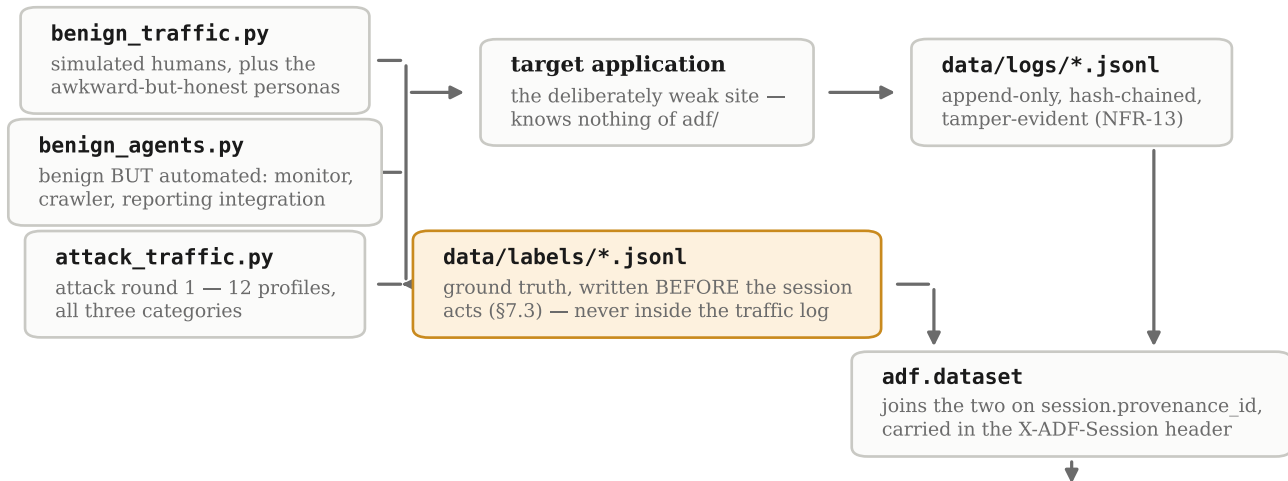

verified corpus → tools/corpus_report.py

Join coverage is a reported result, not an assumption: the build refuses to emit a corpus below 95%. The report then runs the phase exit gates — 6 checks for Phase 1, 7 for Phase 2 — and prints PASS or FAIL for each.

Why the join is checked rather than trusted: the first version of it silently produced zero matches. Labels were keyed by the generator's session id, records by the application's cookie — two namespaces that never met. Nothing raised, every downstream statistic still computed, and every one of them was meaningless.

One command does the whole lifecycle — wipe, seed, start a private server, generate, stop, assemble, verify: `python -m tools.generate_corpus`