

Here is a list of tips to make your LaTeX projects more modular, readable, and maintainable:

- A latex page often have - Lists, Tables, Images. Create seprate tex files for them and use input command to include then in the page.
- **Use subfiles** to divide the content into separate files, allowing independent compilation of chapters or sections. **Use `\input` or `\include`** to separate sections or chapters into different files for better structure.
- **Define reusable variables and commands** with `\newcommand` or `\def` to keep your code cleaner and avoid repetition.
- **Use `\begingroup` and `\endgroup`** to limit the scope of variables or formatting changes, which are automatically destroyed after use. Use a group to safely define macros in one subfile and use them in another, without polluting the global scope. For example:

```
\begingroup
  \input{\subfix{cat.tex}} % defines macros (e.g., \myVar)
  \input{\subfix{apple.tex}} % uses \myVar
\endgroup
```

This ensures macros like `\myVar` do not affect other parts of the document.

- **Create custom environments** with `NewDocumentEnvironment` to define consistent styles or formatting for repeated structures.
- **Organize packages and settings** in a separate preamble file or style file (`.sty`) to avoid cluttering the main document.
- **Comment generously** and maintain a changelog for collaborative projects or long-term maintenance.
- **Use bibliographies modularly** with BibTeX or BibLaTeX in separate files for easier management of references.
- **Avoid hard-coded formatting** in the main document; define styles and colors globally using commands or custom environments.
- **Use consistent naming conventions** for labels, commands, and files to reduce confusion and improve readability.

- **Test small sections independently** before compiling the whole document to quickly catch errors.

Tips while writing latex code

- Avoid `\begin{center}` around floats — use `\centering`.
- `\centering` centers content inside the float.
- Always add `\caption{}` inside the table if you want it to appear in the List of Tables.
- Use `\label{}` after `\caption{}` to reference the table in text.
- `[h!]` → “try to place here as much as possible”.

Chapter 1

Tables in L^AT_EX

1.1 Simple Table With Variables

| | |
|-------|-------|
| Apple | Fruit |
|-------|-------|

Table 1.1: Simple table

```
% usepackage : [table]{xcolor}, float(h!), caption
\begingroup
  % Define variables(macros) for table using \def or \newcommand
  \def\cellOneA{\textbf{Apple}}
  \def\cellOneB{\textcolor{red}{Fruit}}
  \setlength{\tabcolsep}{10pt}
  % Now use these variables inside a table
  \begin{center}
    \renewcommand{\arraystretch}{1.2}
    \begin{tabular}{|c|c|}
      \hline
      \cellOneA & \cellOneB \\ \hline
    \end{tabular}
    \begin{table}[!h]
      \caption{Simple table}
    \end{table}
  \end{center}
  \medskip
\endgroup % After \endgroup, macros \cellOneA etc. are no longer defined.
```

1.2 Simple Table using centering without begin(center)

| | |
|---------------|--------------|
| Fruit | Apple |
| Animal | Cat |

Table 1.2: Table with environment

Code:

```
\begin{simpleCenteringTempChapterTable}{Table with environment}
  \def\cellOneA{\textbf{Fruit}}
  \def\cellOneB{\textcolor{red}{Apple}}
  \def\cellTwoA{\textbf{Animal}}
  \def\cellTwoB{\textcolor{orange}{Cat}}

  \begin{tabular}{|c|c|} \hline
    \cellOneA      & \cellOneB      & \hline
    \cellTwoA      & \cellTwoB      & \hline
  \end{tabular}
\end{simpleCenteringTempChapterTable}
```

Listing 1.1: Simple Table Example

```
\NewDocumentEnvironment{simpleCenteringTempChapterTable}{m} % #1 = caption
{%
  \begin{group} % <--- start local scope
  \begin{table}[!h]
    \centering
    \setlength{\tabcolsep}{10pt}
    \renewcommand{\arraystretch}{1.4}
  }{%
    \caption{#1}
  \end{table}
  \end{group} % <--- end local scope (cleans variables
  ↪ )
}
```

Listing 1.2: Simple Table Example

1.3 Custom Tables

| Description(c) | Content(c) | Tag Used(p) |
|------------------------|----------------|------------------|
| Table Cell with 2 rows | Apple Mango | makecell, \\ |
| Table Cell with 2 rows | newlinecol c | newline col p |
| A multi row cell | Eagle | multirow, cline |
| | Parrot | 6em or * |

Table 1.3: Customizing The Cells

```
% \makecell[l]{\textcolor{red}{Apple} \mid \textcolor{green}{Mango}}
```

```
% \multirow{2}{6em}{Birds} & Eagle & Apple \\ \cline{2-3}  
% & Parrot & Banana \\ \hline
```

1.4 Not recommended : Table Using `\begin{center}`.

| | |
|---------------|-------|
| Fruit | Apple |
| Animal | Cat |

Table 1.4: Table with environment

Code:

```
\begin{simpleTableEnvTempChapterTable}{Table with environment}
  \def\cellOneA{\textbf{Fruit}}
  \def\cellOneB{\textcolor{red}{Apple}}
  \def\cellTwoA{\textbf{Animal}}
  \def\cellTwoB{\textcolor{orange}{Cat}}

  \begin{tabular}{|c|c|} \hline
    \cellOneA      & \cellOneB      & \hline
    \cellTwoA      & \cellTwoB      & \hline
  \end{tabular}
\end{simpleTableEnvTempChapterTable}
```

Listing 1.3: Simple Table Example

```
\NewDocumentEnvironment{simpleTableEnvTempChapterTable}{m}
{
  \begin{group}
    \setlength{\tabcolsep}{10pt}
    \begin{center}
      \renewcommand{\arraystretch}{1.2}
    \end{center}
  \end{group}
  \begin{table}[!h]
    \caption{#1}
  \end{table}
  \end{center}
\end{group}
}
```

Listing 1.4: Simple Table Example

Chapter 2

Lists in L^AT_EX

2.1 Lists in LaTeX

2.1.1 Basic lists

Basic unordered list:

- Apple
- Orange

Basic ordered list:

1. Apple
2. Orange

```
% usepackage : enumitem
\noindent Basic unordered list:
\par
\begin{itemize}[nosep] % nosep(no extra vertical space)
  \item Apple
  \item Orange
\end{itemize}

\noindent Basic ordered list:
\par
\begin{enumerate}
  \item Apple
  \item Orange
\end{enumerate}
```

2.1.2 Basic lists

Description list:

XX Apple

AAA Orange

```
% usepackage : enumitem
\noindent Description list:
\par
\begin{description}[itemsep=Opt,parsep=Opt] % itemsep and parsep
  \item[XX] Apple
  \item[AAA] Orange
\end{description}
```

2.1.3 Wide lists

Wide list for paragraph-like items:

- This item demonstrates wide layout so that wrapped lines align with the text block instead of being indented.
- Another wide item to illustrate multi-line behavior with compact spacing.

```
% chapters/chap03-lists/example_codes/wide_lists_example.tex
% Wide lists: labels align with paragraph, subsequent lines unindented
\noindent Wide list for paragraph-like items:
\par
\begin{itemize}[wide,nosep]
  \item This item demonstrates wide layout so that wrapped lines align with
    ↪ the text block instead of being indented.
  \item Another wide item to illustrate multi-line behavior with compact
    ↪ spacing.
\end{itemize}
```


2.1.4 Nested lists

Nested lists:

- Outer A
- Outer B
 - Inner B.1
 - Inner B.2
 - 1. Numbered subpoint 1
 - 2. Numbered subpoint 2
- Outer C

```
% usepackage : enumitem
\noindent Nested lists:
\par
\begin{itemize}
  \item Outer A
  \item Outer B
  \begin{itemize}
    \item Inner B.1
    \item Inner B.2
    \begin{enumerate}
      \item Numbered subpoint 1
      \item Numbered subpoint 2
    \end{enumerate}
  \end{itemize}
\end{itemize}
\item Outer C
\end{itemize}
```

2.1.5 Custom labels and refs

Custom-labeled enumerate/ref. See Q2, and Q3 [uses ref= to mirror labels].

Q1. What is your name?

Q2. What is your quest?

Q3. What is your favorite color?

In-paragraph list (manual punctuation), useful for compact text:

- (a) apples,
- (b) bananas,
- (c) cherries,
- (d) dates.

```
% usepackage : enumitem
\noindent Custom-labeled enumerate/ref. See \ref{itm:q2}, and \ref{itm:q3} [
    ↪ uses ref= to mirror labels].
\par
\begin{enumerate}[label=Q\arabic*.,ref=Q\arabic*]
  \item\label{itm:q1} What is your name?
  \item\label{itm:q2} What is your quest?
  \item\label{itm:q3} What is your favorite color?
\end{enumerate}

\noindent In-paragraph list (manual punctuation), useful for compact text:
\par
\begin{enumerate}[label=(\alph*),nosep]
  \item apples, \item bananas, \item cherries, \item dates.
\end{enumerate}
```

Chapter 3

Figures in L^AT_EX

3.1 Environment For Using Figures

```
% usepackage : xparse(NewDocumentEnvironment), graphicx(includegraphics),
    ↪ float(h!), subfiles(subfix), caption
\NewDocumentEnvironment{simpleImage}{ m m o o }
{
  \begin{figure}[h!]
    \centering
    \includegraphics[width=#2]{#1}
    \IfValueTF{#3}{\caption{#3}}{}
    \IfValueTF{#4}{\label{#4}}{}
  }\end{figure} }

\begin{simpleImage}
  {\subfix{example_codes/img_02.jpg}}
  {0.6\linewidth}
  [A simple example image]
  [fig:simple_image] % use [] to provide empty values
\end{simpleImage}
```

```
% 2 mandatory, 2 optional args
% #1=image, #2=width, #3=caption, #4=label
% m(mandatory), o(optional []), O({default}), s(starred version)
```

3.2 Environment For Box Figures and List figures

```
% usepackage : xparse(NewDocumentEnvironment), graphicx(includegraphics),
    ↪ subfiles(subfix), caption
\NewDocumentEnvironment{centerBoxImageStyle}{ m m m m m }
{
\begin{center}
  \fbox{%
    \begin{minipage}{#2}
      \centering
      \includegraphics[width=#3]{#1}
      \captionof{figure}{#4}
      \label{#5}
    \end{minipage}
  }
\end{center}
}{}
\begin{comment}
```

```
\begin{centerBoxImageStyle}
  {\subfix{example_codes/img_02.jpg}}      % #1 image path
  {0.6\linewidth}                          % #2 minipage width (box width)
  {0.9\linewidth}                          % #3 image width inside box
  {A simple example image inside a box.}    % #4 caption
  {}                                         % #5 label
\end{centerBoxImageStyle}
\end{comment}
% m(mandatory), o(optional []), D({default}), s(starred version)
```

3.3 Simple Figures




Figure 3.1: A simple example image.

```

% usepackage : graphicx(includegraphics), float(h!), subfiles(subfix), caption
\begin{figure}[h!]
  \centering
  \includegraphics[width=0.6\linewidth]{\subfix{example_codes/img_02.jpg}}
  \caption{A simple example image.}
  \label{fig:simple_image}
\end{figure}

```

3.4 Figures in Box, keep in list

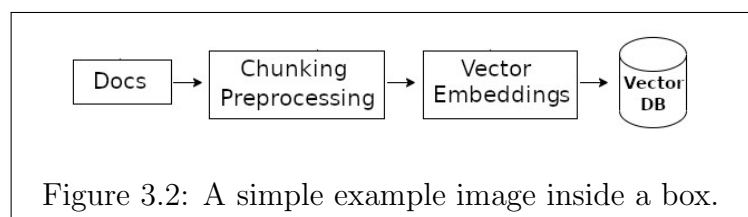


Figure 3.2: A simple example image inside a box.

```

% usepackage : graphicx(includegraphics), float(h!), subfiles(subfix), caption
\begin{center} % Boxed image
  \fbox{%
    \begin{minipage}{0.6\linewidth}
      \centering
      \includegraphics[width=0.9\linewidth]{\subfix{example_codes/img_02.jpg}}
      \captionof{figure}{A simple example image inside a box.}
      \label{fig:simple_boxed_image}
    \end{minipage}
  }
\end{center}

```

3.5 Importatnt Points to add Figures

- Create environment(template) which take arguments and display image.
- Create a seprate tex file that will use the template to display image.
- Import the tex file create in above step to your main code.

Chapter 4

Variables in L^AT_EX

Variables are destroyed after endgroup. (begingroup - endgroup)

4.1 Simple Text Variables in tables

| | |
|--------|-----------|
| Apple | Fruit |
| Carrot | Vegetable |

```
\begingroup
  % Define "variables" (macros) for table cells using \def or \newcommand
  \def\cellOneA{\textbf{Apple}}
  \def\cellOneB{\textcolor{red}{Fruit}}
  \def\cellTwoA{\textbf{Carrot}}
  \def\cellTwoB{\textcolor{orange}{Vegetable}}

  % Now use these variables inside a table
  \begin{center}
    \begin{tabular}{|c|c|}
      \hline
      \cellOneA & \cellOneB \\ \hline
      \cellTwoA & \cellTwoB \\ \hline
    \end{tabular}
  \end{center}
  \medskip
  % After \endgroup, macros \cellA, \cellB, etc. are no longer defined.
\endgroup
```

4.2 Simple Text Variables

Text Variable.

```
\newcommand{\varText}{\textbf{Text Variable}.}
```

4.3 Simple Maths Variables

$$E = mc^2$$

```
\def\varMath{$E = mc^2$} \varMath
```

4.4 Simple tikz image Variables



Figure 4.1: Stored Figure

```
\begingroup
  \newsavebox{\figBox}
  \begin{lrbox}{\figBox}
    \begin{tikzpicture}[scale=0.8]
      \draw[fill=orange!40] (2.5,0) rectangle (3.5,1);
      \node at (3,0.5) {Box};
    \end{tikzpicture}
  \end{lrbox}

  \begin{figure}[h]
    \centering
    \usebox{\figBox}
    \caption{Stored Figure}
  \end{figure}
\bigskip
\endgroup
```


4.5 Simple Table Variables

| Fruit | Color |
|-------|-------|
| Apple | Red |

Stored Figure

```
\begin{group}
  \newsavebox{\tableBox}
  \begin{lrbox}{\tableBox}
    \begin{tabular}{|c|c|} \hline
      \textbf{Fruit} & \textbf{Color} \\ \hline
      Apple & Red \\ \hline
    \end{tabular}
  \end{lrbox}

  \begin{center}
    \usebox{\tableBox} \\[3pt]
    \textbf{Stored Figure}
  \end{center}
\end{group}
```

4.6 Dynamic content variable using newtoks

This is *stored* in a token register.

```
\begin{group}
  \newtoks\varTokens
  \varTokens={This is \textit{stored} in a token register.}
  \the\varTokens
\end{group}
```

4.7 Temporary macros (auto-destroyed after scope)

Scoped variable A

```
\begin{group}
  \def\tempA{Scoped \textbf{variable A}}
  \medskip
  \noindent \tempA
\end{group}
```