


02:36:54




02:37:29




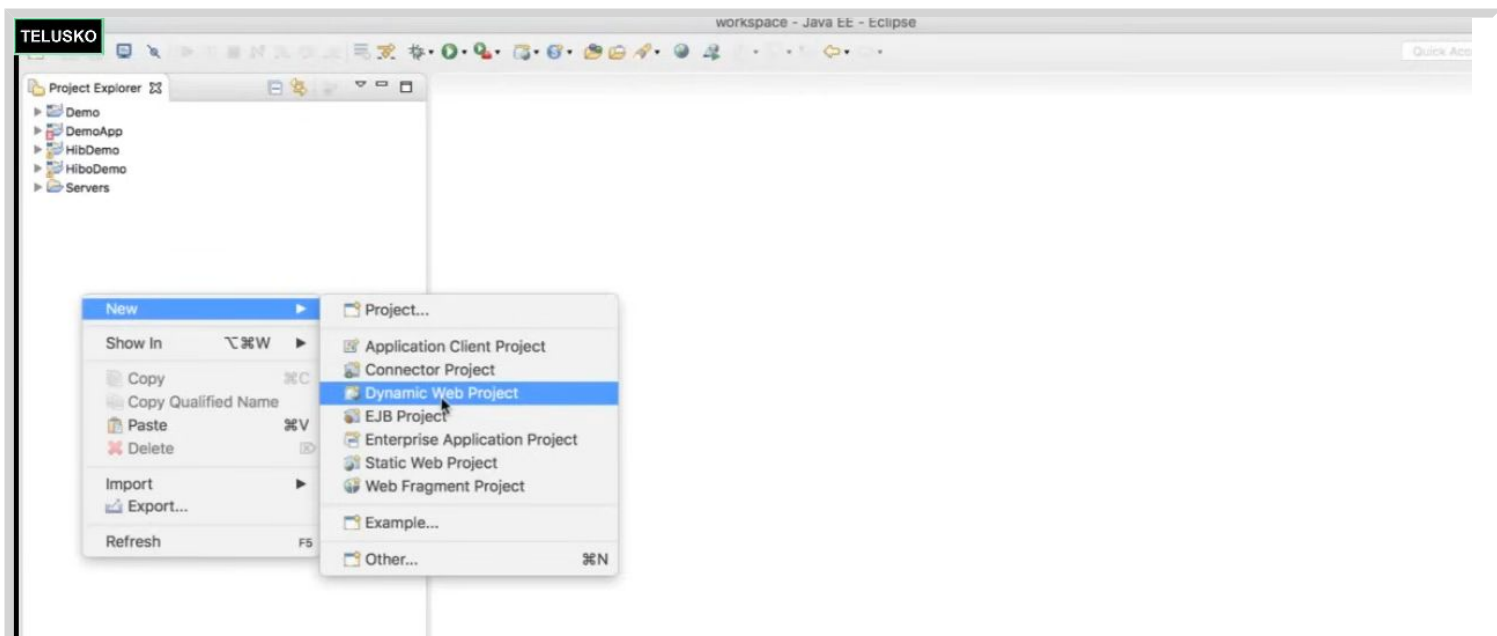


02:37:42

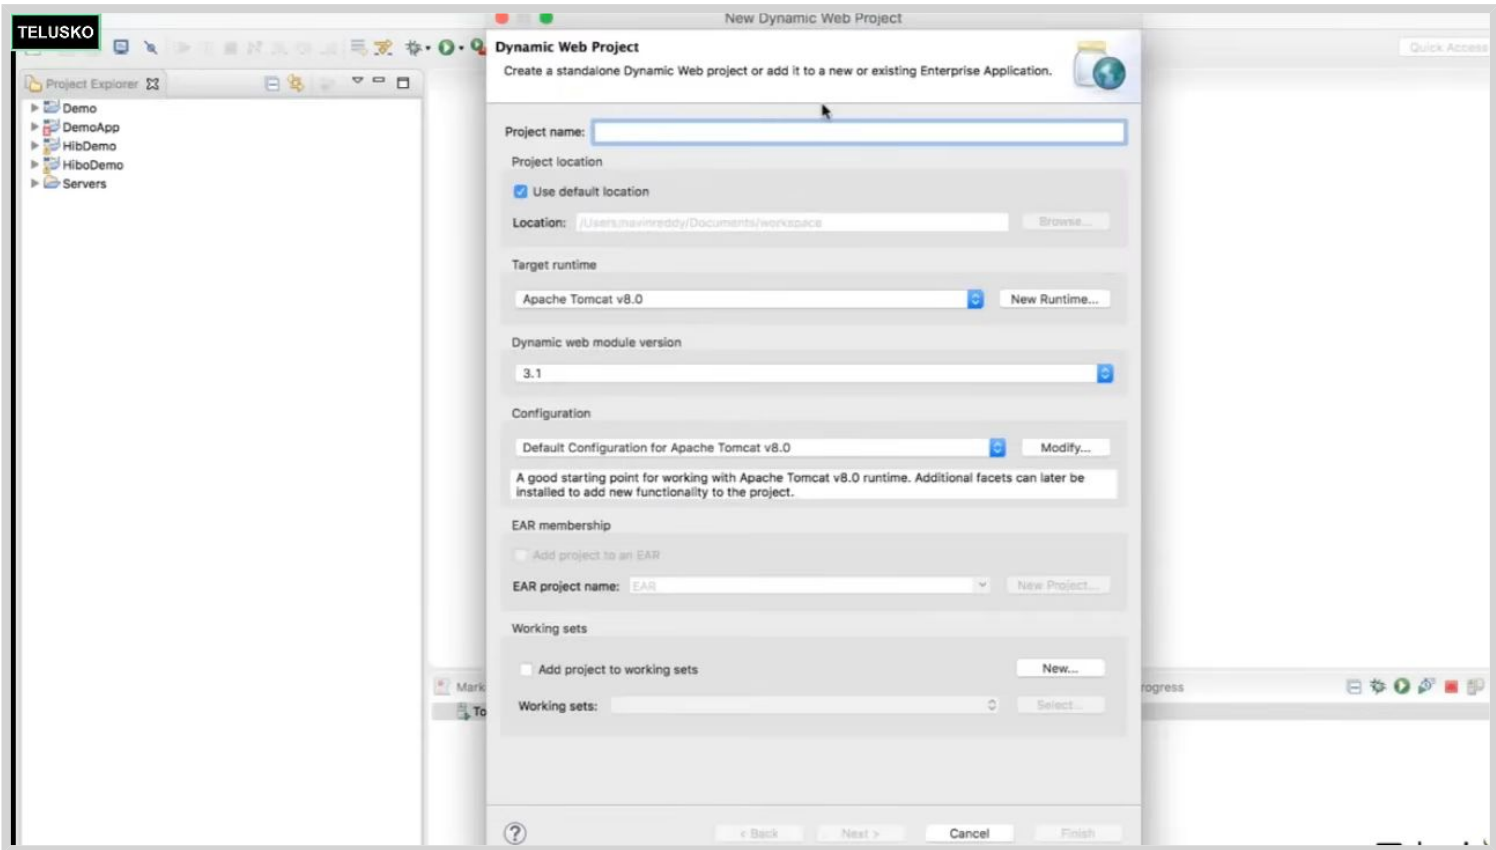


02:37:42

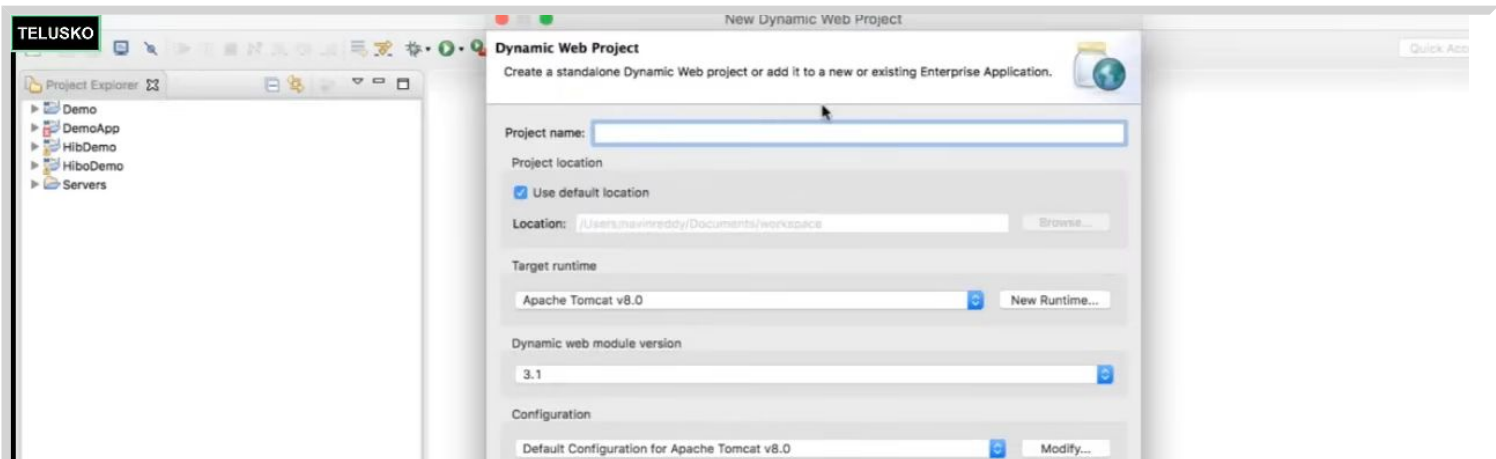


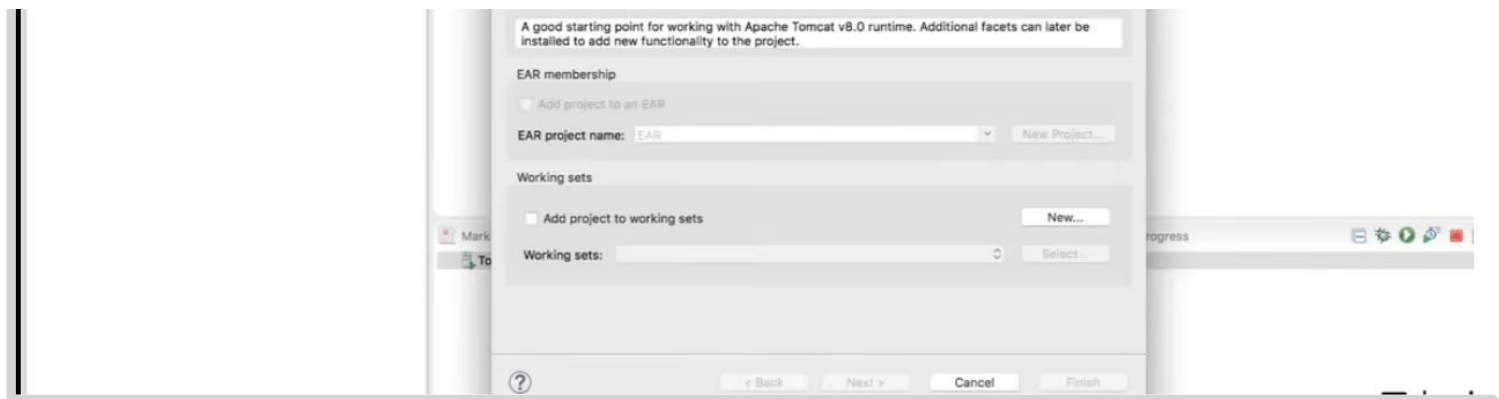


02:37:50

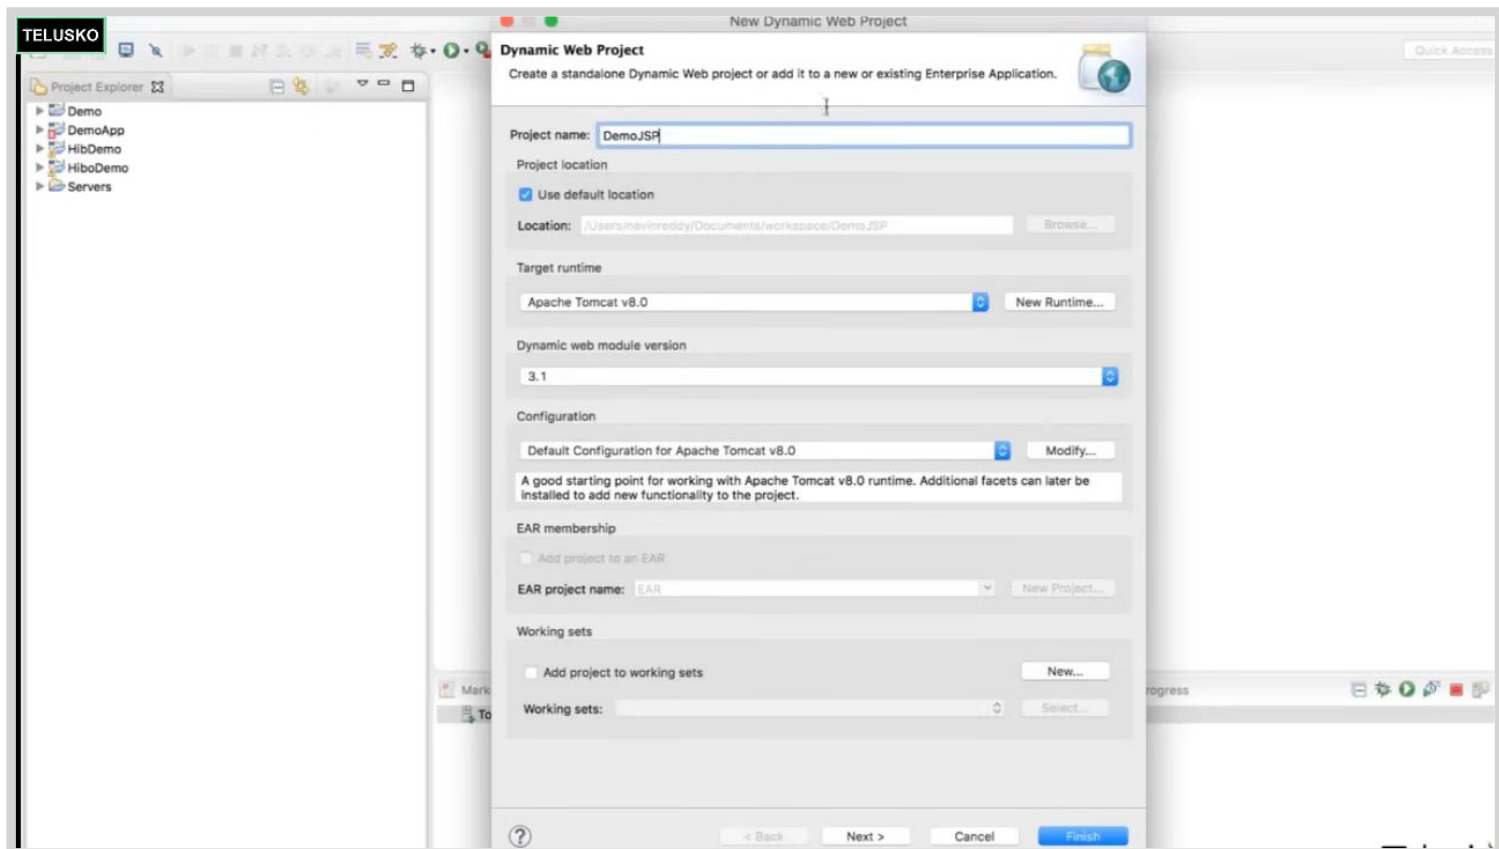


02:38:17

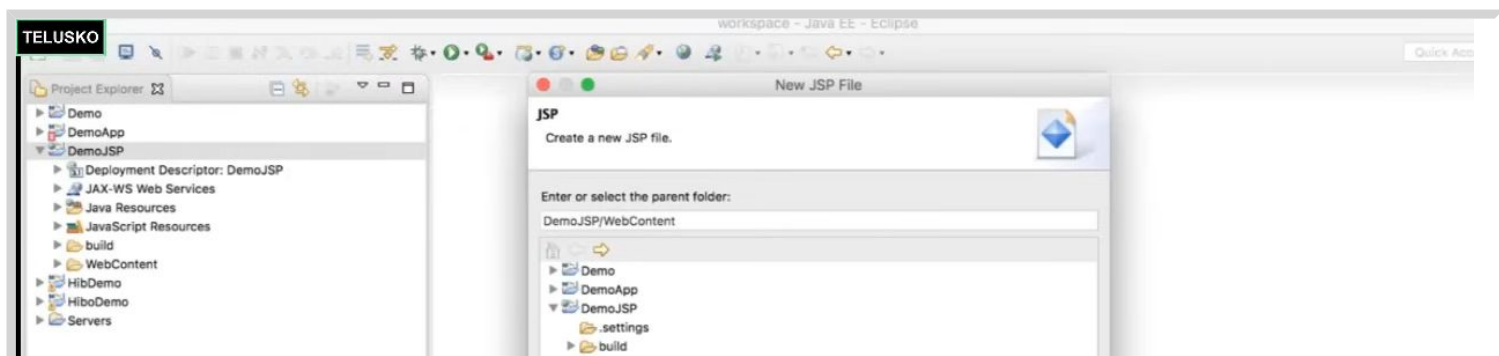


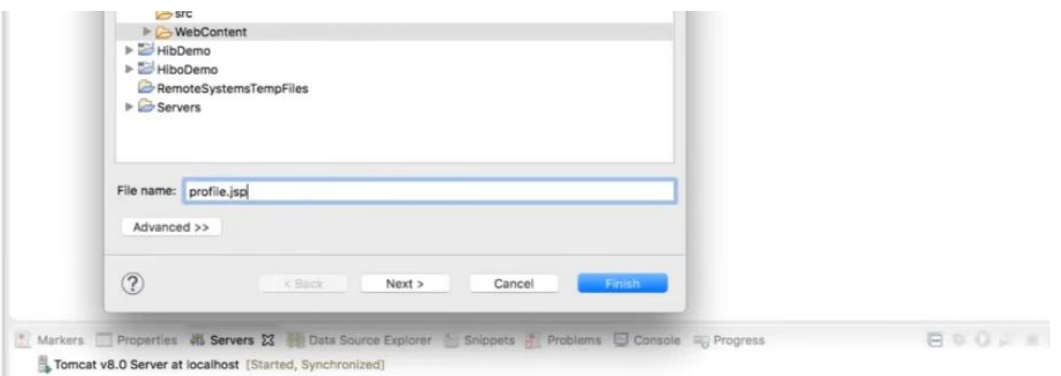


02:38:22

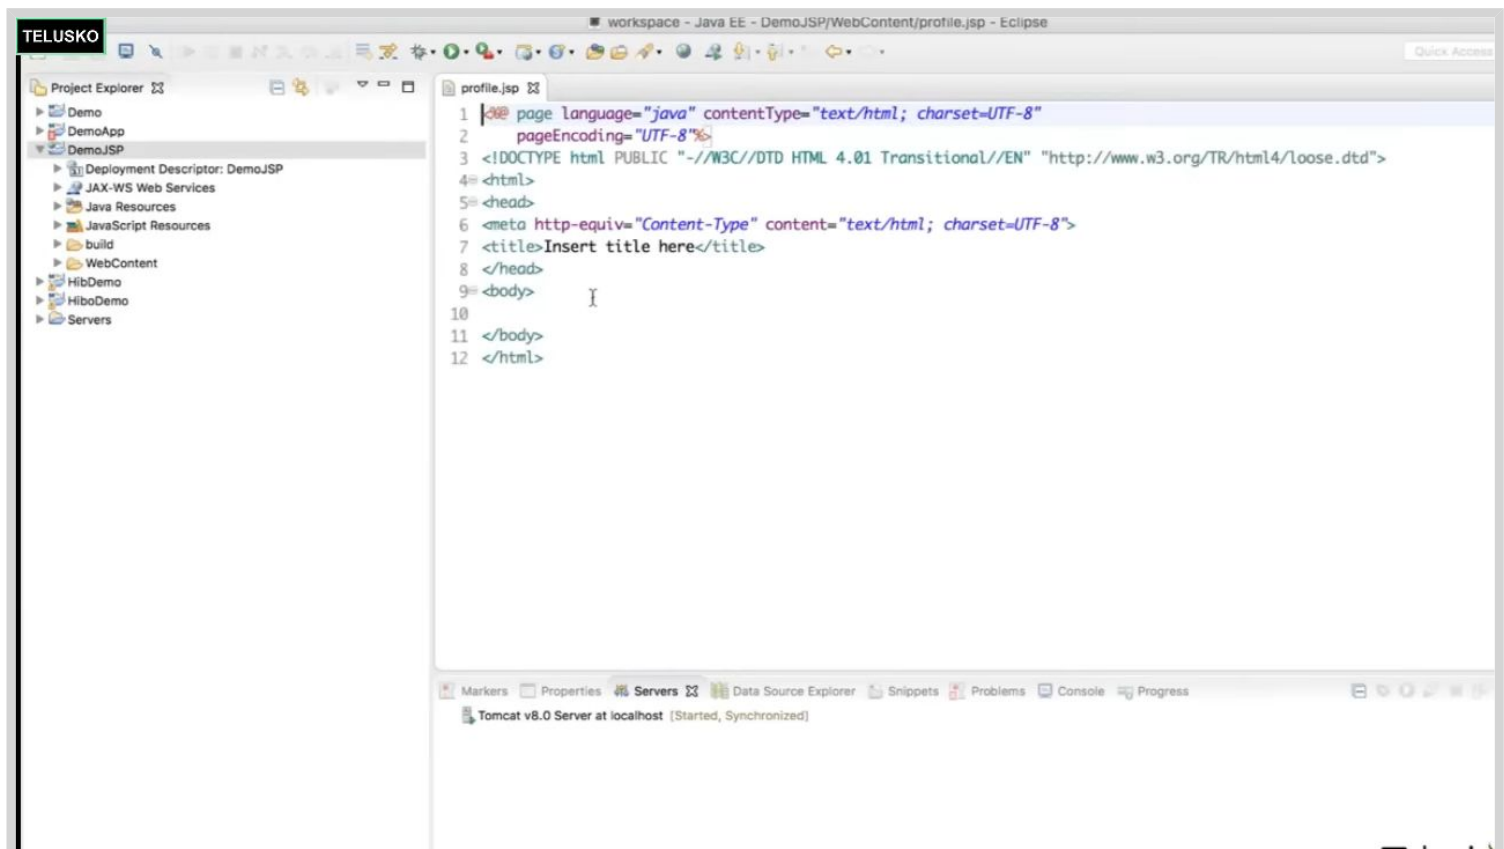


02:38:50

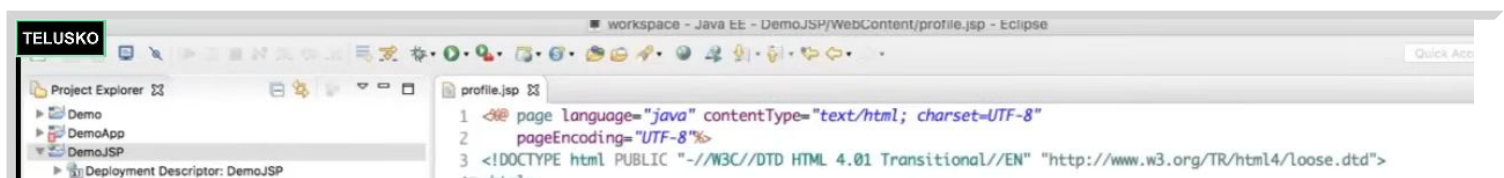


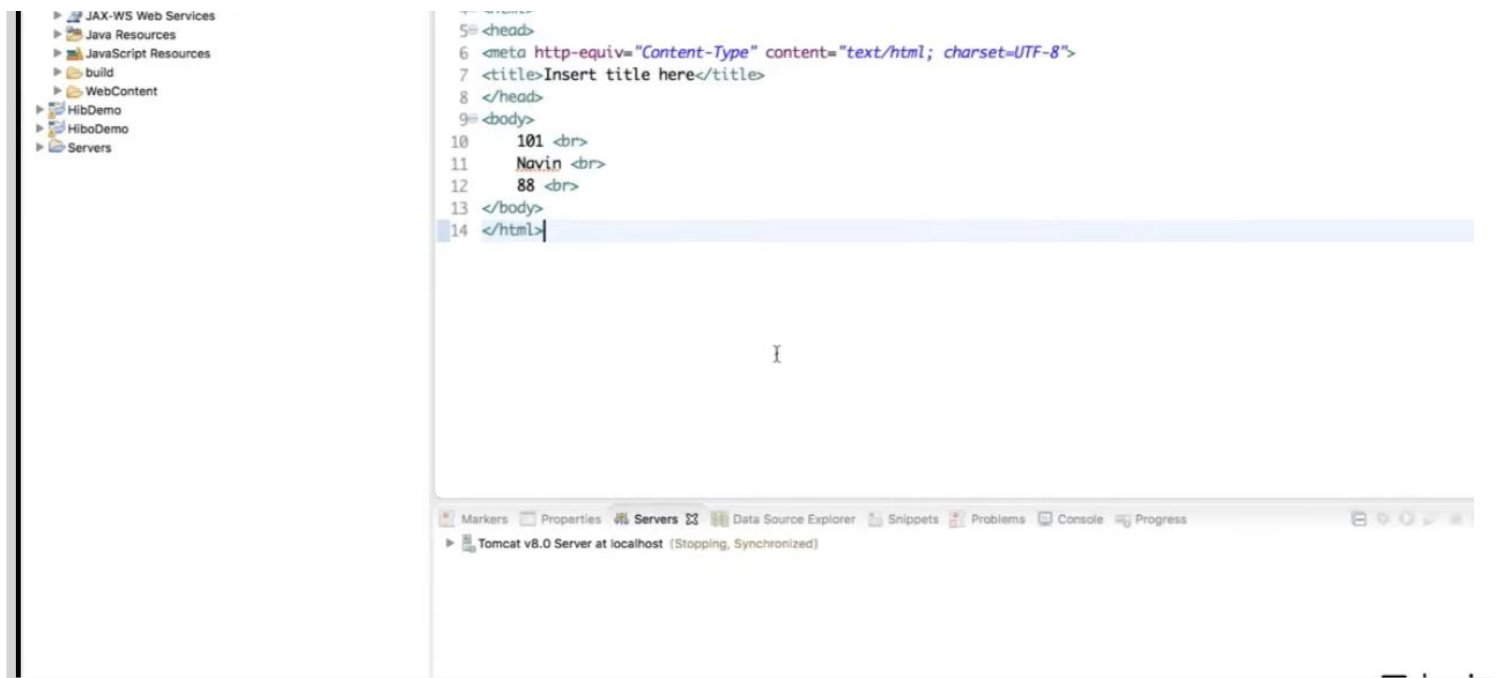


02:38:52

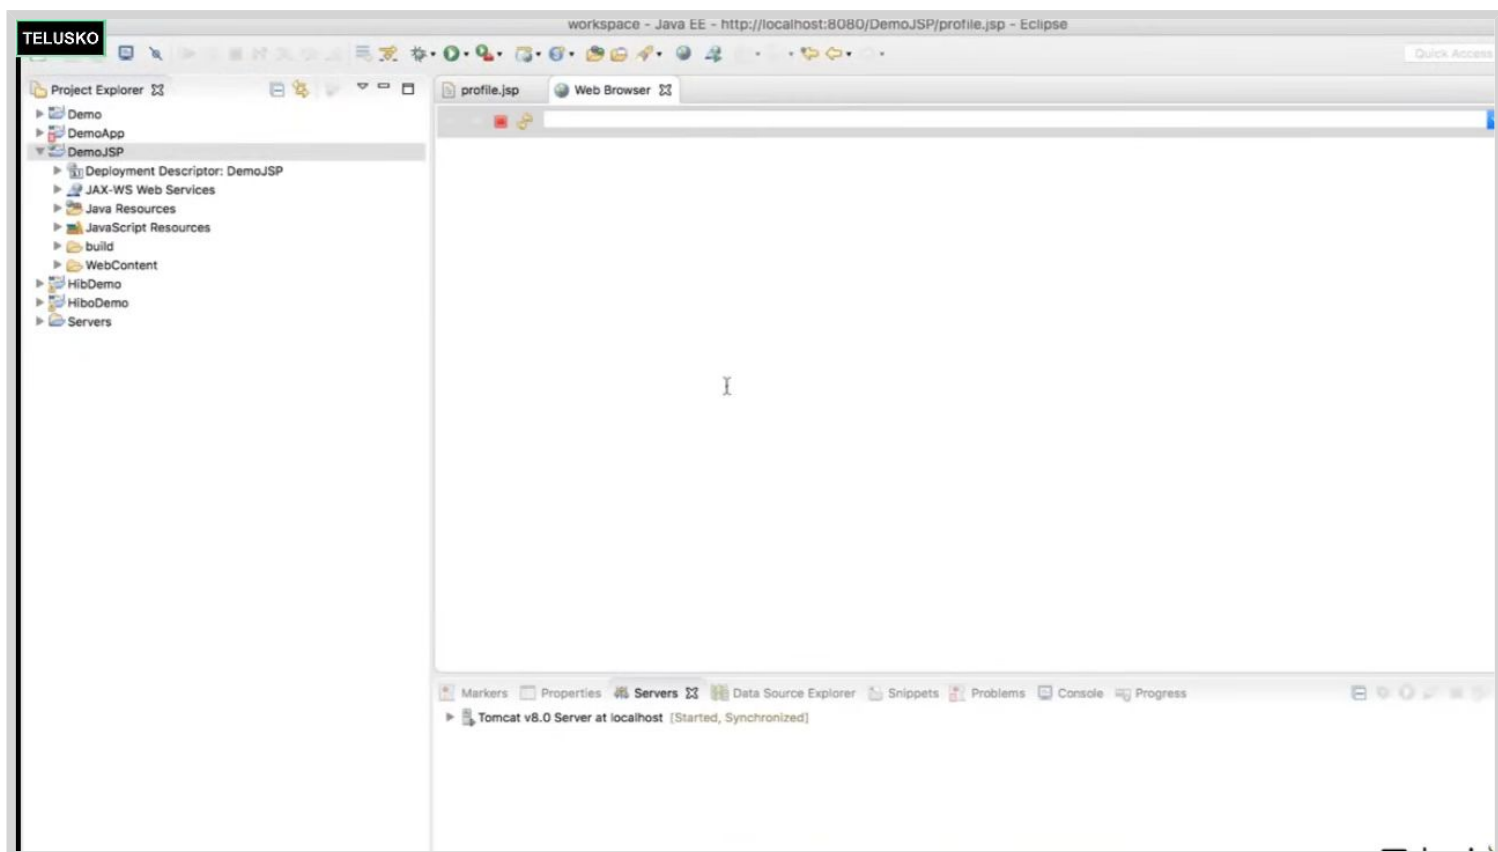


02:38:55




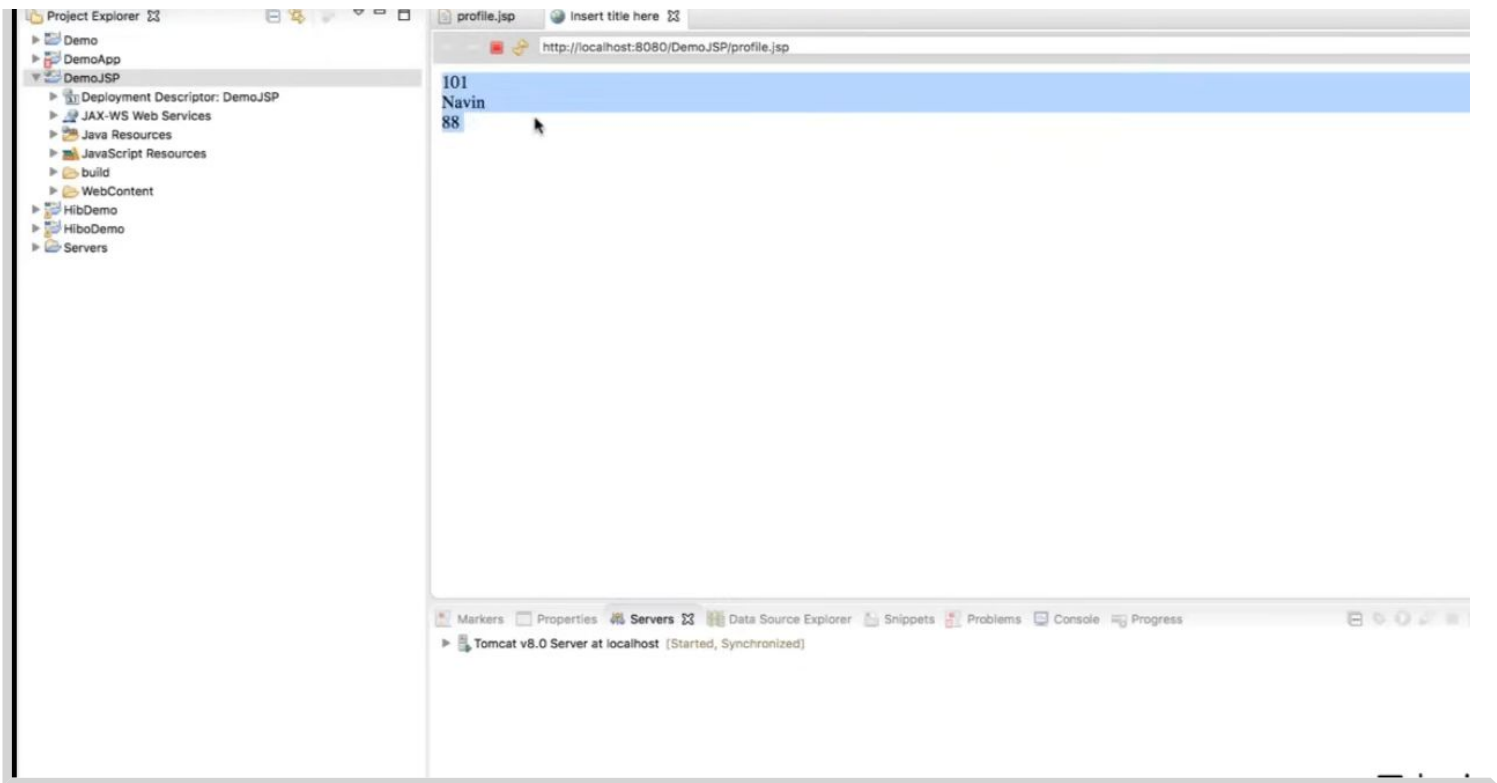


02:39:06

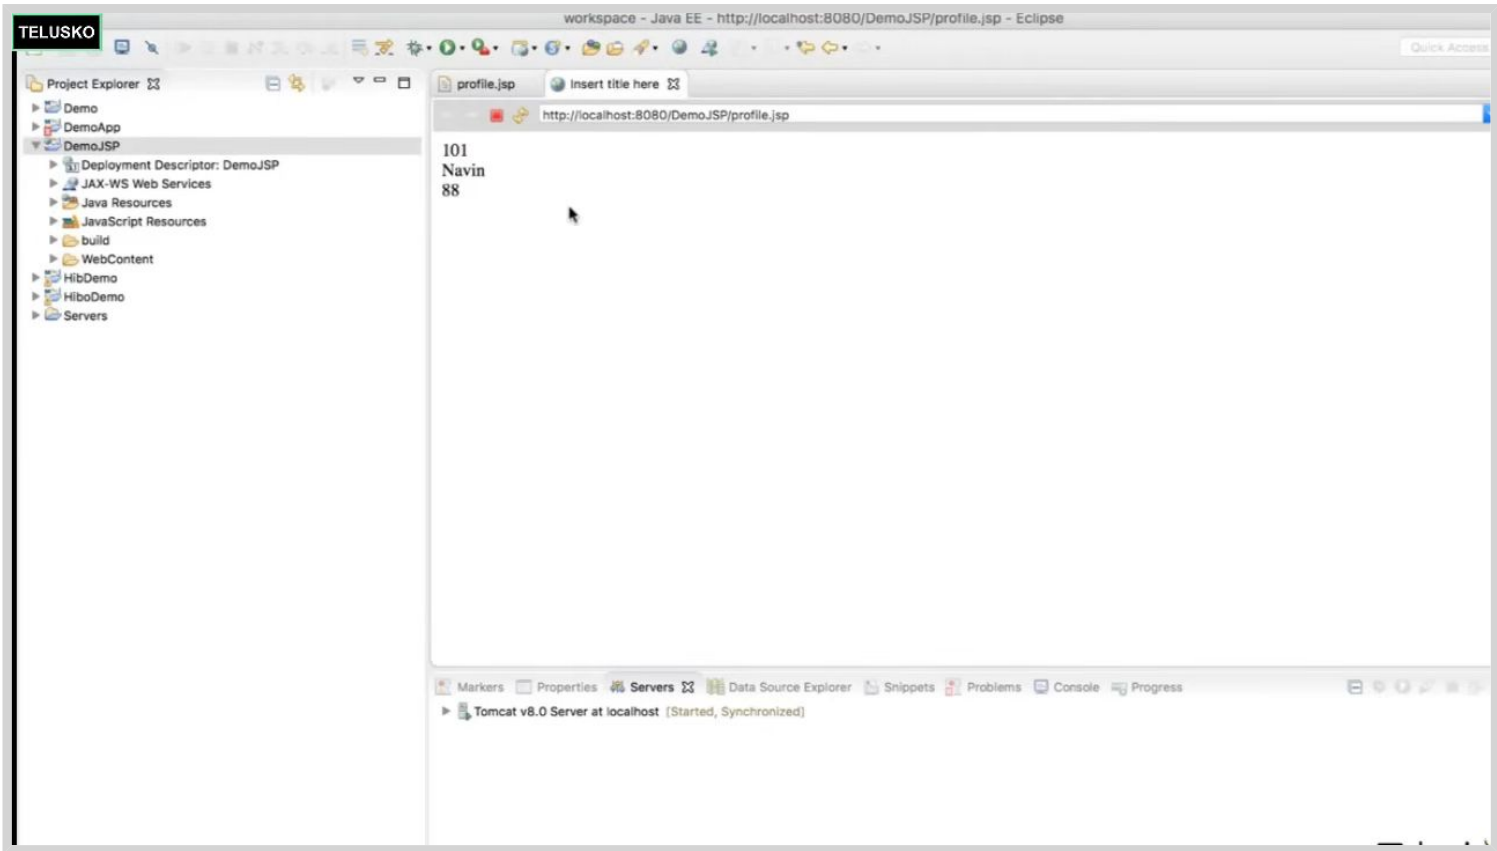


02:39:08

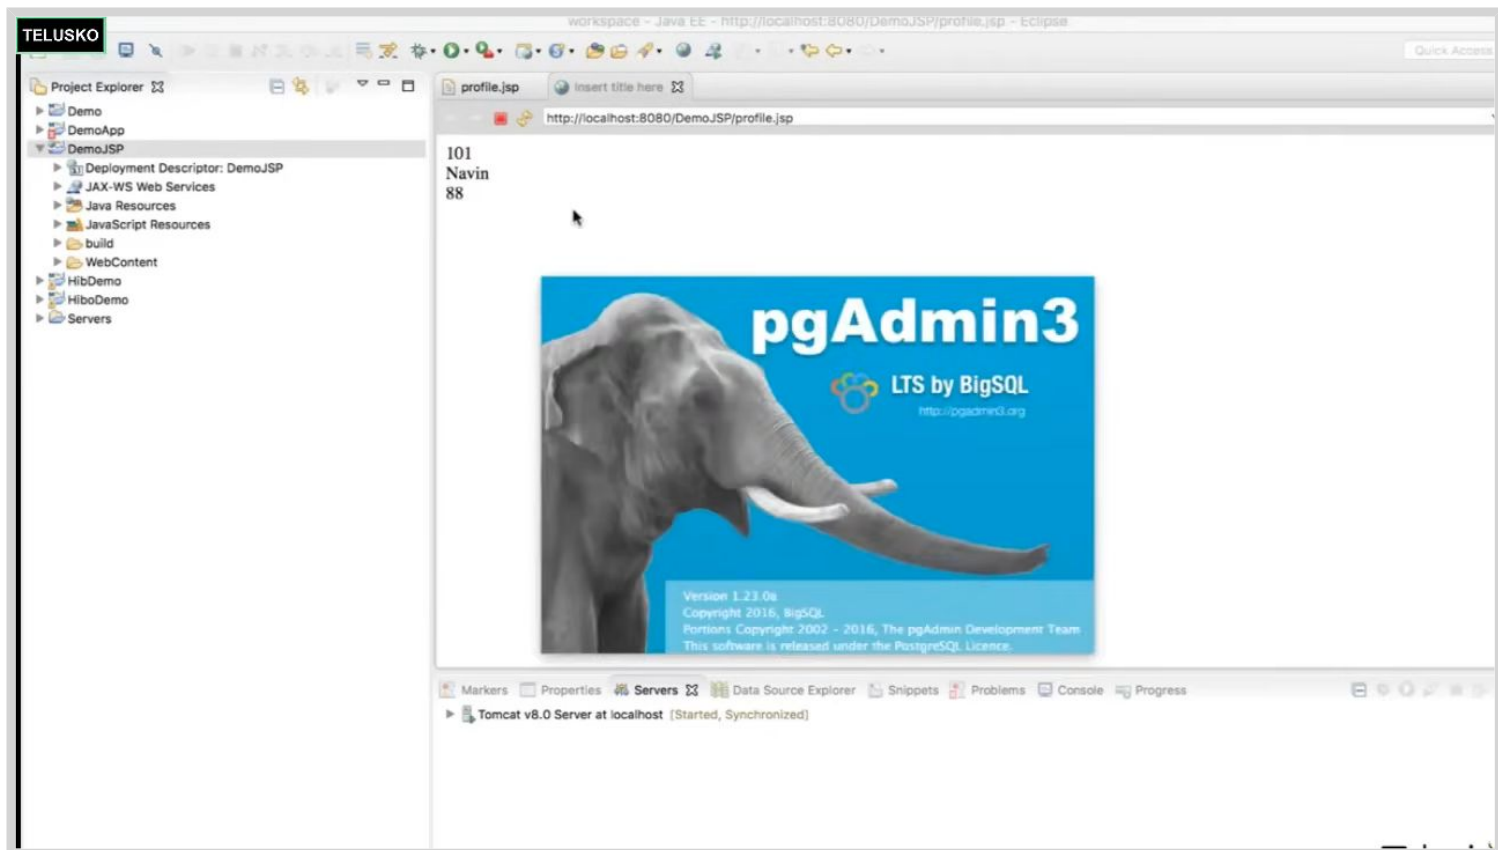


02:39:20

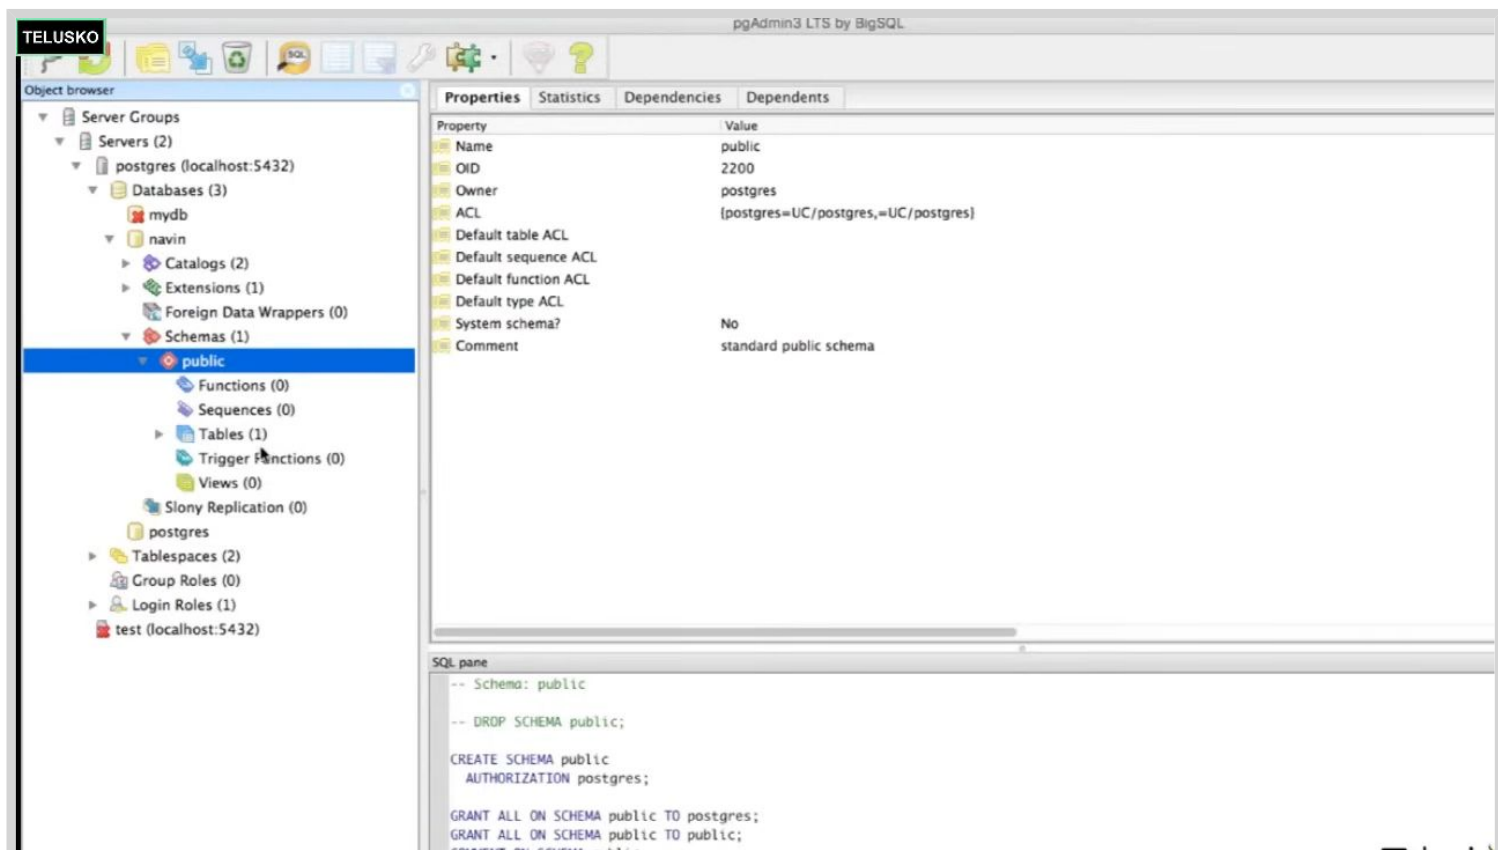


02:39:32

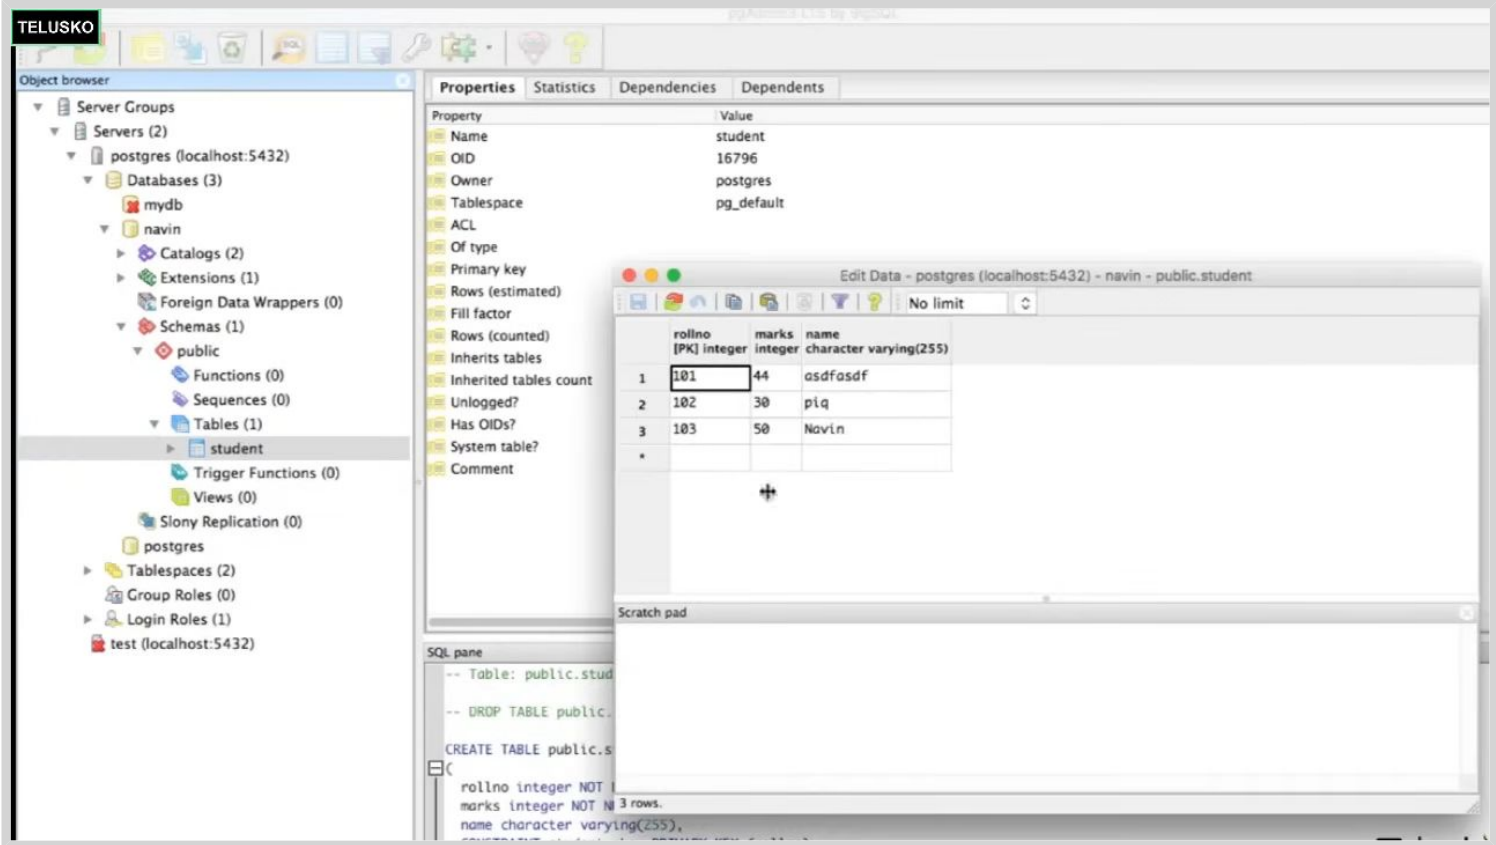


02:39:45

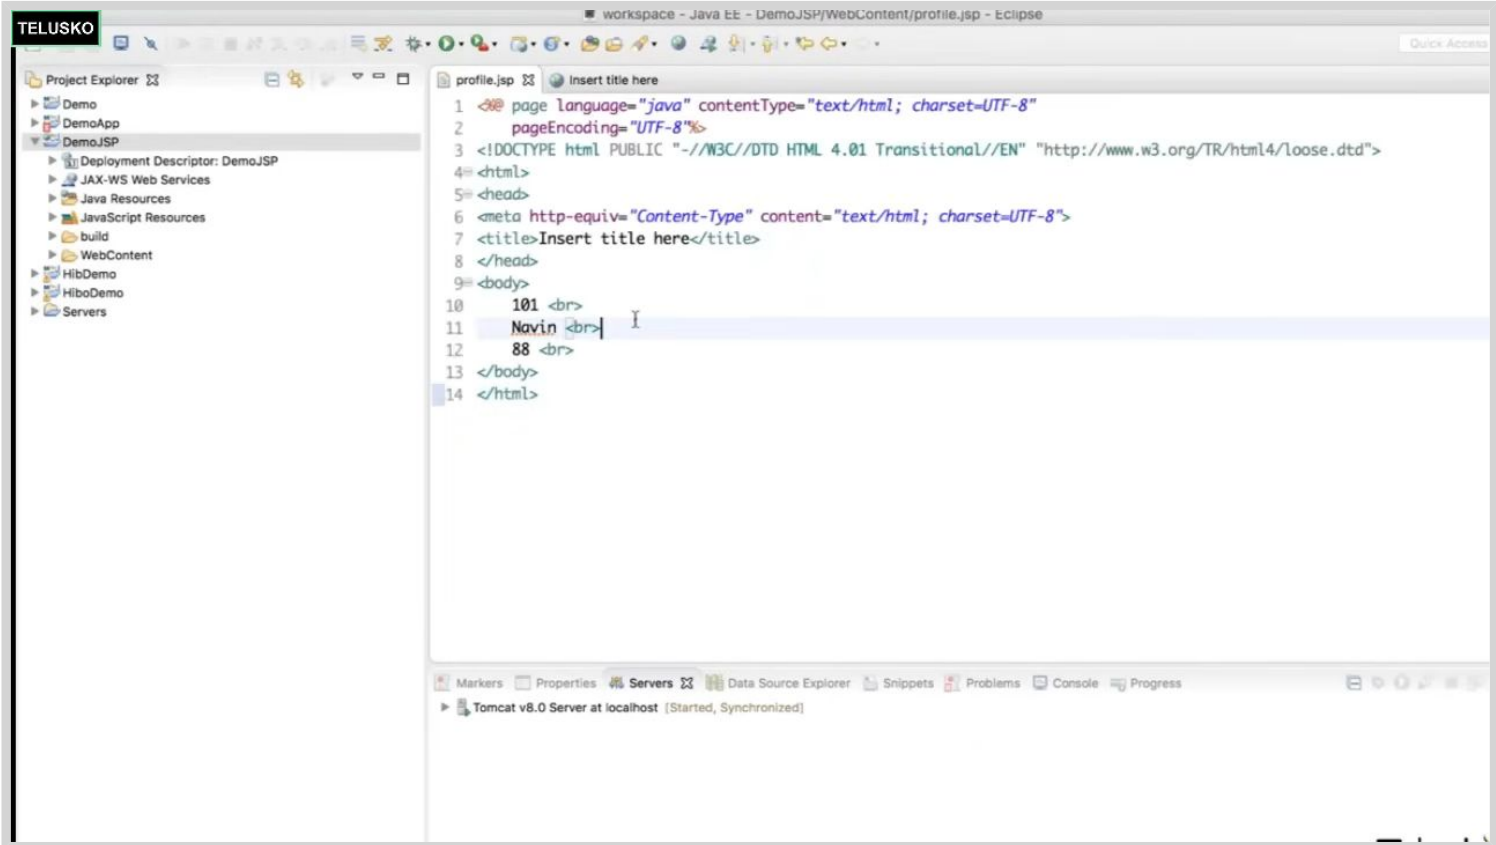


02:40:45

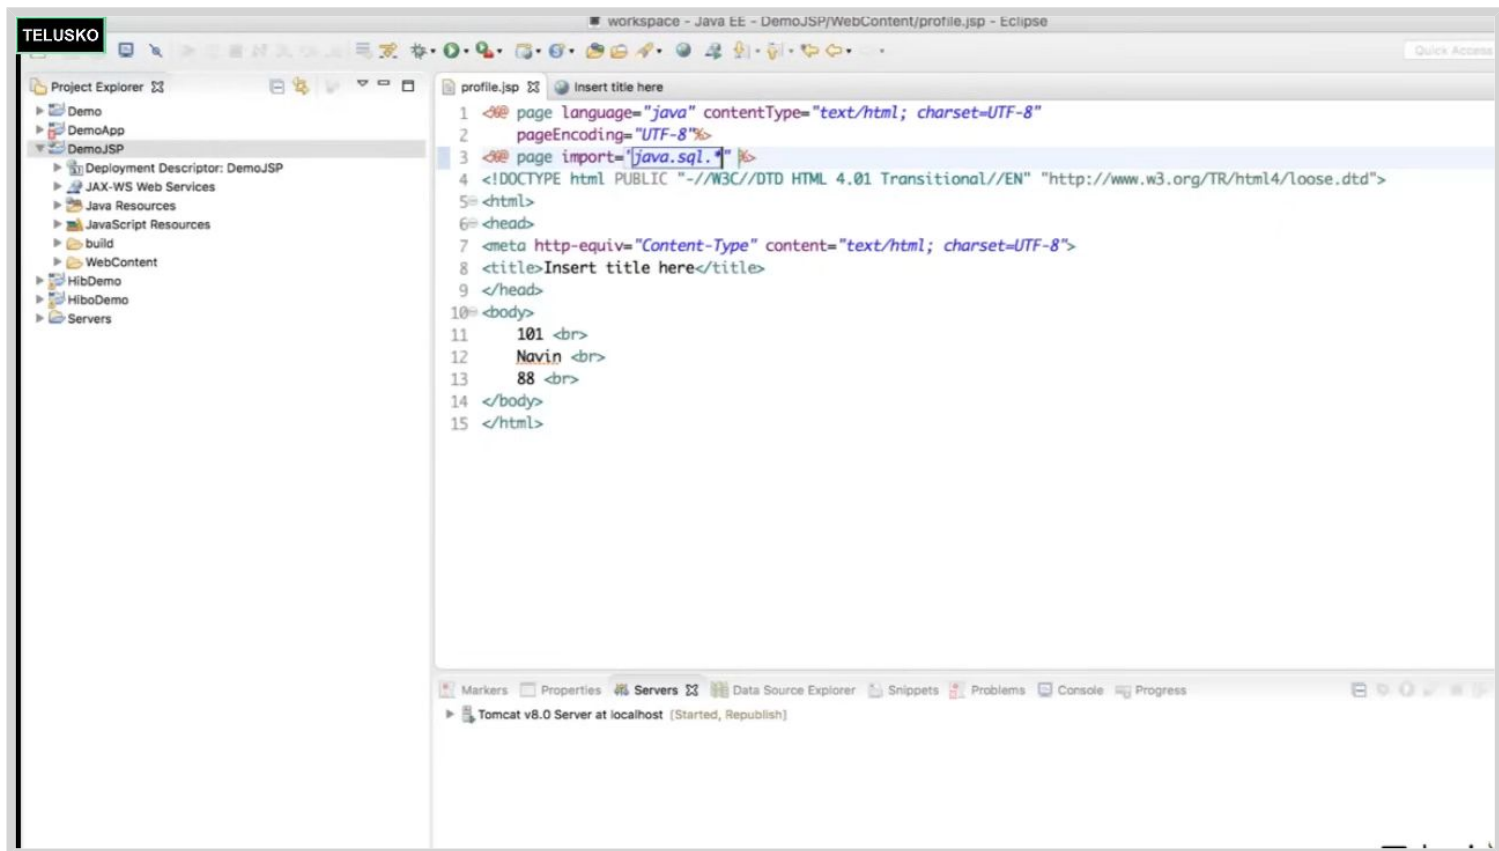

02:40:49

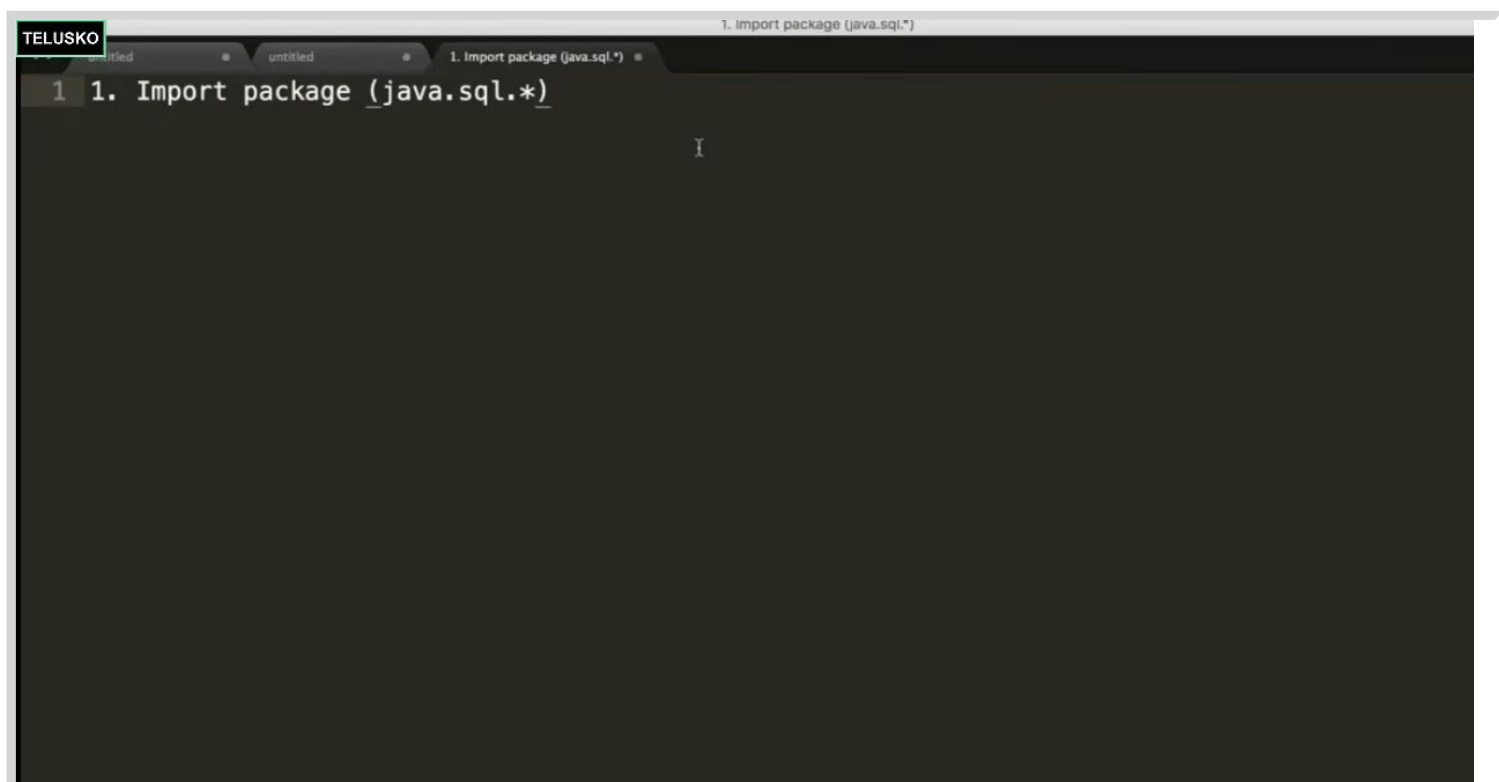


02:40:53

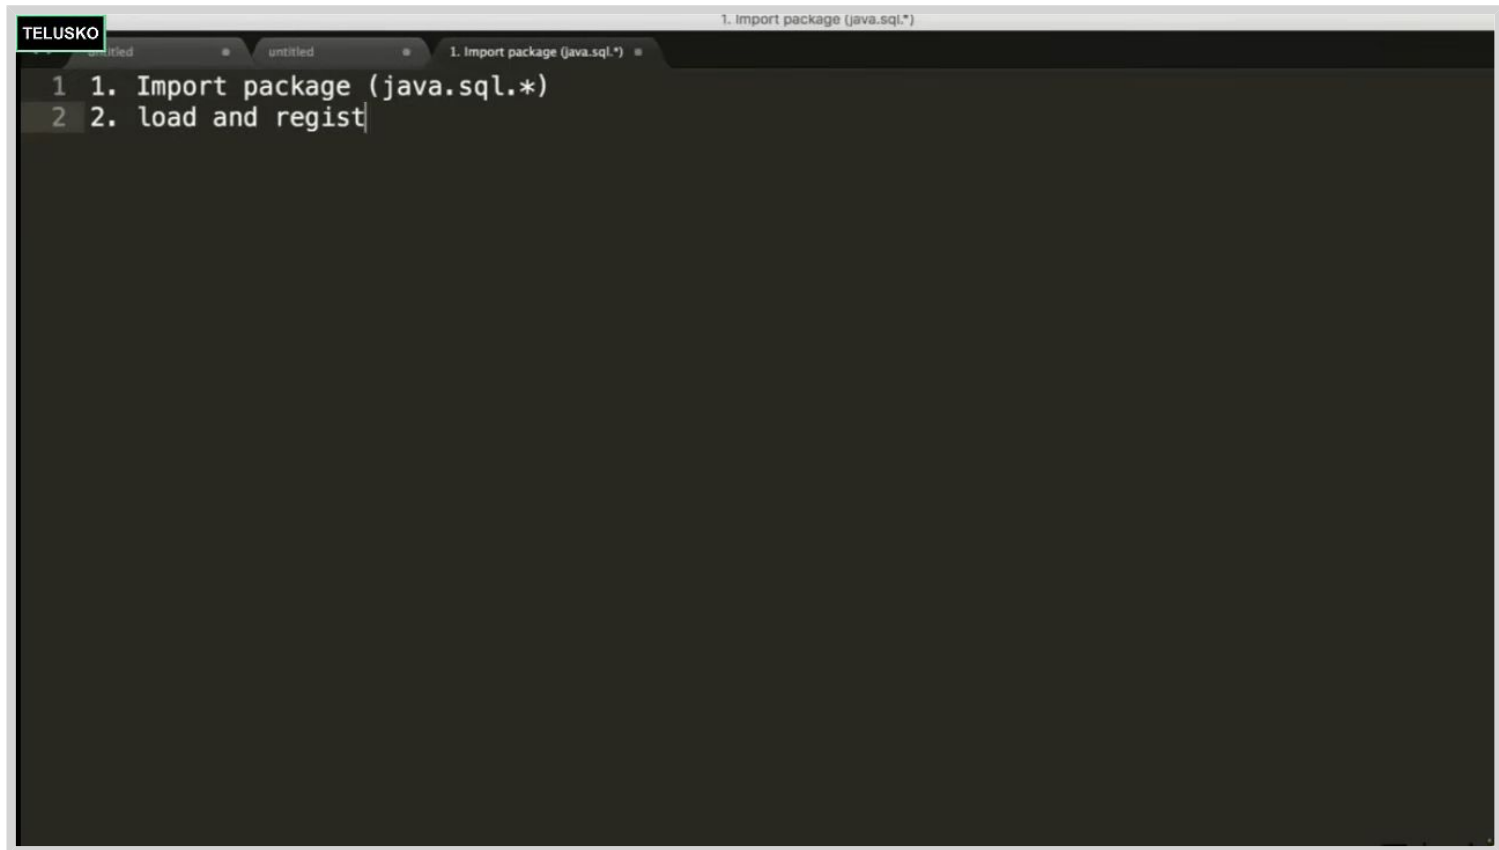

A screenshot of a code editor window. The title bar shows '1. Import package (java.sql.*)'. The editor has three tabs: 'untitled', 'untitled', and '1. Import package (java.sql.*)'. The first tab is active. The code is as follows:

```
1 1. Import package (java.sql.*)
2 2. load and regist
```


02:40:56

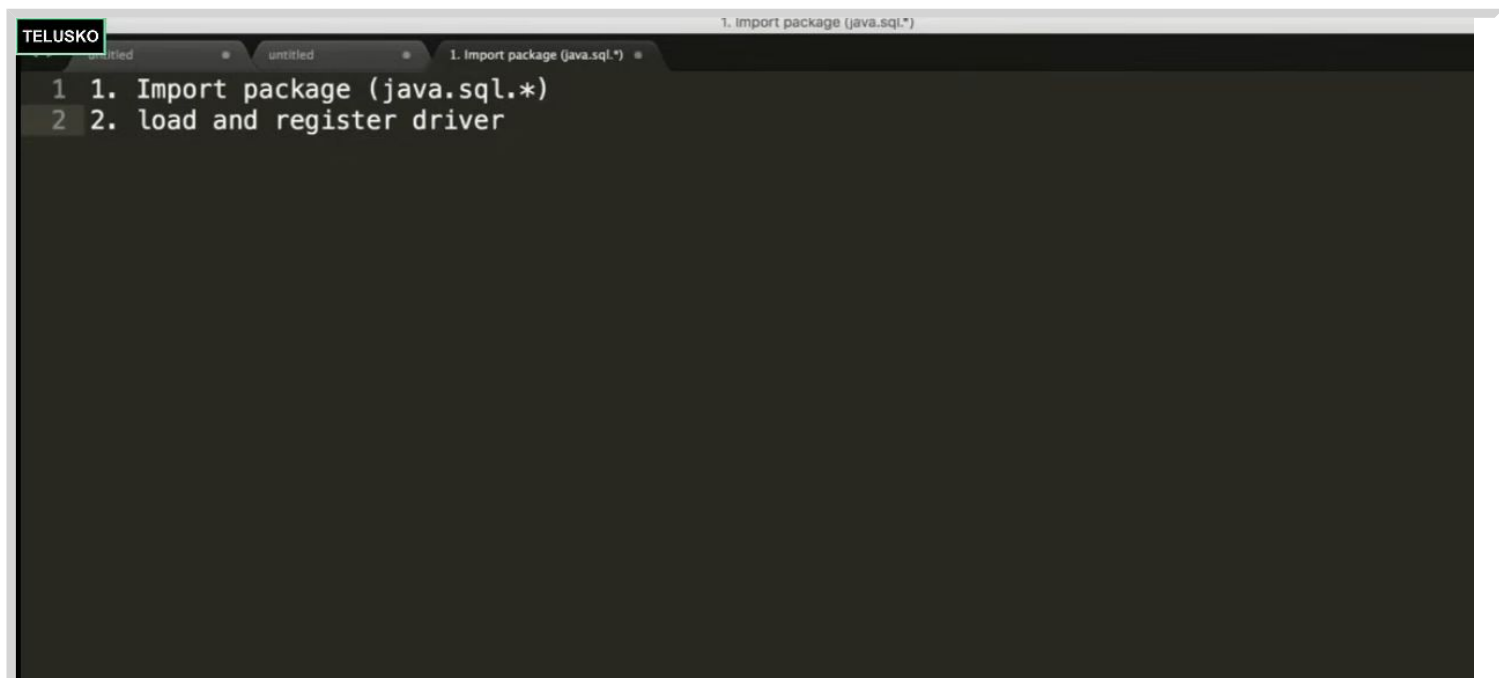


A screenshot of a code editor window. The title bar shows '1. Import package (java.sql.*)'. The editor has three tabs: 'untitled', 'untitled', and '1. Import package (java.sql.*)'. The first tab is active. The code is as follows:

```
1 1. Import package (java.sql.*)
2 2. load and register driver
```

02:41:01

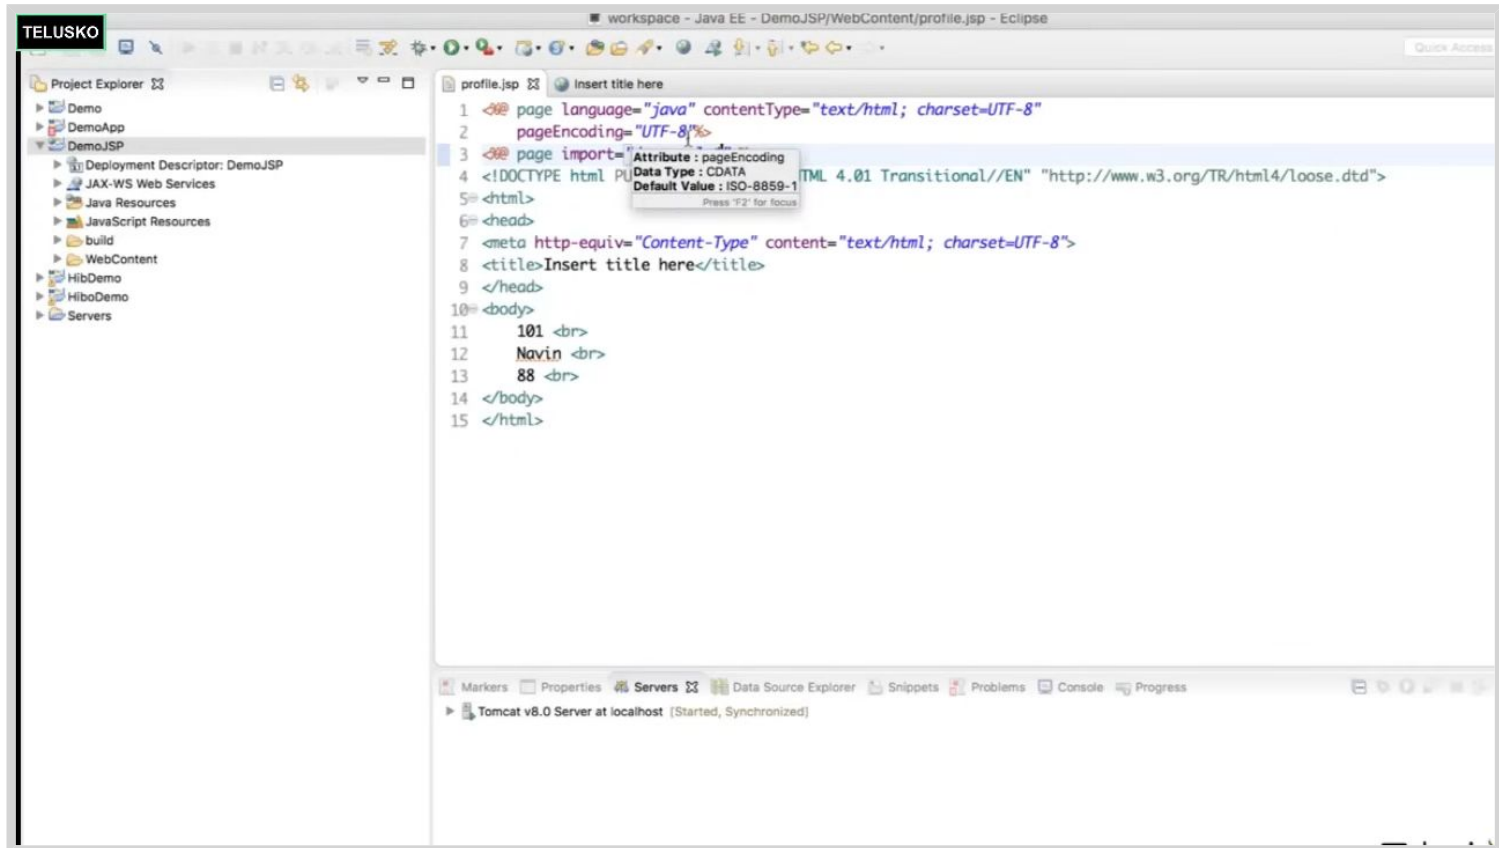


02:41:21

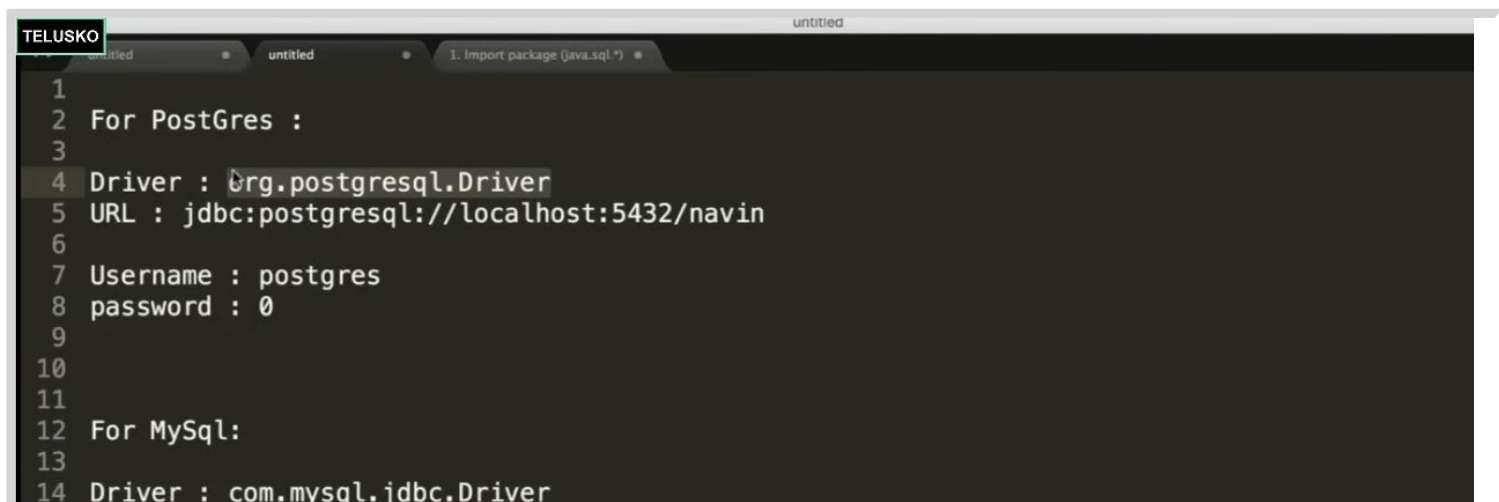


```
15 URL : jdbc:mysql://localhost:3306/navin
16
17 Username : root
18 password :
19
20
21
```

02:42:15

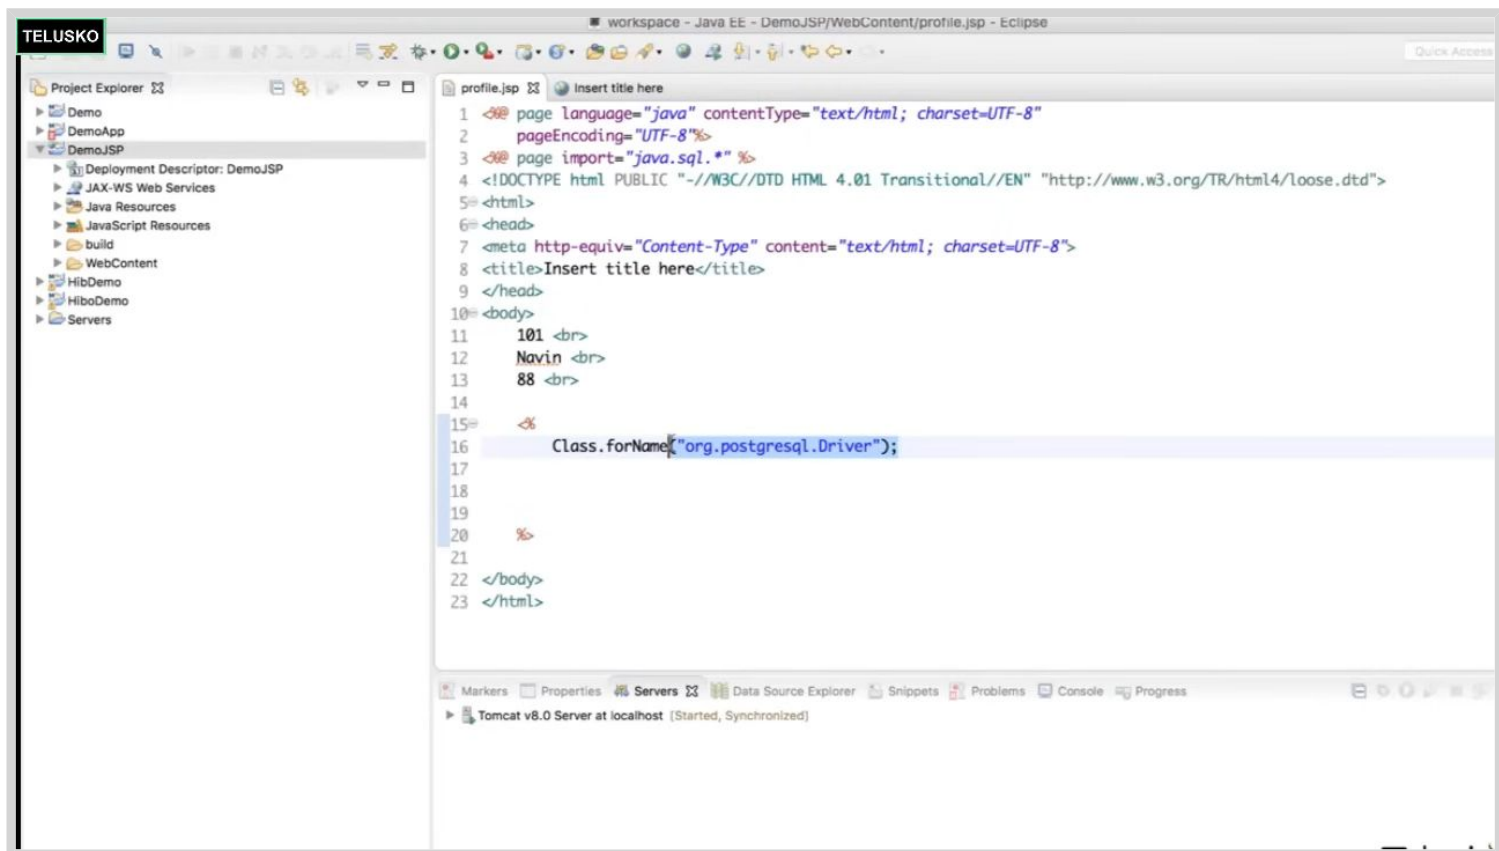

02:43:07

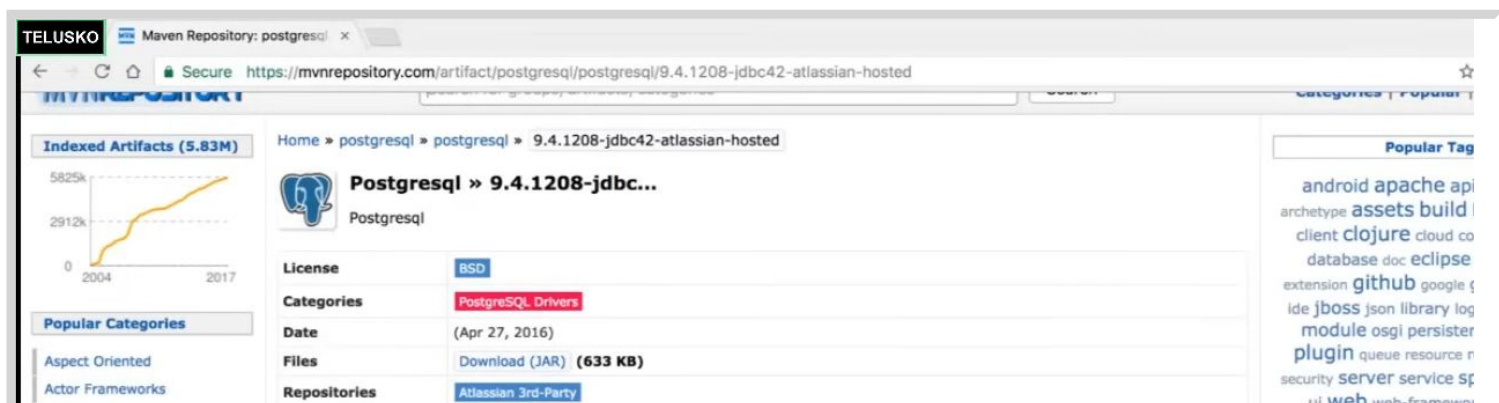

- Application Metrics
- Build Tools
- Bytecode Libraries
- Command Line Parsers
- Cache Implementations
- Cloud Computing
- Code Analyzers
- Collections
- Configuration Libraries
- Core Utilities
- Date and Time Utilities
- Dependency Injection
- Embedded SQL Databases
- HTML Parsers
- HTTP Clients
- I/O Utilities

Used By **766 artifacts**

Maven Gradle SBT Ivy Grape Leiningen Buildr

```
<!-- https://mvnrepository.com/artifact/postgresql/postgresql -->
<dependency>
  <groupId>postgresql</groupId>
  <artifactId>postgresql</artifactId>
  <version>9.4.1208-jdbc42-atlassian-hosted</version>
</dependency>
```

☒ Include comment with link to declaration

Note: this artifact is located at **Atlassian 3rd-Party** repository (<https://maven.atlassian.com/3rdparty/>)

Web site developed by

Powered by: **Scala**, **Play**, **S**
Cassandra

02:43:50

TELUSKO

workspace - Java EE - DemoJSP/WebContent/profile.jsp - Eclipse

Quick Access

Project Explorer

- Demo
 - DemoApp
 - DemoJSP
 - Deployment Descriptor: DemoJSP
 - JAX-WS Web Services
 - Java Resources
 - JavaScript Resources
 - build
 - WebContent
 - META-INF
 - WEB-INF
 - lib
 - postgresql-9.4.1208-jdbc42-atlassian-hosted.jar
 - HibDemo
 - HiboDemo
 - Servers

profile.jsp

Insert title here

```

1 <@ page language="java" contentType="text/html; charset=UTF-8"
2   pageEncoding="UTF-8"%>
3 <@ page import="java.sql.*" %>
4 <!DOCTYPE html PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN" "http://www.w3.org/TR/html4/loose.dtd">
5 <html>
6 <head>
7   <meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
8   <title>Insert title here</title>
9 </head>
10 <body>
11   101 <br>
12   Navin <br>
13   88 <br>
14
15   <
16   Sri|
17   Class.forName("org.postgresql.Driver");
18   Connection con = DriverManager.getConnection();
19
20
21
22   %>
23
24 </body>
25 </html>
```

Markers

Properties

Servers

Data Source Explorer

Snippets

Problems

Console

Progress

Tomcat v8.0 Server at localhost [Apache Tomcat] /Library/Java/JavaVirtualMachines/jdk1.8.0_121.jdk/Contents/Home/bin/java (05-Feb-2017, 12:20:16 PM)

Feb 05, 2017 12:24:57 PM org.apache.catalina.core.StandardContext reload
INFO: Reloading Context with name [/DemoJSP] has started
Feb 05, 2017 12:24:57 PM org.apache.jasper.servlet.TldScanner scanJars
INFO: At least one JAR was scanned for TLDs yet contained no TLDs. Enable debug logging for this logger for a complete
Feb 05, 2017 12:24:57 PM org.apache.catalina.core.StandardContext reload
INFO: Reloading Context with name [/DemoJSP] is completed

02:44:15

TELUSKO

untitled

untitled

1. Import package (java.sql.*)

```

1
2 For PostGres :
3
4 Driver : org.postgresql.Driver
5 URL : jdbc:postgresql://localhost:5432/navin
6
7 Username : postgres
8 password :

```

```

8 password : 0
9
10
11
12 For MySql:
13
14 Driver : com.mysql.jdbc.Driver
15 URL : jdbc:mysql://localhost:3306/navin
16
17 Username : root
18 password :
19
20
21

```

02:45:19

```

workspace - Java EE - DemoJSP/WebContent/profile.jsp - Eclipse
TELUSKO
Project Explorer
  Demo
  DemoApp
  DemoJSP
    Deployment Descriptor: DemoJSP
    JAX-WS Web Services
    Java Resources
    JavaScript Resources
    build
    WebContent
      META-INF
      WEB-INF
      lib
        postgresql-9.4.1208-jdbc42-atlassian-hosted.jar
      profile.jsp
      HibDemo
      HibDemo
      Servers
  Servers

*profile.jsp
1 <@ page language="java" contentType="text/html; charset=UTF-8"
2   pageEncoding="UTF-8"%>
3 <@ page import="java.sql.*" %>
4 <!DOCTYPE html PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN" "http://www.w3.org/TR/html4/loose.dtd">
5 <html>
6 <head>
7   <meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
8   <title>Insert title here</title>
9 </head>
10 <body>
11     101 <br>
12     Navin <br>
13     88 <br>
14
15 <@
16     String url = "jdbc:postgresql://localhost:5432/navin";
17     String username = "postgres";
18     String password = "0";
19     Class.forName("org.postgresql.Driver");
20     Connection con = DriverManager.getConnection(url);
21
22
23
24 %>
25
26 </body>

Markers Properties Servers Data Source Explorer Snippets Problems Console Progress
Tomcat v8.0 Server at localhost [Apache Tomcat] /Library/Java/JavaVirtualMachines/jdk1.8.0_121.jdk/Contents/Home/bin/java (05-Feb-2017, 12:20:16 PM)
Feb 05, 2017 12:24:57 PM org.apache.catalina.core.StandardContext reload
INFO: Reloading Context with name [/DemoJSP] has started
Feb 05, 2017 12:24:57 PM org.apache.jasper.servlet.TldScanner scanJars
INFO: At least one JAR was scanned for TLDs yet contained no TLDs. Enable debug logging for this logger for a complete
Feb 05, 2017 12:24:57 PM org.apache.catalina.core.StandardContext reload
INFO: Reloading Context with name [/DemoJSP] is completed

```

02:45:23


```

workspace - Java EE - DemoJSP/WebContent/profile.jsp - Eclipse
TELUSKO
Project Explorer
  Demo
  DemoApp
  DemoJSP
    Deployment Descriptor: DemoJSP
    JAX-WS Web Services
    Java Resources
    JavaScript Resources
    build
    WebContent
      META-INF
      WEB-INF
      lib
        postgresql-9.4.1208-jdbc42-atlassian-hosted.jar
      profile.jsp
      HibDemo
      HibDemo
      Servers
  Servers


*profile.jsp
1 <@ page language="java" contentType="text/html; charset=UTF-8"
2   pageEncoding="UTF-8"%>
3 <@ page import="java.sql.*" %>
4 <!DOCTYPE html PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN" "http://www.w3.org/TR/html4/loose.dtd">
5 <html>
6 <head>
7   <meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
8   <title>Insert title here</title>
9 </head>
10 <body>
11     101 <br>
12     Navin <br>
13     88 <br>
14
15 <@
16     String url = "jdbc:postgresql://localhost:5432/navin";
17     String username = "postgres";
18     String password = "0";
19     Class.forName("org.postgresql.Driver");
20     Connection con = DriverManager.getConnection(url);
21
22
23
24 %>
25
26 </body>

Markers Properties Servers Data Source Explorer Snippets Problems Console Progress
Tomcat v8.0 Server at localhost [Apache Tomcat] /Library/Java/JavaVirtualMachines/jdk1.8.0_121.jdk/Contents/Home/bin/java (05-Feb-2017, 12:20:16 PM)
Feb 05, 2017 12:24:57 PM org.apache.catalina.core.StandardContext reload
INFO: Reloading Context with name [/DemoJSP] has started
Feb 05, 2017 12:24:57 PM org.apache.jasper.servlet.TldScanner scanJars
INFO: At least one JAR was scanned for TLDs yet contained no TLDs. Enable debug logging for this logger for a complete
Feb 05, 2017 12:24:57 PM org.apache.catalina.core.StandardContext reload
INFO: Reloading Context with name [/DemoJSP] is completed

```

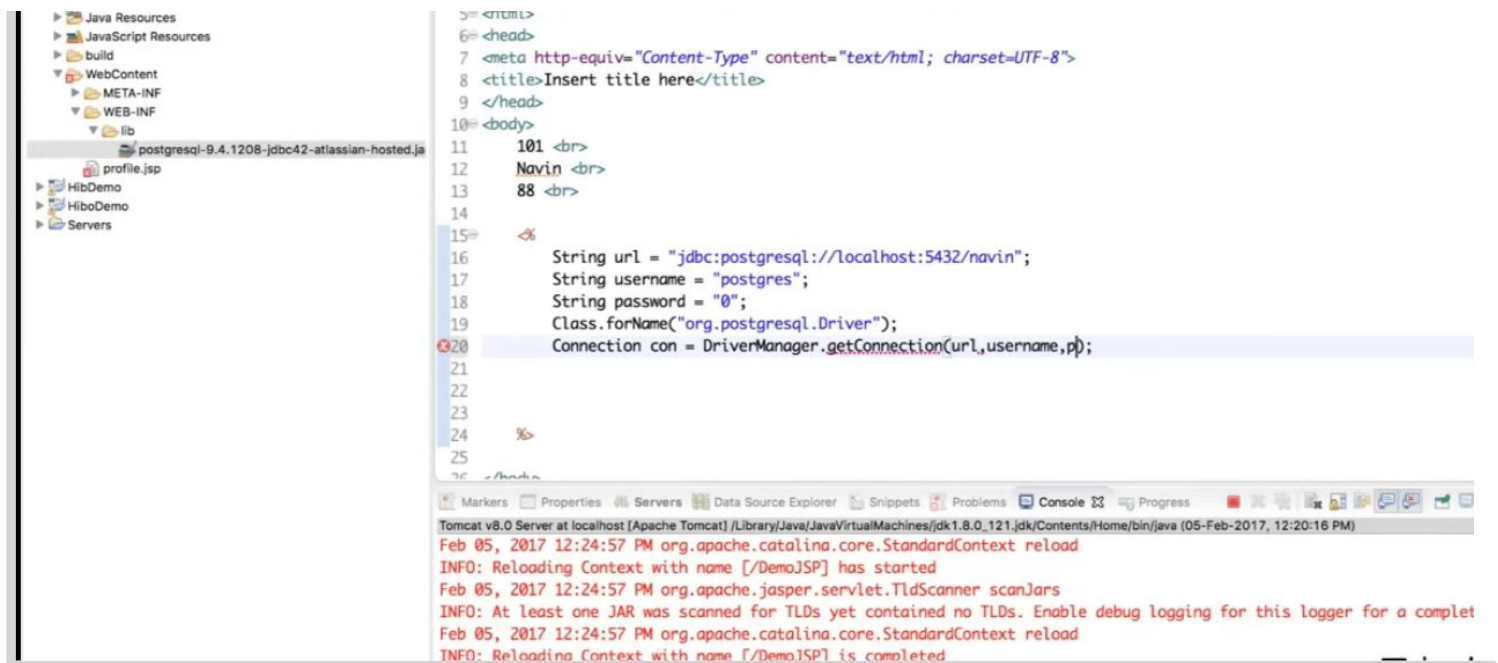



02:45:25

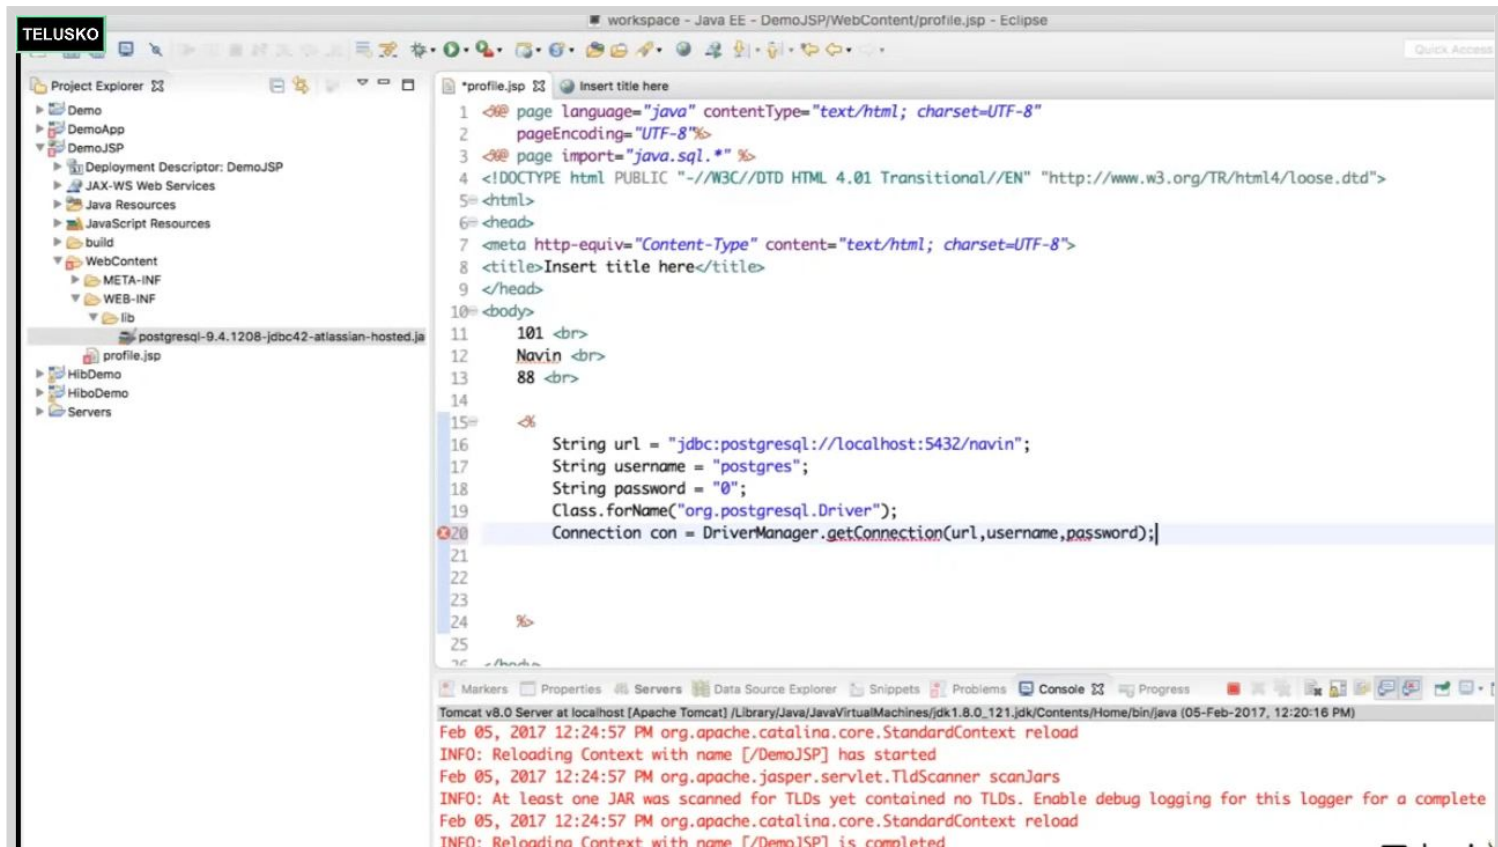


02:46:07



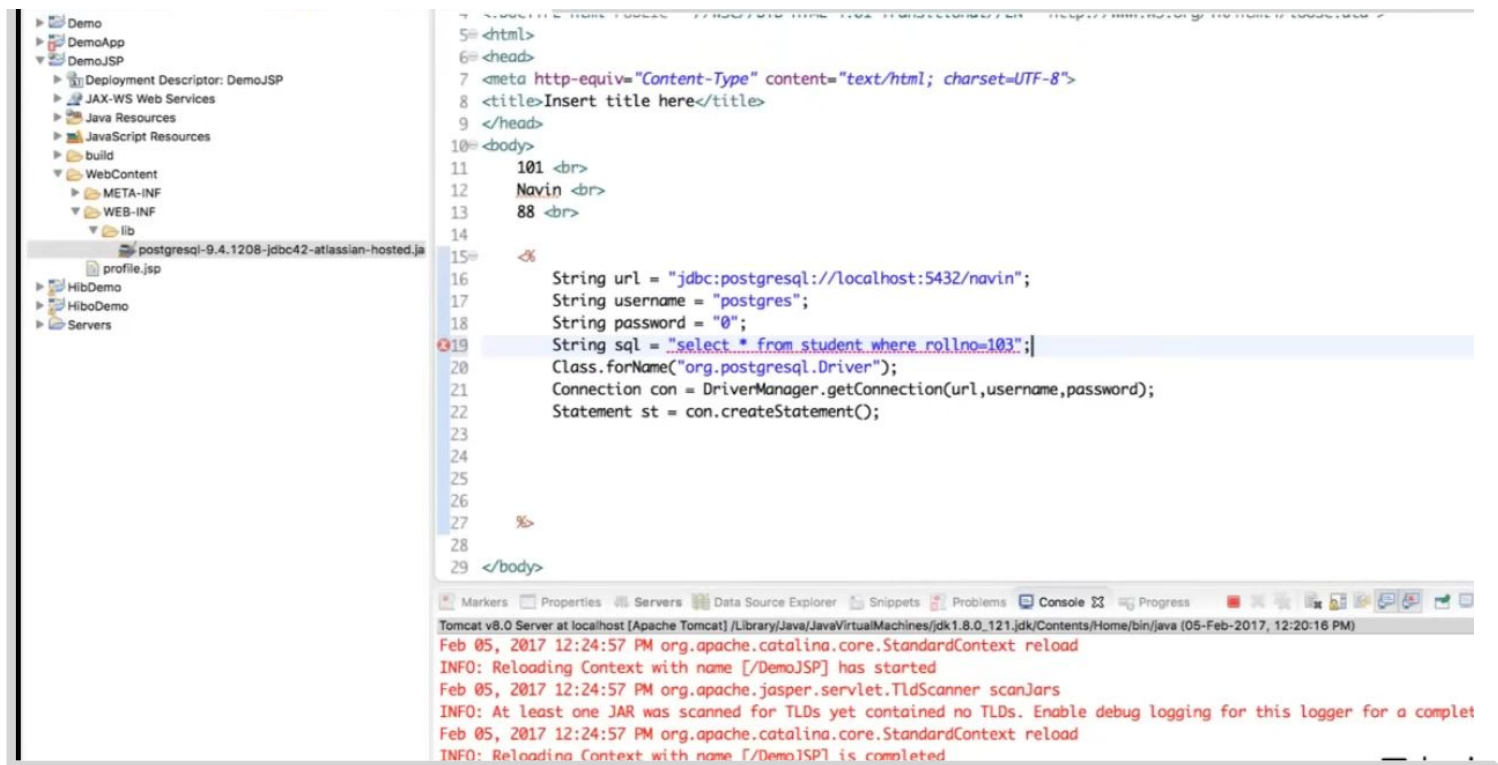

02:46:21

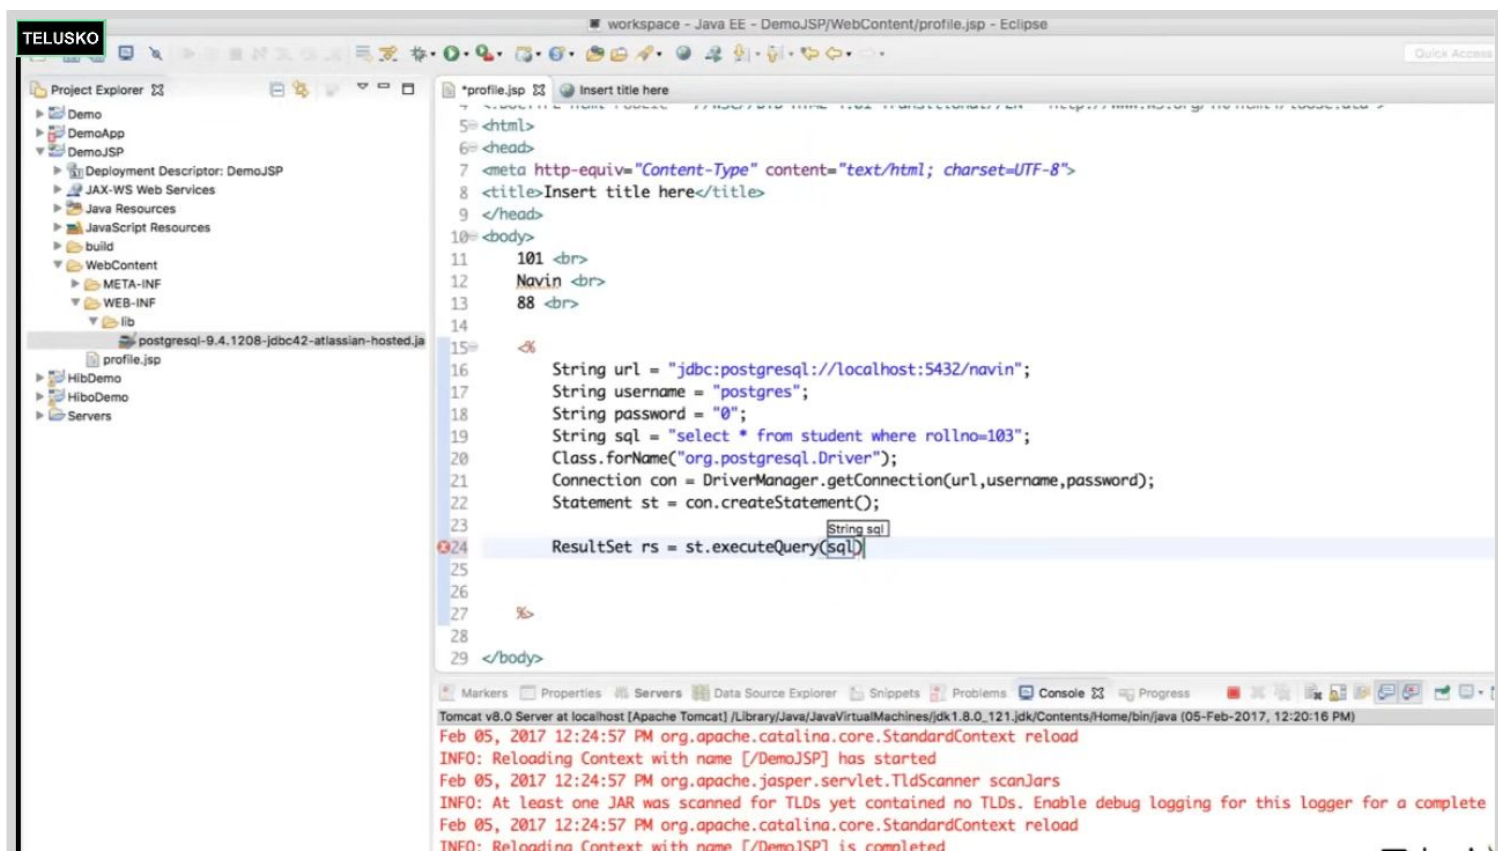

02:46:24

workspace - Java EE - DemoJSP/WebContent/profile.jsp - Eclipse

Project Explorer

- Demo
- DemoApp
- DemoJSP
 - Deployment Descriptor: DemoJSP
 - JAX-WS Web Services
 - Java Resources
 - JavaScript Resources
 - build
 - WebContent
 - META-INF
 - WEB-INF
 - lib
 - postgresql-9.4.1208-jdbc42-atlassian-hosted.jar
 - HibDemo
 - HiboDemo
 - Servers

profile.jsp

```
5 <html>
6 <head>
7 <meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
8 <title>Insert title here</title>
9 </head>
10 <body>
11     101 <br>
12     Navin <br>
13     88 <br>
14
15 <%
16     String url = "jdbc:postgresql://localhost:5432/navin";
17     String username = "postgres";
18     String password = "0";
19     String sql = "select * from student where rollno=103";
20     Class.forName("org.postgresql.Driver");
21     Connection con = DriverManager.getConnection(url,username,password);
22     Statement st = con.createStatement();
23
24     ResultSet rs = st.executeQuery(sql);
25
26
27 %>
28
29 </body>
```

Markers Properties Servers Data Source Explorer Snippets Problems Console Progress

Tomcat v8.0 Server at localhost [Apache Tomcat] /Library/Java/JavaVirtualMachines/jdk1.8.0_121.jdk/Contents/Home/bin/java (05-Feb-2017, 12:20:16 PM)

Feb 05, 2017 12:24:57 PM org.apache.catalina.core.StandardContext reload
INFO: Reloading Context with name [/DemoJSP] has started
Feb 05, 2017 12:24:57 PM org.apache.jasper.servlet.TldScanner scanJars
INFO: At least one JAR was scanned for TLDs yet contained no TLDs. Enable debug logging for this logger for a complete
Feb 05, 2017 12:24:57 PM org.apache.catalina.core.StandardContext reload
INFO: Reloading Context with name [/DemoJSP] is completed

02:46:31

workspace - Java EE - DemoJSP/WebContent/profile.jsp - Eclipse

Project Explorer

- Demo
- DemoApp
- DemoJSP
 - Deployment Descriptor: DemoJSP
 - JAX-WS Web Services
 - Java Resources
 - JavaScript Resources
 - build
 - WebContent
 - META-INF
 - WEB-INF
 - lib
 - postgresql-9.4.1208-jdbc42-atlassian-hosted.jar
 - HibDemo
 - HiboDemo
 - Servers

profile.jsp


```
5 <html>
6 <head>
7 <meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
8 <title>Insert title here</title>
9 </head>
10 <body>
11     101 <br>
12     Navin <br>
13     88 <br>
14
15 <%
16     String url = "jdbc:postgresql://localhost:5432/navin";
17     String username = "postgres";
18     String password = "0";
19     String sql = "select * from student where rollno=103";
20     Class.forName("org.postgresql.Driver");
21     Connection con = DriverManager.getConnection(url,username,password);
22     Statement st = con.createStatement();
23
24     ResultSet rs = st.executeQuery(sql);
25     rs.next();
26
27
28 %>
29
```

Markers Properties Servers Data Source Explorer Snippets Problems Console Progress


Tomcat v8.0 Server at localhost [Apache Tomcat] /Library/Java/JavaVirtualMachines/jdk1.8.0_121.jdk/Contents/Home/bin/java (05-Feb-2017, 12:20:16 PM)

Feb 05, 2017 12:24:57 PM org.apache.catalina.core.StandardContext reload
INFO: Reloading Context with name [/DemoJSP] has started
Feb 05, 2017 12:24:57 PM org.apache.jasper.servlet.TldScanner scanJars
INFO: At least one JAR was scanned for TLDs yet contained no TLDs. Enable debug logging for this logger for a complete
Feb 05, 2017 12:24:57 PM org.apache.catalina.core.StandardContext reload
INFO: Reloading Context with name [/DemoJSP] is completed

02:47:08

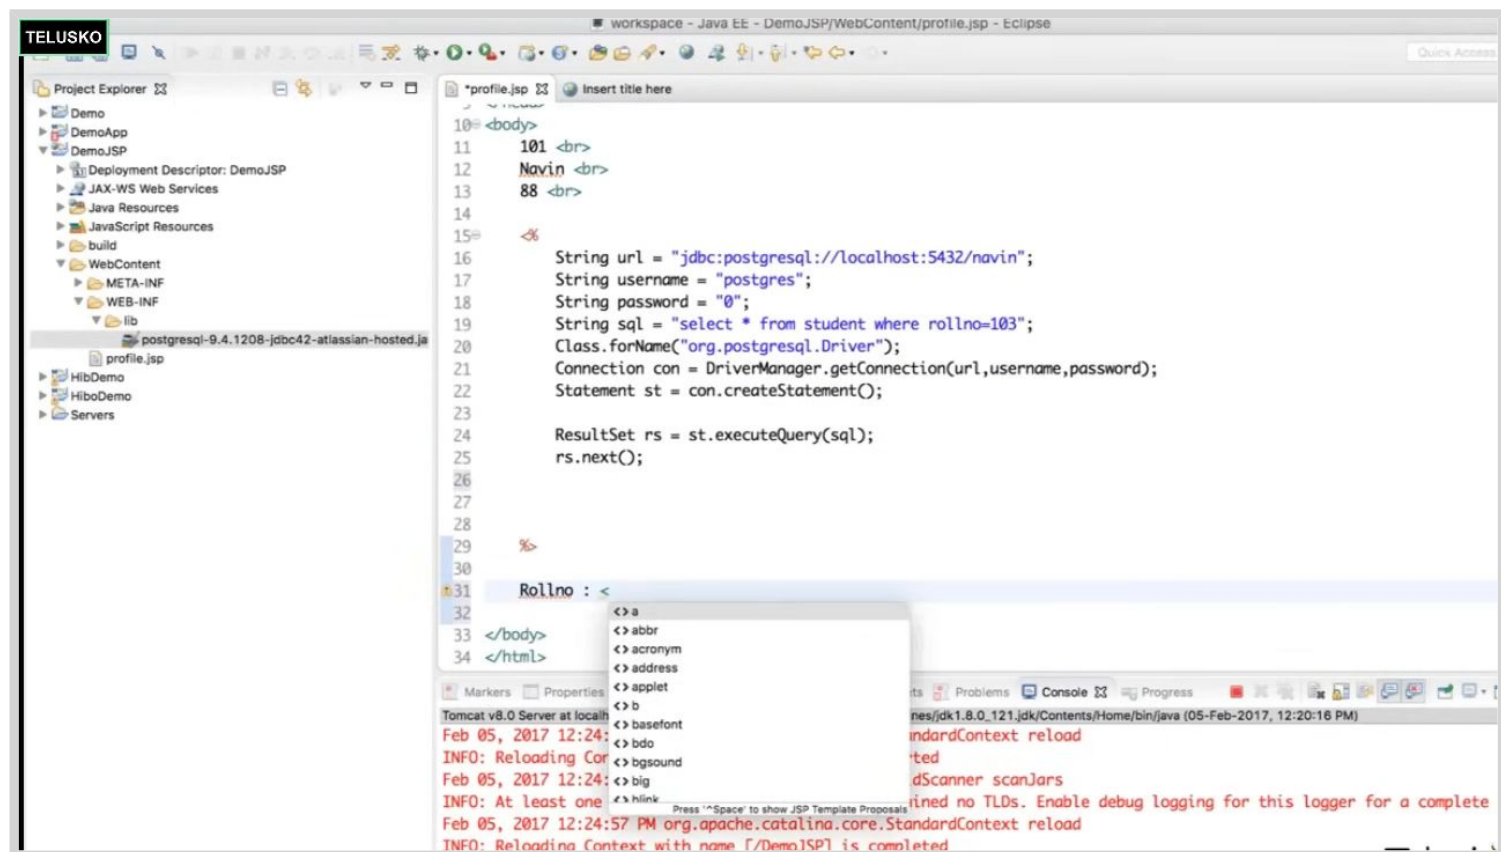

02:47:19

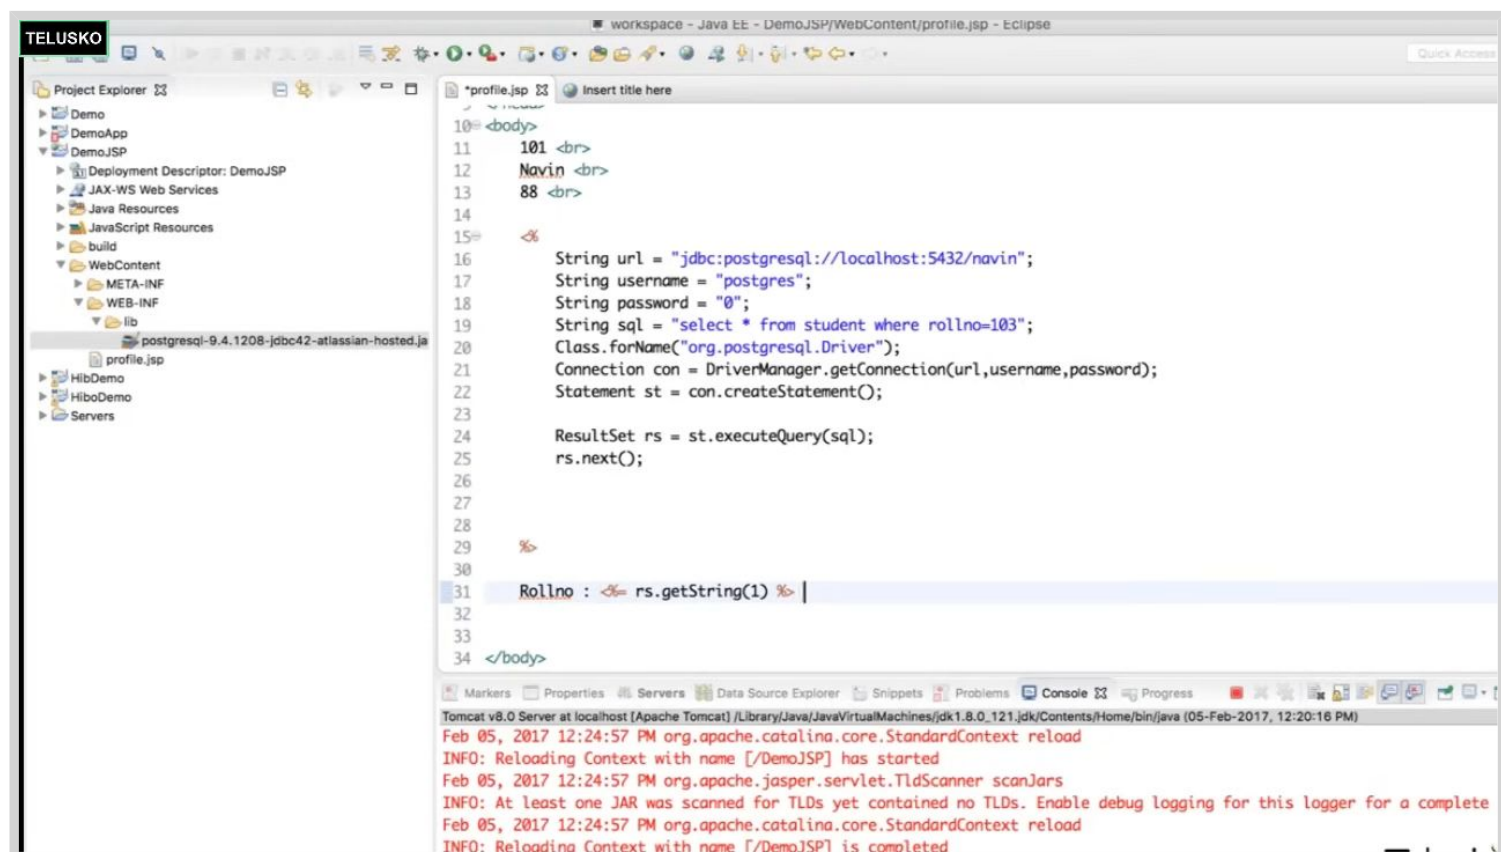

02:47:27

The screenshot shows the Eclipse IDE with a workspace named 'workspace - Java EE - DemoJSP/WebContent/profile.jsp'. The Project Explorer on the left shows a project structure with 'DemoJSP' as the main project. The main editor displays the 'profile.jsp' file with the following code:

```
10<body>
11    101 <br>
12    Navin <br>
13    88 <br>
14
15<%
16    String url = "jdbc:postgresql://localhost:5432/navin";
17    String username = "postgres";
18    String password = "0";
19    String sql = "select * from student where rollno=103";
20    Class.forName("org.postgresql.Driver");
21    Connection con = DriverManager.getConnection(url,username,password);
22    Statement st = con.createStatement();
23
24    ResultSet rs = st.executeQuery(sql);
25    rs.next();
26
27
28
29
30
31    Rollno : <%= rs.getString(1) %> <br>
32    Name : <%= rs.get<
33
34
```

The Console window at the bottom shows the following logs:

```
Tomcat v8.0 Server at localhost [Apache Tomcat] /Library/Java/JavaVirtualMachines/jdk1.8.0_121.jdk/Contents/Home/bin/java (05-Feb-2017, 12:20:16 PM)
Feb 05, 2017 12:24:57 PM org.apache.catalina.core.StandardContext reload
INFO: Reloading Context with name [/DemoJSP] has started
Feb 05, 2017 12:24:57 PM org.apache.jasper.servlet.TldScanner scanJars
INFO: At least one JAR was scanned for TLDs yet contained no TLDs. Enable debug logging for this logger for a complete
Feb 05, 2017 12:24:57 PM org.apache.catalina.core.StandardContext reload
INFO: Reloading Context with name [/DemoJSP] is completed
```


02:47:29

The screenshot shows the same Eclipse IDE workspace and project structure as the previous image. The 'profile.jsp' file is still open in the main editor, showing the same code. However, the Console window now shows a different set of logs:


```
Tomcat v8.0 Server at localhost [Apache Tomcat] /Library/Java/JavaVirtualMachines/jdk1.8.0_121.jdk/Contents/Home/bin/java (05-Feb-2017, 12:20:16 PM)
Feb 05, 2017 12:24:57 PM org.apache.catalina.core.StandardContext reload
INFO: Reloading Context with name [/DemoJSP] has started
Feb 05, 2017 12:24:57 PM org.apache.jasper.servlet.TldScanner scanJars
INFO: At least one JAR was scanned for TLDs yet contained no TLDs. Enable debug logging for this logger for a complete
```

Feb 05, 2017 12:24:57 PM org.apache.catalina.core.StandardContext reload
INFO: Reloading Context with name [/DemoJSP] is completed

02:47:32

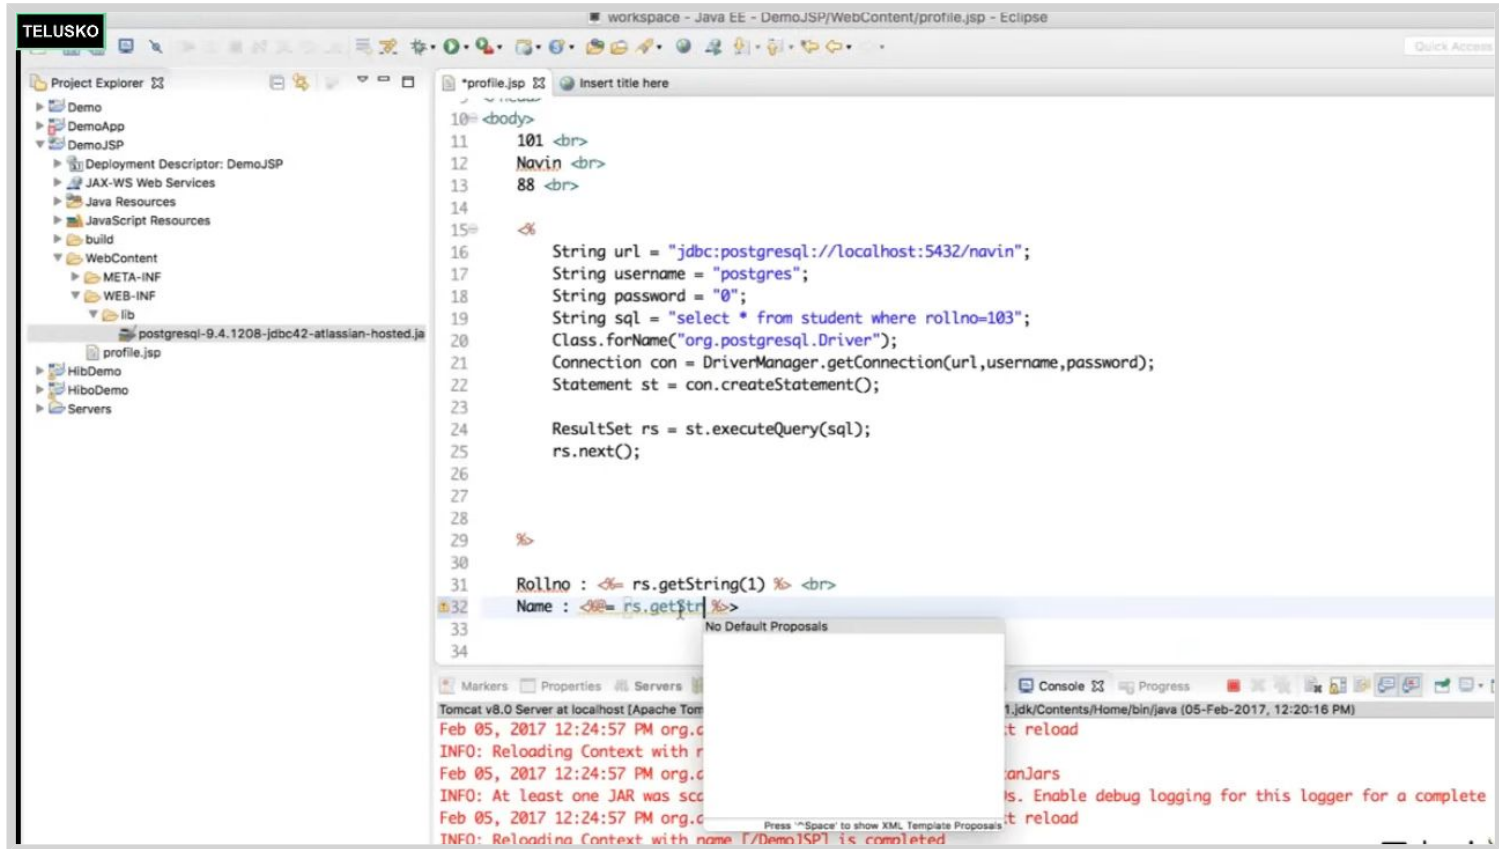

02:47:42

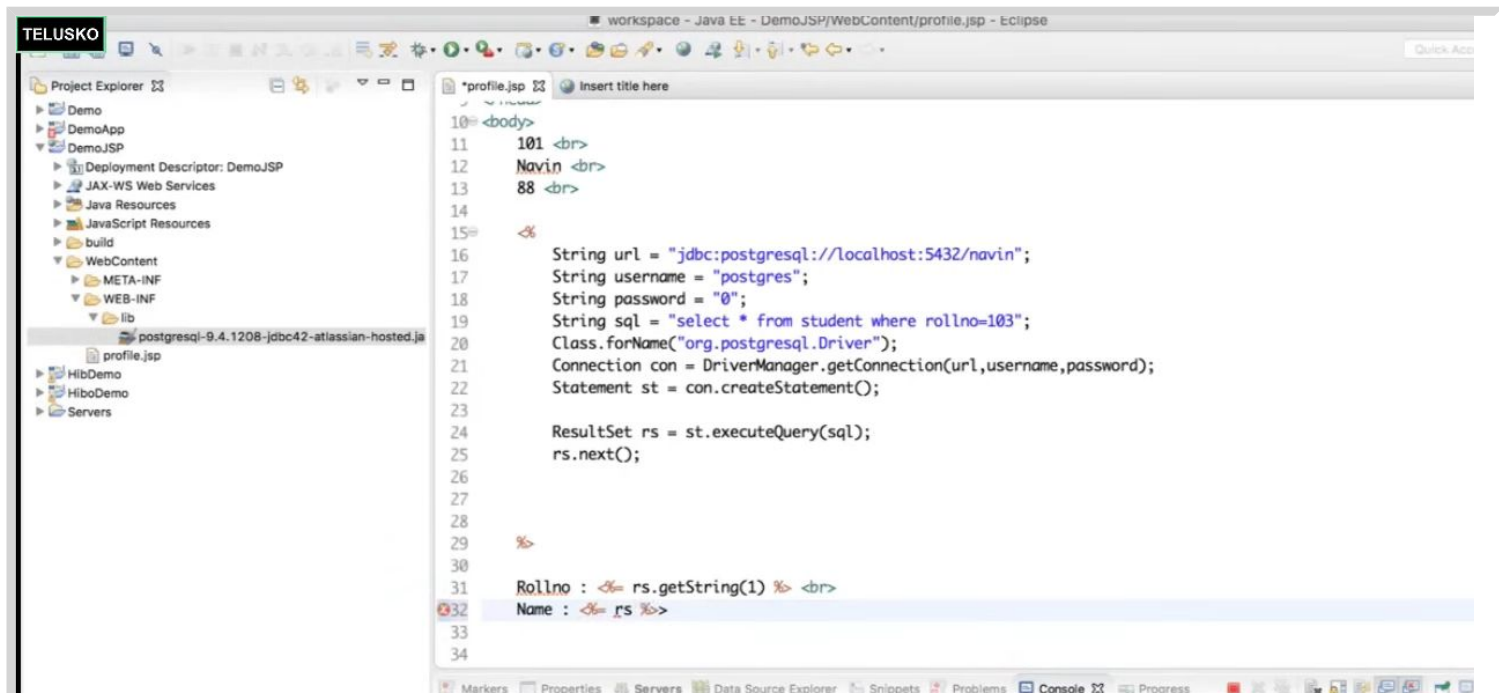

```

Tomcat v8.0 Server at localhost [Apache Tomcat] /Library/Java/JavaVirtualMachines/jdk1.8.0_121.jdk/Contents/Home/bin/java (05-Feb-2017, 12:20:16 PM)
Feb 05, 2017 12:24:57 PM org.apache.catalina.core.StandardContext reload
INFO: Reloading Context with name [/DemoJSP] has started
Feb 05, 2017 12:24:57 PM org.apache.jasper.servlet.TldScanner scanJars
INFO: At least one JAR was scanned for TLDs yet contained no TLDs. Enable debug logging for this logger for a complete log.
Feb 05, 2017 12:24:57 PM org.apache.catalina.core.StandardContext reload
INFO: Reloading Context with name [/DemoJSP] is completed

```

02:47:43

```

*profile.jsp
10 <body>
11     101 <br>
12     Navin <br>
13     88 <br>
14
15
16     String url = "jdbc:postgresql://localhost:5432/navin";
17     String username = "postgres";
18     String password = "0";
19     String sql = "select * from student where rollno=103";
20     Class.forName("org.postgresql.Driver");
21     Connection con = DriverManager.getConnection(url,username,password);
22     Statement st = con.createStatement();
23
24     ResultSet rs = st.executeQuery(sql);
25     rs.next();
26
27
28
29
30
31     Rollno : <%= rs.getString(1) %> <br>
32     Name : <%= rs.get
33
34

```

```

Tomcat v8.0 Server at localhost [Apache Tomcat] /Library/Java/JavaVirtualMachines/jdk1.8.0_121.jdk/Contents/Home/bin/java (05-Feb-2017, 12:20:16 PM)
Feb 05, 2017 12:24:57 PM org.apache.catalina.core.StandardContext reload
INFO: Reloading Context with name [/DemoJSP] has started
Feb 05, 2017 12:24:57 PM org.apache.jasper.servlet.TldScanner scanJars
INFO: At least one JAR was scanned for TLDs yet contained no TLDs. Enable debug logging for this logger for a complete log.
Feb 05, 2017 12:24:57 PM org.apache.catalina.core.StandardContext reload
INFO: Reloading Context with name [/DemoJSP] is completed

```

02:47:48

```

*profile.jsp
10 <body>
11     101 <br>
12     Navin <br>
13     88 <br>
14
15
16     String url = "jdbc:postgresql://localhost:5432/navin";
17     String username = "postgres";
18     String password = "0";
19     String sql = "select * from student where rollno=103";
20     Class.forName("org.postgresql.Driver");
21     Connection con = DriverManager.getConnection(url,username,password);
22     Statement st = con.createStatement();
23
24     ResultSet rs = st.executeQuery(sql);
25     rs.next();
26
27
28
29
30
31     Rollno : <%= rs.getString(1) %> <br>

```

```

Tomcat v8.0 Server at localhost [Apache Tomcat] /Library/Java/JavaVirtualMachines/jdk1.8.0_121.jdk/Contents/Home/bin/java (05-Feb-2017, 12:20:16 PM)
Feb 05, 2017 12:24:57 PM org.apache.catalina.core.StandardContext reload
INFO: Reloading Context with name [/DemoJSP] has started
Feb 05, 2017 12:24:57 PM org.apache.jasper.servlet.TldScanner scanJars
INFO: At least one JAR was scanned for TLDs yet contained no TLDs. Enable debug logging for this logger for a complete log.
Feb 05, 2017 12:24:57 PM org.apache.catalina.core.StandardContext reload
INFO: Reloading Context with name [/DemoJSP] is completed

```



```
32= Name : <%= rs.getString(2) %>
33
34

Markers Properties Servers Data Source Explorer Snippets Problems Console Progress
Tomcat v8.0 Server at localhost [Apache Tomcat] /Library/Java/JavaVirtualMachines/jdk1.8.0_121.jdk/Contents/Home/bin/java (05-Feb-2017, 12:20:16 PM)
Feb 05, 2017 12:24:57 PM org.apache.catalina.core.StandardContext reload
INFO: Reloading Context with name [/DemoJSP] has started
Feb 05, 2017 12:24:57 PM org.apache.jasper.servlet.TldScanner scanJars
INFO: At least one JAR was scanned for TLDs yet contained no TLDs. Enable debug logging for this logger for a complete log.
Feb 05, 2017 12:24:57 PM org.apache.catalina.core.StandardContext reload
INFO: Reloading Context with name [/DemoJSP] is completed
```

02:47:53

workspace - Java EE - DemoJSP/WebContent/profile.jsp - Eclipse

Project Explorer

- Demo
- DemoApp
- DemoJSP
 - Deployment Descriptor: DemoJSP
 - JAX-WS Web Services
 - Java Resources
 - JavaScript Resources
 - build
 - WebContent
 - META-INF
 - WEB-INF
 - lib
 - postgresql-9.4.1208-jdbc42-atlassian-hosted.jar
 - profile.jsp
 - HibDemo
 - Servers

profile.jsp

```
10= <body>
11     101 <br>
12     Navin <br>
13     88 <br>
14
15= <%
16     String url = "jdbc:postgresql://localhost:5432/navin";
17     String username = "postgres";
18     String password = "0";
19     String sql = "select * from student where rollno=103";
20     Class.forName("org.postgresql.Driver");
21     Connection con = DriverManager.getConnection(url,username,password);
22     Statement st = con.createStatement();
23
24     ResultSet rs = st.executeQuery(sql);
25     rs.next();
26
27
28
29
30
31     Rollno : <%= rs.getString(1) %> <br>
32     Name : <%= rs.getString(2) %> |
33
34
```

Markers Properties Servers Data Source Explorer Snippets Problems Console Progress

Tomcat v8.0 Server at localhost [Apache Tomcat] /Library/Java/JavaVirtualMachines/jdk1.8.0_121.jdk/Contents/Home/bin/java (05-Feb-2017, 12:20:16 PM)

Feb 05, 2017 12:24:57 PM org.apache.catalina.core.StandardContext reload

INFO: Reloading Context with name [/DemoJSP] has started

Feb 05, 2017 12:24:57 PM org.apache.jasper.servlet.TldScanner scanJars

INFO: At least one JAR was scanned for TLDs yet contained no TLDs. Enable debug logging for this logger for a complete log.

Feb 05, 2017 12:24:57 PM org.apache.catalina.core.StandardContext reload

INFO: Reloading Context with name [/DemoJSP] is completed

02:48:08

workspace - Java EE - DemoJSP/WebContent/profile.jsp - Eclipse

Project Explorer

- Demo
- DemoApp
- DemoJSP
 - Deployment Descriptor: DemoJSP
 - JAX-WS Web Services
 - Java Resources
 - JavaScript Resources
 - build
 - WebContent
 - META-INF
 - WEB-INF
 - lib
 - postgresql-9.4.1208-jdbc42-atlassian-hosted.jar
 - profile.jsp
 - HibDemo
 - Servers

profile.jsp

```
10= <body>
11     101 <br>
12     Navin <br>
13     88 <br>
14
15= <%
16     String url = "jdbc:postgresql://localhost:5432/navin";
17     String username = "postgres";
18     String password = "0";
19     String sql = "select * from student where rollno=103";
20     Class.forName("org.postgresql.Driver");
21     Connection con = DriverManager.getConnection(url,username,password);
22     Statement st = con.createStatement();
23
24     ResultSet rs = st.executeQuery(sql);
25     rs.next();
26
27
28
29
30
31     Rollno : <%= rs.getString(1) %> <br>
32     Name : <%= rs.getString(2) %> |
33
34
```

Markers Properties Servers Data Source Explorer Snippets Problems Console Progress

Tomcat v8.0 Server at localhost [Apache Tomcat] /Library/Java/JavaVirtualMachines/jdk1.8.0_121.jdk/Contents/Home/bin/java (05-Feb-2017, 12:20:16 PM)

Feb 05, 2017 12:24:57 PM org.apache.catalina.core.StandardContext reload

INFO: Reloading Context with name [/DemoJSP] has started

Feb 05, 2017 12:24:57 PM org.apache.jasper.servlet.TldScanner scanJars

INFO: At least one JAR was scanned for TLDs yet contained no TLDs. Enable debug logging for this logger for a complete log.

Feb 05, 2017 12:24:57 PM org.apache.catalina.core.StandardContext reload

INFO: Reloading Context with name [/DemoJSP] is completed


```
27
28
29 %>
30
31 Rollno : <rs.getString(1) %> <br>
32 Name : <rs.getString(2) %> <br>
33 Marks : <rs.getString(3) %>
34
```

Markers Properties Servers Data Source Explorer Snippets Problems Console Progress

Tomcat v8.0 Server at localhost [Apache Tomcat] /Library/Java/JavaVirtualMachines/jdk1.8.0_121.jdk/Contents/Home/bin/java (05-Feb-2017, 12:20:16 PM)

Feb 05, 2017 12:24:57 PM org.apache.catalina.core.StandardContext reload
INFO: Reloading Context with name [/DemoJSP] has started
Feb 05, 2017 12:24:57 PM org.apache.jasper.servlet.TldScanner scanJars
INFO: At least one JAR was scanned for TLDs yet contained no TLDs. Enable debug logging for this logger for a complete
Feb 05, 2017 12:24:57 PM org.apache.catalina.core.StandardContext reload
INFO: Reloading Context with name [/DemoJSP] is completed

02:48:31

The screenshot shows the Eclipse IDE interface. On the left is the Project Explorer showing a project named 'DemoApp' with a sub-project 'DemoJSP'. The 'profile.jsp' file is selected. The main editor window displays the output of the JSP page in a web browser view. The output shows the following text:

```
101
Navin
88
Rollno : 103
Name : 50
Marks : Navin
```

At the bottom, the Console window shows Tomcat logs, including messages about context reloading and JAR scanning.

```
1
2 For PostGRES :
3
4 Driver : org.postgresql.Driver
5 URL : jdbc:postgresql://localhost:5432/navin
6
7 Username : postgres
8 password : 0
9
10
11
```

```
11
12 For MySql:
13
14 Driver : com.mysql.jdbc.Driver
15 URL : jdbc:mysql://localhost:3306/navin
16
17 Username : root
18 password :
19
20
21
```