




Créez un web service exposant une API

Architecture

- fzaninotto/faker": "^1.9",
- nelmio/api-doc-bundle": "^4.3"
- lexik/jwt-authenticationbundle": "^2.12"
...

Librairies

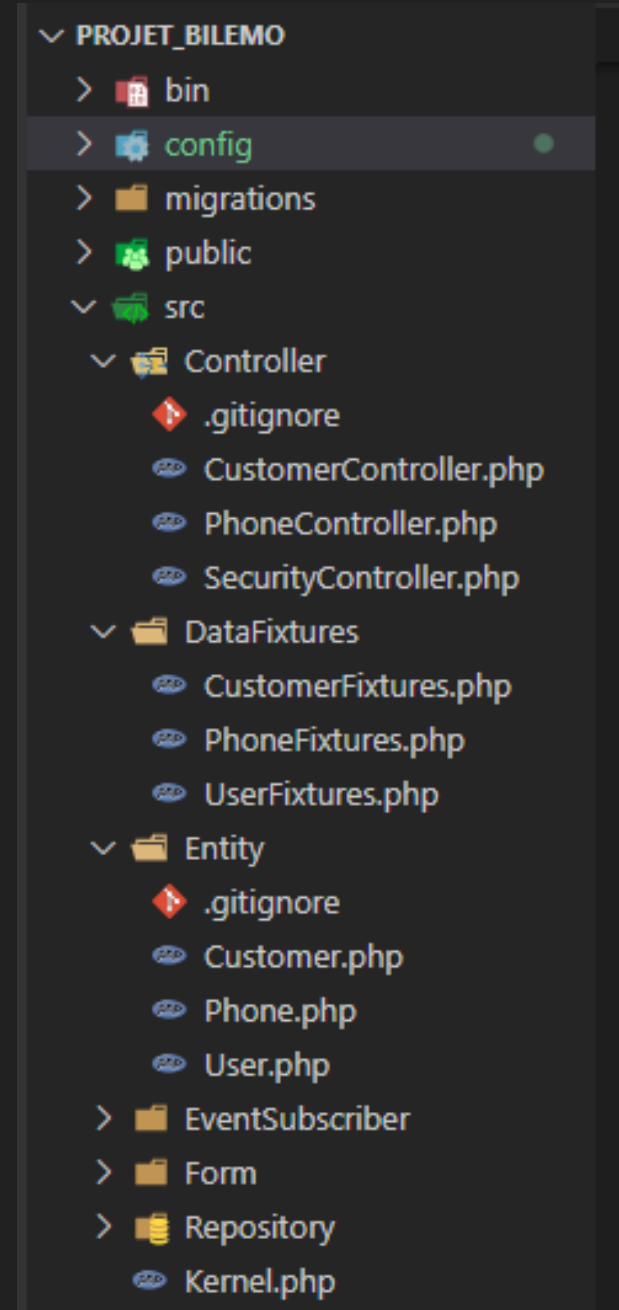

Développer 1 vitrine de téléphones mobiles

BileMo

entreprise offrant sélection de téléphones
mobiles
haut de gamme.

Consulter la liste des produits

Consulter les détails d'un produit

Consulter la liste des utilisateurs inscrits liés à un client sur le site web

Consulter le détail d'un utilisateur inscrit lié à un client


Ajouter un nouvel utilisateur lié à un client

Supprimer un utilisateur ajouté par un client

Besoins

BileMo

Modèle de maturité de Richardson

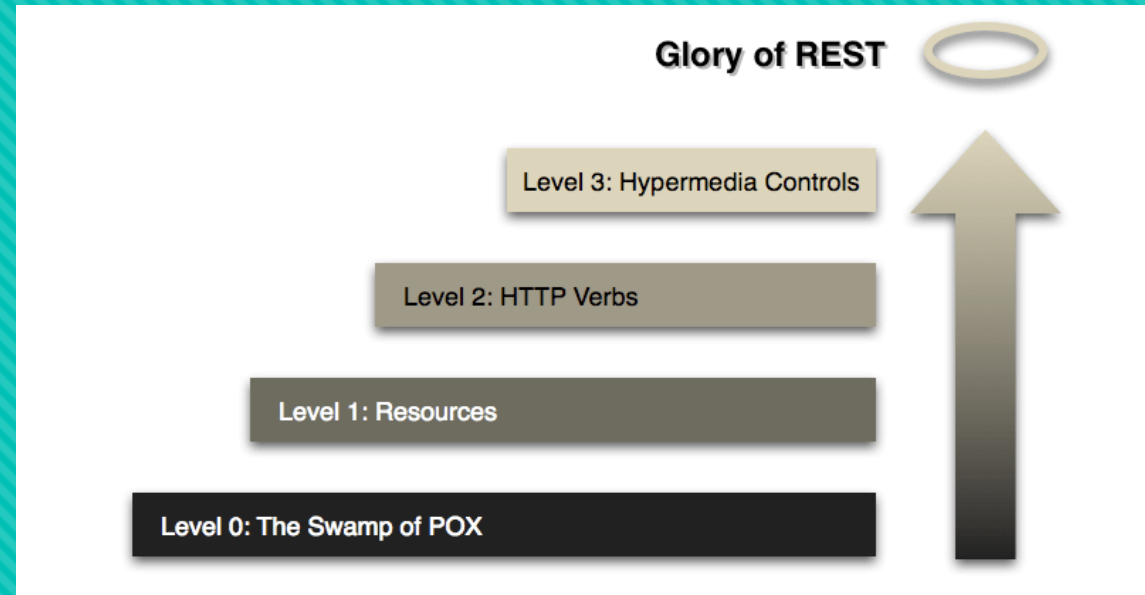

CODACY Analyse

Repository name Grade

projet_bileMo

A



BileMo App

1.0.0

OAS3

Acces aux clients de BileMo

Servers

Authorize



Customers



GET

</api/customer>

POST

</api/customer>

GET

</api/customer/{id}>

DELETE

</api/customer/{id}>

Phones



GET

</api/phone>

GET

</api/phone/{id}>

Connexion



POST

</api/login>

Schemas



DOCUMENTATION API

Paramètres - Réponses

nelmio api-doc-bundle

Phones

GET /api/phone

Parameters

No parameters

Request body

Example Value | Schema

```
{
  "id": 0,
  "name": "string",
  "Couleur": "string",
  "memoire": "string",
  "description": "string"
}
```

```
{
  "id": 9,
  "email": "deven28@yahoo.com",
  "name": "Stokes",
  "_links": {
    "self": {
      "href": "https://localhost:8000/api/customer/9",
      "actions": {
        "read": "GET",
        "delete": "DELETE"
      }
    }
  }
}
```

Customers

GET /api/customer

POST /api/customer

GET /api/customer/{id}

DELETE /api/customer/{id}

Phones

GET /api/phone

GET /api/phone/{id}

Connexion

POST /api/login

Schemas