Error Event

Error Event

- A BPMN error is meant for business errors - which are different than technical exceptions.
- So, this is different than Java exceptions - which are, by default, handled in their own way.

Error event types:

- These are the available Error Event types.
  - Start Error Event.
  - Error Boundary Event
  - End Event Event

Error Event

Start error event



- An error start event can only be used to trigger an Event Sub-Process - it **cannot** be used to start a process instance.
- The error start event is always interrupting.

Error Event

Error End event:

- When process execution arrives at an error end event, the current path of execution is ended and an error is thrown.
- This error can be caught by a matching intermediate error boundary event.
- In case no matching error boundary event is found, the execution semantics defaults to the none end event semantics.

Error Event

Intermediate error boundary event

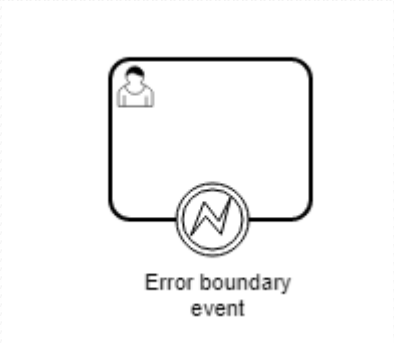

- An intermediate catching error event on the boundary of an activity, or error boundary event for short, catches errors that are thrown within the scope of the activity on which it is defined.
- Defining an error boundary event makes most sense on an embedded subprocess, or a call activity, as a subprocess creates a scope for all activities inside the subprocess.

Error Event

Intermediate error boundary event

- Errors are thrown by error end events.
- Such an error will propagate its parent scopes upwards until a scope is found on which an error boundary event is defined that matches the error event definition.
- When an error event is caught, the activity on which the boundary event is defined is destroyed, also destroying all current executions therein (e.g., concurrent activities, nested subprocesses, etc.).
- Process execution continues following the outgoing sequence flow of the boundary event.