Timer Event

Timer Event

- Timer events are events which are triggered by a defined timer.
- They can be used as start event, intermediate event or boundary event.
- Boundary events can be interrupting or non interrupting event.

Start timer event

- A timer start event is used to create process instance at a given time.
- It can be used both for processes which should start only once and for processes that should start in specific time intervals.
- A sub process cannot have a timer start event.
- A timer start event is scheduled as soon as process is deployed.

Timer Event

Intermediate timer catching event

- A timer intermediate event acts as a stopwatch.
- When an execution arrives in catching event activity, a timer is started.
- When the timer fires (e.g., after a specified interval), the sequence flow going out of the timer intermediate event is followed.

Timer boundary event

- A timer boundary event acts as a stopwatch and as an alarm clock.
- When an execution arrives in the activity to which the boundary event is attached, a timer is started.
- When the timer fires (e.g., after a specified interval), the activity is interrupted and the sequence flow going out of the timer boundary event are followed.

Timer Event

Interrupting Vs Non interrupting timer event

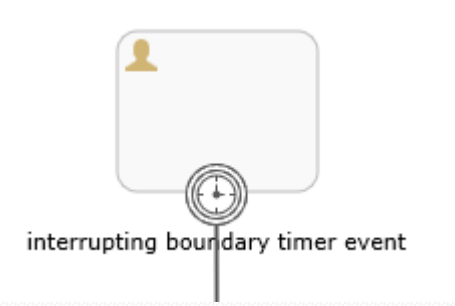

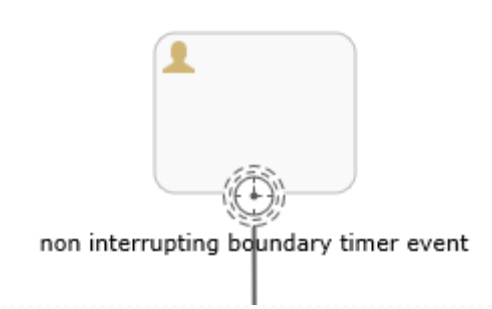

Cancel (Interrupting) timer event:

- The interrupting event is the default. In the case of an interrupting Event, the activity which was being performed will immediately be canceled.

Non-interrupting timer event:

- Non-Interrupting Event, the activity which was being performed will continue in parallel along with the new flow that was initiated by the boundary event. The current activity will NOT be cancelled (or interrupted).