Message Event

Message Event

- Most processes require communication, which can be represented in BPMN by means of the message event.
- Message events are events which reference a named message.
- A message has a name and a payload.
- Message event is always directed at a single recipient.

Start message event

- If you want a process or event sub process to start when a message is received, use a start message event in your business process definition or inside your event sub process.
- This effectively allows us to select the right start event from a set of alternative start events using the message name.

Message Event

Start message event

- Incoming messages can originate from a message event in a process.
- When deploying a process definition with one or more message start events, the following considerations apply:
  - The name of the message start event must be unique across a given process definition, i.e., a process definition must not have multiple message start events with the same name.
  - The engine throws an exception upon deployment of a process definition in case two or more message start events reference the same message or if two or more message start events reference messages with the same message name.
  - The name of the message start event must be unique across all deployed process definitions.
  - The engine throws an exception upon deployment of a process definition in case one or more message start events reference a message with the same name as a message start event already deployed by a different process definition.

Message Event

Start message event

- When deploying a process definition with one or more message start events, the following considerations apply:
  - Process versioning: Upon deployment of a new version of a process definition, the message subscriptions of the previous version are canceled. This is also the case for message events that are not present in the new version.
  - Message start events are only supported in top-level processes. Message start events are not supported in embedded sub processes.

Message intermediate catch event

- When a token arrives at the message intermediate catching event it will wait there until a message with the proper name arrives.
- As already described, the message must be handed into the engine via the appropriate API calls.

Message Event

Message boundary event

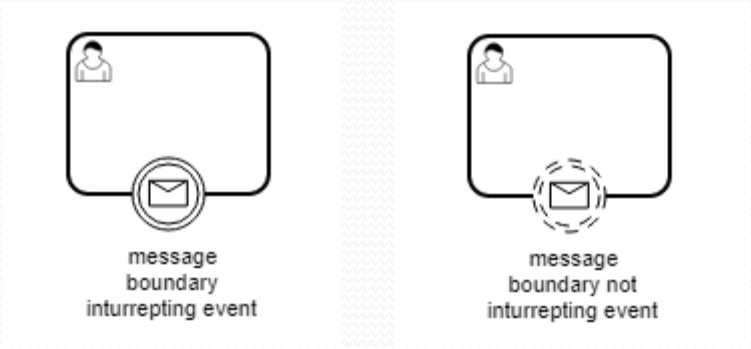

- Boundary events are catching events that are attached to an activity.
- This means that while the activity is running, the message boundary event is listening for named message.
- When this is caught, two things might happen, depending on the configuration of the boundary event:
  - Interrupting boundary event: The activity is interrupted and the sequence flow going out of the event is followed.
  - Non-interrupting boundary event: One token stays in the activity and an additional token is created which follows the sequence flow going out of the event.

Message Event

Message intermediate throw event

- A Message Intermediate Throwing event sends a message to an external service.
- This event has the same behavior as a Service Task.

Message end event

- When process execution arrives at a Message End Event, the current path of execution is ended and a message is sent.
- The Message End Event has the same behavior as a Service Task.