

LESSON 1.5: Static Route

What this lesson is about

This lesson describes about Sterling File Gateway routing channels, includes the procedure to upload and download files through myfilegateway, and provides visibility into system activity and transactions.

What you should be able to do

- Transfer files using Static Routing.
- Explain the different ways to upload a file in Sterling File Gateway.
- Edit and monitor Routing Channel result.
- Analyze the routes file transfer in myfilegateway and File Gateway.

How you will check your progress

The progress of the course is analyzed based on the successful application of the hands-on exercises.

Additional References

Documentation

- Sterling File Gateway routing:
http://www.ibm.com/support/knowledgecenter/SS4TGX_2.2.0/com.ibm.help.sfg_route_prov.doc/sfg_route_prov_plugin-gentopic2.html?lang=en
-

Routing Channels

Introduction

Routing channels match incoming producer files to the appropriate consumer and then transform the file and file name according to the policies of the consumer.

Route Provisioner's create routing channels. Before routing channels can be created, the Integration Architect should create a routing channel template and the Route Provisioner should create the producer and consumer Partners.

You cannot create duplicate routing channels. A routing channel with the same routing channel template, producer, and consumer is considered a duplicate. At least one parameter must be different.

There are two types of routing channels:

- Static routing channel

The consumer is explicitly identified during the configuration, and there is only one consumer to process the transaction.

- Dynamic routing channel

The consumer is not explicitly specified. The routing channel allows routing to any consumer of the consumer group that is specified in the routing channel template.

Creating routing channels

Procedure

Route Provisioner's, create routing channels using routing channel templates that are created by an Integration Architect. Use the information from the routing channel request form.

To create a routing channel:

1. From the filegateway user interface, click **Routes > Channels**.
2. Click **Create**.
3. Select a **routing channel template** from the list.



Important

If you select a static template, select a producer and a consumer. If you select a dynamic template, select only a producer from the list. If you selected dynamic template select only a producer.

Exercise 1.5.1: Create a routing channel

Introduction

In this exercise, you will create a routing channel linking the producer called *partner* with the consumer called *abcde*. The partners such as *partner* and *abcde* were created in lesson 2.

Instructions

Complete the following steps to create a routing channel.

Step 1: Log in to filegateway by specifying **fg_sysadmin** as the user ID and **password** as password.


Step 2: From the **main menu**, select **Routes > Channels**.

Step 3: Click **+Create**.

Step 4: In the **Create a New Routing Channel** window, specify the following parameters:

Parameter	Value
Routing Channel Template:	Static
Producer:	partner
Consumer:	abcde

Step 5: Click **Save**. The message, Routing Channel was created successfully is displayed. click **OK**.

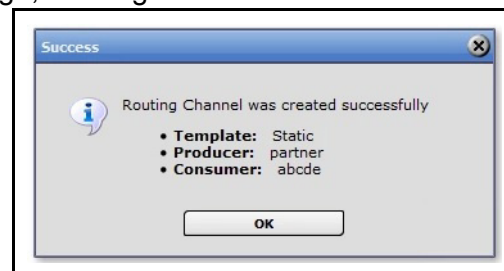

MyFileGateway

Introduction

The companion web application to Sterling File Gateway is myfilegateway. Internal or external partner users access Sterling File Gateway using myfilegateway. From myfilegateway, partner users can:

- Upload or download files.
- Search for routes they participated in.
- View recent activity and status for file transfers they participated in.
- Generate reports for activity they participated in.
- Generate PDF reports in Asian languages.
- Subscribe to notifications.
- View and update profile information.

Myfilegateway requires access to a valid user account. This user account is created when a route provisioner creates the partner.

Exercise 1.5.2: Upload a file using MyFileGateway

Introduction

In this exercise, you will use partner user interface to upload a file into the mailbox. Once the file is uploaded, the respective routing channel template is invoked to transfer the files.

Instructions

Follow the instructions to upload the file from partner's interface:

Step 1: Connect to myfilegateway in a new web browser Open a web browser, access *http://sfg01:9000/myfilegateway*

Step 2: Log in using the **partner** as user ID and **password** as password.

Step 3: Click the **Upload Files** tab.

Step 4: Select the / (root) mailbox. [Note: select only slash]

Step 5: Select any PDF file from the **C:/6F86G/ClassFiles**.

Step 6: Click **Send** and follow the progress of your route.

Search Criteria

Arrived File

Times shown in local time zone  [Change to server time zone](#)

The number of search results found: 1

☐	Reviewed	Arrived Fil...	Delivery Status	Producer	Original File Name	Discovery Time ▾
☐	☐	Routed	Complete	partner	README.pdf	03/21/2016 02:06:19

(Continued on next page)

Exercise 1.5.2: Upload a file using MyFileGateway

(Continued)

Instructions

....(Continued)

Step 7: Select Routed file in the Arrived File location, to view the routed status.

The screenshot displays the Sterling File Gateway web interface. At the top, there are tabs for 'File Activity', 'Upload Files', 'Download Files', and 'Reports'. Below these, a search section titled 'Search for file activities' includes a text input field and a 'Find' button. The 'Arrived File' tab is selected, showing a table with one file entry: 'README.pdf' with a 'Discovery Time' of '03/21/2016 02:06:19'. To the right, the 'Arrived File Events' panel is open, displaying a list of events. The first event, FG_0504, is highlighted with a red box and describes the routing process for the 'README.pdf' file.

Event Code	Time	Description
FG_0504	03/21/2016 02:06:19	Route: Send Producer Payload ['README.pdf'] from ProducerCode 'partner' to ConsumerCode 'abcde' using Routing Channel Template ['Static'] which matched Producer File Structure 'Unknown{.+}'
FG_0410	03/21/2016 02:06:19	Arrived File is now Routing.
FG_0602	03/21/2016 02:06:19	Extracting producer file with 1 layer(s): Unknown{.+}.
FG_0605	03/21/2016 02:06:19	Extracted UNKNOWN Layer from file 'README.pdf'.
FG_0411	03/21/2016 02:06:19	Arrived File is now Routed.

File activity

Introduction

The file transfers between the partners in Sterling File Gateway are viewed through different user interfaces. The activity view the file transfers and its status is called file activity.

You can view activity status information for the last hour, day, and week through the activity snapshot.

Metrics of the file activities to monitor are listed in the table:

Activity	Description
Total Arrived Files	Total number of arrived files from the producer that are completed in the specified time period.
Total Payloads	Total arrived files found inside a container type or non-container type.
Unidentified Files	Number of payloads that were failed due to routing channel being unidentified.
Successfully Routed	Number of payloads that were successfully routed.
New Failures	Number of payloads that failed to route for reason other than route identification. It excludes reviewed failures.
Reviewed Failures	Number of payloads that failed to route for reason other than route identification failure. It includes only reviewed failures.
Total in-flight	To view list of files currently being processed. Also files that arrived from the producer yet to be moved to a completed state.

(Continued on next page)

File Activity

(Continued)

Route Detail

The search results tab provides the arrived files that meet the criteria that are specified for your search.

To view the detailed route information:

- Sort the results by clicking the header of any column. Click again to change from ascending to descending order.
 - Under arrived files, click in the row of the file you are interested in. Arrived file events are shown in the right pane, with the time and description. Select the hyperlink within the description to view more information about any event. Error events are shown in red.
 - Click in the row of an event you are interested in to get details about the event.
 - To view routing channel template details, select the routing channel, right-click, select view associated template.
 - Sort the results by clicking the header of any column. Click again to change from ascending to descending order.
-

Replay or redeliver a route

Introduction

If a route fails due to a communication failure or unavailability of a partner, then that route can be re-sent without creating new files. Resending transacted file is called replaying a route. There are two ways a route can be replayed:

- Replay from the beginning of a transfer.
- Redeliver a processed file.

Mass replay

Replay a successful or a failed route to have one or more files transferred again from the beginning.

To replay a route:

1. From the **Search** page, enter criteria for the file to replay.
2. Click **Find** to initiate the search.
3. To replay all files matching the search criteria,
 - a. Click **Replay All**
 - b. In the Replay Arrived File pop-up, you can add a comment (upto 255 characters) about replay.
 - c. Click **Replay**. All files matching the search criteria, are replayed.
4. You can enter a new name to rename the file for the replay. Do not use the following characters:
!%*?<>"\|:.

The selected file is replayed and added to the list of arrived files, with a special icon to indicate that it is a replay. You can replay a route any number of times.



Hint

By default, *FileGatewayReroute* business process runs every five minutes. If you select *Replay All*, the actual replay occurs the next time the *FileGatewayReroute* business process is run.

(Continued on next page)

Replay or redeliver a route

(Continued)

Mass redeliver

Mass redeliver does redeliver of more than one successfully routed or failed routed file transfers in Sterling File Gateway. The files are redelivered according to previous processing without repetition.

You can redeliver all the files from the list. Only files that had a previous delivery attempt, successful, or failed, can be redelivered.



Note

Purged activities are not found in the search criteria. You cannot deliver messages that are purged.

To redeliver a route:

1. From the **Search** page, enter criteria for the file to redeliver.
2. Click **Find** to initiate the search.
3. To redeliver all files matching the search criteria:
 - a. Click **Redeliver All**.
 - b. In the Redeliver Arrived File pop-up, you can add a comment (upto 255 characters) about redeliver.
 - c. Click **Redeliver**. All files matching the search criteria, are redelivered.
4. To redeliver only selected files, on the Arrived File tab, select one or more files to redeliver.
5. On the **Delivery** tab, right-click the delivery and select Redeliver this Arrived File.

The selected file is redelivered. Information about the redelivery is added to the delivery details of the original delivery.

You can redeliver a route any number of times. When you redeliver a route, the reviewed box is automatically selected. Right-click and select **Mark as Not Reviewed** to remove the selection.



Hint

By default, *FileGatewayReroute* business process runs every five minutes. If you select *Redeliver All*, the actual redeliver occurs the next time the *FileGatewayReroute* business process is run.

Exercise 1.5.3: Analyze uploaded file transfer

Introduction

In this exercise, you will analyze the file received by the consumer **abc**. Also, view the abcde inbox to verify that partner file was successfully transferred.

Instructions

Complete the following steps to analyze message ID.

Step 1: Log out of myfilegateway.

Step 2: Log in to filegateway by specifying **fg_sysadmin** as the user ID and **password** as password.

Step 3: Select **Tools > B2B Console**.

Step 4: Navigate to **Deployment > Mailboxes > Messages**.

Step 5: Click **Go!** on Search panel to view the consumed messages.

Message Management								
Messages 1-1 of 1								
Select	Name ▲▼	ID ▲▼	Created ▲▼	Size ▲▼	Mailbox ▲▼	Extract Policy	Policy Value	Locked by BP
edit	README.pdf	2	03/21/2016 5:06:19 AM EDT	11395	/abcde/inbox	Extractable Count	1	

Complete the following steps to analyze */abcde/inbox*.

Step 1: From a web browser, access <http://192.168.40.100:9000/mailbox>. If credentials needed, specify **admin** as the user ID, and **password** as password.

Step 2: From Search Options of Mailbox Search window, select */abcde > /inbox*. You notice that the Mailbox field is pointing to */abcde/inbox*.

Step 3: Click **Go!** to view the inbox of abcde, as shown in the screen shot.

Extract	Message Name	Id	Created	Size	Mailbox	Extract Policy	Policy Value
	README.pdf	2	2016-03-21 05:06:19.85	11395	/abcde/inbox	Count	1

Items 1 - 1 of 1

Items per page: [5](#) [10](#) [25](#) [50](#) [100](#)

Last update time: Mon Mar 21 2016 02:50:41 GMT-0700 (Pacific Standard Time)

Exercise 1.5.4: Creating a listening partner

Introduction

In this exercise, you will edit the *abc* partner profile so that after Sterling File Gateway routes a file to the consumer's mailbox of */abcde/inbox*, an FTP process is started to push the file to a backend server. The route channel and route channel template will not change. The only modification that is required is to edit the *abc* partner profile to include the FTP connection information.

The table indicates the details of the producer, consumer communication through SFG through respective backend system:

Producer	SFG	Consumer	Backend System
name= partner	Route Channel	name= abc	nil
URL-myfilegateway	RCT- static	/abcde/inbox	Linux server

Instructions

Complete the steps to edit the connections of FTP listener.

Step 1: Log in to filegateway by specifying **fg_sysadmin** as the user ID and **password** as password.

Step 2: From the main menu, select **Participants > Partners**.

Step 3: Highlight abc partner **abcde** and click **Edit**.

Step 4: From Protocol window, click **edit** icon.

Step 5: Select **Partner will listen for a connection to consume data** and click **Next**.

Step 6: **Will abcde use either SSH/SFTP or SSH/SCP protocol to initiate connections?**

Step 7: Select **No** for the parameter and Click **Next**.

(Continued on next page)

Exercise 1.5.4: Creating a listening partner

(Continued)

Instructions

....(Continued)

Step 8: The Select a Protocol Published by SFG screen opens. Select **Listen for FTP Connections**. Specify the following FTP Connection information:

Parameter	Value
FTP Server host name (or IP address)	192.168.40.100
FTP Listen Port:	9032
Connection Type:	Active
User name:	admin
New Password:	password
Confirm New Password:	password
Base Directory	/from_sfg
Local Port Range	<leave blank>
Control Port Range	<leave blank>
Number of retries	3
Interval between retries (in minutes)	1
Upload file under a temporary name first?	No

Step 9: Click Next.

Step 10: From the **PGP Settings** screen, specify the following values:

Parameter	Value
Does partner require data to be signed by the Router?	No
Does partner require data to be encrypted by the Router?	No

(Continued on next page)

Exercise 1.5.4: Creating a listening partner

(Continued)

Instructions

....(Continued)

Step 11: Click **Finish** and close the window to view protocol configuration.

Protocol	
Partner Role:	Producer of Data, Consumer of Data
Connection Direction:	Listen Connection
Transport Method:	FTP
Connection Type :	active
FTP Server Host Name(or IP address):	192.168.40.100
FTP Listen Port:	9032
User Name:	admin
Password:	*****
Base Directory:	/from_sfg
Local Port Range:	
Control Port Range:	
Number of retries:	3
Interval between retries (in minutes):	1
FTP rename file:	no
Does abcde require data to be signed by the Router:	No

Exercise 1.5.5: Set up directories in FTP

Introduction

In this exercise, you will verify that FTP server and directories are created through FTP commands. The setting up of directories is required to initiate connections in FTP.

Instructions

Complete the following steps to create directories using FTP commands.

Step 1: FTP Server adapter in Sterling B2B Integrator is enable by default. To view, you need to access <http://192.168.40.100:9000/dashboard> URL **Admin Console > Deployment > Services > Configuration**.

Step 2: Type **FTP Server Adapter** in Search panel and Click Go! to view image as shown in the screen shot.



Enabled	Select	Name ▲▼	Type ▲▼	Advanced State
☒		FTP Client SITE Service	FTP Client SITE Service	
☒		FTP Send To GIS Support	FTP Send Adapter	Enabled
☒		FTP Server Adapter	FTP Server Adapter	Enabled
☒		FTPClientObscureParameter	Obscure Data - Process Data Values	
☒		FTPSend	FTP Send Adapter	Enabled

Step 3: From the command window of windows image.

Step 4: Enter **ftp** and click **Enter**.

Step 5: Enter **open 192.168.40.100 9032**. Click **Enter**.

Step 6: Enter **admin** as the username and **password** as password. Click **Enter**.

Step 7: Enter **pwd**. Click **Enter**

Step 8: Enter **ls -ltr** to list the directories. Click **Enter**. You will see all the partners mailbox.

Step 9: Enter **mkdir from_sfg** to create a directory. Click **Enter**.

Step 10: Enter **cd from_sfg** to change directory. Click **Enter**.

Step 11: Enter **pwd** to view the present working directory. Click **Enter**.

Step 12: Enter **ls -ltr**. Click **Enter**. The from_sfg directory is created

Exercise 1.5.6: Upload file to initiate FTP process

Introduction

In this exercise, you will start the FTP process by uploading a data file into the repository in myfilegateway. This task represents an outside trading partner accessing the mailbox system using HTTP. Sterling File Gateway detects the new file and moves it to consumer mailbox of `/abcde/inbox` and then starts the FTP process.

Instructions

Complete the following steps to upload input data into myfilegateway:

Step 1: Log in to myfilegateway with the ID of **partner** and password as **password**.

Step 2: Select the **Upload Files** tab.

Step 3: In the Mailbox path section, select `/` [slash].

Step 4: In the File section, select `C:\6F86G\ClassFiles\Safety.GIF`.

Step 5: Click **Send**. The output is displayed as shown in the screen shot.

The screenshot displays the Sterling File Gateway web interface. The 'Upload Files' tab is selected. Below the tabs, there is a search section with 'Search Criteria' and 'Arrived File' sub-tabs. The 'Arrived File' sub-tab shows a table with one search result:

Reviewed	Arrived File...	Delivery Status	Producer	Original File Name	Discovery Time
☒	☐	Routed	Complete	partner	Safety.GIF

Below the table, it states 'The number of search results found: 1'. To the right, the 'Arrived File Events' section shows a list of events:

Event Code	Time	Description
FG_0504	03/22/2016 04:33:31	['Safety.GIF'] from ProducerCode 'partner' to ConsumerCode 'abcde' using Routing Channel Template ['Static'] which matched Producer File Structure 'Unknown{.+}'
FG_0505	03/22/2016 04:33:31	The following 1 route(s) will be run:
FG_0410	03/22/2016 04:33:31	Arrived File is now Routing.
FG_0602	03/22/2016 04:33:31	Extracting producer file with 1 layer(s): Unknown{.+}.
FG_0605	03/22/2016 04:33:31	Extracted UNKNOWN Layer from file 'Safety.GIF'.
FG_0411	03/22/2016 04:33:31	Arrived File is now Routed.

(Continued on next page)

Exercise 1.5.6: Upload file to initiate FTP process

(Continued)

Instructions

....(Continued)

Analyze the process through FTP log and FTP client

Complete the following steps to view FTP log files:

Step 1: Log in to filegateway by specifying **fg_sysadmin** as the user ID and **password** as password.

Step 2: From the main menu, select **Tools > Logs**.

Step 3: From the new window, scroll to view the FTP Server panel.

Step 4: Review the ftp.log file, as shown in the screen shot.



```

Log.FTP Log 03/22/2016 7:20:57 AM - ftp.log

[2016-03-22 07:20:57.462] ALL FtpServerAdapterImpl.startupAdapter() - Adapter: FTP_SERVER_ADAPTER_FtpServerAdapter_node1 - starting
[2016-03-22 07:20:57.501] ALL FtpServer.init(P,S) starting initialization.
[2016-03-22 07:20:57.505] ALL FtpConfig.extractNatConfiguration(P) instanceNATAddress in FtpConfig=null
[2016-03-22 07:20:57.506] ALL FtpConfig.logConfiguration() server configuration: ftpListenPort=[9032], passiveDataPortCollection=[null
[2016-03-22 07:20:57.775] ALL AdapterConcurrencyManager constructed with adapterMax [-1] and userMax [-1]
[2016-03-22 07:20:57.776] ALL FtpMailboxConfig.logConfiguration() server mailbox configuration: documentStorageType=[1], extractabilit
[2016-03-22 07:20:57.838] ALL FtpServer.init(P,S) initialization successful.
[2016-03-22 07:20:57.905] ALL FtpServerAdapterImpl.update() - Adapter: FTP_SERVER_ADAPTER_FtpServerAdapter_node1 - running
[2016-03-22 07:25:53.347] ALL AUDIT: User [admin] from [192.168.40.1] has logged in using unsecure channel.
[2016-03-22 07:33:31.412] ALL AUDIT: User [admin] from [192.168.40.100] has logged in using unsecure channel.
[2016-03-22 07:33:31.517] ALL AUDIT: User [admin] storing file [/from_sfg/Safety.GIF].
[2016-03-22 07:33:31.627] ALL AUDIT: User [admin] from [192.168.40.100] has quitted.
  
```

(Continued on next page)

Exercise 1.5.6: Upload file to initiate FTP process

(Continued)

Instructions

....(Continued)

Complete the following steps to view FTP directory:

Step 1: From the command window of **windows** image.

Step 2: Enter **ftp** and click **Enter**.

Step 3: Enter **open 192.168.40.100 9032**. Click **Enter**.


Step 4: Enter **admin** as user name and **password** as password. Click **Enter**.

Step 5: Enter **pwd**. Click **Enter**

Step 6: Enter **ls -ltr** to list the directories. Click **Enter**.

Step 7: Enter **cd from_sfg** to change directory. Click **Enter**.

Step 8: Enter **ls** to view the uploaded or processed file in from_sfg directory. Click **Enter**. The screen shot depicts the list of executed commands.

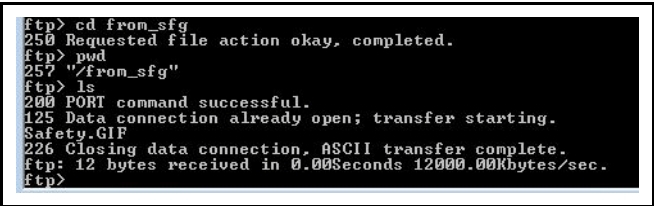

```
ftp> cd from_sfg
250 Requested file action okay, completed.
ftp> pwd
257 "/from_sfg"
ftp> ls
200 PORT command successful.
125 Data connection already open; transfer starting.
Safety.GIF
226 Closing data connection, ASCII transfer complete.
ftp: 12 bytes received in 0.00Seconds 12000.00Kbytes/sec.
ftp>
```

Exercise 1.5.7: Disable FTP configuration from listening partner

Introduction

In this exercise, you will disable configuration of FTP of abcde partner.

Instructions

Complete the following steps to disable FTP from listening partner abcde:

Step 1: Log in to filegateway by specifying fg_sysadmin as the user ID and password as password.

Step 2: From the main menu, select **Participants > Partners**.

Step 3: Highlight your abcde partner and click **Edit**.

Step 4: Click **edit** in the Protocol section.

Step 5: Select **Partner will initiate the connection to consume data**.

Step 6: Click **Next**.

Step 7: **Will abcde use either SSH/SFTP or SSH/SCP protocol to initiate connections?**

Step 8: Select **No** to the parameter and click **Next**.

Step 9: In the **PGP Settings** screen, specify the following parameters:.

Parameter	Value
Does partner require data to be signed by the Router?	No
Does partner require data to be encrypted by the Router?	No

Step 10: Click **Finish** and close the window.

Exercise 1.5.8: Extracting Data From the Mailbox Repository Using a Business Process

Introduction

In this exercise, you build a business process that extracts data from the consumer's mailbox */abcde/inbox* using a routing rule. The routing rule is started automatically when a file is received into the consumer's mailbox. In this lab, you will simulate how to start a Sterling B2B Integrator business process when a file is received from a trading partner.

This exercise is a four step process:

1. Review the mailbox extract business process.
2. Check in 6F86G_process Business Process.
3. Create a routing rule.
4. Upload input data into myFileGateway.

Instructions

Review the mailbox extract business process

Complete the following steps to review the mailbox extract business process

Step 1: Log in to filegateway by specifying **fg_sysadmin** as the user ID and **password** as password.

Step 2: Click **Tools > B2B Console**.

Step 3: In the **Tools** panel, click **Go!** to Run Graphical Process Modeler.

Step 4: Click **OK** for JDK version.

Step 5: Click **Run** install.

Step 6: Enter username as **admin** and password as **password**.

Step 7: Select **File > Open**.

(Continued on next page)


Exercise 1.5.8: Extracting Data From the Mailbox Repository Using a Business Process

(Continued)

Instructions

....(Continued)

Step 8: Open the **6F86G_extract_process.bp** file from the **C:\6F86G\ClassFiles** directory, as shown in the screen shot.i

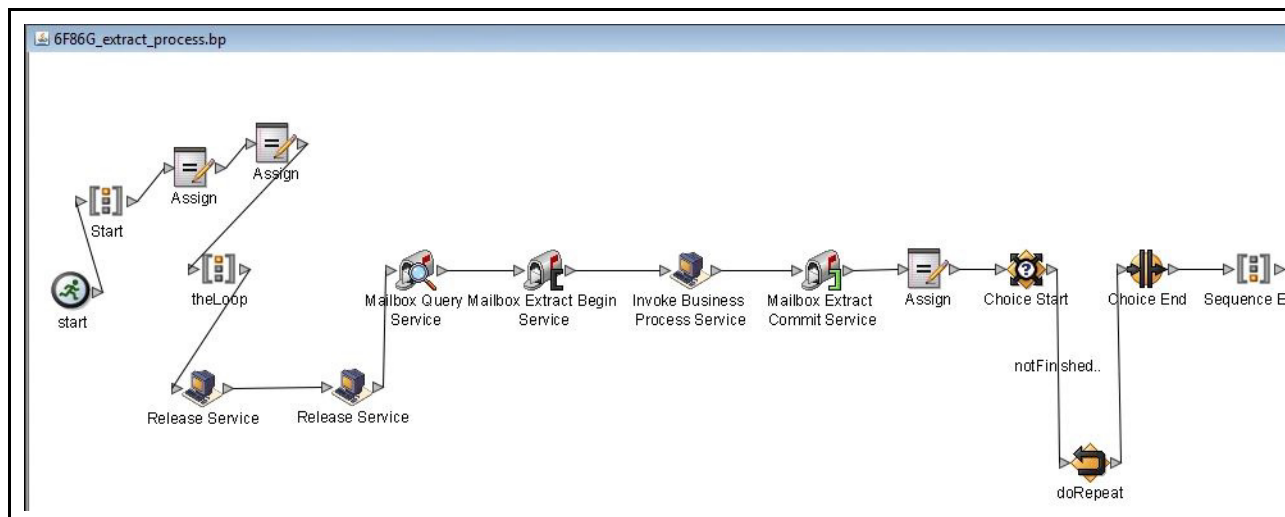

Step 9: Double-click the first Assign stencil. The first assign service sets a variable to one (loop_counter) and places the tag into process data. If multiple files are received at the same time, then the business process can process them individually as the process loops.

Step 10: Select the first Release Service. This Release Service removes the primary document from memory so that the business process processes a different document for each loop.

Step 11: Select the second Release Service. This Release Service removes the old message ID that was processed by the prior loop.

(Continued on next page)

Exercise 1.5.8: Extracting Data From the Mailbox Repository Using a Business Process

(Continued)

Instructions

....(Continued)

- Step 12:** The Mailbox Query Service uses the XPath statement of `//RoutingRequest/MessageId[number(//loop_counter/text())]/text()` to determine which file to extract from the mailbox repository. As the `loop_counter` variable increases, the business process extracts different files.
- Step 13:** The Mailbox Extract Begin service starts to extract messages from a mailbox. If the extractability is `ExtractableCount=1`, the Mailbox Extract Begin service locks the message until the extraction is complete and decrements the extract count to 0.
- Step 14:** The Invoke Business Process Service starts a Sterling B2B Integrator business process asynchronously.
- Step 15:** The Mailbox Extract Commit Service completes the extraction process and causes the `ExtractableCount` to be decremented upon a successful extraction.
- Step 16:** Click the third Assign stencil. The assign service updates the variable by one (`loop_counter`).
- Step 17:** The Choice Start decides whether more files need to be processed. If so, the Repeat Service sends the process back to the Loop tag and starts the sequence again. If all files have been processed, then the business process ends.

(Continued on next page)

Exercise 1.5.8: Extracting Data From the Mailbox Repository Using a Business Process

(Continued)

Instructions

....(Continued)

Check in 6F86Gprocess Business Process

Complete the following steps to check in 6F86G_extract_process Business Process

Step 1: From Sterling B2B Integrator interface, log in as **admin** user ID, password as **password**.

Step 2: Open the Admin Console and navigate to **Business Process > Manager**.

Step 3: In the Create section, next to Process Definition, click **Go!**

Step 4: In the Editor: Process Name dialog box, complete the fields listed in the following table using the parameters given:

Field	Parameter
Name	6F86Gextract_process
Select an input mode for defining the new process	Check in Business Process created by the graphical modeling tools.

Step 5: Click **Next**.

Step 6: In the Editor: Process: **6F86Gextract_process**: Check-in screen, click **Browse** and select **6F86G_extract_process.bp**. Click **Open**.

Step 7: In the Editor: Process: **6F86Gextract_process**: Check-in dialog box, in the **Description** text box, type **Mailbox Extraction process** and click **Next**.

(Continued on next page)

Exercise 1.5.8: Extracting Data From the Mailbox Repository Using a Business Process

(Continued)

Instructions

....(Continued)

Step 8: Use the default setting for the remaining parameters. Verify that the Business Process is enabled when you click **Finish**.



Note

6F86Gextract_process is invoking basic inventory process. You should check in basic inventory process.bp from the 6F86G/ClassFile/basicinventoryprocess.bp.

Complete the following steps to check in basicinventoryprocess Business Process:

Step 1: Open the Admin Console and navigate to **Business Process > Manager**.

Step 2: In the Create section, Next to Process Definition, click **Go!**

Step 3: In the Editor: Process Name dialog box, complete the fields listed in the following table using the parameters given:

Paramter	Value
Name	basicinventoryprocess
Select an input mode for defining the new process	Check in Business Process created by the graphical modeling tools.

Step 4: Click **Next**.

Step 5: In the Editor: Process: **basicinventoryprocess**: Check-in screen, click **Browse** and select **basicinventoryprocess.bp**. Click **Open**.

Step 6: In the Editor: Process: **basicinventoryprocess**: Check-in dialog box, in the **Description** text box, type **Basic Inventory process** and click **Next**.

Step 7: Use the default setting for the remaining parameters. Verify that the Business Process is enabled when you click **Finish**.

(Continued on next page)

Exercise 1.5.8: Extracting Data From the Mailbox Repository Using a Business Process

(Continued)

Instructions

....(Continued)

Create a routing rule

Complete the following steps to create a routing rule to route the files to mailbox repository:

Step 1: From the Sterling B2B Integrator, navigate to **Deployment > Mailboxes > Routing Rules**.

Step 2: In the create section, click **GO!**

Step 3: Type, **6F86Grouting_rule**.

Step 4: Set Evaluation mode to: **Evaluate Automatically**.

Step 5: Set Action Type to: **Business Process** and click **Next**.

Step 6: Select Filter by Name: radio button.

Step 7: In the Available Mailboxes section, select **/abcde/Inbox** and use the arrow to move to selected mailboxes and click **Next**.

Step 8: In the Rule Action screen, select **6F86Gextract_process** and click **Next**.

Step 9: In the User section, select **admin** and click **Next**.

Step 10: Click **Finish** to confirm the rule.

Step 11: Log out of Sterling B2B Integrator and Filegateway.

(Continued on next page)

Exercise 1.5.8: Extracting Data From the Mailbox Repository Using a Business Process

(Continued)

Instructions

....(Continued)

Upload input data into myfilegateway

In this exercise, you start the process by uploading a data file into the repository in myfilegateway. This task represents a trading partner accessing the mailbox system using HTTP. Sterling File Gateway detects the new file and moves it to consumer mailbox of /abcde/inbox and then starts the basic inventory process.

Complete the following steps to upload input data into myfilegateway:

Step 1: Log in to **myfilegateway** by specifying **partner** as user ID, **password** as password.

Step 2: Select the **Upload Files** tab.

Step 3: In the Mailbox path section, select / [forward slash].

Step 4: In the File section, select **C:\6F86G\ClassFiles\InventoryOf3.xml**.

Step 5: Click **Send**.

Step 6: Confirm that the file is routed and basic inventory process is executed.

The screenshot displays the Sterling File Gateway web interface. The top navigation bar includes tabs for 'Search Criteria', 'Arrived File', 'Route', and 'Delivery'. The 'Arrived File' tab is active, showing a table with search results. The table has columns: Reviewed, Arrived File..., Delivery Status, Producer, Original File Name, and Discovery Time. One result is shown for 'InventoryOf3.xml' with a status of 'Routed'. To the right, the 'Arrived File Events' pane lists several events. The event 'Arrived File is Routed' (Event Code FG_0411) is highlighted with an orange border.

Event Code	Time	Description
FG_0504	03/22/2016 21:06:44	Route: Send Producer Payload ['InventoryOf3'] from Producer 'partner' to ConsumerCode 'abcde' using Routing Channel Template ['Sta'] which matched Producer File Structure 'Unknown{.+}'
FG_0410	03/22/2016 21:06:44	Arrived File is Routed.
FG_0602	03/22/2016 21:06:44	Extracting process file with 1 layer Unknown{.+}.
FG_0605	03/22/2016 21:06:44	Extracted UNKNOWN Layer from file 'InventoryOf3.xml'
FG_0411	03/22/2016 21:06:44	Arrived File is Routed.

Step 7: Log out of myfilegateway.

(Continued on next page)

Exercise 1.5.8: Extracting Data From the Mailbox Repository Using a Business Process

(Continued)

Instructions

....(Continued)

Complete the following steps to view the files are transferred into **abc** partner.

Step 1: Log in to **myfilegateway** by specifying **abcde** as user ID, **password** as password.

Step 2: Select the **File Activity** tab.

Step 3: Click **Find** button in Search Criteria panel to view the arrived files in abcde's inbox.

Step 4: Click **Logout**.

(Continued on next page)

Exercise 1.5.8: Extracting Data From the Mailbox Repository Using a Business Process

(Continued)

Instructions

....(Continued)

Complete the following steps to view the files in the filegateway:

Step 1: Log in to filegateway by specifying **fg_sysadmin** as the user ID and **password** as password.

Step 2: Click **Routes > Activity**.

Step 3: Click **Find** to list all the transferred files.

Step 4: Select the latest routed activity to view the details.

Step 5: The Arrived File Events on the right panel will display the details. Note the Workflow number **6818** shown in the screen shot.

The screenshot shows the Sterling File Gateway interface. The top navigation bar includes 'Routes', 'Participants', 'Tools', 'Profile', 'Help', and 'Sign Out'. Below this, there are tabs for 'Search Criteria', 'Arrived File', 'Route', and 'Delivery'. The 'Arrived File' tab is active, showing a table of search results. The table has columns: 'Reviewed', 'Arrived File...', 'Delivery Status', 'Producer', 'Original File Name', and 'Discovery Time'. There are three rows of data, all with 'Routed' status and 'Complete' delivery status. The 'Arrived File Events' panel on the right shows a list of events. The event FG_0425 is selected, and its description is displayed, including the workflow number 6818, which is highlighted in a red box.

Event Code	Time	Description
FG_0408	03/22/2016 21:06:43	Arrived File has Started.
FG_0404	03/22/2016 21:06:43	Producer partner is 'partner'.
FG_0425	03/22/2016 21:06:43	User 'partner' sent the Arrived File named [InventoryOf3.xml] to mailbox '/partner' (Details include MessageId=6, FileSize=232 bytes, Dataflow=[41], Workflow=[6818]).
FG_0409	03/22/2016 21:06:44	Arrived File is now Determining Routes.
FG_0501	03/22/2016 21:06:44	For 'Producer & Mailbox' there are 1 routing channel(s).
FG_0502	03/22/2016 21:06:44	For 'Producer Payload [InventoryOf3.xml]' there are 1 candidate route(s), listed below. Candidate Route: Send Producer Payload

Exercise 1.5.8: Extracting Data From the Mailbox Repository Using a Business Process

(Continued)

Instructions

....(Continued)

Complete the following steps to view the business process execution of the routed inventoryOf3.xml file by the partner.

Step 1: Log in to Sterling B2B Integrator by specifying **admin** as user ID and **password** as password.

Step 2: From Admin Console, navigate to **Business Processes > Monitor > Advanced Search > Business Processes**.

Step 3: Enter Process ID as **6818** and click Go!.

Step 4: Click **ID 6818** to view the steps of the file gateway execution.

Step 5: Scroll to the page 2 to view the File Gateway Delivery Service execution Subprocess.

Step 6: Click Subprocess 6819 to view the mailbox extracted details.

Business Process Detail

Name: FileGatewayMailboxRouteArrivedFile Instance ID: 6818
Deadline: None Contract ID: 6818

Action: Restart Go!

Steps 11-16 of 16

Step	Service	Status	Advanced Status
10	Decision Engine Service	Success	1
11	Assign Service	Success	None
12	File Gateway Delivery Service	Success	None
13	Subprocess 6819	Success	None
14	Decision Engine Service	Success	2
15	Assign Service	Success	None

Execute Business Process

Name: FileGatewayMailboxRouteArrivedFile Instance ID: 6818 Service Name: File Gateway Delivery Service
Status Report:

Successfully delivered file to consumer:

- + File Name [InventoryOf3.xml]
- + Content Type [application/x-octet]
- + Document ID [385474153a1a16b5bnode1]
- + Layer Type [UNKNOWN]
- + Mailbox Path [/abcde/Inbox]

(Continued on next page)

Exercise 1.5.8: Extracting Data From the Mailbox Repository Using a Business Process

(Continued)

Instructions

....(Continued)

Complete the following steps to delete routing rule, as you will not use this routing rule in upcoming exercise.

Step 1: Log in to Sterling B2B Integrator by specifying **admin** as user ID and **Password** as password.

Step 2: Navigate to **Deployment > Mailboxes > Routing Rules** search for 6F86routing_rule and click **GO!**.

Step 3: Click **delete** next to the routing rule.

Step 4: Click **Delete**. The system replies successful update completed.

Lesson review

What you have been able to do

- Transfer file using Static Routing.
 - Explain the different ways to upload a file in Sterling File Gateway.
 - Edit and monitor Routing Channel result.
 - Analyze the routes file transfer in myfilegateway and FileGateway.
-

