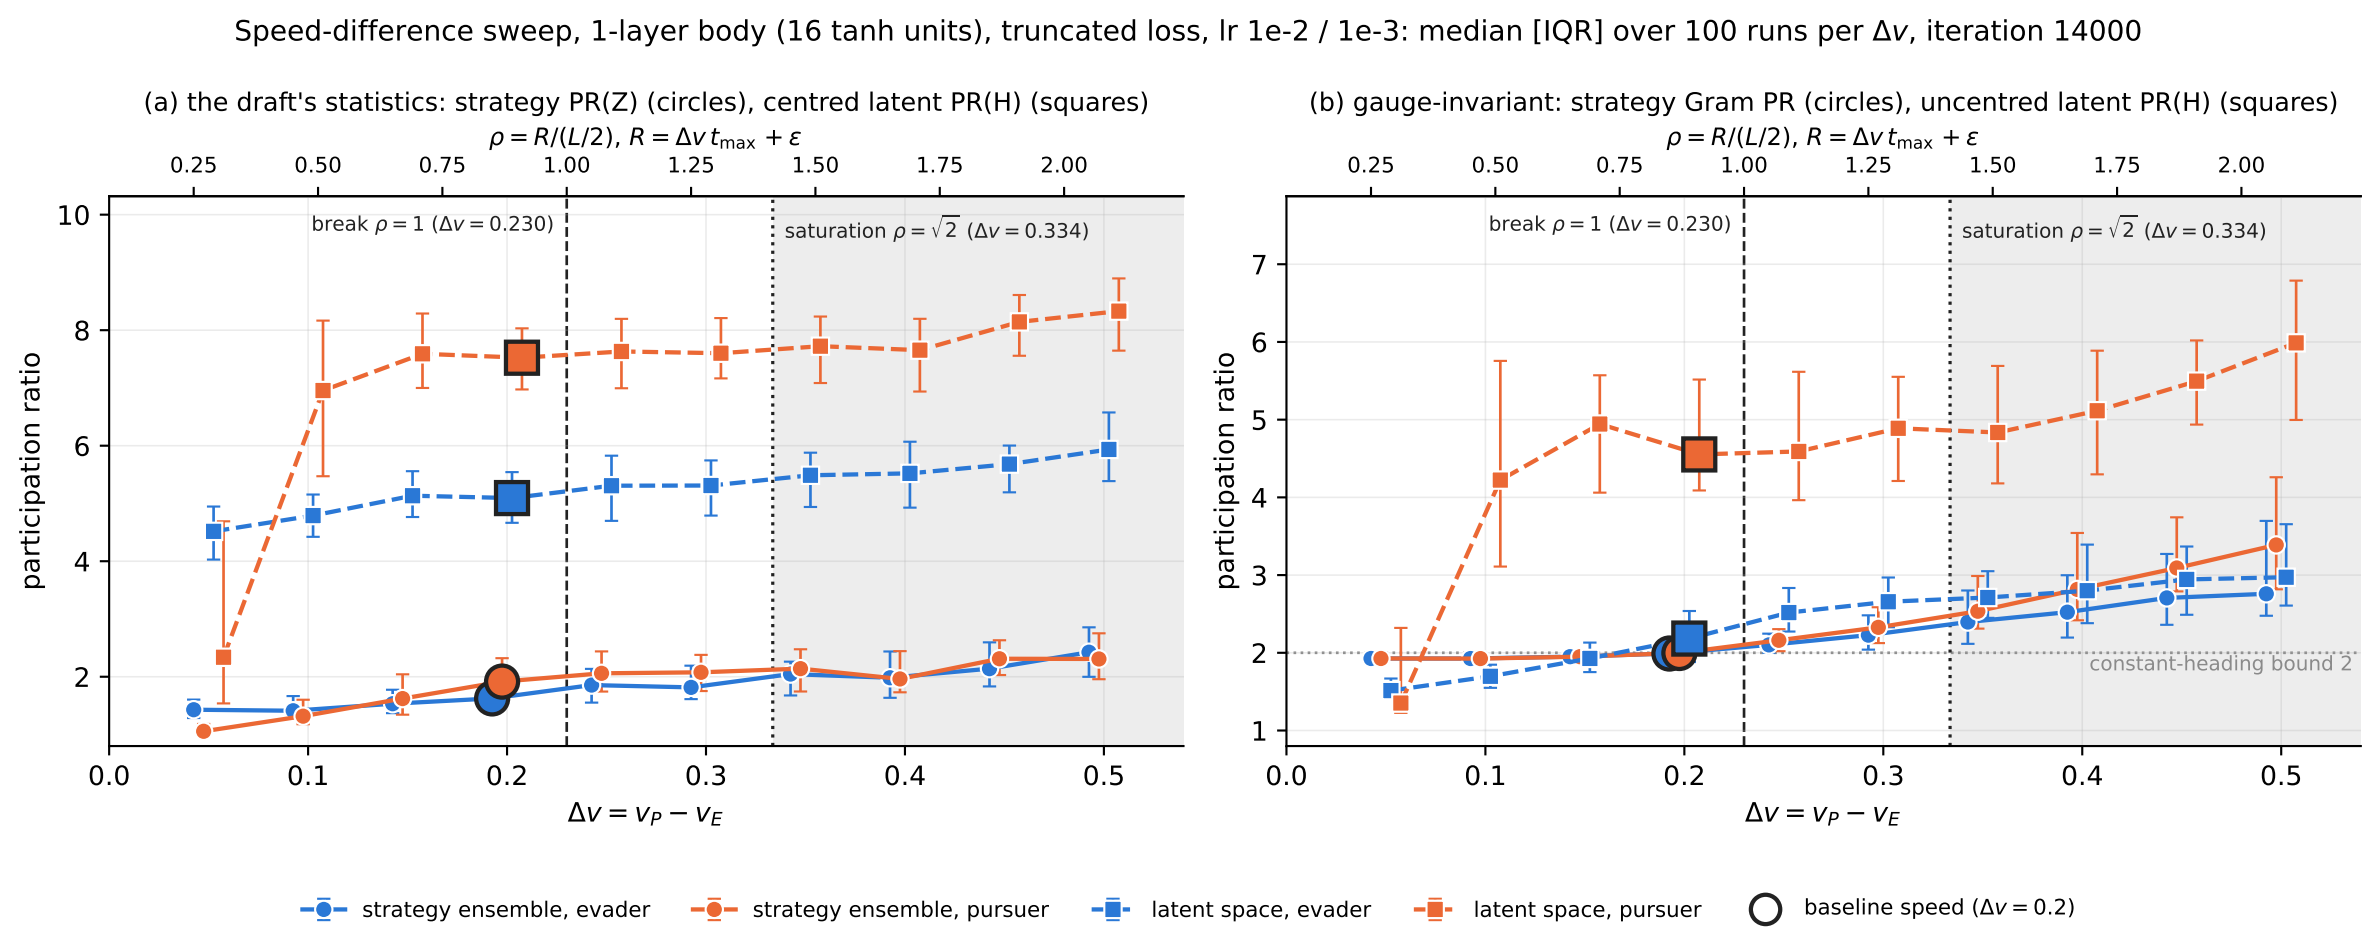
Speed-difference sweep, 1-layer body (16 tanh units), truncated loss, lr 1e-2 / 1e-3: median [IQR] over 100 runs per Δv, iteration 14000
(a) the draft's statistics: strategy PR(Z) (circles), centred latent PR(H) (squares)
(b) gauge-invariant: strategy Gram PR (circles), uncentred latent PR(H) (squares)
ρ = R/(L/2), R = Δv t_max + ε
break ρ = 1 (Δv = 0.230)
saturation ρ = √2 (Δv = 0.334)
participation ratio
Δv = v_P − v_E
constant-heading bound 2
strategy ensemble, evader
strategy ensemble, pursuer
latent space, evader
latent space, pursuer
baseline speed (Δv = 0.2)