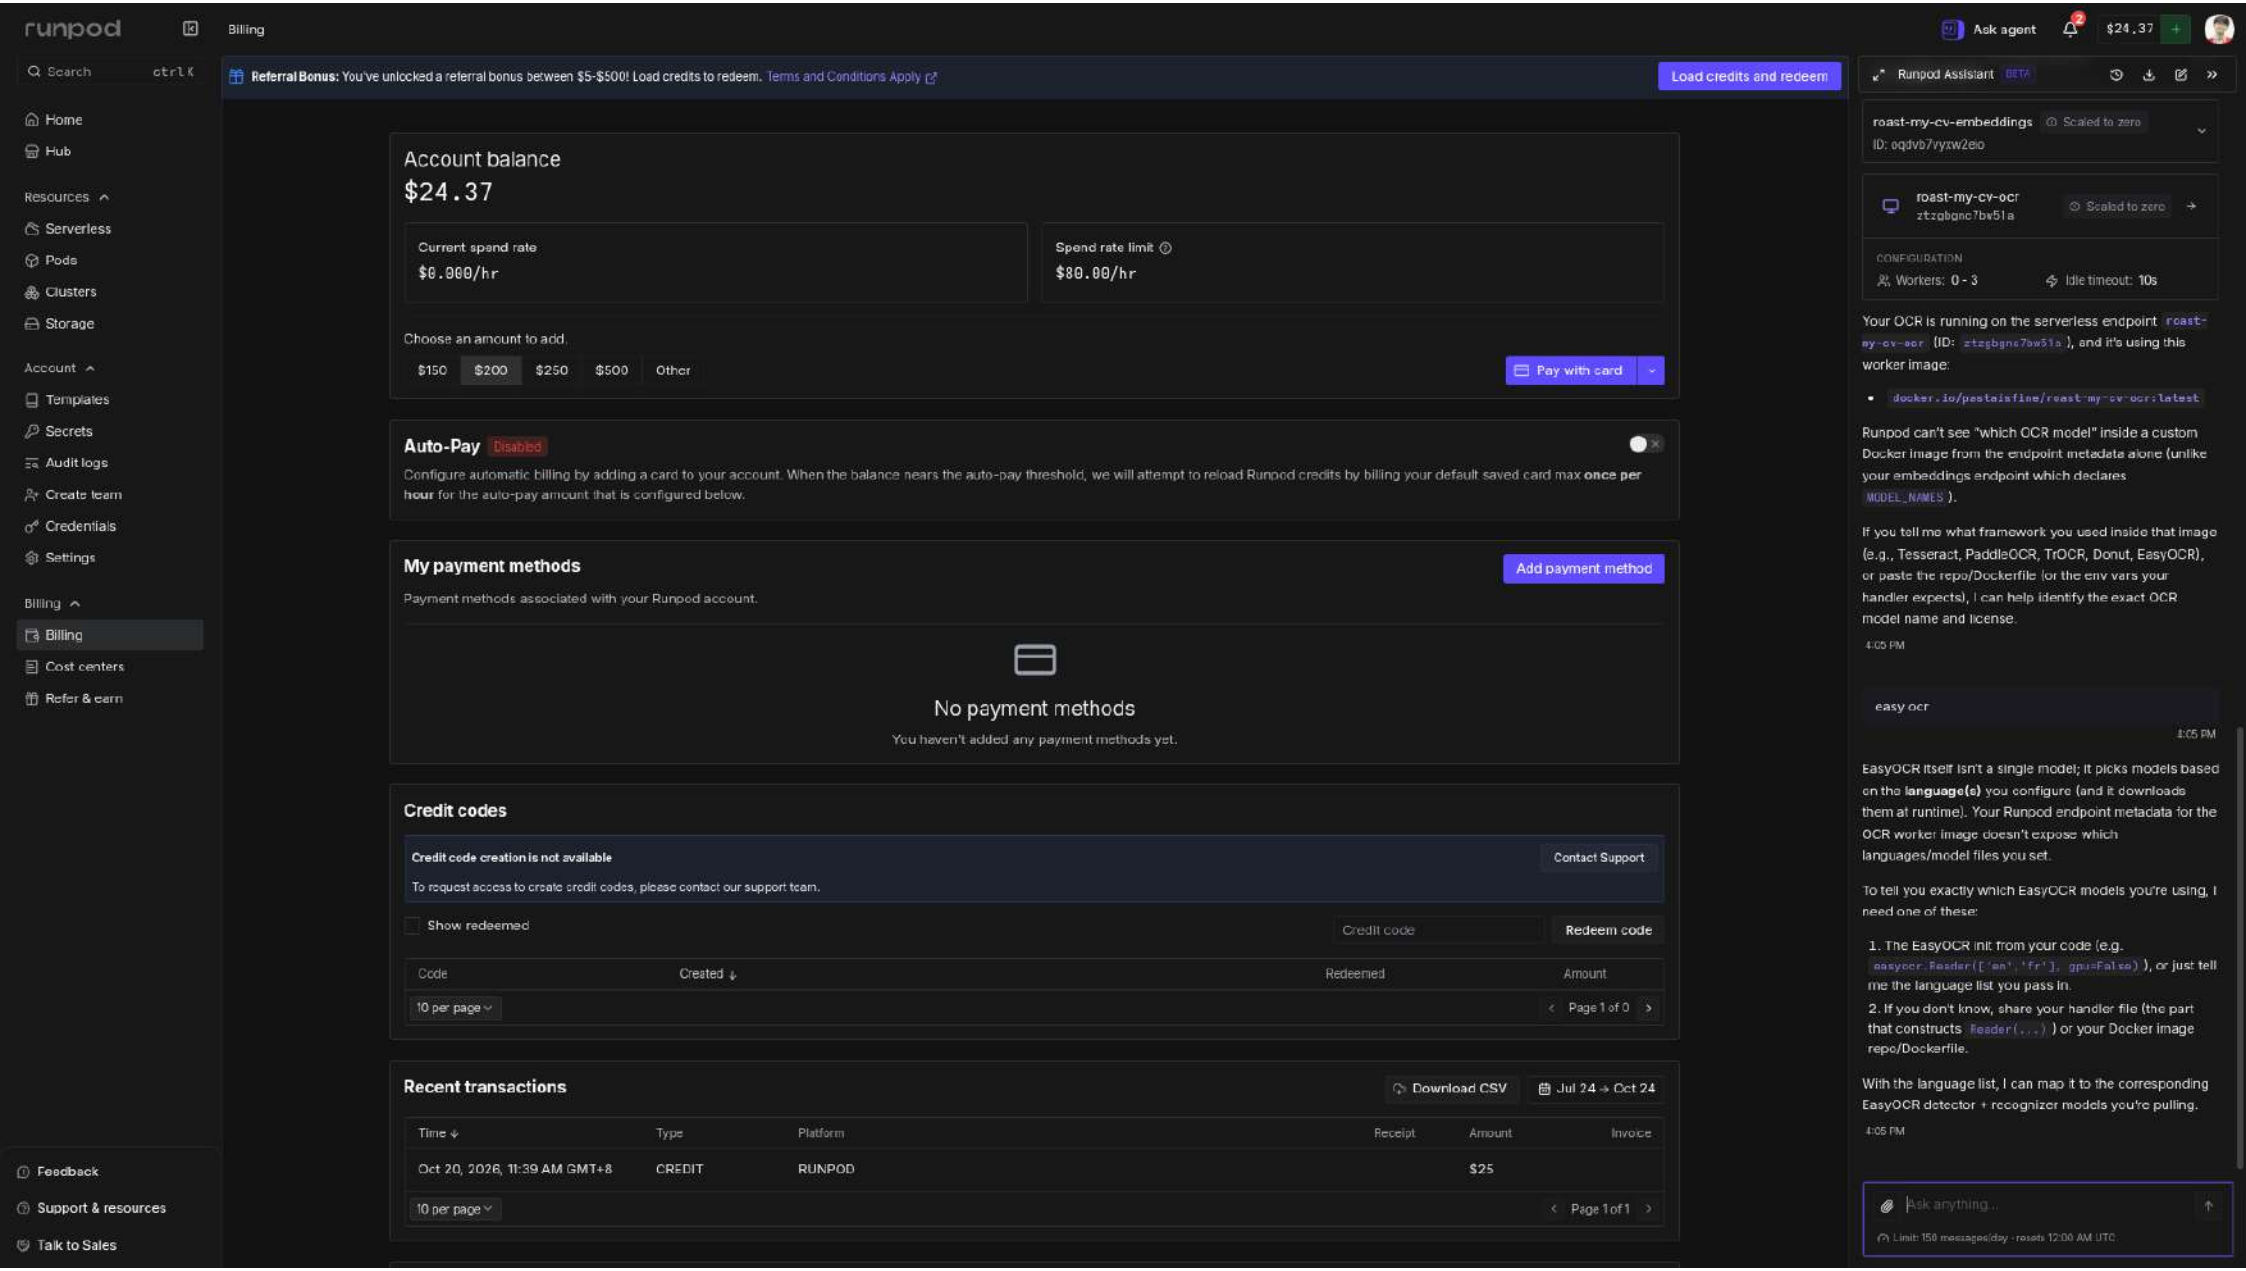
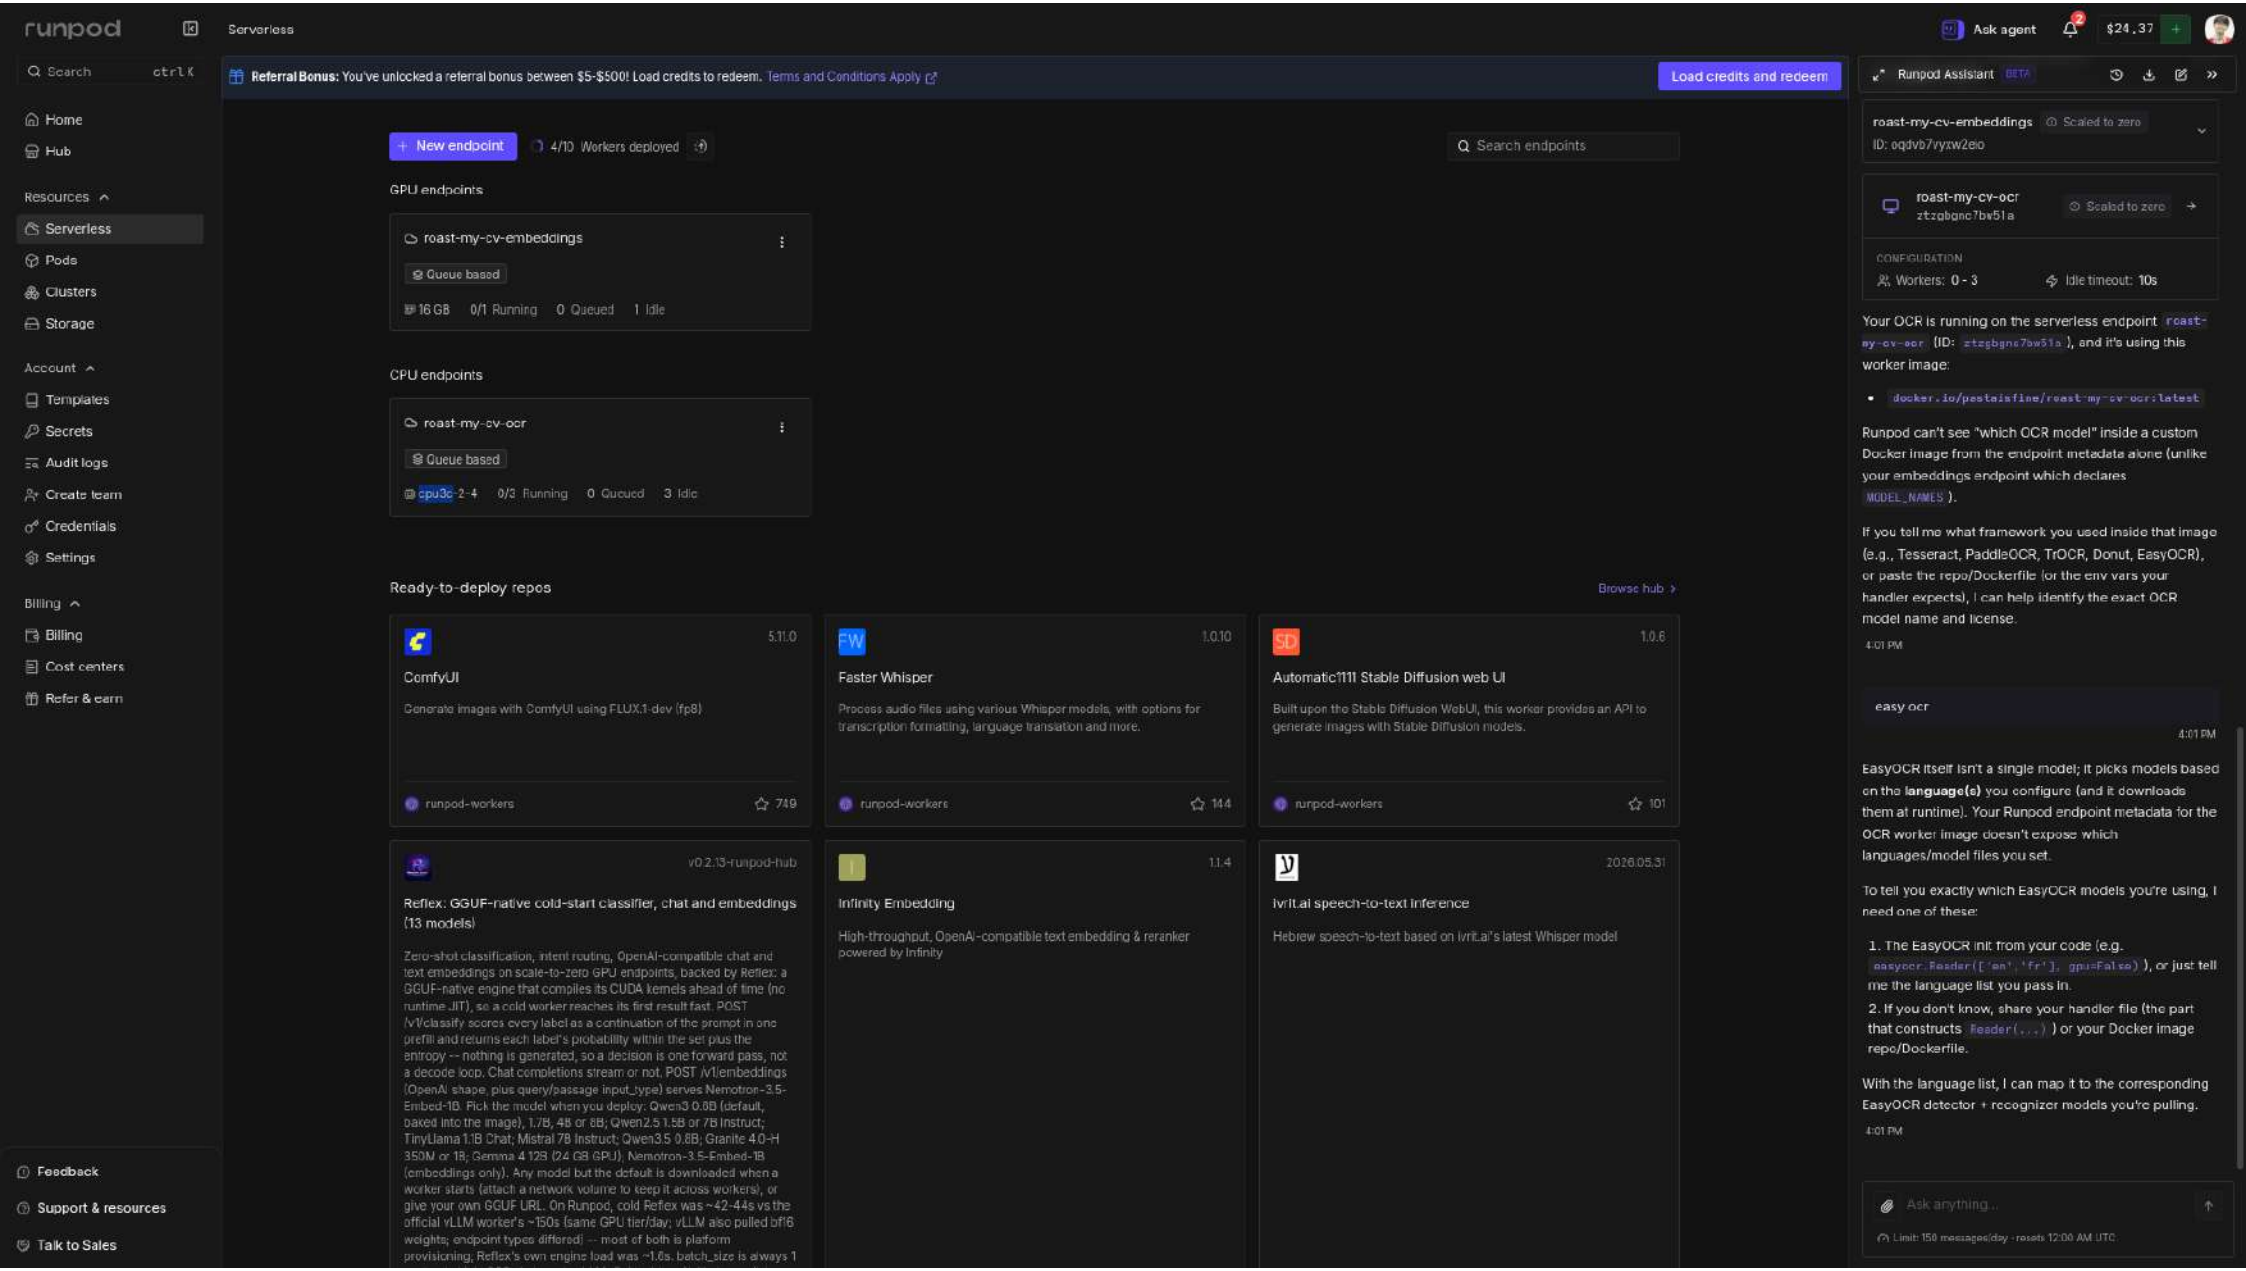

runpod
Billing
Ask agent
$24.37
Search ctrl K
Referral Bonus: You've unlocked a referral bonus between $5-$500! Load credits to redeem. Terms and Conditions Apply
Load credits and redeem
Runpod Assistant BETA
Home
Hub
Resources
Serverless
Pods
Clusters
Storage
Account
Templates
Secrets
Audit logs
Create team
Credentials
Settings
Billing
Billing
Cost centers
Refer & earn
Feedback
Support & resources
Talk to Sales
Account balance
$24.37
Current spend rate
$0.000/hr
Spend rate limit
$80.00/hr
Choose an amount to add.
$150 $200 $250 $500 Other
Pay with card
Auto-Pay Disabled
Configure automatic billing by adding a card to your account. When the balance nears the auto-pay threshold, we will attempt to reload Runpod credits by billing your default saved card max once per hour for the auto-pay amount that is configured below.
My payment methods
Add payment method
Payment methods associated with your Runpod account.
No payment methods
You haven't added any payment methods yet.
Credit codes
Credit code creation is not available
Contact Support
To request access to create credit codes, please contact our support team.
Show redeemed
Credit code
Redeem code
Code
Created
Redeemed
Amount
10 per page
Page 1 of 0
Recent transactions
Download CSV
Jul 24 → Oct 24
Time
Type
Platform
Receipt
Amount
Invoice
Oct 20, 2026, 11:39 AM GMT+8
CREDIT
RUNPOD
$25
10 per page
Page 1 of 1
roast-my-cv-embeddings
Scaled to zero
ID: oqdvb7vyxw2eio
roast-my-cv-ocr
ztzgbgnc7bw51a
Scaled to zero
CONFIGURATION
Workers: 0 - 3
Idle timeout: 10s
Your OCR is running on the serverless endpoint roast-my-cv-ocr (ID: ztzgbgnc7bw51a), and it's using this worker image:
docker.io/pestainfine/roast-my-cv-ocr:latest
Runpod can't see "which OCR model" inside a custom Docker image from the endpoint metadata alone (unlike your embeddings endpoint which declares MODEL_NAMES).
If you tell me what framework you used inside that image (e.g., Tesseract, PaddleOCR, TrOCR, Donut, EasyOCR), or paste the repo/Dockerfile (or the env vars your handler expects), I can help identify the exact OCR model name and license.
4:05 PM
easy ocr
4:05 PM
EasyOCR itself isn't a single model; it picks models based on the language(s) you configure (and it downloads them at runtime). Your Runpod endpoint metadata for the OCR worker image doesn't expose which languages/model files you set.
To tell you exactly which EasyOCR models you're using, I need one of these:
1. The EasyOCR init from your code (e.g. easyocr.Reader(['en','fr'], gpu=False)), or just tell me the language list you pass in.
2. If you don't know, share your handler file (the part that constructs Reader(...)) or your Docker image repo/Dockerfile.
With the language list, I can map it to the corresponding EasyOCR detector + recognizer models you're pulling.
4:05 PM
Ask anything...
Limit: 150 messages/day - resets 12:00 AM UTC


runpod
Serverless
Search ctrl K
Home
Hub
Resources
Serverless
Pods
Clusters
Storage
Account
Templates
Secrets
Audit logs
Create team
Credentials
Settings
Billing
Billing
Cost centers
Refer & earn
Feedback
Support & resources
Talk to Sales
Ask agent
$24.37
Referral Bonus: You've unlocked a referral bonus between $5-$500! Load credits to redeem. Terms and Conditions Apply
Load credits and redeem
New endpoint
4/10 Workers deployed
Search endpoints
GPU endpoints
roast-my-cv-embeddings
Queue based
16 GB 0/1 Running 0 Queued 1 Idle
CPU endpoints
roast-my-cv-ocr
Queue based
cpu3c-2-4 0/3 Running 0 Queued 3 Idle
Ready-to-deploy repos
Browse hub
5.11.0
ComfyUI
Generate images with ComfyUI using FLUX.1-dev (fp8)
runpod-workers
749
1.0.10
Faster Whisper
Process audio files using various Whisper models, with options for transcription formatting, language translation and more.
runpod-workers
144
1.0.6
Automatic1111 Stable Diffusion web UI
Built upon the Stable Diffusion WebUI, this worker provides an API to generate images with Stable Diffusion models.
runpod-workers
101
v0.2.13-runpod-hub
Reflex: GGUF-native cold-start classifier, chat and embeddings (13 models)
Zero-shot classification, intent routing, OpenAI-compatible chat and text embeddings on scale-to-zero GPU endpoints, backed by Reflex: a GGUF-native engine that compiles its CUDA kernels ahead of time (no runtime JIT), so a cold worker reaches its first result fast. POST /v1/classify scores every label as a continuation of the prompt in one prefill and returns each label's probability within the set plus the entropy -- nothing is generated, so a decision is one forward pass, not a decode loop. Chat completions stream or not, POST /v1/embeddings (OpenAI shape, plus query/passage input_type) serves Nemotron-3.5-Embed-1B. Pick the model when you deploy: Qwen3 0.6B (default, baked into the image), 1.7B, 4B or 8B; Qwen2.5 1.5B or 7B Instruct; TinyLlama 1.1B Chat; Mistral 7B Instruct; Qwen3.5 0.8B; Granite 4.0-H 350M or 1B; Gemma 4 12B (24 GB GPU). Nemotron-3.5-Embed-1B (embeddings only). Any model but the default is downloaded when a worker starts (attach a network volume to keep it across workers), or give your own GGUF URL. On Runpod, cold Reflex was ~42-44s vs the official vLLM worker's ~150s (same GPU tier/day; vLLM also pulled bf16 weights; endpoint types differed) -- most of both is platform provisioning; Reflex's own engine load was ~1.6s. batch_size is always 1
1.1.4
Infinity Embedding
High-throughput, OpenAI-compatible text embedding & reranker powered by Infinity
2026.05.31
ivrit.ai speech-to-text inference
Hebrew speech-to-text based on ivrit.ai's latest Whisper model
Runpod Assistant BETA
roast-my-cv-embeddings Scaled to zero
ID: oqdvb7vyxw2eio
roast-my-cv-ocr
ztzgbgnc7bw51a
Scaled to zero
CONFIGURATION
Workers: 0 - 3
Idle timeout: 10s
Your OCR is running on the serverless endpoint roast-my-cv-ocr (ID: ztzgbgnc7bw51a), and it's using this worker image:
docker.io/pestaisfine/roast-my-cv-ocr:latest
Runpod can't see "which OCR model" inside a custom Docker image from the endpoint metadata alone (unlike your embeddings endpoint which declares MODEL_NAMES).
If you tell me what framework you used inside that image (e.g., Tesseract, PaddleOCR, TrOCR, Donut, EasyOCR), or paste the repo/Dockerfile (or the env vars your handler expects), I can help identify the exact OCR model name and license.
4:01 PM
easy ocr
4:01 PM
EasyOCR itself isn't a single model; it picks models based on the language(s) you configure (and it downloads them at runtime). Your Runpod endpoint metadata for the OCR worker image doesn't expose which languages/model files you set.
To tell you exactly which EasyOCR models you're using, I need one of these:
1. The EasyOCR init from your code (e.g. easyocr.Reader(['en','fr'], gpu=False)), or just tell me the language list you pass in.
2. If you don't know, share your handler file (the part that constructs Reader(...)) or your Docker image repo/Dockerfile.
With the language list, I can map it to the corresponding EasyOCR detector + recognizer models you're pulling.
4:01 PM
Ask anything...
Limit: 150 messages/day - resets 12:00 AM UTC