


IDLE

Goal: Page is ready for interaction when needed.

- * Time from page becoming usable to start of an interaction.
- * `init()` your application state.
- * Perform CPU intensive calculations, memoize results.
- * Maximise idle time.

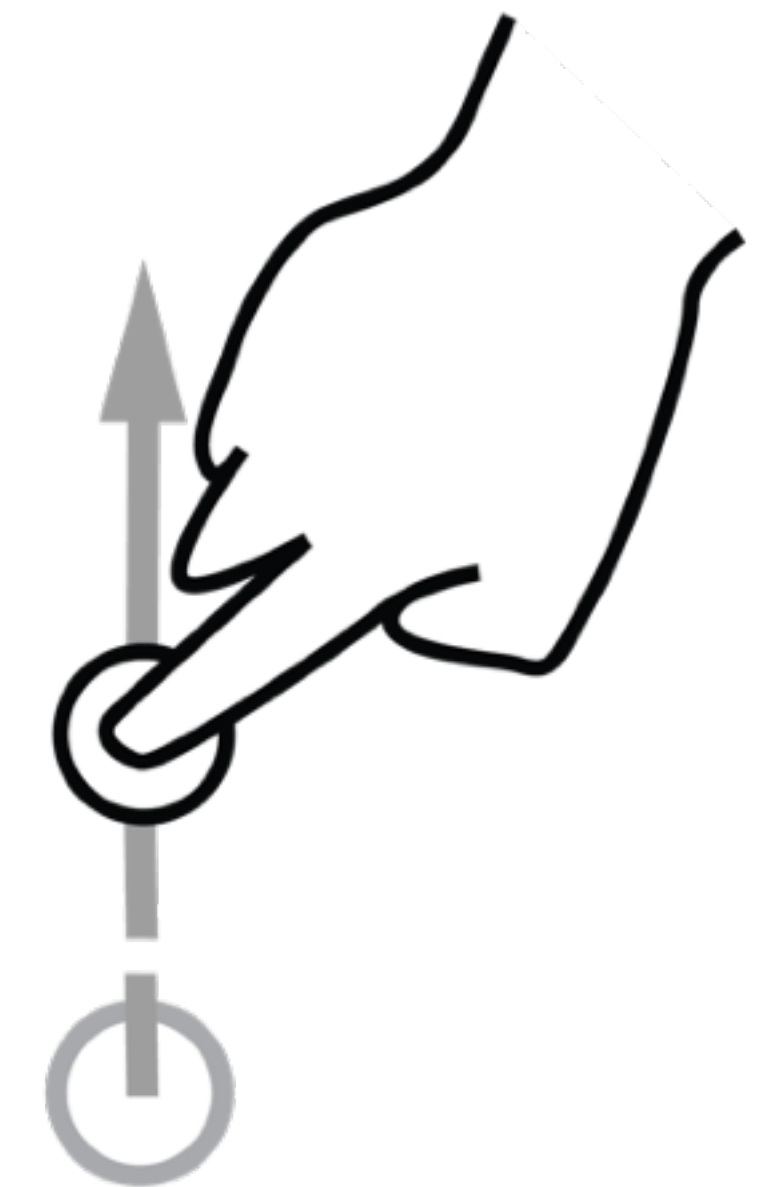

requestIdleCallback

Schedule non important tasks when CPU is Idle



only