



PG-101 MOTORADAPTER 6061-T6, QTY 1, 285.3 g (INVENTOR), SCALE 1.5:1, ENVELOPE 116.0 x 116.0 x 18.0 MM
OD 116 x 18; NEMA 17 FACE: PILOT 22 H7 x 2.2, 4 X 3.4 THRU ON 31 SQ, C'BORE 6 X 2 (GEAR SIDE);
BORE 86 x 9 (z 6-15); RING RECESS 110 H7 x 3; 6 X 4.5 THRU ON 98 PCD (0 DEG ON X)

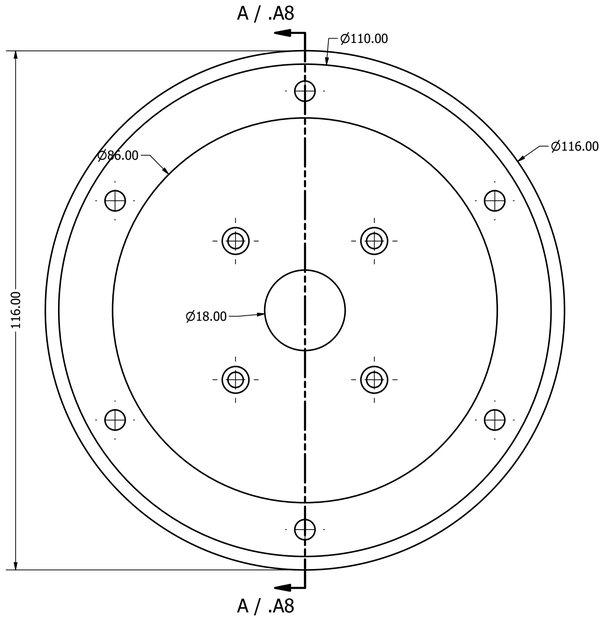


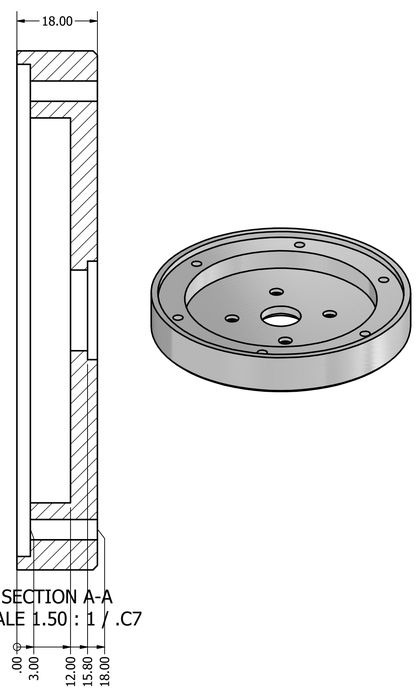

PG-102 OUTPUTHOUSING 6061-T6, QTY 1, 390.4 g (INVENTOR), SCALE 1.5:1, ENVELOPE 116.0 x 116.0 x 48.5 MM
FLANGE 116, NOSE 40; RING RECESS 110 H7 x 3; CHAMBER 86 TO z 44.5; 2 X 28 J7 SEATS (6001), SHOULDER 24 x 8;
6 X M4 x 13 ON 98 PCD (FROM THE RECESS); 4 X M5 x 10 ON 100 PCD AT 45 DEG (FRONT FACE)

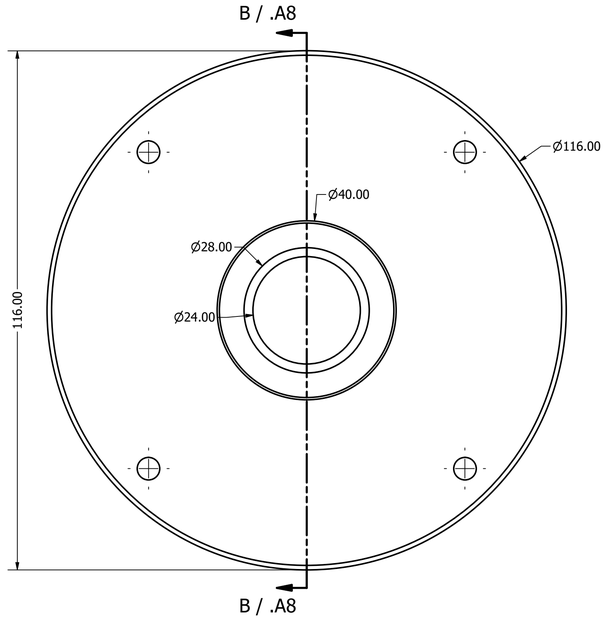

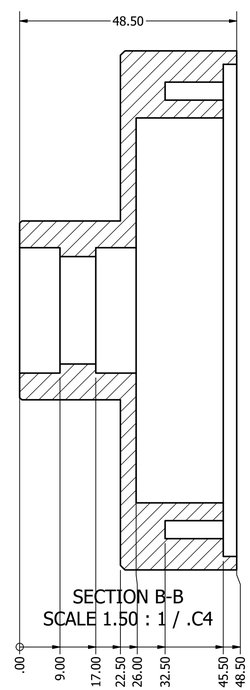






NOTES:
1. 6061-T6 / 1045 CD: MACHINE, BREAK SHARP EDGES 0.3. UNTOLERANCED DIMS +/-0.1 (TURNED), +/-0.2 (MILLED).
2. BEARING SEATS: HOUSING 28 J7, CARRIER SHAFT 12 k5; PIN BORES 5 P7 (PIN 5 h6: INTERFERENCE, PRESS); PILOT 22 H7; RING RECESS 110 H7.
3. KHK SI1-80 RING (PURCHASED): DRILL 6 X 4.5 THRU ON 98 PCD, 0 DEG ON A TOOTH CENTRE; DEBURR; NO OTHER CHANGE.
4. PETG BRACKET: 0.4 NOZZLE, 0.2 LAYERS, 4 WALLS, 40 % GYROID; UPRIGHT FACE DOWN ON THE BED.
5. ALL DIMENSIONS MM. GEARBOX FRAME: Z = AXIS, Z 0 AT THE MOTOR FACE. SOURCE: _build/design.py + build_parts.py.

DRAWN Jay Patel	10/28/2026	
CHECKED		TITLE
QA		PlanetaryGearbox - manufacturing drawings
MFG		
APPROVED		SIZE D / DWG NO PG-DWG-100 / REV
		SCALE 1.50 : 1 / SHEET 1 OF 3


PG-103 CARRIER 1045 CD, QTY 1, 283.0 g (INVENTOR), SCALE 1.5:1, ENVELOPE 70.0 x 70.0 x 59.5 MM
PLATE 70 x 8; 4 X 5 P7 THRU ON 50 PCD (0/90/180/270); NECK 17 x 2; SHAFT 12 k5 (BEARING SEATS);
DIN 471 GROOVE 11.5 x 1.1 AT z 69.6; D-FLAT 1 DEEP x 20 AT THE END; OVERALL 59.5

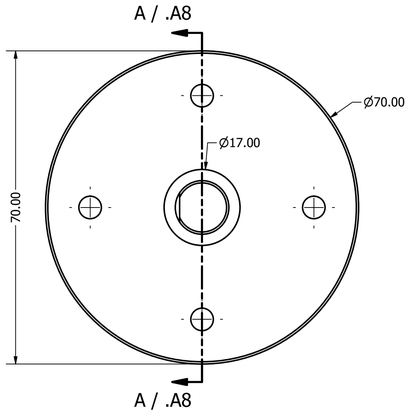


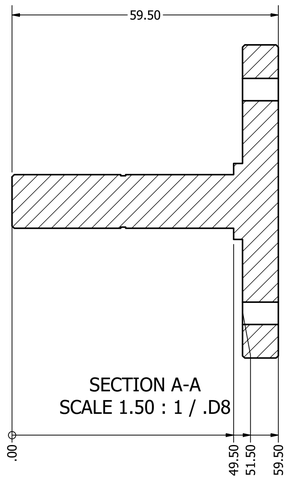




PG-104 PLANETPIN_5X30 5 MM HARDENED SHAFT, QTY 4, 4.6 g (INVENTOR), SCALE 2:1, ENVELOPE 30.0 x 5.0 x 5.0 MM
5 h6 x 30 HARDENED GROUND (CUT FROM STOCK), 0.3 CHAMFERS; DIN 6799 GROOVE 4.0 x 0.64,
0.9 FROM THE FREE END; PRESS 8 DEEP INTO THE CARRIER









PG-213 RING_KHK_SI1-80 KHK SI1-80 (MODIFY), QTY 1, 342.4 g (INVENTOR), SCALE 1:1, ENVELOPE 110.0 x 110.0 x 10.0 MM
PURCHASED KHK SI1-80 (m1, z80, 110 x 78 x 10, S45C): ONLY CHANGE = 6 X 4.5 THRU ON 98 PCD;
HOLE 1 AT 0 DEG CENTRED ON A TOOTH (TEETH ARE NOT DRAWN HERE IN DETAIL)

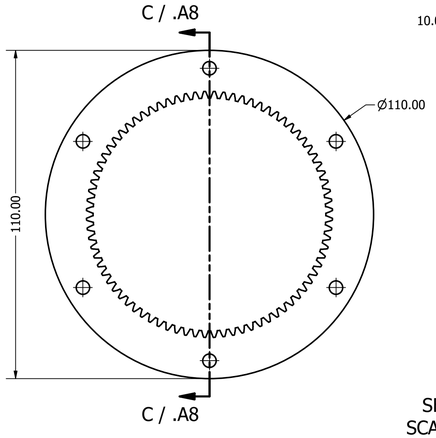

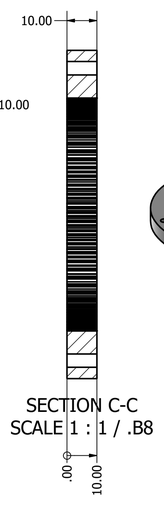



NOTES:
1. 6061-T6 / 1045 CD: MACHINE, BREAK SHARP EDGES 0.3. UNTOLERANCED DIMS +/-0.1 (TURNED), +/-0.2 (MILLED).
2. BEARING SEATS: HOUSING 28 J7, CARRIER SHAFT 12 k5; PIN BORES 5 P7 (PIN 5 h6: INTERFERENCE, PRESS); PILOT 22 H7; RING RECESS 110 H7.
3. KHK SI1-80 RING (PURCHASED): DRILL 6 X 4.5 THRU ON 98 PCD, 0 DEG ON A TOOTH CENTRE; DEBURR; NO OTHER CHANGE.
4. PETG BRACKET: 0.4 NOZZLE, 0.2 LAYERS, 4 WALLS, 40 % GYROID; UPRIGHT FACE DOWN ON THE BED.
5. ALL DIMENSIONS MM. GEARBOX FRAME: Z = AXIS, Z 0 AT THE MOTOR FACE. SOURCE: _build/design.py + build_parts.py.


DRAWN Jay Patel	10/28/2026	
CHECKED		
QA		
MFG		
APPROVED		


TITLE: PlanetaryGearbox - manufacturing drawings


SIZE	DWG NO	REV
D	PG-DWG-100	


SCALE 1.50 : 1 SHEET 2 OF 3

PG-105 MOUNTBRACKET PETG (PRINTED), QTY 1, 251.8 g (INVENTOR), SCALE 1:1, ENVELOPE 132.0 x 118.0 x 96.0 MM
UPRIGHT 132 x 118 x 8: NOSE HOLE 42, 4 X 5.5 ON 100 PCD AT 45 DEG, AXIS 70 ABOVE THE BENCH;
BASE 96 x 132 x 8 WITH 4 X M6 SLOTS 6.6 x 16; 2 GUSSETS 6; TOP CORNERS R12

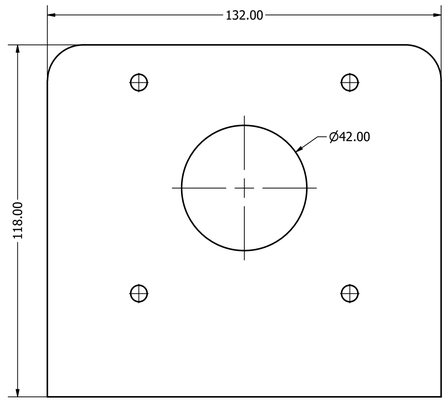

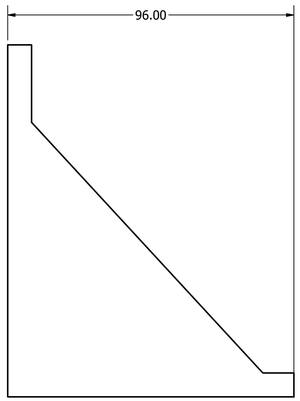



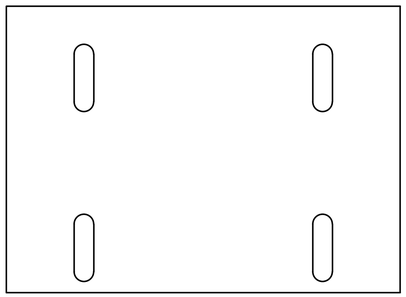

NOTES:
1. 6061-T6 / 1045 CD: MACHINE, BREAK SHARP EDGES 0.3. UNTOLERANCED DIMS +/-0.1 (TURNED), +/-0.2 (MILLED).
2. BEARING SEATS: HOUSING 28 J7, CARRIER SHAFT 12 k5; PIN BORES 5 P7 (PIN 5 h6: INTERFERENCE, PRESS); PILOT 22 H7; RING RECESS 110 H7.
3. KHK SI1-80 RING (PURCHASED): DRILL 6 X 4.5 THRU ON 98 PCD, 0 DEG ON A TOOTH CENTRE; DEBURR; NO OTHER CHANGE.
4. PETG BRACKET: 0.4 NOZZLE, 0.2 LAYERS, 4 WALLS, 40 % GYROID; UPRIGHT FACE DOWN ON THE BED.
5. ALL DIMENSIONS MM. GEARBOX FRAME: Z = AXIS, Z 0 AT THE MOTOR FACE. SOURCE: _build/design.py + build_parts.py.

DRAWN Jay Patel	10/28/2026	
CHECKED		TITLE
QA		PlanetaryGearbox - manufacturing drawings
MFG		
APPROVED		SIZE D / DWG NO PG-DWG-100 / REV
		SCALE 1 : 1 / SHEET 3 OF 3