

c program


patel Dirgh

August 2025

1 multiple

```
#include <stdio.h>

int main() {
    int a, b, multiple
    printf("a=5,b=6: ");
    scanf("%d %d", &a, &b);
    multiple = 5 * 6;
    printf("multiple = %d\n", multiple);
    return 0;
}
```

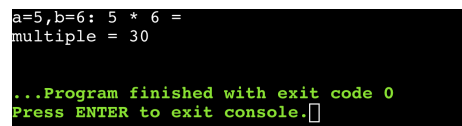

```
a=5,b=6: 5 * 6 =
multiple = 30

...Program finished with exit code 0
Press ENTER to exit console.█
```

Figure 1: Caption