

NAME:- p Dharani

ROLL NO:- *A24126552261*

BRANCH:- *CSM*

SECTION:- *B*

COURSE NAME:- *FULL STACK WEB DEVELOPMENT*

CODE:- *23CM4121*

TITLE OF THE EXPERIMENT:

To understand how CSS3 enhances the appearance of web pages and explore HTML5 graphics using the Canvas element. Concepts Covered

DESCRIPTION:

The "My Styled Webpage" project demonstrates the visual design capabilities of modern CSS3 combined with the programmatic drawing features of HTML5. It features a structured layout containing a header, navigation bar, footer, and a grid of interactive content cards. The webpage highlights advanced presentation techniques including custom gradients, text and box shadows, rounded borders, and dynamic hover transformations, while integrating a localized native `<canvas>` rendering script to draw geometric shapes and custom text

PROGRAM:

CANVAS.html

```
<!DOCTYPE html>

<html lang="en">

<head>

  <meta charset="UTF-8">

  <meta name="viewport" content="width=device-width, initial-scale=1.0">

  <title>Styled WebPage</title>

</head>

<body>

  <center><canvas height="500px" width="1000px" id="canvas" style="border: 1px solid black; border-radius: 5px;"></canvas></center>

</body>

<script>

  const canvas = document.getElementById("canvas")
```

```

const ctx = canvas.getContext("2d")

// ctx.fillStyle = "blue"

ctx.fillRect(20,20,150,200)

// ctx.strokeStyle = "red"

// ctx.lineWidth = 5

ctx.strokeRect(200,20,150,100)

ctx.beginPath();

ctx.moveTo(50,300)

ctx.lineTo(200,300)

ctx.strokeStyle = "green"

ctx.lineWidth = 5

ctx.stroke()

ctx.beginPath()

ctx.arc(300,200,50,0,Math.PI*2)

ctx.fill()

// ctx.beginPath()


ctx.fillText("Dharani", 500, 250);

</script>

</html>

```

OUTPUT:

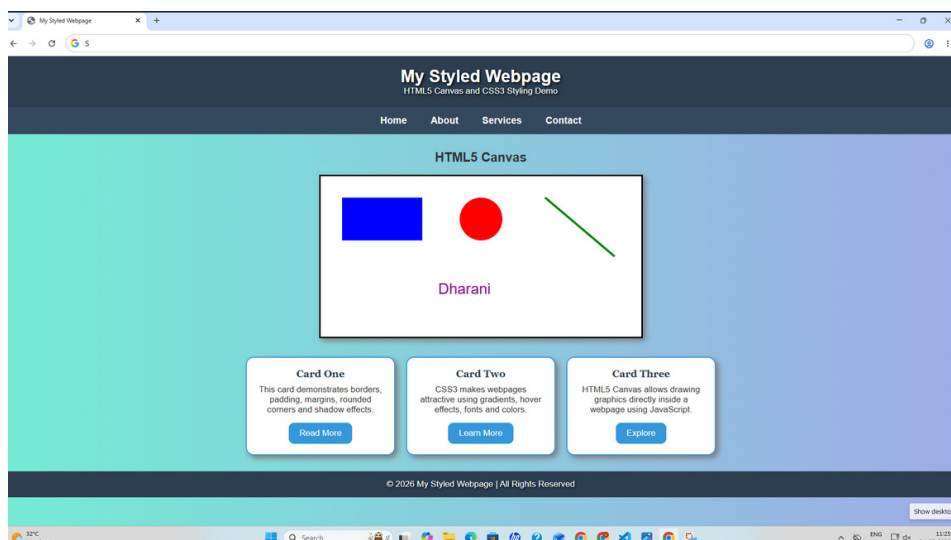

PART-B.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-
scale=1.0">
  <title>Styled</title>
  <style>
    * {
      margin: 0;
      padding: 0;
      box-sizing: border-box;
      font-family: Arial, sans-serif;
    }
    #nav{
      background-color: blue;
      /* width: 100%; */
      height: 45px;
      color: white;
      /* display: flex; */
    }
    ul{
```

```
list-style: none;
display: flex;
height: 100%;
/* padding-left: 1000px; */
gap: 15px;
align-items: center;
justify-content: flex-end;
}
.title{
width: 100%;
height: 100px;
background-color: black;
color: white;
text-align: center;
padding-top: 30px;
}
.container{
display: flex;
gap: 30px;
padding: 20px;
justify-content: center;
}
.card{
width: 500px;
```

```
height: 300px;  
border: 2px solid black;  
border-radius: 15px;  
padding: 30px;  
text-align: center;  
justify-content: center;  
box-shadow: 2px 2px 10px rgba(0, 0, 0, 0.1);  
background-color: #67b46a;
```

```
font-size: 20px;  
display: flex;  
flex-direction: column;  
gap: 15px;  
}
```

```
.btn{  
width: 100px;  
height: 40px;  
border: none;  
border-radius: 5px;  
background-color: blue;  
color: white;  
cursor: pointer;  
transition: all 0.5s ease;  
}
```

```
.btn:hover{
    background-color: rgb(0, 0, 0);
    box-shadow: 0px 0px 20px 10px rgb(229, 255, 0);
    transform: translateY(-3px);
}

li{
    cursor: pointer;
    transition: all 0.5s ease;
}

li:hover{
    color: rgb(255, 255, 255);

    transform: translateY(-3px);
}

</style>
</head>
<body>
    <header>
        <div class="title">
            <h1>WELCOME TO PAGE</h1>
        </div>
        <nav id="nav">
            <ul>
                <li>HOME</li>
```

```
<li>CONTEXT</li>
<li>BOOK</li>
<li>NEAR BY</li>
<li>ABOUT US</li>
</ul>
</nav>
</header>
<main class="container">
  <article class="card">
    <h2>Card One</h2>
    <p>This is the first content card. It uses a custom serif font for
the heading to stand out from the body text style.</p>
    <center><button class="btn">Read More</button></center>
  </article>

  <!-- Card 2 -->
  <article class="card">
    <h2>Card Two</h2>
    <p>This is the second content card. Notice the subtle drop
shadow and rounded corners applied to the card container
framework.</p>
    <center><button class="btn" >Read More</button></center>
  </article>

  <!-- Card 3 -->
```



```
<article class="card">
  <h2>Card Three</h2>
  <p>This is the third content card. Hover over the button below
or the top navigation bar links to see color changes instantly.</p>
  <center><button class="btn">Read More</button></center>
</article>
</main>
</body>
</html>
```

OUTPUT:

