

NAME:-RISHIKESH SHEDE

CLASS:- SYBTECH-C

BATCH:- C-2

ROLL NO:- 223053

GR NO:- 17U208

ASSIGNMENT NO.7.

Aim :- Insert the keys into a hash table of length m using open addressing using double hashing with $h(k)=1+(k \bmod (m-1))$.

Objective:- to study the hashing concept and its techniques.

Theory:-

Open Addressing—

Like separate chaining, open addressing is a method for handling collisions. In Open Addressing, all elements are stored in the hash table itself. So at any point, size of the table must be greater than or equal to the total number of keys (Note that we can increase table size by copying old data if needed).

Insert(k): Keep probing until an empty slot is found. Once an empty slot is found, insert k .

Search(k): Keep probing until slot's key doesn't become equal to k or an empty slot is reached.

Delete(k): **Delete operation is interesting.** If we simply delete a key, then search may fail. So slots of deleted keys are marked specially as "deleted".

Insert can insert an item in a deleted slot, but the search doesn't stop at a deleted slot.

Open Addressing is done following ways:

a) Linear Probing: In linear probing, we linearly probe for next slot. For example, typical gap between two probes is 1 as taken in below example also.

let **hash(x)** be the slot index computed using hash function and **S** be the table size

If slot $\text{hash}(x) \% S$ is full, then we try $(\text{hash}(x) + 1) \% S$

If $(\text{hash}(x) + 1) \% S$ is also full, then we try $(\text{hash}(x) + 2) \% S$

If $(\text{hash}(x) + 2) \% S$ is also full, then we try $(\text{hash}(x) + 3) \% S$

Double Hashing:-

NAME:-RISHIKESH SHEDE

CLASS:- SYBTECH-C

BATCH:- C-2

ROLL NO:- 223053

GR NO:- 17U208

Double hashing is a collision resolving technique in **Open Addressed** Hash tables. Double hashing uses the idea of applying a second hash function to key when a collision occurs.

Double hashing can be done using :

$(hash1(key) + i * hash2(key)) \% TABLE_SIZE$

Here hash1() and hash2() are hash functions and TABLE_SIZE is size of hash table.

(We repeat by increasing i when collision occurs)

First hash function is typically $hash1(key) = key \% TABLE_SIZE$

A popular second hash function is : **$hash2(key) = PRIME - (key \% PRIME)$** where PRIME is a prime smaller than the TABLE_SIZE.

A good second Hash function is:

- It must never evaluate to zero
- Must make sure that all cells can be probed

NAME:-RISHIKESH SHEDE

CLASS:- SYBTECH-C


BATCH:- C-2

ROLL NO:- 223053

GR NO:- 17U208

Lets say, $\text{Hash1}(\text{key}) = \text{key} \% 13$

$\text{Hash2}(\text{key}) = 7 - (\text{key} \% 7)$

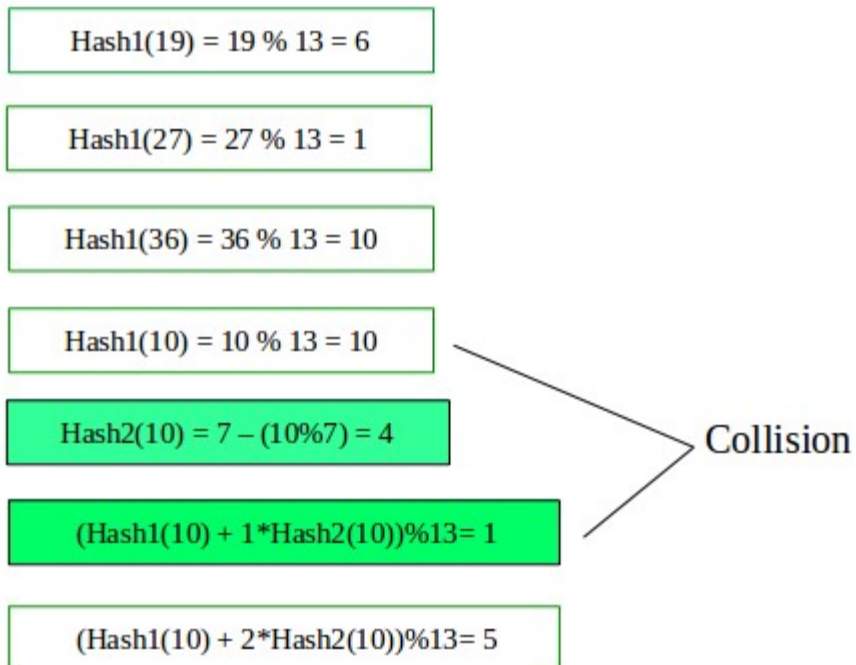

Algorithm:-

Program Code:-

```
#include <bits/stdc++.h>
```

```
using namespace std;
```

NAME:-RISHIKESH SHEDE

CLASS:- SYBTECH-C

BATCH:- C-2

ROLL NO:- 223053

GR NO:- 17U208

```
#define TABLE_SIZE 13
```

```
#define PRIME 7
```

```
class DoubleHash
```

```
{
```

```
    int *hashTable;
```

```
    int curr_size;
```

```
public:
```

```
    bool isFull()
```

```
{
```

```
        return (curr_size == TABLE_SIZE);
```

```
}
```

```
    int hash1(int key)
```

```
{
```

```
        return (key % TABLE_SIZE);
```

```
}
```

NAME:-RISHIKESH SHEDE

CLASS:- SYBTECH-C

BATCH:- C-2

ROLL NO:- 223053

GR NO:- 17U208

```
int hash2(int key)
```

```
{  
    return (PRIME - (key % PRIME));  
}
```

```
DoubleHash()
```

```
{  
    hashTable = new int[TABLE_SIZE];  
    curr_size = 0;  
    for (int i=0; i<TABLE_SIZE; i++)  
        hashTable[i] = -1;  
}
```

```
void insertHash(int key)
```

```
{  
    if (isFull())  
        return;
```

```
    int index = hash1(key);
```

```
    if (hashTable[index] != -1)
```

```
{
```

NAME:-RISHIKESH SHEDE

CLASS:- SYBTECH-C

BATCH:- C-2

ROLL NO:- 223053

GR NO:- 17U208

```
        int index2 = hash2(key);

        int i = 1;

        while (1)
        {
            int newIndex = (index + i * index2) %
                                TABLE_SIZE;

            if (hashTable[newIndex] == -1)
            {
                hashTable[newIndex] = key;
                break;
            }
            i++;
        }
    }

    else
        hashTable[index] = key;

    curr_size++;
}

// function to display the hash table
```

NAME:-RISHIKESH SHEDE

CLASS:- SYBTECH-C

BATCH:- C-2

ROLL NO:- 223053

GR NO:- 17U208

```
void displayHash()
{
    for (int i = 0; i < TABLE_SIZE; i++)
    {
        if (hashTable[i] != -1)
            cout << i << " --> "
                << hashTable[i] << endl;
        else
            cout << i << endl;
    }
}

};

// Driver's code

int main()
{

    int a[] = {19, 27, 36, 10, 64};
    int n = sizeof(a)/sizeof(a[0]);
    cout<<"inserted elements in hash table are as follows:";
    // inserting keys into hash table

    DoubleHash h;
```

NAME:-RISHIKESH SHEDE

CLASS:- SYBTECH-C

BATCH:- C-2

ROLL NO:- 223053

GR NO:- 17U208

```
for (int i = 0; i < n; i++)
```

```
h.insertHash(a[i]);
```


```
// display the hash Table
```

```
h.displayHash();
```

```
return 0;
```

```
}
```

Output Screenshots:-

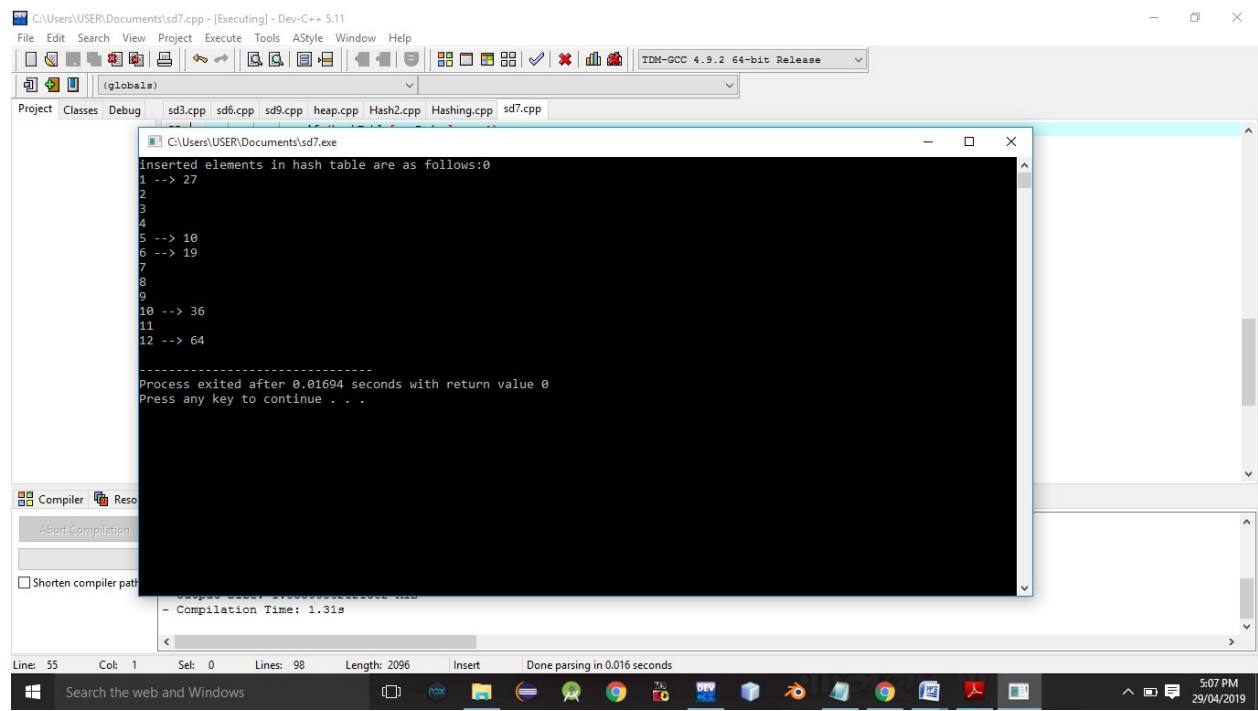

```
C:\Users\USER\Documents\sd7.exe
Inserted elements in hash table are as follows:0
1 --> 27
2
3
4
5 --> 10
6 --> 19
7
8
9
10 --> 36
11
12 --> 64
-----
Process exited after 0.01694 seconds with return value 0
Press any key to continue . . .
```

Conclusion:- Thus, we have studied double hashing and hashing technique.