


CS 33

Intro to Storage Allocation

A Queue

```
typedef struct list_element {  
    int value;  
    struct list_element *next;  
} list_element_t;  
  
list_element_t *head, *tail;
```

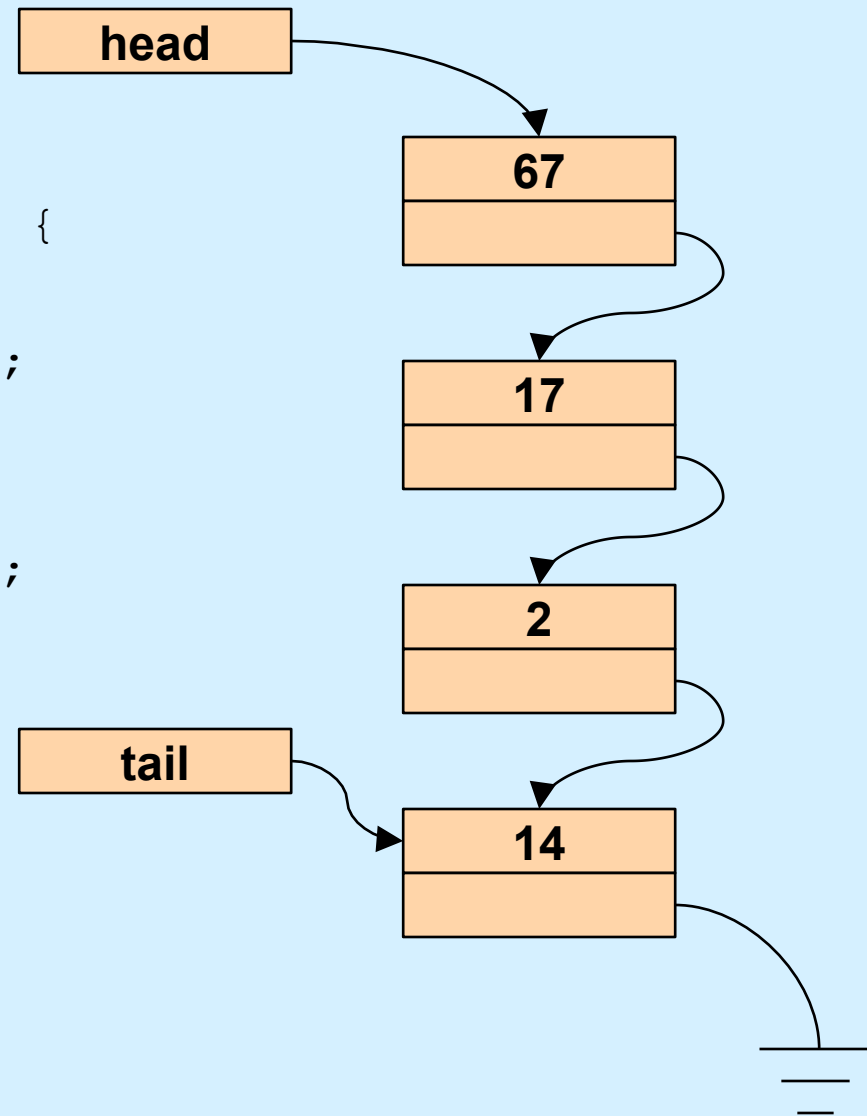

Enqueue

```
int enqueue(int value) {
    list_element_t *newle
        = (list_element_t *)malloc(sizeof(list_element_t));
    if (newle == 0)
        return 0;
    newle->value = value;
    newle->next = 0;
    if (head == 0) {
        // list was empty
        assert(tail == 0);
        head = newle;
    } else {
        tail->next = newle;
    }
    tail = newle;
    return 1;
}
```

Deque

```
int dequeue(int *value) {
    list_element_t *first;
    if (head == 0) {
        // list is empty
        return 0;
    }
    *value = head->value;
    first = head;
    head = head->next;
    if (tail == first) {
        assert(head == 0);
        tail = 0;
    }
    return 1;
}
```

What's wrong with this code???

Storage Leaks

```
int main() {  
    while(1)  
        if (malloc(sizeof(list_element_t)) == 0)  
            break;  
    return 1;  
}
```

**For how long will this program
run before terminating?**

Deque, Fixed

```
int dequeue(int *value) {
    list_element_t *first;
    if (head == 0) {
        // list is empty
        return 0;
    }
    *value = head->value;
    first = head;
    head = head->next;
    if (tail == first)
        assert(head == 0);
    tail = 0;
}
free(first);
return 1;
}
```

Quiz 1

```
int enqueue(int value) {
    list_element_t *newle
        = (list_element_t *)malloc(sizeof(list_element_t));
    if (newle == 0)
        return 0;
    newle->value = value;
    newle->next = 0;
    if (head == 0) {
        // list was empty
        assert(tail == 0);
        head = newle;
    } else {
        tail->next = newle;
    }
    tail = newle;
    free(newle); // saves us the bother of freeing it later
    return 1;
}
```

This version of enqueue makes unnecessary the call to free in dequeue.

- a) It works well.**
- b) It fails occasionally.**
- c) It usually causes problems.**
- d) It never works.**

malloc and free

void *malloc(**size_t** size)

- allocate *size* bytes of storage and return a pointer to it
- returns 0 (NULL) if the requested storage isn't available

void free(**void** *ptr)

- free the storage pointed to by *ptr*
- *ptr* must have previously been returned by *malloc* (or other storage-allocation routine — *calloc* and *realloc*)



realloc

```
void *realloc(void *ptr, size_t size)
```

- change the size of the storage pointed to by *ptr*
- the contents, up to the minimum of the old size and new size, will not be changed
- *ptr* must have been returned by a previous call to *malloc*, *realloc*, or *calloc*
- it may be necessary to allocate a completely new area and copy from the old to the new
 - » thus the return value may be different from *ptr*
 - » if copying is done the old area is freed
- returns 0 if the operation cannot be done

Get (contiguous) Input (1)

```
char *getinput() {  
    int alloc_size = 4;    // start small  
    int read_size = 4;     // max number of bytes to read  
    int next_read = 0;     // index in buf of next read  
    int bytes_read;        // number of bytes read  
    char *buf = (char *)malloc(alloc_size);  
    char *newbuf;  
  
    if (buf == 0) {  
        // no memory  
        return 0;  
    }  
}
```

Get (contiguous) Input (2)

```
while (1) {
    if ((bytes_read
        = read(0, buf+next_read, read_size)) == -1) {
        perror("getinput");
        return 0;
    }
    if (bytes_read == 0) {
        // eof, possibly premature
        return buf;
    }
    if ((buf+next_read)[bytes_read-1] == '\n') {
        // end of line
        break;
    }
}
```

Get (contiguous) Input (3)

```
next_read += read_size;
read_size = alloc_size;
alloc_size *= 2;
newbuf = (char *)realloc(buf, alloc_size);
if (newbuf == 0) {
    // realloc failed: not enough memory.
    // Free the storage allocated previously and report
    // failure
    free(buf);
    return 0;
}
buf = newbuf;
}
```

Get (contiguous) Input (4)

```
// reduce buffer size to the minimum necessary
newbuf = (char *)realloc(buf,
    alloc_size - (read_size - bytes_read));
if (newbuf == 0) {
    // couldn't allocate smaller buf
    return buf;
}
return newbuf;
}
```

Dereferencing Bad Pointers

- The classic `scanf` bug

```
int val;  
  
...  
  
scanf("%d", val);
```

Reading Uninitialized Memory

- Assuming that heap data is initialized to zero

```
/* return y = Ax */
int *matvec(int A[][N], int x[]) {
    int *y = (int *)malloc(N*sizeof(int));
    int i, j;

    for (i=0; i<N; i++)
        for (j=0; j<N; j++)
            y[i] += A[i][j]*x[j];
    return y;
}
```


Overwriting Memory

- Allocating the (possibly) wrong-sized object

```
// set up p so it is an array of
// int *'s, allocated dynamically
int **p;

p = (int **)malloc(N*sizeof(int));

for (i=0; i<N; i++) {
    p[i] = (int *)malloc(M*sizeof(int));
}
```

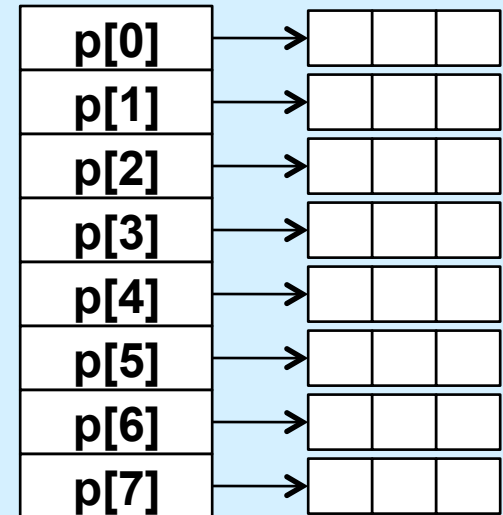

Overwriting Memory

- Off-by-one error

```
int **p;  
  
p = (int **)malloc(N*sizeof(int *));  
  
for (i=0; i<=N; i++) {  
    p[i] = (int *)malloc(M*sizeof(int));  
}
```

Overwriting Memory

- Not checking the max string size

```
char s[8];  
int i;  
  
gets(s); /* reads "123456789" from stdin */
```

- Basis for classic buffer overflow attacks

Going Too Far

- **Misunderstanding pointer arithmetic**

```
int *search(int p[], int val) {  
  
    while (*p && *p != val)  
        p += sizeof(int);  
  
    return p;  
}
```

Referencing Nonexistent Variables

- Forgetting that local variables disappear when a function returns

```
int *foo () {  
    int val;  
  
    return &val;  
}
```

Freeing Blocks Multiple Times

- Nasty!

```
x = (int *)malloc(N*sizeof(int));  
    <manipulate x>  
free(x);  
  
y = (int *)malloc(M*sizeof(int));  
    <manipulate y>  
free(x);
```

Referencing Freed Blocks

- Evil!

```
x = (int *)malloc(N*sizeof(int));  
    <manipulate x>  
free(x);  
    ...  
y = (int *)malloc(M*sizeof(int));  
for (i=0; i<M; i++)  
    y[i] = x[i]++;
```

Failing to Free Blocks (Memory Leaks)

- **Slow, long-term killer!**

```
foo() {  
    int *x = (int *)malloc(N*sizeof(int));  
    Use(x, N);  
    return;  
}
```

Failing to Free Blocks (Memory Leaks)

- Freeing only part of a data structure

```
struct list {  
    int val;  
    struct list *next;  
};  
  
foo() {  
    struct list *head = malloc(sizeof(struct list));  
    head->val = 0;  
    head->next = NULL;  
    <create and manipulate the rest of the list>  
    ...  
    free(head);  
    return;  
}
```


Total Confusion

```
foo() {  
    char *str;  
    str = (char *)malloc(1024);  
    ...  
    str = "";  
    ...  
    strcat(str, "c");  
    ...  
    return;  
}
```

It Works, But ...

- Using a hammer where a feather would do ...

```
funky() {  
    int *x = (int *)malloc(1024*sizeof(int));  
    Use(x, 1024);  
    free(x);  
    return;  
}
```

```
better_funky() {  
    int x[1024];  
    Use(x, 1024);  
    return;  
}
```