

# CS 33

## Introduction to C Part 5


# Basic Data Types



$-2,147,483,648 - 2,147,483,647$




$-32,768 - 32,767$

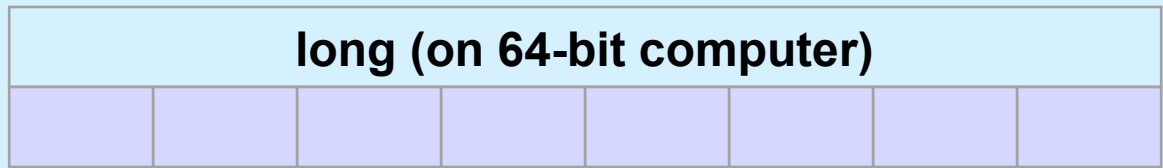


$-9,223,372,036,854,775,808 - 9,223,372,036,854,775,807$



$\sim 10^{-44.85} - \sim 10^{38.53}$ , 23-bit significand

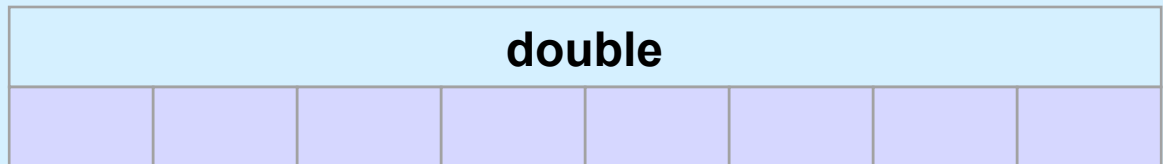

$\sim 10^{-323.3} - \sim 10^{308.3}$ , 52-bit significand



$-128 - 127$

# Characters

- **ASCII**

- **American Standard Code for Information Interchange**

- **works for:**

- » **English**
    - » **Swahili**

- » **not much else**

- **doesn't work for:**

- » **French**
    - » **Dutch**
    - » **Spanish**
    - » **German**

- » **Arabic**
    - » **Sanskrit**
    - » **Chinese**
    - » **pretty much everything else**



# Who cares!!

---



**You should care ...  
(but not in this course)**

# ASCII Character Set

	00	10	20	30	40	50	60	70	80	90	100	110	120
	-----												
0:	\0	\n		(	2	<	F	P	Z	d	n	x	
1:		\v		)	3	=	G	Q	[	e	o	y	
2:		\f	sp	*	4	>	H	R	\	f	p	z	
3:		\r	!	+	5	?	I	S	]	g	q	{	
4:			"	,	6	@	J	T	^	h	r		
5:			#	-	7	A	K	U	_	i	s	}	
6:			\$	.	8	B	L	V	`	j	t	~	
7:	\a		%	/	9	C	M	W	a	k	u	DEL	
8:	\b		&	0	:	D	N	X	b	l	v		
9:	\t		'	1	;	E	O	Y	c	m	w		

# *chars* as Integers


```
char tolower(char c) {  
    if (c >= 'A' && c <= 'Z')  
        return c + 'a' - 'A';  
    else  
        return c;  
}
```

# Character Strings

```
char c = 'a';
```

**c:** a

```
char *s = "string";
```

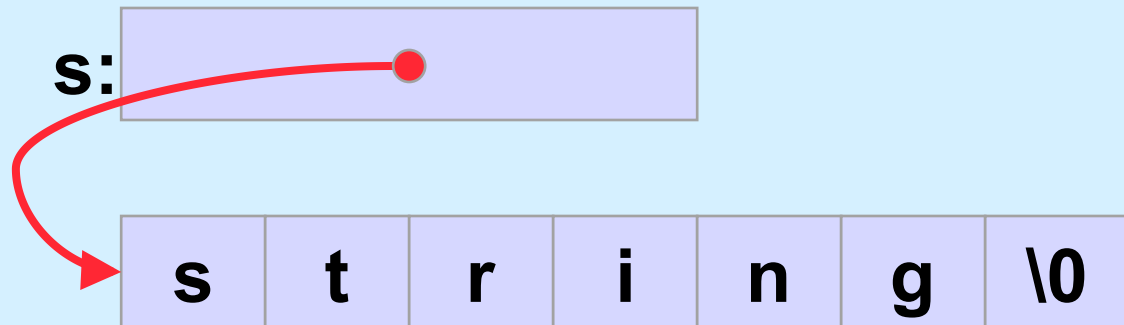




**Is there any difference between *c1* and *c2* in the following?**

```
char c1 = 'a';
```


```
char *c2 = "a";
```

# Yes!!

```
char c1 = 'a';
```


**c1:** 

```
char *c2 = "a";
```

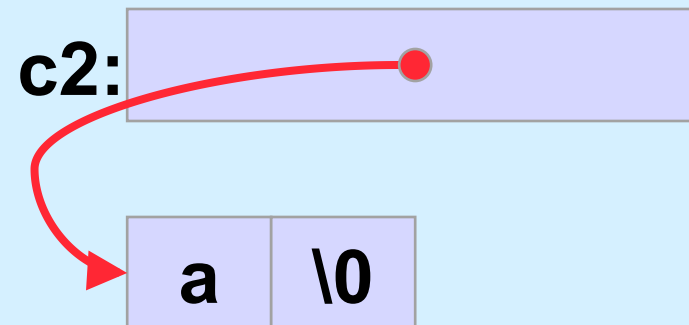

**What do *s1* and *s2* refer to after the following is executed?**

```
char s1[] = "abcd";  
char *s2 = s1;  
s1[0] = 'z';  
s2[2] = '\\0';
```

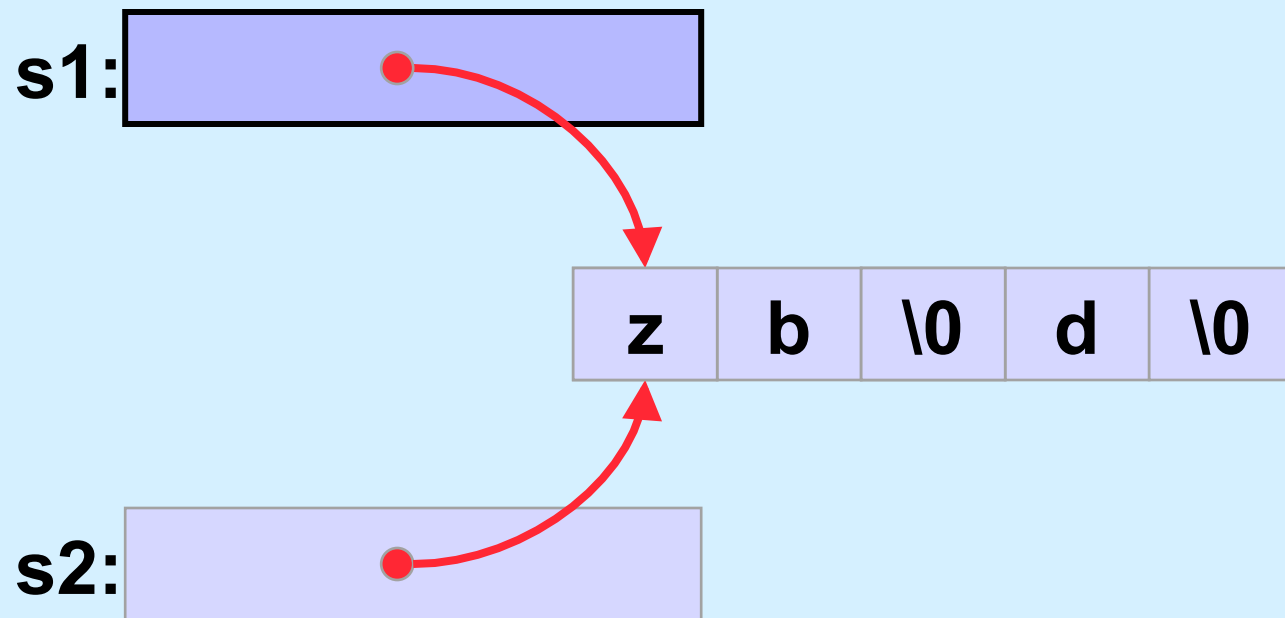

# Weird ...

Suppose we did it this way:

```
char *s1 = "abcd";  
char *s2 = s1;  
s1[0] = 'z';  
s1[2] = '\\0';
```

```
% gcc -o char char.c
```

```
% ./char
```

Segmentation fault



# Copying Strings (1)

```
char s1[] = "abcd";
```

```
char s2[5];
```

```
s2 = s1;    // does this do anything useful?
```

```
// correct code for copying a string
```

```
for (i=0; s1[i] != '\0'; i++)
```

```
    s2[i] = s1[i];
```

```
s2[i] = '\0';
```

```
// would it work if s2 were declared:
```

```
char *s2;
```

```
// ?
```

# Copying Strings (2)

```
char s1[] = "abcdefghijklmnopqrstuvwxyz";
```

```
char s2[5];
```

```
for (i=0; s1[i] != '\0'; i++)
```

```
    s2[i] = s1[i];
```

```
s2[i] = '\0';
```

**Does this work?**

```
for (i=0; (i<4) && (s1[i] != '\0'); i++)
```

```
    s2[i] = s1[i];
```

```
s2[i] = '\0';
```

# String Length

```
char *s1;
```

```
s1 = produce_a_string();  
// how long is the string?
```

```
sizeof(s1); // doesn't yield the length!!
```

```
for (i=0; s1[i] != '\0'; i++)  
    ;  
// number of characters in s1 is i
```



# Size

```
int main() {  
    char s[] = "1234";  
    printf("%d\n", sizeof(s));  
    proc(s, 5);  
    return 0;  
}
```

```
$ gcc -o size size.c  
$ ./size  
5  
8  
12  
$
```

```
void proc(char s1[], int len) {  
    char s2[12];  
    printf("%d\n", sizeof(s1));  
    printf("%d\n", sizeof(s2));  
}
```

# Quiz 1

```
void proc(char s[16]) {  
    printf("%d\n", sizeof(s));  
}
```

**What's printed?**

- a) 8
- b) 15
- c) 16
- d) 17

# Comparing Strings (1)

```
char *s1;
```

```
char *s2;
```

```
s1 = produce_a_string();
```

```
s2 = produce_another_string();
```

```
// how can we tell if the strings are the same?
```

```
if (s1 == s2) {
```

```
    // does this mean the strings are the same?
```

```
} else {
```

```
    // does this mean the strings are different?
```

```
}
```

# Comparing Strings (2)

```
int strcmp(char *s1, char *s2) {
    int i;
    for (i=0;
        (s1[i] == s2[i]) && (s1[i] != 0) && (s2[i] != 0);
        i++)
        ; // an empty statement
    if (s1[i] == 0) {
        if (s2[i] == 0) return 0; // strings are identical
        else return -1; // s1 < s2
    } else if (s2[i] == 0) return 1; // s2 < s1
    if (s1[i] < s2[i]) return -1; // s1 < s2
    else return 1; // s2 < s1;
}
```

# The String Library

```
#include <string.h>
```

```
char *strcpy(char *dest, char *src);
```

```
    // copy src to dest, returns ptr to dest
```

```
char *strncpy(char *dest, char *src, int n);
```

```
    // copy at most n bytes from src to dest
```

```
int strlen(char *s);
```

```
    // return the length of s (not counting the null)
```

```
int strcmp(char *s1, char *s2);
```

```
    // returns -1, 0, or 1 depending on whether s1 is
```

```
    // less than, the same as, or greater than s2
```

```
int strncmp(char *s1, char *s2, int n);
```

```
    // do the same, but for at most n bytes
```

# The String Library (more)

```
size_t strspn(const char *s, const char *accept);  
    // returns length of initial portion of s  
    // consisting entirely of bytes from accept
```

```
size_t strcspn(const char *s, const char *reject);  
    // returns length of initial portion of s  
    // consisting entirely of bytes not from  
    // reject
```

# Quiz 2


```
#include <stdio.h>
#include <string.h>
```

```
int main() {
    char s1[] = "Hello World!\n";
    char *s2;
    strcpy(s2, s1);
    printf("%s", s2);
    return 0;
}
```

**This code:**

- a) is a great example of well written C code**
- b) has syntax problems**
- c) might seg fault**


# Parsing a String

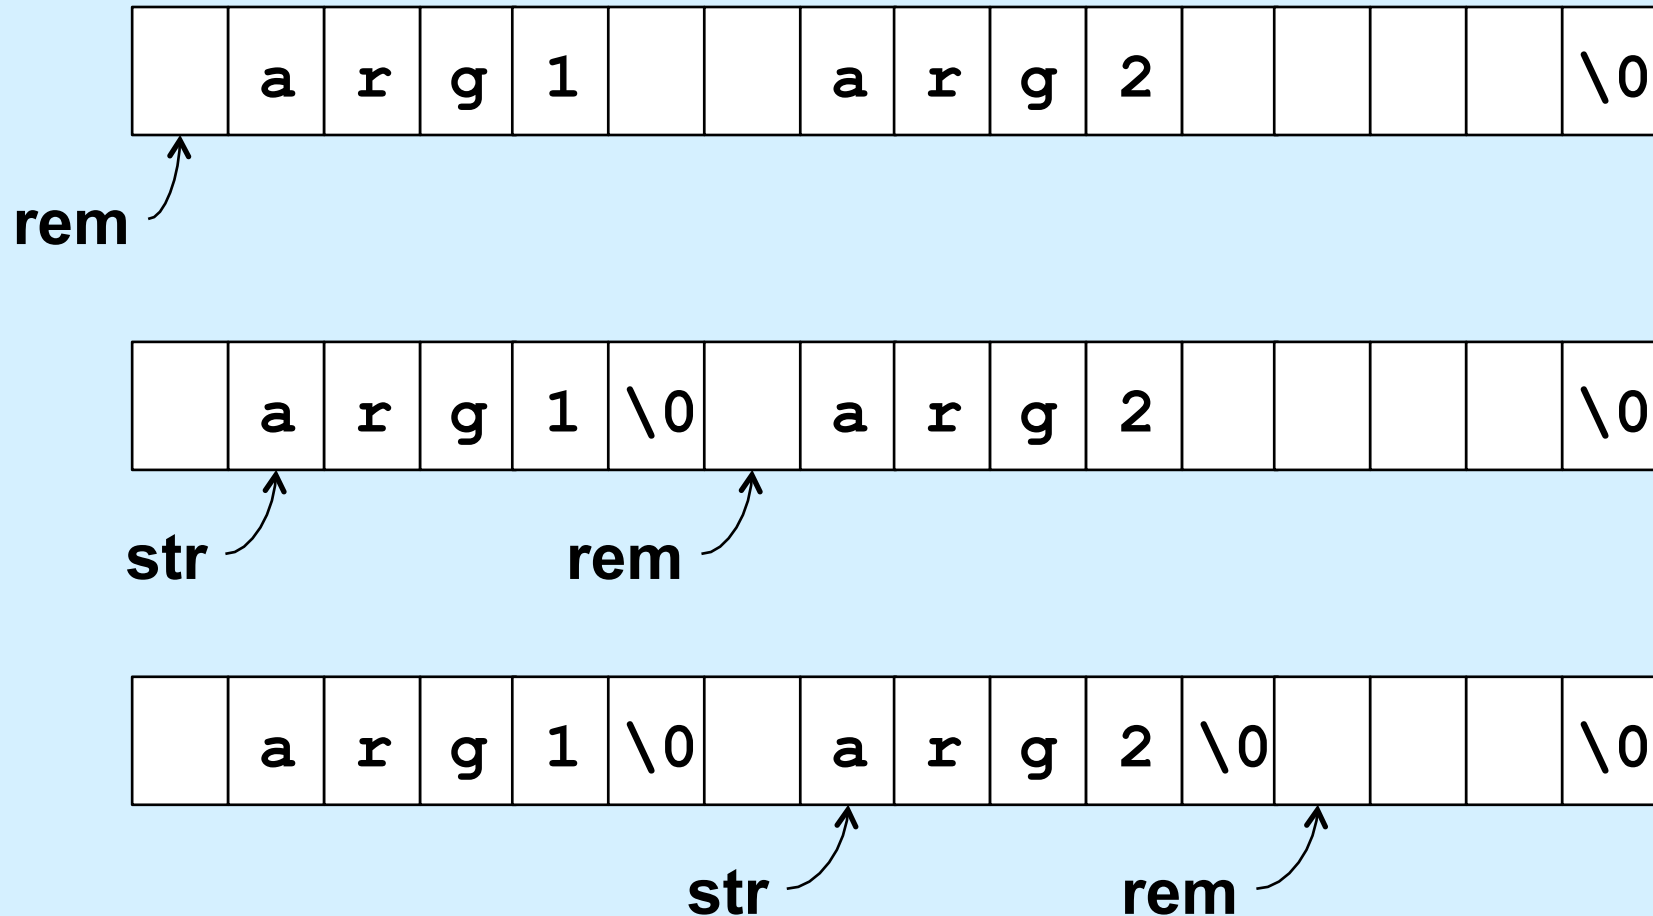



# Design of *getfirstword*

- **char \*getfirstword(char \*\*rem\_p)**
  - returns
    - » pointer to null-terminated first word in \*rem\_p
    - or
    - » NULL, if \*rem\_p is a string of entirely whitespace
  - \*rem\_p modified to
    - » point to character following first word in \*rem\_p if within bounds of string
    - or
    - » NULL if next character not within bounds

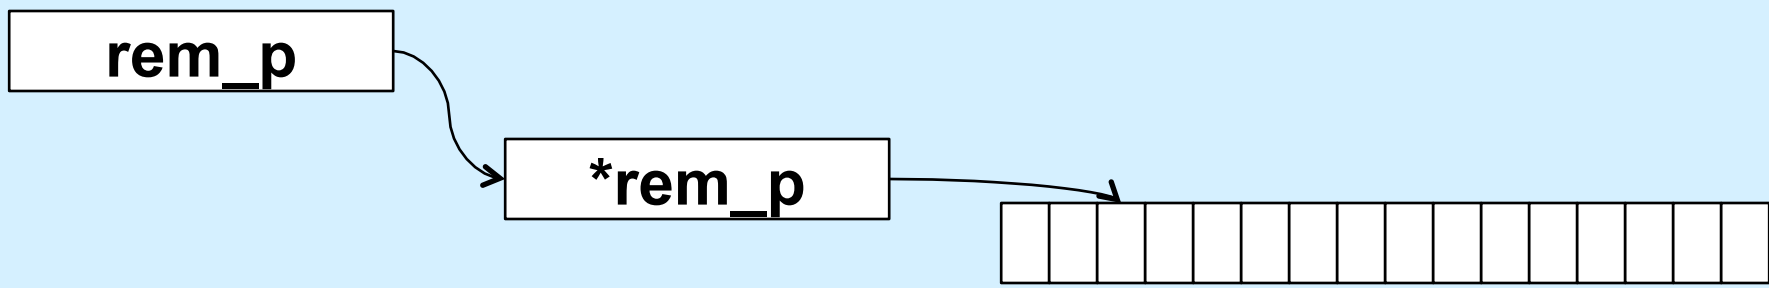

# Using *getfirstword*

```
int main() {  
    char line[] = " arg0  arg1 arg2  arg3  ";  
    char *rem = line;  
    char *str;  
    while ((str = getfirstword(&rem)) != NULL) {  
        printf("%s\n", str);  
    }  
    return 0;  
}
```

## Output:

```
arg0  
arg1  
arg2  
arg3
```

# Code

```
char *getfirstword(char **rem_p) {  
    char *str = *rem_p;  
    if (str == NULL)  
        return NULL;  
    int len = strlen(str);  
    int wslen =  
        strspn(str, " \t\n");  
    // initial whitespace  
    if (wslen == len) {  
        // string is all whitespace  
        return NULL;  
    }  
    str = &str[wslen];  
    // skip over whitespace  
    len -= wslen;  
  
    int wlen =  
        strcspn(str, " \t\n");  
    // length of first word  
    if (wlen < len) {  
        // word ends before end of  
        // string: terminate  
        // it with null  
        str[wlen] = '\0';  
        *rem_p = &str[wlen+1];  
    } else {  
        // no more words  
        *rem_p = NULL;  
    }  
    return str;  
}
```