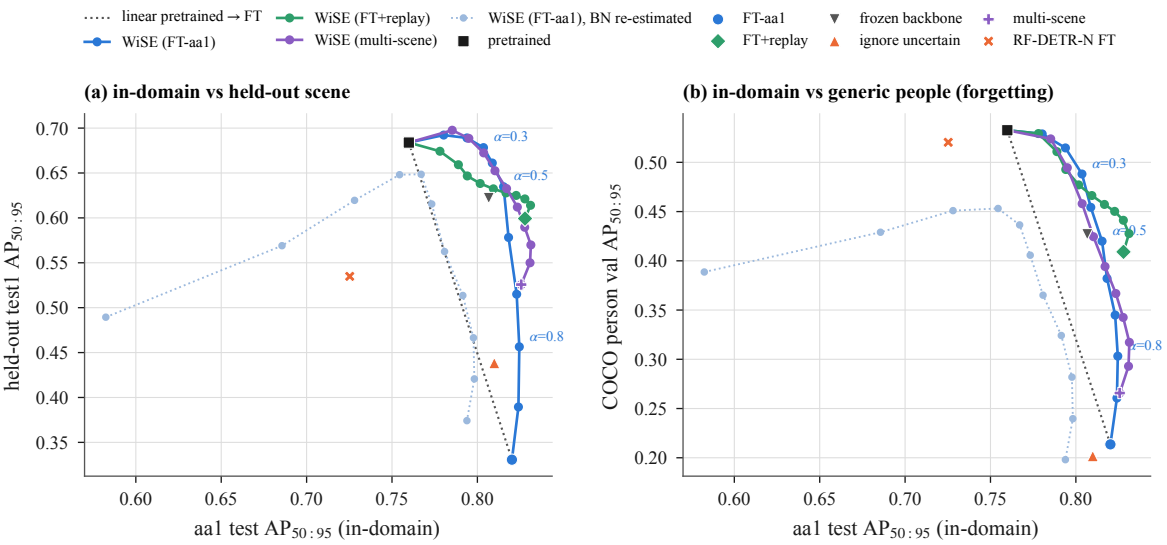

linear pretrained → FT
WiSE (FT-aa1)
WiSE (FT+replay)
WiSE (multi-scene)
WiSE (FT-aa1), BN re-estimated
pretrained
FT-aa1
FT+replay
frozen backbone
ignore uncertain
multi-scene
RF-DETR-N FT
(a) in-domain vs held-out scene
held-out test1 $AP_{50:95}$
aa1 test $AP_{50:95}$ (in-domain)
α=0.3
α=0.5
α=0.8
(b) in-domain vs generic people (forgetting)
COCO person val $AP_{50:95}$
aa1 test $AP_{50:95}$ (in-domain)
α=0.3
α=0.5
α=0.8