

LEU (SCL), 0.2 M: pooled-count PMF construction without pseudocounts


(a) Recover and fold all nine count histograms

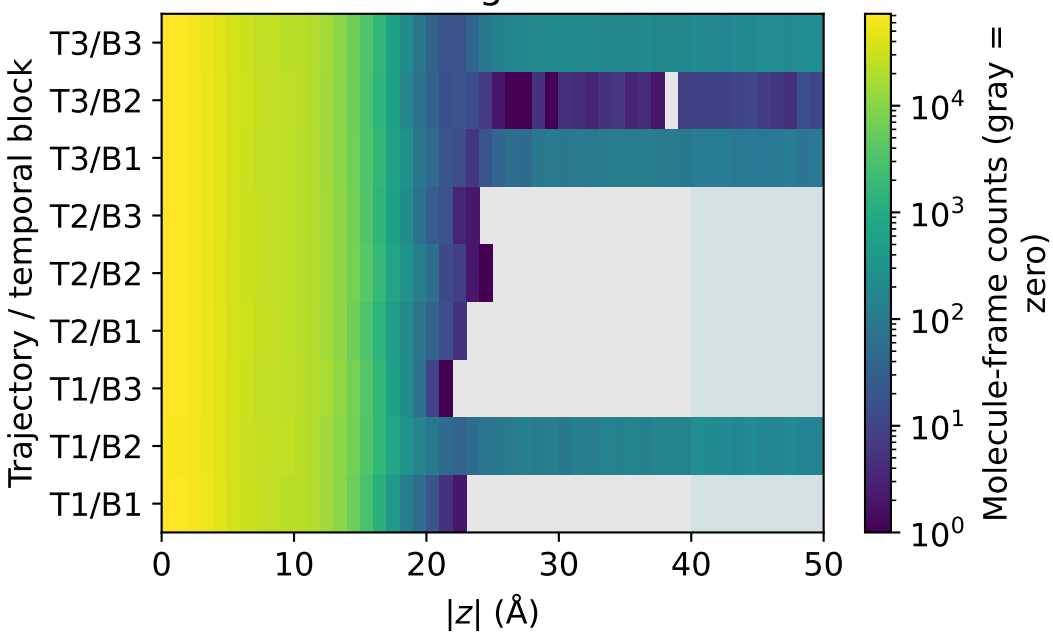


(b) Sum BEFORE log: $C(z) = \sum_b n_b(z)$

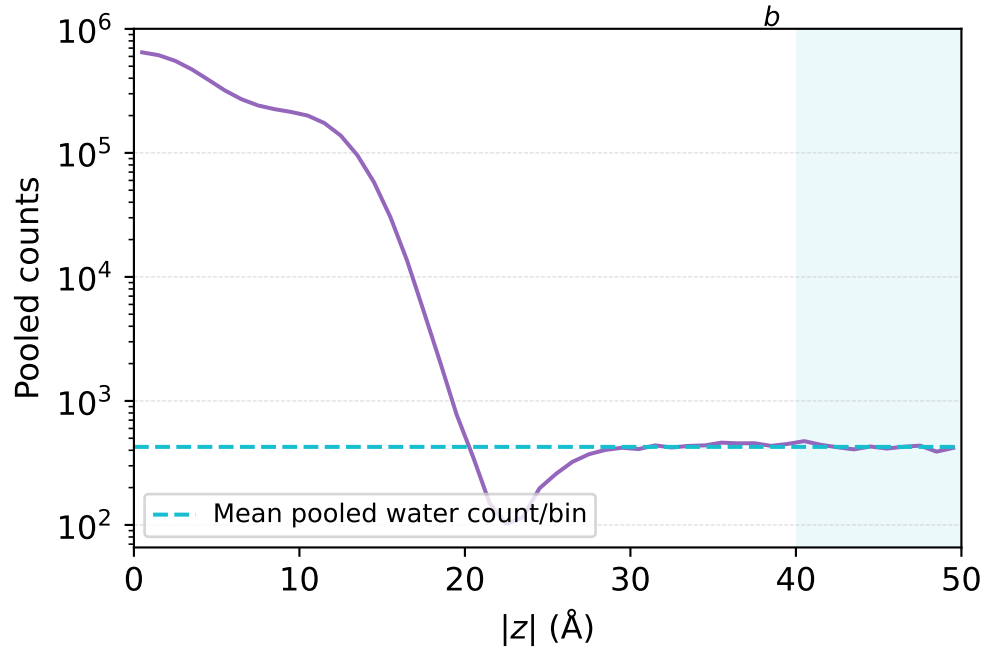


(c) Normalize: $P(z) = C(z) / \sum_{\text{native bins}} C$

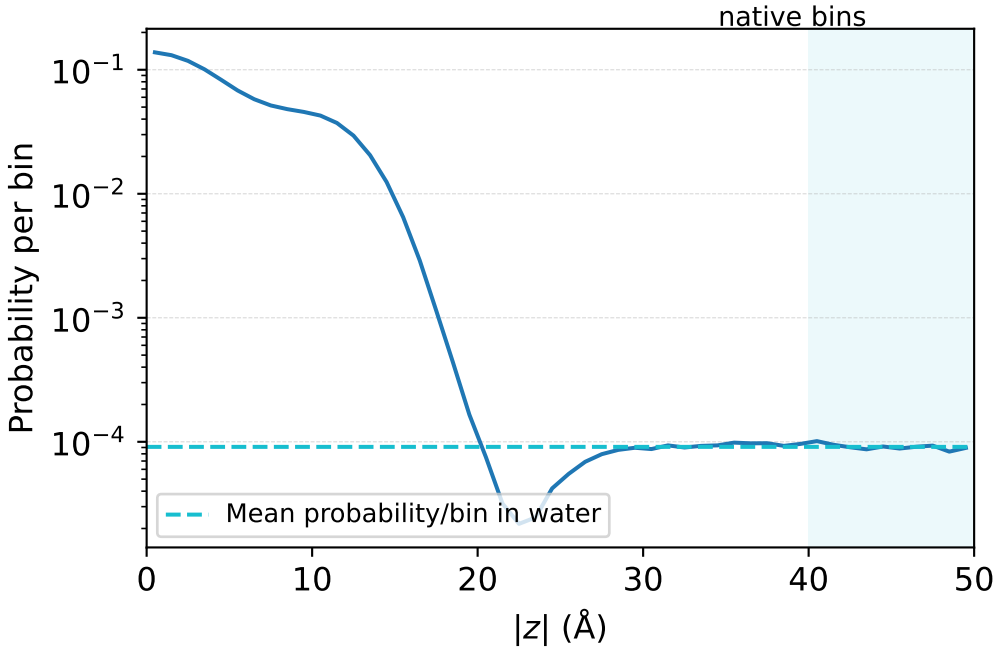

(d) Reference: $a = -k_B T \ln \langle P \rangle_{\text{water}}$

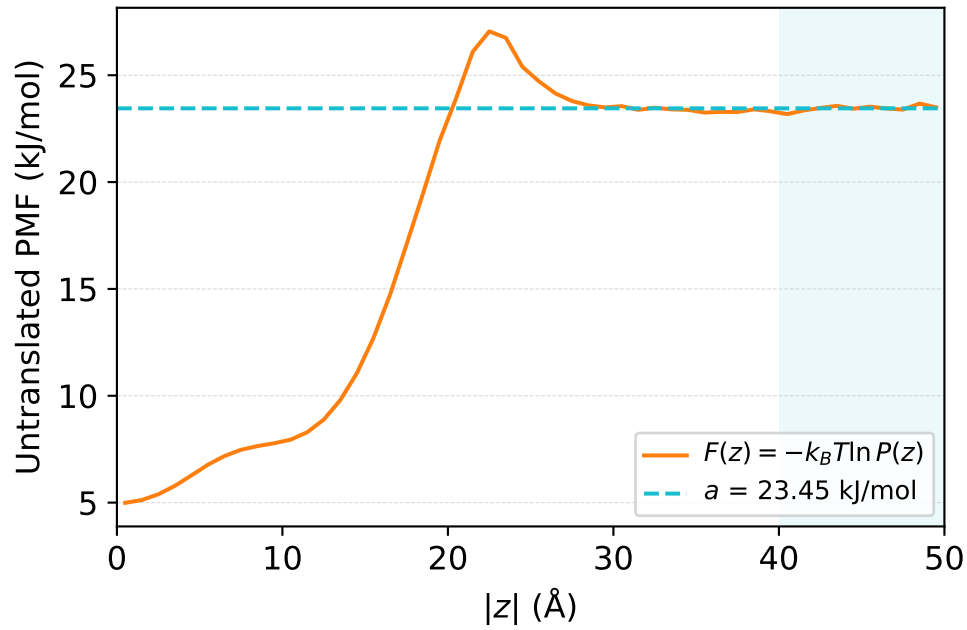

(e) $G(z) = -k_B T \ln[C(z)/\langle C \rangle_{\text{water}}]$

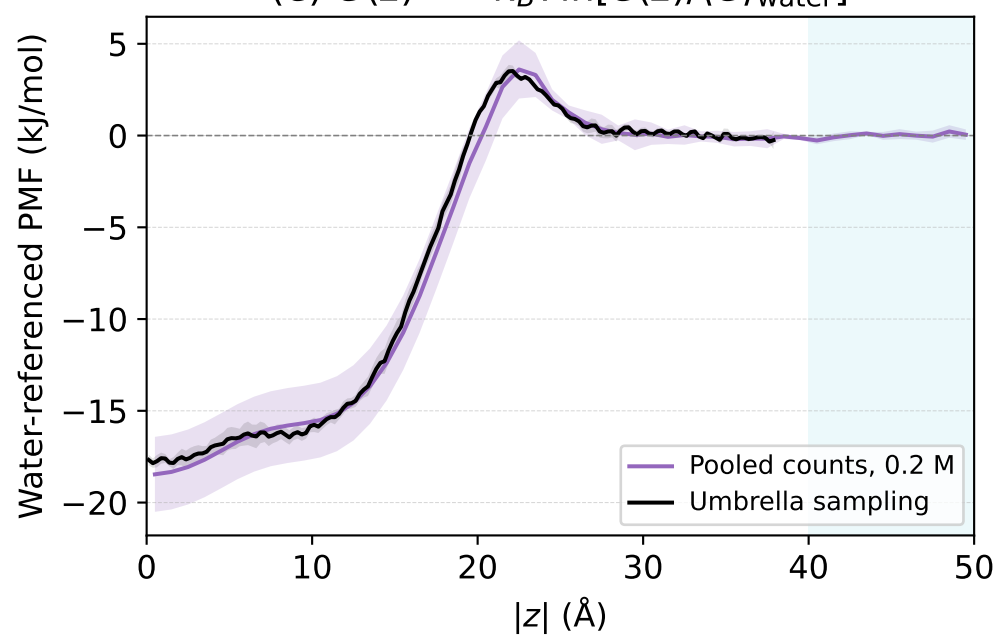

(f) Resample 9 whole blocks, 10,000 times

