
MEETINGS - OCE MEETINGS PACKAGE (OCE9 PACKAGE)

The Meetings module in OCE enables Sales Reps to organize meetings for their organization by entering details (including topics to be discussed and the location of the meeting), inviting attendees, speakers, and colleagues, and entering expenses tied to the meeting. Before this can be done, an Admin must set up the Meetings module.

This section of the guide explains how to configure Meetings in the OCE Meetings (OCE9) package (recommended approach). The OCE package steps are deprecated and explained in a separate section [Meetings - OCE Package - Deprecated](#).

Note: There are specific steps regarding Activity History operation for Meetings. For more details, refer to [Configuring Activity History](#).

Basic Activation of the Meetings Module (OCE9 Package)

The below table describes the basic minimum configuration steps required to activate the Meetings module. Throughout this guide there are more details on feature specific configurations that may not be included in the table. Please see the respective sections of the guide on the Meetings feature you wish to configure for more information.

Configurati on Category	Steps	Notes
Permission Sets	• Assign Meetings User to appropriate users. • Assign Meetings Admin to appropriate users.	• To complete this step, see more information from Salesforce on assigning permission sets to users. • Meetings Admin: assign to the Admin user of Meetings. The Meeting Admin can add Expense Types, Locations, Speakers, Topics, Topic Products, and Topic Materials, and will get access to the Meetings tile in the Admin Console. • Meetings User: assign to the users who will create Meetings and any approvers that will approve Meetings. This permission set also needs to be assigned to the Admin user.

Configurati on Category	Steps	Notes
Record Type Assignment	- Assign record types to profiles (Sales Rep and Admin, or any other profiles you want to create Meetings): - Displays & Exhibits (Sales Rep/Admin) - Rep Presentation (Sales Rep/Admin) - Speaker Meeting (Sales Rep/Admin) - HCP Sponsorship (Admin only)	To complete this step, see more information from Salesforce on assigning record types to profiles.
Object Access	Ensure that Create access is given on the Location object to profiles that will be creating Meetings (<i>not mandatory</i>).	- To complete this step, see more information from Salesforce on editing object permissions. - This is only needed if you want to enable users to add their own Locations in case they do not find the Location they need using the Meeting Location object. Some orgs may only wish for Admin users to create Location records. If you do not wish for other profiles to create Location records, skip this step.

Configurati on Category	Steps	Notes
Page Layouts	• Make Category__c and LineItem__c read only on the Meeting Expense page layouts (for both Estimated Expense and Actual Expense record types). • For all profiles, manually make Line Item record type on Expense Type object use the page layout called Line Item Layout.	• To complete this step, see more information from Salesforce on assigning page layouts to profiles or record types and field access.

Configuration Category	Steps	Notes
Buttons and Overrides	- If it is not there already, add the Edit button to Meeting page layouts. - Add the following button overrides to objects - Meeting - Edit - GenericEditActionOverride (Lightning component) - Meeting Topic - New - OCE9__MeetingTopicCreationOverrideLwc (Visualforce page) - Edit - GenericEditActionOverride (Lightning component) - Delete - OCE9__MeetingTopicDeletionOverrideLwc(Visualforce page) - Meeting Location - Edit - GenericEditActionOverride (Lightning component) - Meeting Budget 2 - New - Replace OCE9__MeetingBudget2CreationOverride to OCE9__MeetingBudget2NewActionOverride (Visualforce page) - Edit - GenericEditActionOverride	- To complete the first step, go to Mobile & Lightning Actions and drag the Edit button to Salesforce Mobile and Lightning Experience Actions section. - To complete the next steps, see more information from Salesforce on overriding standard buttons. - Meeting Member, Meeting Expense, Meeting Expense Allocation, and Meeting Expense Budget Allocation objects do not have overrides. - MeetingCreateActionOverride was previously recommended for Meeting Location 'New' button, but does not allow users to create new Locations from the Meeting Location screen itself and has other limitations. Therefore, it is recommended to not use an override on Meeting Location 'New' button.

Configurati on Category	Steps	Notes
	(Lightning component)	
Fields and Picklist Values	• If wanting the Meeting ID field on Meeting object to be unique, use field UniqueMeetingID__c instead of OCMeetingId__c. • Add picklist value Not Applicable to MeetingMember__c.Status__c. and MeetingMember__c.AttendanceStatus__c. fields. Update all Meeting Member record type picklists with this value. • Add picklist value Tentative to MeetingMember__c.Status__c. Update all Meeting Member record type picklists with this value.	• To assign picklist values, see more information from Salesforce on adding or editing picklist values. • Assigning picklist values is required for orgs that have upgraded; for brand new installs this is OOB.
Sharing Settings	• Default Internal Access of Topic object should be set to <i>Private</i>.	• To complete this step, see more information from Salesforce on sharing settings.

Configurati on Category	Steps	Notes
Lightning Record Pages	- Assign Meeting Lightning page to all Meeting record types. - Add Lightning record pages with Details, Related, and Notes and Attachments tabs for these 3 objects: Meeting Location, Meeting Member, and Meeting Expenses. - Change Meeting Lightning page/Attendees tab: - Replace 'MeetingAttendees' (DEPRECATED) or 'MeetingAttendeesNew' (DEPRECATED) component with 'Meeting Attendees Lwc' component. - Replace 'MeetingSpeakers' (DEPRECATED) or 'MeetingSpeakersNew' (DEPRECATED) component with 'Meeting Speakers Lwc' component. - Replace 'MeetingColleagues' (DEPRECATED) or 'MeetingColleaguesNew' (DEPRECATED) component with 'Meeting Colleagues Lwc' component. - Replace MeetingNonProfiledAttendees (DEPRECATED) component with MeetingNonProfiledAttendeesNew component.	- To complete this step, see more information from Salesforce on activating Lightning pages. - Lightning record pages with Details, Related, and Notes and Attachments tabs are OOB. But, if orgs are adding their own Lightning pages, please ensure the correct Lightning page has been assigned. - For orgs migrating from OCE to OCE9, complete the third step.

Configurati on Category	Steps	Notes
User Object	Ensure all Meetings users have a value set in the MDM Preferred Country field on User object.	- This is required because there is a lookup filter on Meeting Location object that uses the MDM Preferred Country from the logged in user's User record to filter location results. If no country is filled out, users will not see any results when searching for locations. - This is also required when using System Generated Filter on Colleague and Speaker in order to get a correct list of filtered results.
Validation Rules	- Activate the validation rule EndTime_Must_Be_Later_Than_StartTime_Fix. - Ensure EndTime_Should_Be_Later_Than_StartTime is deactivated.	To complete this step, see more information from Salesforce on activating validation rules.
Trigger Handlers	See below table	

Configuration Category	Steps	Notes
DB Schemas		- To complete this step, go to Setup > Custom Code > Custom Metadata Types > DB Schema > Manage DB Schemas > Edit record. Check the Active checkbox and save. - For feature specific DB Schemas to activate, see the respective section of the Meetings Configuration Guide (e.g. Satellite Meetings, Surveys in Meetings, etc.).
Metadata Cache	To use Meetings on mobile, run cache.	- To complete this step, go to Admin Console > Mobile > Metadata Cache. Click the Create New Cache button. - The user running the cache must have the Meetings Admin and Meetings User permission sets assigned.

Ensure the following trigger handler configuration:

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Meeting Member Create	OCE9.MeetingMemberCreateHandler2	Meeting WorkFlow Handler (DEPRECATED)	OCE.MeetingWorkFlowHandler (DEPRECATED)

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Meeting Calculation Event	OCE9.MeetingCalculationEventHandler2	MeetingCalculationEventHandler (DEPRECATED)	OCE.MeetingCalculationEventHandler (DEPRECATED)
Meeting Populate Allowed MM Types	OCE9.MeetingPopulateAllowedMMtypesHandler2	MeetingLocationWorkflowHandler (DEPRECATED)	OCE.MeetingLocationWorkflowHandler (DEPRECATED)
Meeting Update Meeting Budget	OCE9.MeetingUpdateMeetingBudgetHandler2	MeetingMemberWorkflowHandler (DEPRECATED)	OCE.MeetingMemberWorkflowHandler (DEPRECATED)
MEBA Update Meeting Budget	OCE9.MEBASUpdateMeetingBudgetHandler2	MeetingTopicWorkflowHandler (DEPRECATED)	OCE.MeetingTopicWorkflowHandler (DEPRECATED)
Meeting Expense Allocation Creator	OCE9.MeetingExpenseAllocationCreator2	MeetingExpenseWorkflowHandler (DEPRECATED)	OCE.MeetingExpenseWorkflowHandler (DEPRECATED)
Copy Meeting DeliveryFormat To MM	OCE9.MeetingDataNormalizationHandler2	Meeting Topic Handler (only for ENGAGE)	OCE.MeetingTopicHandler
Meeting Expense Locker	OCE9.MeetingExpenseLockerHandler2	N- Engage clients may still continue to use MeetingTopic Handler as it is used in Engage functionality.	
Meeting Expense	OCE9.MeetingExpenseHandler2	MeetingExpenseAllocationHandler (DEPRECATED)	OCE.MeetingExpenseAllocationHandler (DEPRECATED)

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
MEA Recalculation on ME change	OCE9.RecalculateMEAonMEChangeHandler	MarkMeetingMemberAllocationFlagsHandler (DEPRECATED)	OCE.MarkMeetingMemberAllocationFlagsHandler (DEPRECATED)
Meeting Expense Calculation	OCE9.MeetingExpenseCalculationHandler2	MeetingLocationHandler (DEPRECATED)	OCE.MeetingLocationHandler (DEPRECATED)
Meeting Expense Delete	OCE9.MeetingExpenseDeleteHandler2	Meeting Sharing Handler (DEPRECATED)	OCE.MeetingSharingHandler (DEPRECATED)
Meeting Expense Allocation Locker	OCE9.MeetingExpenseAllocationLockerHandler2	MeetingCalculationEventHandler (DEPRECATED)	OCE.MeetingCalculationEventHandler (DEPRECATED)
Meeting Expense Allocation Calculation	OCE9.MeetingExpenseAllocationCalcHandler2	MeetingPopulateAllowedMMtypesHandler (DEPRECATED)	OCE.MeetingPopulateAllowedMMtypesHandler (DEPRECATED)
MEBA Amount Validation	OCE9.MebaAmountValidationHandler2	MeetingUpdateMeetingBudgetHandler (DEPRECATED)	OCE.MeetingUpdateMeetingBudgetHandler (DEPRECATED)
Meeting Expense Budget Allocation Create	OCE9.MeetingExpenseBudgetAllocCreateHandler2	MEBA Update Meeting Budget Handler (DEPRECATED)	OCE.MEBAUpdateMeetingBudgetHandler (DEPRECATED)
Meeting Sharing Additional Async	OCE9.MeetingSharingAdditionalAsyncHandler2	MeetingExpenseAllocationCreator (DEPRECATED)	OCE.MeetingExpenseAllocationCreator (DEPRECATED)
Meeting Sharing Additional	OCE9.MeetingSharingAdditionalHandler2	MeetingSharingAdditionalHandler (DEPRECATED)	OCE.MeetingSharingAdditionalHandler (DEPRECATED)

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Meeting Sharing New	OCE9.MeetingSharingNewHandler2	Meeting Data Denorm. To Meeting Member (DEPRECATED)	OCE.MeetingDataDenormalizationHandler (DEPRECATED)
Meeting Topic Compliance	OCE9.MeetingTopicComplianceHandler2	MeetingExpenseLockerHandler (DEPRECATED)	OCE.MeetingExpenseLockerHandler (DEPRECATED)
Meeting Location Update Meeting Address	OCE9.MeetingLocationUpdateMeetingAddrHandler2	Meeting Expense Handler (DEPRECATED)	OCE.MeetingExpenseHandler (DEPRECATED)
Meeting Location Validation	OCE9.MeetingLocationValidationHandler2	MeetingExpenseAllocationRecalcHandler (DEPRECATED)	OCE.MeetingExpenseAllocationRecalcHandler (DEPRECATED)
Meeting member Date Time Validation	OCE9.MeetingMemberDateTimeValidationHandler2	MeetingExpenseCalculationHandler (DEPRECATED)	OCE.MeetingExpenseCalculationHandler (DEPRECATED)
Meeting Member Duplicate Member	OCE9.MeetingMemberDuplicateMemberHandler2	Meeting Expense Delete Handler (DEPRECATED)	OCE.MeetingExpenseDeleteHandler (DEPRECATED)
Meeting Member Expense Calculation	OCE9.MeetingMemberExpenseCalculationHandler2	MeetingExpenseAllocationLockerHandler (DEPRECATED)	OCE.MeetingExpenseAllocationLockerHandler (DEPRECATED)
Meeting Member Invited Date	OCE9.MeetingMemberInvitedDateHandler2	MeetingExpenseAllocationCalcHandler (DEPRECATED)	OCE.MeetingExpenseAllocationCalcHandler (DEPRECATED)
Meeting Member Populate Fields	OCE9.MeetingMemberPopulateFieldsHandler2	MEBA Amount Validation Handler (DEPRECATED)	OCE.MebaAmountValidationHandler (DEPRECATED)

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Meeting Member Sharing	OCE9.MeetingMemberSharingHandler2	MeetingSharingAdditionalAsyncHandler (DEPRECATED)	OCE.MeetingSharingAdditionalAsyncHandler (DEPRECATED)
Meeting Member Specialty Provider	OCE9.MeetingMemberSpecialtyProviderHandler2	MeetingSharingAdditionalHandler (DEPRECATED)	OCE.MeetingSharingAdditionalHandler (DEPRECATED)
Meeting Member Status	OCE9.MeetingMemberStatusHandler2	Meeting Topic Compliance Handler (DEPRECATED)	OCE.MeetingTopicComplianceHandler (DEPRECATED)
WorkflowPathAssociationHandler	OCE.WorkflowPathAssociationHandler	MeetingLocation Update Meet.Address Hndl (DEPRECATED)	OCE.MeetingLocationUpdateMeetingAddrHandler (DEPRECATED)
Workflow Path Permissions Handler	OCE.WorkflowPathPermissionsHandler	Meeting Location Validation Handler (DEPRECATED)	OCE.MeetingLocationValidationHandler (DEPRECATED)
Sync WorkflowPathAssociation from Mobile	OCE.WorkflowPathOfflineAssociationHandler	MeetingMember DT Validation Handler (DEPRECATED)	OCE.MeetingMemberDateTimeValidationHandler (DEPRECATED)
Meeting Member Context User Role	OCE9.MeetingMemberContextUserRoleHandler2	Meeting Member Duplicate Member Handler (DEPRECATED)	OCE.MeetingMemberDuplicateMemberHandler (DEPRECATED)
MEA To Meeting Relation	OCE9.MEAToMeetingRelationHandler2	MeetingMemberExpenseCalculationHandler (DEPRECATED)	OCE.MeetingMemberExpenseCalculationHandler (DEPRECATED)
MEBA To Meeting Relation	OCE9.MEBAToMeetingRelationHandler2	MeetingMemberInvitedDateHandler (DEPRECATED)	OCE.MeetingMemberInvitedDateHandler (DEPRECATED)

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Meeting DateTime Validation	OCE9.MeetingDateTimeValidationHandler2	MeetingMemberPopulateFieldsHandler (DEPRECATED)	OCE.MeetingMemberPopulateFieldsHandler (DEPRECATED)
Denormalize Meeting Data to Member	OCE9.MeetingMemberDenormalizationHandler2	Meeting Member Sharing Handler (DEPRECATED)	OCE.MeetingMemberSharingHandler (DEPRECATED)
		Meeting Member SpecialtyProvider Handler (DEPRECATED)	OCE.MeetingMemberSpecialtyProviderHandler (DEPRECATED)
		Meeting Member Status Handler (DEPRECATED)	OCE.MeetingMemberStatusHandler (DEPRECATED)
		AccountSpeakerHandler (DEPRECATED)	OCE.AccountSpeakerHandler (DEPRECATED)
		MeetingMemberContextUserRoleHandler (DEPRECATED)	OCE.MeetingMemberContextUserRoleHandler (DEPRECATED)
		MEAToMeetingRelationHandler (DEPRECATED)	OCE.MEAToMeetingRelationHandler (DEPRECATED)
		MEBAToMeetingRelationHandler (DEPRECATED)	OCE.MEBAToMeetingRelationHandler (DEPRECATED)
		Meeting DateTime Validation Handler (DEPRECATED)	OCE.MeetingDateTimeValidationHandler (DEPRECATED)
		Meeting Data Denorm. To Meeting Member (DEPRECATED)	OCE.MeetingMemberDenormalizationHandler (DEPRECATED)

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
		Account Speaker (DEPRECATED)	OCE9.AccountSpeakerHandler2 (DEPRECATED) May 2024 Monthly

Remove Date and Time Defaulting to Today's Date and Time (OCE9)

This feature allows organizations to control whether the Start Date/Time and End Date/Time fields on the Meeting record are automatically pre-filled during Meeting creation.

By default, these fields are populated with the current date and time. With this enhancement, they can be left empty based on the presence of a custom permission assigned to the user.

1. Navigate to **Setup** → **Custom Permissions**.
2. Locate the permission named:
Meetings_EmptyMeetingDatesOnCreate.
3. Go to Permission Sets or Profiles that should allow users to create Meetings with empty date/time fields.
4. Under Custom Permissions, add:
Meetings_EmptyMeetingDatesOnCreate.
5. **Save** and assign the permission set to the intended users.

Configure Speakers (OCE9 Package)

As part of the Meetings module, participants can be invited to the meeting to speak. These individuals are added using the **+ Speakers** button on a meeting. In order for speakers to appear for selection, the Admin needs to set them up in the **Speakers** object.

Prerequisites: Ensure that the **Speakers** tab is configured in your OCE org.

To configure speakers

1. In the **App Launcher**, click the **Speakers** tab in your organization.
2. The list view of your created speakers, if any, displays. To create a new speaker, click the **New** button at the top right.
3. The New Speaker dialog box opens.

4. A speaker can be linked to a customer or user in the system.
5. If your speaker is neither a customer nor a user, enter their name in the **Speaker Name** field.
6. If your speaker is a customer, populate the **Customer/Account** lookup linking the **Account** to the **Speaker**.

Note: The customer name will be automatically applied for the Speaker Name and will override the user input.

Note: This will automatically check the **Is Speaker** checkbox on an Account.

If your speaker is a user in the system, search the **User** field and enter the user name for **Speaker Name**.

Note: Ensure that you do not fill in both a customer and a user—only one or the other, or neither.

Ensure you have shared the Account with appropriate users if you are using a customer as a speaker, otherwise they will not be able to be used in Meetings.

SpecialityText__c field on Meeting Member stores the value from the Specialty field on Speaker when that Speaker is added to the Meeting as a Meeting Member. This field can only hold 255 characters, so if a Speaker is configured with too many specialties, it is possible an error message will appear to the Meetings user upon trying to add them as a Meeting Member, as the insert will fail due to the character limitation. It is advised to have Speakers with specialties that fit within the 255 character limit for this reason.

1. Fill in the other pertinent fields for the speaker, such as address and monetary information.
2. Once your fields are entered, click the **Save** button. Your speaker is created and will be

available to select in the Meetings module.

The screenshot shows a web interface for a Speaker record. At the top, there's a header bar with the title 'Speaker Chris Norch' and action buttons 'Edit', 'Delete', 'Clone', and a dropdown arrow. Below the header, the record is divided into two main sections: 'RELATED' and 'DETAILS'. The 'DETAILS' section is currently active and shows various fields for the speaker. On the left side of the details, there are fields for 'Speaker Name' (Chris Norch), 'Specialty' (Military health care provider), 'Address Line 1' (3254 W. Enon St.), 'Address Line 2', 'City' (Brooklyn), 'Country' (United States), 'State' (New York), 'Zip' (01122), 'Tier' (Tier 1), 'YTD Spend' (USD 2,000.00), and 'YTD Utilization' (5,000). On the right side, there are fields for 'Owner' (OCE Admin), 'Status', 'Customer' (Chris NORCH), 'User', and 'Primary Employer'. Each field has a small edit icon (pencil) next to it.

Create Speaker from Account (OCE9 Package)

You can also trigger the automatic creation of a Speaker record from an Account. To activate this feature:

- Ensure Sales Rep or other profiles that need to use this feature have Create/Read/Edit access to Speaker__c object and Read/Write access to the following fields on Speaker object:
 - Specialty__c
 - ProfessionalTitle__c
 - ProfessionalDesignation__c
 - AddressLine1__c
 - AddressLine2__c
 - City__c
 - Country__c
 - State__c
 - Zip__c

- FirstName__c
- LastName__c
- MiddleName__c
- Account__c
- KanaName__c
- Email__c
- Phone__c
- Ensure Sales Rep or other profiles that need to use this feature have Read/Write access to the following fields on Account object:
 - AccountFullName__c (Read)
 - DoubleByteKanaName__c (Read)
 - ParentAccount__c (Read)
 - IsSpeaker__c (Read/Write)
 - SpeakerReference__c (Read/Write)
 - Specialty__c (Read)
 - ProfessionalTitle__c (Read)
 - ProfessionalDesignation__c (Read)
 - Email__c (Read)
 - PhoneFormulaDashboard__c (Read)
- Run batch job UpdateSpeakerFieldsOnAccountBatch.
- Ensure the following trigger handler configuration:

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Speaker Populate Account	OCE9.SpeakerPopulateAccountHandler2	AccountSpeakerHandler (DEPRECATED)	OCE.AccountSpeakerHandler (DEPRECATED)
Speaker Duplicate Validation	OCE9.SpeakerDuplicateValidationHandler2	SpeakerPopulateAccountHandler (DEPRECATED)	OCE.SpeakerPopulateAccountHandler (DEPRECATED)
Account Info To Speaker	OCE9.AccountInfoToSpeakerHandler	SpeakerDuplicateValidation (DEPRECATED)	OCE.SpeakerDuplicateValidationHandler (DEPRECATED)
Copy Account Info To Inactive Speaker	OCE9.CopyAccountInfoToInactiveSpeakerHandler	Account Speaker (DEPRECATED)	OCE9.AccountSpeakerHandler2 (DEPRECATED) May 2024 Monthly

- Add IsSpeaker__c and SpeakerReference__c fields to corresponding Account page layout.
- Remove Speaker__c field on Account object from all Account page layouts.

The user can check the 'Is Speaker' checkbox on Account to automatically create the Speaker record.

- The following Account data will be copied to the Speaker record:
 - Speaker Name = Account Full Name
 - Status = 'Nominated'
 - Specialty = Account Specialty
 - Professional Title = Account Professional Title
 - Professional Designation = Account Professional Designation
 - Primary Employer = Parent Account
 - Currency = Account Currency
 - Email = Account Email (OCE__Email__c)
 - Phone = Account Phone (OCE__PhoneFormulaDashboard__c)

Note: If a field with Account name info is longer than the Speaker standard Name field (80 chars), the value will be trimmed to keep the first 80 chars (as it is now).

- The following Account Address fields will be copied to the Speaker record:
 - Address Line 1 = Address Line 1
 - Address Line 2 = Address Line 2
 - City = City
 - Country = Country
 - State = State
 - Zip = Zip Code

Note: If the user creates a Speaker record first and gives them a name and then uses the Account lookup on Speaker to then link them to Account, we will also copy the fields over in this scenario. This means that the Speaker Name field will be overwritten with the Account Name.

In order for the data to copy properly when checking the 'Is Speaker' checkbox on Account, the Account and Account Address records should both be in the system first. Take note of this when doing data loads.

Include Account First/Last/Middle Name When Creating Speaker From Account (OCE9 Package)

When nominating an Account as a Speaker, certain fields are copied from the Account record to the Speaker record. This feature allows for additional fields (First Name, Last Name, and Middle Name) to be copied when creating a Speaker record from an Account.

Configuring Speakers > Create Speakers from Account is a prerequisite.

To activate this feature:

- Go to Setup → Home → User Interface → Name Settings → Ensure that the 'Enable Middle Names for Person Names' setting is enabled in the org.
- Ensure users for which the feature is being configured have both create and edit permissions to Speaker sObject.
- Ensure users have edit access to the following fields on the Speaker object:
 - OCE__FirstName__c
 - OCE__LastName__c
 - OCE__MiddleName__c
- Ensure that fields: FirstName__c, LastName__c, MiddleName__c from Speaker sObject are added to Speaker page layout.
- Ensure the following trigger handler configuration:

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Speaker Populate Account	OCE9.SpeakerPopulateAccountHandler2	AccountSpeakerHandler (DEPRECATED)	OCE.AccountSpeakerHandler (DEPRECATED)
Speaker Duplicate Validation	OCE9.SpeakerDuplicateValidationHandler2	SpeakerPopulateAccountHandler (DEPRECATED)	OCE.SpeakerPopulateAccountHandler (DEPRECATED)
Account Info To Speaker	OCE9.AccountInfoToSpeakerHandler	SpeakerDuplicateValidation (DEPRECATED)	OCE.SpeakerDuplicateValidationHandler (DEPRECATED)
Copy Account Info To Inactive Speaker	OCE9.CopyAccountInfoToInactiveSpeakerHandler	Account Speaker (DEPRECATED)	OCE9.AccountSpeakerHandler2 (DEPRECATED) May 2024 Monthly

- Go to Edit Page in App Builder -> Meeting -> Attendees:
 - Remove 'MeetingSpeakers' (DEPRECATED)
 - Add 'Meeting Speakers Lwc'

Note: Only those fields to which the user has edit permission will be copied. The fields to which the user has no edit permissions will be skipped without any error messages.

Reflect Account Name (Including Middle Name) on Speaker (OCE9 Package)

Admins can specify what field from the Account object should be copied to the Speaker Name during the Speaker Nomination process. To do that, go to *Admin Console > Meetings > Meeting Org Level Config* and populate the field 'Account Name Field To Copy To Speaker' with the field from the Account object.

After the user creates an Account with the '**Is Speaker**' field = **true** or updates the existing Account and sets its '**Is Speaker**' field = **true**, the value from the specified field should populate the Speaker Name. If the value of this field is blank, the Speaker Name will be populated with the ID of the Speaker record. If the user has no access to the field, an error will be shown in the following format: '*Fieldname* of Account requires read access'. If the field specified in the custom setting is absent on the Account object, an error will be shown in the following format: 'Invalid Account sObject field name: *FieldName*'.

If the 'Account Name Field To Copy To Speaker' on Meetings Org Level Config is blank, OCE__AccountFullName__c (on Account object) field will be used to copy the Name from Account To Speaker.

Note: If the User chooses the standard Name field to copy to Speakers, Salutation won't be copied to Speaker Name, only First Name, Middle Name, Last Name, and Suffix.

According to Salesforce [documentation](#), the Person Account Name field includes the fields: First Name, Last Name, Middle Name, and Suffix. Salutation is not included in the Name field value in the database (but for the Account details page, Salutation is part of the Account name). When Account Name to Speaker Name is copied, this value is taken from the database and it does not include Salutation.

To activate this feature, the **Account Name Field To Copy To Speaker** field on Meetings Org Level Config should be populated with the API name of a field on the Account object, and the following trigger handlers should be enabled:

- Account Info To Speaker
- Speaker Populate Account

- Copy Account Info To Inactive Speaker
- Speaker Duplicate Validation

Note: The *Account Speaker* trigger handler that was utilized instead of the **Account Name Field To Copy To Speaker** trigger handler before will also be impacted.

The *Account Speaker* handler is now deprecated and it is not recommended to use it (Trigger Handler API Name: OCE9.AccountSpeakerHandler2, Label: DEPRECATED).

After populating the custom setting field, you can update historical data (Speaker and Meeting Members record) using a non-package batch.

To execute the batch, execute the following code:

```
Database.executeBatch(new SpeakerNamesUpdateBatch());
```

Note: To successfully update Meeting Member records' Name using batch, ensure WorkflowPathPermissionHandler is disabled. After the job is successfully processed, enable WorkflowPathPermissionHandler again.

Note: Refer to the files section of CSH (OCE Personal Library) to find *SpeakerNamesUpdateBatch* files.

Update Speaker Information According to Account/Account Address Updates (OCE9 Package)

When nominating an Account as a Speaker, certain fields are copied from the Account record and Primary Account Address record to the Speaker record. This feature allows automatically updating fields on the Speaker record upon Account/Account Address update.

When Account information is updated the following Account data is updated on the Speaker record:

- Speaker Name = Account Full Name
- Speaker First Name = Account First Name
- Speaker Last Name= Account Last Name
- Speaker Middle Name= Account Middle Name
- Speaker Specialty = Account Specialty

- Speaker Professional Title = Account Professional Title
- Speaker Professional Designation = Account Professional Designation
- Speaker KanaName__c = Account DoubleByteKanaName__c
- Speaker PrimaryEmployer__c = Account ParentAccount__c
- Speaker OCE__Email__c = Account OCE__Email__c
- Speaker OCE__Phone__c = Account OCE__PhoneFormulaDashboard__c

When Primary Account Address information is updated or when the lookup on the Account Address page is updated, the following Account Address fields are updated on the Speaker record:

- Speaker Address Line 1 = Account Address Address Line 1
- Speaker Address Line 2 = Account Address Address Line 2
- Speaker City = Account Address City
- Speaker Country = Account Address Country
- Speaker State = Account Address State
- Speaker Zip = Account Address Zip Code

Prerequisites for the feature are:

- Configuring Speakers > Create Speaker from Account
- Configuring Speakers > Include Account First/Last/Middle Name When Creating Speaker From Account

To activate this feature ensure the following trigger handler configuration:

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Account Info To Speaker	OCE9.AccountInfoToSpeakerHandler	Account Speaker (DEPRECATED)	OCE9.AccountSpeakerHandler2 (DEPRECATED)
Account Address Info To Speaker	OCE9.AccountAddressInfoToSpeakerHandler	AccountSpeakerHandler (DEPRECATED)	OCE.AccountSpeakerHandler (DEPRECATED)
Account Address Fields Update Handler	OCE.AccAddrFieldsUpdateHandler		

Note:

- In case *Speaker Duplicate Validation (OCE9)* or *SpeakerDuplicateValidation (OCE) (DEPRECATED)* trigger handler is active, it is not allowed to change Speaker Reference field on Account. This is expected behavior.
- Generic Workflow may block updating Speaker record if there is no configured Workflow Path for Account (or Account Address) and there is a Workflow Path for Speaker with restriction of editing. This is also expected behavior since in this case Speaker would be the first object checked by Generic Workflow.

Explanation on *Account Speaker* and *Account Info To Speaker* trigger handlers usage:

OCE9 Trigger Handler: *Account Speaker* (Trigger Handler API Name: OCE9.AccountSpeakerHandler2) (DEPRECATED)

- Creates Speaker records with set of mapped Account-Speaker fields e.g., FirstName, Specialty (excluding Currency).
- When Account is updated, handler **does not** update Speaker records with Account field values like FirstName, Specialty.

OCE9 Trigger Handler: *Account Info To Speaker* (Trigger Handler API Name: OCE9.AccountInfoToSpeakerHandler)

- Creates Speaker records with set of mapped Account-Speaker fields e.g., FirstName, Specialty (Including CurrencyIsoCode).
- When Account is updated, handler updates Speaker with Account field values like FirstName, Specialty.

Validation for Duplicated Accounts on a Meeting When Merging Accounts

When merging two Accounts that were added to a Meeting as an Account Attendee or a Speaker, a situation could occur where the Account becomes duplicated on two Meeting Members of the same Meeting. It is possible to restrict users from moving the Meeting to the next stage if there are duplicated Accounts or Speakers with inactive status and a populated Account Merge Information field. This can be achieved using custom scripts.

Note: For more information on merging Accounts with Speaker records, see section [Object Behavior for Account Merge](#).

After merging Accounts, it is recommended to run the Meeting Share Management job. See: [Configure Meeting Share Management After Account Realignment \(OCE9 Package\)](#).

To configure this feature:

- Provide read access to the **Account Merge Information** field on Speaker object.
- Modify existing or create new validation custom script. You can use the attached script as an example.

Note: Refer to the files section of CSH (OCE Personal Library) to find *meetings-account-and-speaker-validation.js* files.

Update Inactive Speaker Information When Merging Accounts (OCE9 Package)

When two Accounts with related Speakers are merged, the Speaker record from the loser Account will be reparented to the winner Account. This feature allows population of fields from winner Account and Account Address to the inactive ("loser") Speaker.

To activate this feature:

- Activate trigger handler: **Copy Account Info To Inactive Speaker** (Trigger Handler API Name: OCE9.CopyAccountInfoToInactiveSpeakerHandler)

Allow to Add Speaker to a Meeting Without Access to Linked Account

If User tries to add a Speaker Meeting Member to a Meeting record and he has no access to Account linked to Speaker record, a validation will be executed, an error message will be shown and the User will not be able to create a Speaker. To allow Users to create Speakers in such cases Admin can assign **Allow adding speaker with unaligned account** custom permission. After this custom permission is assigned to appropriate Users, they will be able to add Speakers without having access to the linked Account and no error will appear. The feature works both on the Web and Mobile (the feature is available on iOS after an app upgrade and a new cache is applied).

Create Speaker record Without Access to the Parent Account of the Linked Account

The feature provides the ability for the clients to create speaker records without having access to the Parent Account of the Speaker Linked Account. The feature is non-transparent and active OOB for clients that utilize the **Account Info To Speaker**, **Speaker Populate Account**, and *Copy Account Info To Inactive Speaker* trigger handlers.

Configure Eligible Speakers (OCE9 Package)

The Eligible Speakers feature validates that Speakers added to a Meeting are trained and have valid contracts. A check is done both when adding Meeting Topic and when adding Meeting Member of type Speaker.

The following describes the flow from both Meeting Topic and Meeting Member screens (applies on both Salesforce and iOS):

- **Meeting Topic Flow**

- Toast message will appear notifying sales rep user that all Topics may not display in the list.
- When no Speaker is added to Meeting, all accessible Topics on Meeting Topic screen will be shown.
- When any Speaker is added to Meeting, any previously added Meeting Topics as well as Topics without Speaker Restriction = Speaker Bureau will be displayed.
- If any Meeting Topic with Speaker Restriction has been already added to the Meeting and non-eligible Speaker has been added to the Meeting, sales rep user is blocked from adding Meeting Topic (they will see message that they need to remove Speaker first).
- If sales rep user does have access to Speaker Restriction field but doesn't have access to the Agreement/Training related field(s), error message will appear.
- System Generated Filter, if enabled, will apply here in addition to above mentioned filtering.

- **Meeting Speaker Flow**

- When no Meeting Topic has been added to Meeting, all accessible Speakers on Speaker selection screen will be shown.
- If any Meeting Topic with Speaker Restriction = Speaker Bureau has been added to Meeting, Speakers will be filtered to show only those that are eligible for such Topics (for all Meeting Topics with Speaker Restrictions), plus any previously added Speakers.
- Each time sales rep user adds a Speaker, all Meeting Topics will be checked. All Speakers must be eligible for all Meeting Topics with Speaker Restrictions. If any non-eligible Speaker exists, sales rep user will be blocked from adding Speakers. Warning message will be displayed. Sales rep user will only be able to delete

Meeting Speaker (this also applies when changes were done in the Meeting, Agreement, or Training records to make the Speaker ineligible).

- If sales rep user does have access to Speaker Restriction field but doesn't have access to the Agreement/Training related field(s), error message will appear.
- System Generated Filter, if enabled, will apply here in addition to above mentioned filtering.

Speakers will be considered eligible to speak on a Topic based on the following criteria:

- There is a Training record related to the Speaker and Topic that includes Meeting Start and End Dates
 - Hardcoded condition Effective Date <= Meeting.Start Date AND Expiration Date >= Meeting.End Date AND formula field (configurable)
- There is an Agreement Member record for current Meeting record type, Meeting Subtype, with same Business Unit, and Agreement term includes Meeting Start and End Dates
 - Hardcoded condition Effective Date <= Meeting.Start Date AND Expiration Date >= Meeting.End Date AND formula field (configurable)
- In addition to Agreement/Training criteria, custom setting with a field name (boolean) from Agreement Member is provided. Orgs can create a checkbox formula field and put its name in the custom setting to configure additional criteria (see below activation steps for custom setting names).

To activate this feature:

- Activate mobile entities for "Agreement Member" & "Training" sObjects from Admin Console > Mobile > Entities (DB Schema).
- Manually add and activate a DB Schema record for Agreement sObject.
 - In Case Agreement DB Schema does not exist then it should be created manually:
 - Open DbSchema custom metadata
 - Click '**Manage Db Schemas**'
 - Click '**New**'
 - Fill values:

- **Label:** *Agreement*
- **Type:** *Data*
- **Delta Date Field:** *LastModifiedDate*
- **SObject:** *OCE_Agreement_c*
- **Mandatory Fields:**
Id, CreatedDate, CreatedById, LastModifiedDate, LastModifiedById, Name, IsDeleted, UserRecordAccess.HasReadAccess, UserRecordAccess.HasEditAccess, UserRecordAccess.HasDeleteAccess, UserRecordAccess.HasAllAccess, UserRecordAccess.MaxAccessLevel
- **DB Schema Name:** *Agreement_c*
- **Permitted Profiles:** ;OCE Admin;Sales Representative;
- Click 'Save'
- Configure the below custom settings from Admin Console > Meetings > Eligible Speaker Settings:
 - Active Agreement Field Name
 - Active Training Field Name
- Ensure the following trigger handler configuration:

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
AgreementMemberFromAgreementDenorm	OCE9.AgreementMemberFromAgreementDenormHndl2	AgreementMemberFromAgreementDenormHndl (DEPRECATED)	OCE.AgreementMemberFromAgreementDenormHndl (DEPRECATED)
AgreementToAgreementMemberDenorm	OCE9.AgreementToAgreementMemberDenormHndl2 (DEPRECATED)	AgreementToAgreementMemberDenormHndl (DEPRECATED)	OCE.AgreementToAgreementMemberDenormHndl (DEPRECATED)

- Ensure Admin users are assigned permission set OCE9MeetingEligibleSpeakersAdmin
- Ensure non-Admin users are assigned permission set OCE9MeetingEligibleSpeakersUser
- Add the below listed fields to page layouts of various sObjects:
 - Topic sObject page layouts
 - OCE__SpeakerRestriction__c
 - Agreement sObject page layouts
 - OCE__MeetingRecordTypes__c
 - OCE__MeetingSubtypes__c
 - OCE__AgreementEffectiveDate__c
 - OCE__AgreementExpirationDate__c
 - Agreement Member sObject page layouts
 - OCE__Speaker__c
 - OCE__MeetingRecordTypes__c
 - OCE__MeetingSubtypes__c
 - OCE__AgreementEffectiveDate__c
 - OCE__AgreementExpirationDate__c
 - OCE__OrganizingBusinessUnit__c
 - Training sObject page layouts
 - OCE__Topic__c
 - OCE__Speaker__c
 - OCE__EffectiveDate__c
 - OCE__ExpirationDate__c
- Run metadata cache.

Configure Eligible Speakers - Compliance Topics (OCE9 Package)

Compliance Training is an additional part of the Speaker Eligibility check and works in conjunction with Meeting Topic validation. This allows users to only add Speakers to Meetings that have a valid compliance training on a Topic.

If Compliance Training is enabled, Speakers will be considered eligible to speak on a Topic based on the following criteria:

- There is a Training record related to the Speaker and Topic that includes Meeting Start and End Dates
 - Hardcoded condition Effective Date <= Meeting.Start Date AND Expiration Date >= Meeting.End Date AND formula field (configurable)
- There are Training records related to the Speaker and Compliance Topics specified in a compliance topic field (configurable) on Topic record
 - Hardcoded condition Effective Date <= Meeting.Start Date AND Expiration Date >= Meeting.End Date AND formula field (configurable)
- There is an Agreement Member record for current Meeting record type, Meeting Subtype, with same Business Unit, and Agreement term includes Meeting Start and End Dates
 - Hardcoded condition Effective Date <= Meeting.Start Date AND Expiration Date >= Meeting.End Date AND formula field (configurable)
- In addition to Agreement/Training criteria, custom setting with a field name (boolean) from Agreement Member is provided. Orgs can create a checkbox formula field and put its name in the custom setting to configure additional criteria

The following table provides examples of eligibility checks based on setup:

		Topic Setup			Outcome	
Meeting Scenario	#	Topic Name	Speaker Restriction	Compliance Topic	Eligibility Check	Why
Single Topic	1	Topic A	Speaker Bureau	Topic 1	Speaker must have active/valid trainings on Topic A and Topic 1	SB-restricted topic (A) defines a compliance topic (1)
	2	Topic B	Speaker Bureau	-	Speaker must have active/valid training on Topic B	SB-restricted topic (B) but no compliance topic is defined

		Topic Setup			Outcome	
Meeting Scenario	#	Topic Name	Speaker Restriction	Compliance Topic	Eligibility Check	Why
Multi-Topic	3	Topic C Topic D	Speaker Bureau Speaker Bureau	Topic 2 Topic 2	Speaker must have active/valid trainings on Topic C, Topic D, and Topic 2	Both SB-restricted topics (C, D) define a common compliance topic (2)
	4	Topic E Topic F	Speaker Bureau Speaker Bureau	Topic 3 Topic 4	Speaker must have active/valid trainings on Topic E, Topic F, Topic 3 and Topic 4	Both SB-restricted topics (E, F) define unique compliance topics (3, 4)
	5	Topic G Topic H	Speaker Bureau -	Topic 5 -	Speaker must have active/valid trainings on Topic G and Topic 5	Only 1 SB-restricted topic (G) and it defines a compliance topic (5)

To activate this feature:

- Assign Permission Sets:
 - OCE Compliance User (ComplianceUser) from OCE package
 - OCE Meeting Eligible Speakers User (OCE9MeetingEligibleSpeakersUser)
- Add the Speaker component:

If not using Generic Related List	If using Generic Related List
Add the component MeetingSpeakersNew (OCE9) (DEPRECATED) to Meeting Layout to the sub-tab Attendees.	Use standard Generic Related List configuration, but change the following for the Speaker component: • Update/Delete Handler - OCE9:MeetingSpeakersUpdateDeleteHandlerNew • Component Name For The 'New' Action - OCE9:AddMeetingSpeakerNew

- Go to Setup > Object Manager > Meeting Topic > Buttons, Links and Actions
 - Set overrides for buttons:
 - New - OCE9__MeetingTopicCreationOverrideLwc (Visualforce page)
 - Delete - OCE9__MeetingTopicDeletionOverrideLwc (Visualforce page)
- Create/use an existing field on Topic__c object. The field should return list of UniqueIntegrationID of compliance topics separated by a semicolon.
- For users, Read access should be granted to the field from the previous step.
- Name of the field should be populated in the **Compliance Topics Field** of MeetingsConfig__c custom setting.
- To use on mobile, run metadata cache.

Configure Speaker Restrictions (MVP) (OCE9 Package)

The Engage package API can be used to check Speaker eligibility and validate if a Speaker can be part of a Meeting.

To activate this feature:

Prerequisite: Install Engage package.

- Assign the "Engage - Restrictions API User" permission set to the needed user.
- Replace 'MeetingSpeakersNew' (DEPRECATED) component with 'Meeting Speakers Lwc' component on Meeting Lightning page.
- Enable the "Enable Speaker Bureau Validation" setting in the Admin Console.

Configure Speaker Restrictions (OCE9 Package)

The Engage package API can be used to check Speaker eligibility and validate if a Speaker can be part of a Meeting.

To activate this feature:

Prerequisite: Install Engage package.

- Assign the "Engage - Restrictions API User" permission set to the needed user.
- Replace MeetingSpeakersNew component with MeetingSpeakersLwc component on Meeting Lightning page.
- Enable the "Enable Speaker Bureau Validation" setting in the Admin Console.

Configure Meeting Members (OCE9 Package)

The Meeting Member feature allows users to add participants to a Meeting. These can be of the following record types:

- Account Attendee (Meeting Members associated to Account)
- Speaker (Meeting Members associated to Speaker)
- Colleague (Meeting Members associated to User)
- Non Profiled Attendee (Meeting Members not associated to any other object)
- Write-In (Meeting Members that have written themselves in on day of Meeting; can later be converted to one of the other record types (see [Configure Write-Ins and Reconciliation \(OCE9 Package\)](#) to learn more))

Note:

- OCE has a fallback in the code that if a Colleague does not belong to a territory, they will automatically be assigned with a "Participant" role. If "Participant" value is excluded from the Type__c picklist, users will see an error when attempting to add a user as a Colleague with no territory. Therefore, users in OCE must either have a territory assigned if not wanting to use the Participant role, or the Participant role needs to be included in the Type__c picklist to not see an error when adding a Colleague without a territory.
- In certain instances, users may not see all roles displayed. It's recommended scrolling down to view all values.
- On Salesforce, when users add Account Attendees and the Meetings custom setting **Enable Attendees Filtering** is disabled, the screen is filtered by default based on record types configured in AccountRecordTypeAPIName__c. OCE recommends enabling **Enable Attendees Filtering** in order to see the full list of available Accounts. (Mobile does not respect AccountRecordTypeAPIName__c.)
- On Account Attendee screen in Salesforce, Account search is limited by the first 10,000 Accounts in the territory.
- Meeting Member custom components will translate the Specialty value (SpecialtyText__c comes from picklist on Account object). However, when it edit mode on a Meeting Member record, this is a text field and therefore cannot be translated on the standard edit page.
- For Speaker Meetings, OCE will set the Invitation Status of Meeting Members to 'Walk In' by default when the Meeting Member is added to the Meeting on date of Meeting or later.
- Attendee meeting member is expected to have the OCE__Customer__c field populated
- Colleague meeting member is expected to have the OCE__Colleague__c field populated
- Speaker meeting member is expected to have the OCE__Speaker__c field populated

To activate this feature ensure the following trigger handler configuration:

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Meeting Member Date Time Validation	OCE9.MeetingMemberDate TimeValidationHandler2	Meeting Member WorkFlow Handler (DEPRECATED)	OCE.MeetingMemberWork FlowHandler (DEPRECATED)
Meeting Member Status	OCE9.MeetingMemberStatu sHandler2	MeetingMember DT Validation Handler (DEPRECATED)	OCE.MeetingMemberDate TimeValidationHandler (DEPRECATED)
Meeting Member Specialty Provider	OCE9.MeetingMemberSpeci altyProviderHandler2	Meeting Member Status Handler (DEPRECATED)	OCE.MeetingMemberStatu sHandler (DEPRECATED)
Meeting Member Sharing	OCE9.MeetingMemberShari ngHandler2	Meeting Member Specialty Provider Handler (DEPRECATED)	OCE.MeetingMemberSpeci altyProviderHandler (DEPRECATED)

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Meeting Member Populate Fields	OCE9.MeetingMemberPopulateFieldsHandler2	Meeting Member Sharing Handler (DEPRECATED)	OCE.MeetingMemberSharingHandler (DEPRECATED)
Meeting Member Invited Date	OCE9.MeetingMemberInvitedDateHandler2	MeetingMemberPopulateFieldsHandler (DEPRECATED)	OCE.MeetingMemberPopulateFieldsHandler (DEPRECATED)
Meeting Member Expense Calculation	OCE9.MeetingMemberExpenseCalculationHandler2	MeetingMemberInvitedDateHandler (DEPRECATED)	OCE.MeetingMemberInvitedDateHandler (DEPRECATED)
Meeting Member Duplicate Member	OCE9.MeetingMemberDuplicateMemberHandler2	MeetingMemberExpenseCalculationHandler (DEPRECATED)	OCE.MeetingMemberExpenseCalculationHandler (DEPRECATED)

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Denormalize Meeting Data to Member	OCE9.MeetingMemberDenormalizationHandler2	Meeting Member Duplicate Member Handler (DEPRECATED)	OCE.MeetingMemberDuplicateMemberHandler (DEPRECATED)
Meeting Member Context User Role	OCE9.MeetingMemberContextUserRoleHandler2	Meeting Data Denorm. To Meeting Member (DEPRECATED)	OCE.MeetingMemberDenormalizationHandler (DEPRECATED)
		MeetingMemberContextUserRoleHandler (DEPRECATED)	OCE.MeetingMemberContextUserRoleHandler (DEPRECATED)

- Activate DB Schemas
 - Speaker_c
 - MeetingMember_c
- Activate validation rule
 - Meal_Can_Not_Be_Edit_With_Signature
- Ensure the following picklist values are added
 - **Not Applicable** in MeetingMember__c.Status__c. and MeetingMember__c.AttendanceStatus__c. fields. Update all Meeting Member record type picklists with this value.
 - **Tentative** in MeetingMember__c.Status__c. Update all Meeting Member record type picklists with this value.
- Ensure Meeting Member record type access is granted to relevant profiles

- If you want to use additional functionality, configure Meeting Member related custom settings (see more in **Admin Console - Meeting Settings** section of the guide)

Note: In Meetings, the Territories field will store all territories of Meeting Colleagues with roles Organizer, Co-Organizer (with Invitation Status "Invited" or "Accepted"), and Coordinator (with any Invitation Status) to ensure the Meeting is properly shared with them. (Note: For Approver roles, only the Approver user gets access to the Meeting and not their Territory. As Meeting's Territory field(s) will not be updated with Approver's territory, Approver cannot see Meetings in Planner.)

It is possible that the Territories fields' length limit (255 characters) is exceeded if multiple or lengthy territories are inserted in this field, in which case the Colleague cannot be added. On Salesforce, an error message will block the user from adding any Colleagues whose territories will exceed the field limit, however, on mobile it is currently not possible to get all the Territory information of all Users (the object linked to Colleagues) in order to preemptively block this action. Therefore, a Meetings user may be able to add a Colleague, but it will fail during sync if the Territories limit is exceeded. It is advised to monitor the sync transaction queue for such failures and manually correct them. In the future, this may be remedied when other modules in OCE begin supporting Object Territory 2 Association (OT2A).


Configure Account Attendee Columns (OCE9 Package)

The Account Attendee screen's columns are configurable via field sets on Account object (both Salesforce and iPad are supported). One can be configured for fields that will display, and one can be configured for fields that can be searched on.


To configure this

- Go to **Setup > Object Manager > Account > Field Sets**. Create and save two new field sets to be used for display and search on the new Account Attendee screen.

Note: The maximum supported fields are 10, including Name and Address, which are hardcoded fields that will always display). Drag the fields from Account object into the field sets that you wish to use.

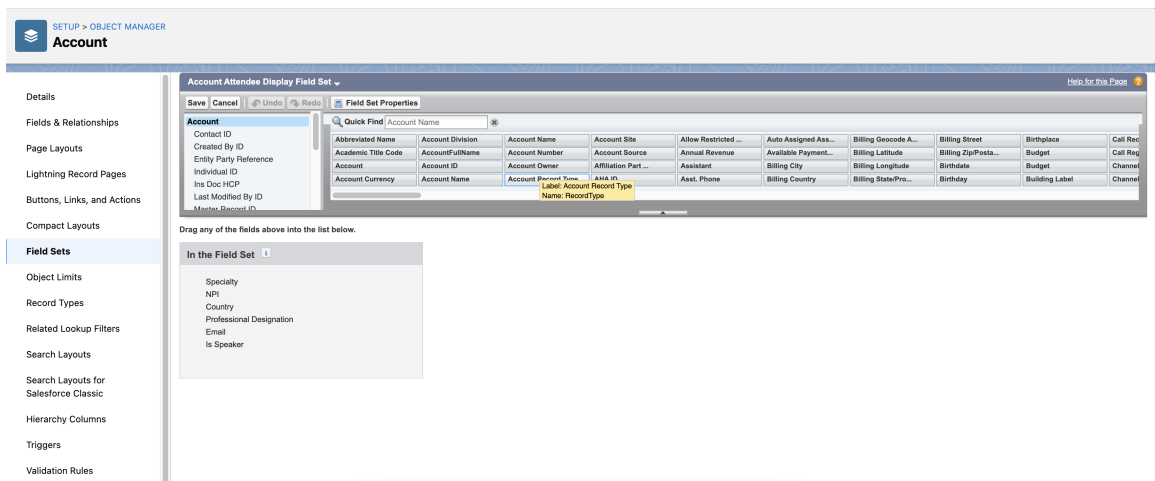

- Navigate to Admin Console to configure the name of the field sets to be used by profile:
Admin Console > Meetings > Search Settings.

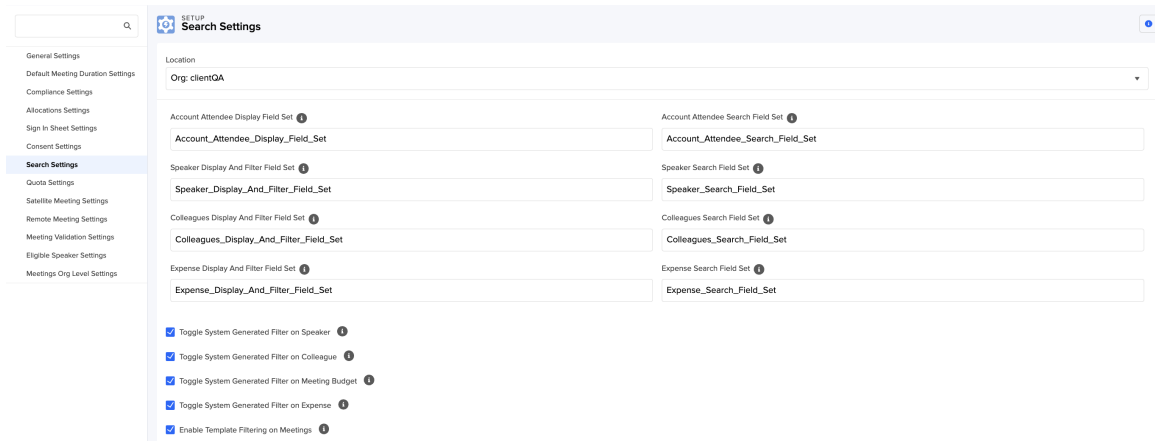

- Populate **Account Attendee Display Field Set** with the developer name of the field set which you wish to use for displaying the columns.
- Populate **Account Attendee Search Field Set** with the developer name of the field set which you wish to use for searching (this can be the same as above).
- Select the Location where the field sets will apply (e.g. org/profile).
- Save the results.

Note:

Ensure at least Read access is provided to fields used in the field sets, or the columns will not be viewable to the users.

The first 8 accessible fields in the field set will be displayed in order of the field set config (not including Name and Address, which are always displayed first).

Regarding search and display nuances between SF and iPad:

- Salesforce and iPad show Lookup fields as ID.
- Salesforce doesn't support search by ID due to platform limitations.
- iPad supports search by ID because it's just a string in mobile.
- **As a best practice:** To search by parent record's name, Admins should put parent object's name field (like ParentObject__r.Name) in the search field set.

List of Supported Field Types

+ = *Supported*

- = *Not Supported*

Salesforce Field Type	Salesforce Data Type	Attendee Search		Attendee Display	
		SF	iOS	SF	iOS
Auto Number	String	+	+	+	+
Address	String	-	-	+	+
Checkbox	Boolean	-	-	+	+
Currency	Double	-	-	+	+
Date	String	-	-	+	+
Date/Time	String	-	-	+	+
Time	String	-	-	+	+
Email	String	+	+	+	+
External Lookup	String	-	-	+	+
Indirect Lookup	Id	-	-	+	+
Formula (Text)	String	+	+	+	+
Formula (Checkbox)	Boolean	-	-	+	+


Salesforce Field Type	Salesforce Data Type	Attendee Search		Attendee Display	
		SF	iOS	SF	iOS
Formula (Number)	Double	-	-	+	+
Formula (Percent)	Double	-	-	+	+
Formula (Currency)	Double	-	-	+	+
Formula (Date)	String	-	-	+	+
Formula (Date/Time)	String	-	-	+	+
Formula (Time)	String	-	-	+	+
Hierarchical relationship	Id	-	-	+	+
Lookup relationship	Id	-	+	+	+
Master-detail relationship	Id	-	-	+	+
Number	Double	-	-	+	+
Percent	Double	-	-	+	+
Phone	String	+	+	+	+
Picklist	String	+	+	+	+
Picklist (Multi-select)	String	+	+	+	+
Roll-Up Summary	Double	-	-	+	+
Text	String	+	+	+	+
Text (Encrypted)	String	-	-	-	-
Text Area	String	+	+	+	+
Text Area (Long)	String	-	-	+	+
Text Area (Rich)	String	-	-	+	+
URL	String	-	-	+	+

Configure Speaker Columns (OCE9 Package)


The Speaker screen's columns are configurable via field sets on Speaker object (both Salesforce and iPad are supported). One can be configured for fields that will display and can be filtered on, and one can be configured for fields that can be searched on.

To configure this

- Go to **Setup > Object Manager > Speaker > Field Sets**. Create and save two new field sets to be used for display/filter and search on the new Speaker screen. (Note: The maximum supported fields are 10, including Name and Address, which are hardcoded fields that will always display). Drag the fields from Speaker object into the field sets that you wish to use.

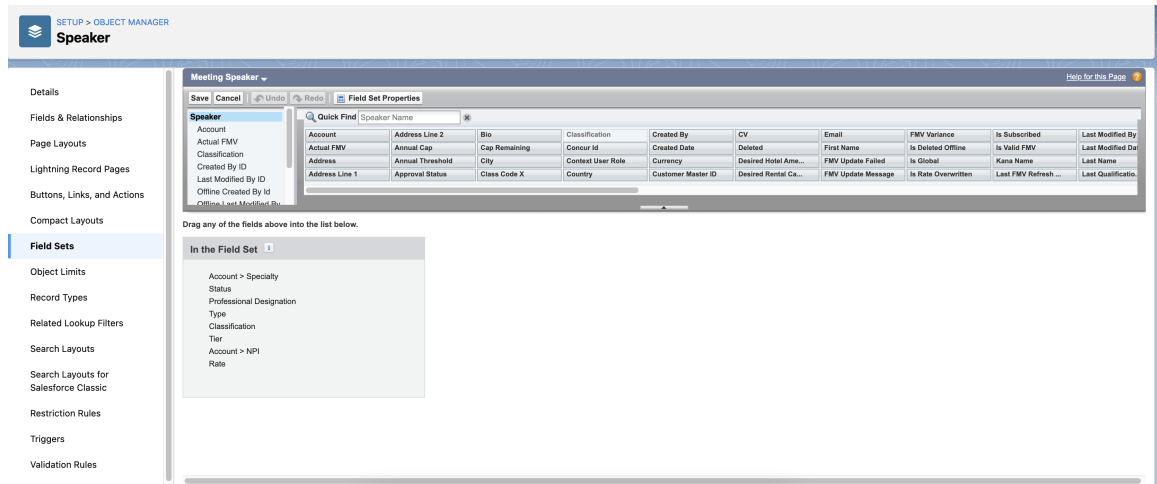

- Navigate to Admin Console to configure the name of the field sets to be used by profile: **Admin Console > Meetings > Search Settings**.

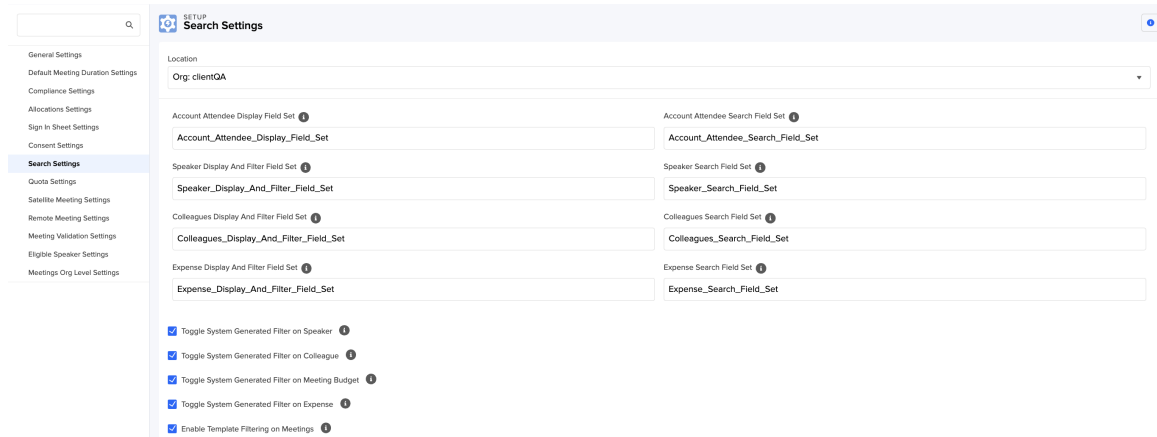

- Populate **Speaker Display and Filter Field Set** with the developer name of the field set which you wish to use for displaying and filtering the columns.
- Populate **Speaker Search Field Set** with the developer name of the field set which you wish to use for searching (this can be the same as above).
- Select the Location where the field sets will apply (e.g. org/profile).
- Save the results.

Note: Ensure at least Read access is provided to fields used in the field sets, or the columns will not be viewable to the users.

The first 8 accessible fields in the field set will be displayed in order of the field set config (not including Name and Address, which are always displayed first).

Regarding search and display nuances between SF and iPad:

- Salesforce and iPad show Lookup fields as ID.
- Salesforce doesn't support search by ID due to platform limitations.
- iPad supports search by ID because it's just a string in mobile.
- **As a best practice:** To search by parent record's name, Admins should put parent object's name field (like ParentObject__r.Name) in the search field set.

When the display/filter field set is configured (i.e. name is saved in Speaker Search Field Set setting), a filter icon will appear on the Speaker screen (Salesforce and iPad).

List of Supported Field Types

+ = *Supported*

- = *Not Supported*

Salesforce Field Type	Salesforce Data Type	Speaker Search		Speaker Filter		Speaker Display	
		SF	iOS	SF	iOS	SF	iOS
Auto Number	String	+	+	+	+	+	+
Address	String	-	-	-	-	+	+
Checkbox	Boolean	-	-	+	+	+	+
Currency	Double	-	-	+	+	+	+
Date	String	-	-	+	+	+	+
Date/Time	String	-	-	+	+	+	+
Time	String	-	-	-	-	+	+
Email	String	+	+	+	+	+	+
External Lookup	String	-	-	-	-	+	+


Salesforce Field Type	Salesforce Data Type	Speaker Search		Speaker Filter		Speaker Display	
		SF	iOS	SF	iOS	SF	iOS
Indirect Lookup	Id	-	-	-	-	+	+
Formula (Text)	String	+	+	+	-	+	+
Formula (Checkbox)	Boolean	-	-	+	-	+	+
Formula (Number)	Double	-	-	+	-	+	+
Formula (Percent)	Double	-	-	+	-	+	+
Formula (Currency)	Double	-	-	+	-	+	+
Formula (Date)	String	-	-	+	-	+	+
Formula (Date/Time)	String	-	-	+	-	+	+
Formula (Time)	String	-	-	-	-	+	+
Hierarchical relationship	Id	-	-	-	-	+	+
Lookup relationship	Id	-	+	-	-	+	+
Master-detail relationship	Id	-	-	-	-	+	+
Number	Double	-	-	+	+	+	+
Percent	Double	-	-	+	+	+	+
Phone	String	+	+	-	-	+	+
Picklist	String	+	+	+	+	+	+
Picklist (Multi-select)	String	+	+	-	-	+	+
Roll-Up Summary	Double	-	-	+	+	+	+
Text	String	+	+	+	+	+	+
Text (Encrypted)	String	-	-	-	-	-	-
Text Area	String	+	+	-	-	+	+
Text Area (Long)	String	-	-	-	-	+	+
Text Area (Rich)	String	-	-	-	-	+	+
URL	String	-	-	-	-	+	+

Configure Colleague Columns (OCE9 Package)

From May 2023 release, The Colleagues screen's columns are configurable via field sets on User object (both Salesforce and iPad/iPhone are supported). One can be configured for fields that will display and can be filtered on, and one can be configured for fields that can be searched on.

To configure this feature:

- Go to **Setup > Object Manager > User > Field Sets**. Create and save two new field sets to be used for display/filter and search on the new Colleagues screen. (Note: The maximum supported fields are 10, including Name, which is hardcoded field that will always display). Drag the fields from User object into the field sets that you wish to use.

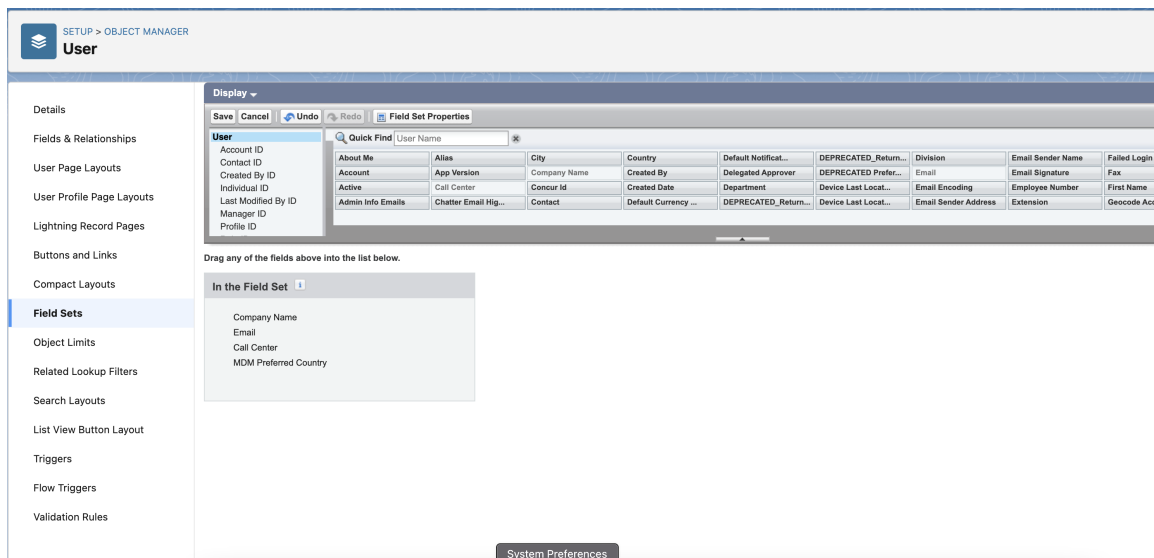

- Navigate to Admin Console to configure the name of the field sets to be used by profile: **Admin Console > Meetings > Search Settings**.

Search Settings

Location
Org: clientQA

Account Attendee Display Field Set
Account_Attendee_Display_Field_Set

Account Attendee Search Field Set
Account_Attendee_Search_Field_Set

Speaker Display And Filter Field Set
Speaker_Display_And_Filter_Field_Set

Speaker Search Field Set
Speaker_Search_Field_Set

Colleagues Display And Filter Field Set
Colleagues_Display_And_Filter_Field_Set

Colleagues Search Field Set
Colleagues_Search_Field_Set

Expense Display And Filter Field Set
Expense_Display_And_Filter_Field_Set

Expense Search Field Set
Expense_Search_Field_Set

☒ Toggle System Generated Filter on Speaker

☒ Toggle System Generated Filter on Colleague

☒ Toggle System Generated Filter on Meeting Budget

☒ Toggle System Generated Filter on Expense

☒ Enable Template Filtering on Meetings

- Populate **Colleague Display and Filter Field Set** with the developer name of the field set which you wish to use for displaying and filtering the columns.
- Populate **Colleague Search Field Set** with the developer name of the field set which you wish to use for searching (this can be the same as above).
- Select the Location where the field sets will apply (e.g. org/profile).
- Save the results.
- Run metadata cache

Note: Ensure at least Read access is provided to fields used in the field sets, or the columns will not be viewable to the users.

The first 9 accessible fields in the field set will be displayed in order of the field set config (not including Name, which is always displayed first).

Search and display nuances between SF and iOS:

- Salesforce and iOS show Lookup fields as ID.
- Salesforce doesn't support search by ID due to platform limitations.
- iOS supports search by ID because it's just a string in mobile.
- **As a best practice:** To search by parent record's name, Admins should put parent object's name field (like ParentObject__r.Name) in the search field set.

When the display/filter field set is configured (i.e. name is saved in Colleague Search Field Set setting), a filter icon will appear on the Colleagues screen (Salesforce and iPad/iPhone).

List of Supported Field Types

+ = *Supported*

- = *Not Supported*

Salesforce Field Type	Salesforce Data Type	Colleague Search		Colleague Filter		Colleague Display	
		SF	iOS	SF	iOS	SF	iOS
Auto Number	String	+	+	+	+	+	+
Address	String	-	-	-	-	+	+

Salesforce Field Type	Salesforce Data Type	Colleague Search		Colleague Filter		Colleague Display	
		SF	iOS	SF	iOS	SF	iOS
Checkbox	Boolean	-	-	+	+	+	+
Currency	Double	-	-	+	+	+	+
Date	String	-	-	+	+	+	+
Date/Time	String	-	-	+	+	+	+
Time	String	-	-	-	-	+	+
Email	String	+	+	+	+	+	+
External Lookup	String	-	-	-	-	+	+
Indirect Lookup	Id	-	-	-	-	+	+
Formula (Text)	String	+	+	+	-	+	+
Formula (Checkbox)	Boolean	-	-	+	-	+	+
Formula (Number)	Double	-	-	+	-	+	+
Formula (Percent)	Double	-	-	+	-	+	+
Formula (Currency)	Double	-	-	+	-	+	+
Formula (Date)	String	-	-	+	-	+	+
Formula (Date/Time)	String	-	-	+	-	+	+
Formula (Time)	String	-	-	-	-	+	+
Hierarchical relationship	Id	-	-	-	-	+	+

Salesforce Field Type	Salesforce Data Type	Colleague Search		Colleague Filter		Colleague Display	
		SF	iOS	SF	iOS	SF	iOS
Lookup relationship	Id	-	+	-	-	+	+
Master-detail relationship	Id	-	-	-	-	+	+
Number	Double	-	-	+	+	+	+
Percent	Double	-	-	+	+	+	+
Phone	String	+	+	-	-	+	+
Picklist	String	+	+	+	+	+	+
Picklist (Multi-select)	String	+	+	-	-	+	+
Roll-Up Summary	Double	-	-	+	+	+	+
Text	String	+	+	+	+	+	+
Text (Encrypted)	String	-	-	-	-	-	-
Text Area	String	+	+	-	-	+	+
Text Area (Long)	String	-	-	-	-	+	+
Text Area (Rich)	String	-	-	-	-	+	+
URL	String	-	-	-	-	+	+

List of Supported Operators per Field Type

+ = *Supported*

- = *Not Supported*

N/A - *Not Applicable*

The equivalent of the operator for iOS is in parentheses.

Salesforce Field Type	equal (is)		not equal (is not)		contains (like)		does not contain (not like)		less than (<)		greater than (>)		less or equal (<=)		greater or equal (>=)		starts with		in	
	SF	iOS	SF	iOS	SF	iOS	SF	iOS	SF	iOS	SF	iOS	SF	iOS	SF	iOS	SF	iOS	SF	iOS
Text	+	+	+	N/A	+	+	+	N/A	+	N/A	+	N/A	+	N/A	+	N/A	+	N/A	N/A	N/A
Auto-number	+	+	+	N/A	+	+	+	N/A	+	N/A	+	N/A	+	N/A	+	N/A	+	N/A	N/A	N/A
Email	+	+	+	N/A	+	+	+	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	+	N/A	N/A	N/A
Number	+	+	+	N/A	N/A	N/A	N/A	N/A	+	+	+	+	+	N/A	+	N/A	N/A	N/A	N/A	N/A
Percent	+	+	+	N/A	N/A	N/A	N/A	N/A	+	+	+	+	+	N/A	+	N/A	N/A	N/A	N/A	N/A
Currency	+	+	+	N/A	N/A	N/A	N/A	N/A	+	+	+	+	+	N/A	+	N/A	N/A	N/A	N/A	N/A
Date	+	+	+	N/A	N/A	N/A	N/A	N/A	+	+	+	+	+	N/A	+	N/A	N/A	N/A	N/A	N/A
Date/Time	+	+	+	N/A	N/A	N/A	N/A	N/A	+	+	+	+	+	N/A	+	N/A	N/A	N/A	N/A	N/A
Picklist	N/A	+	N/A	N/A	N/A	+	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	+	N/A
Checkbox	+	+	+	+	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Configure Ability to Add HCPs as New Speakers from Speaker Search (MVP) (OCE9 Package)

This feature is available only in OCE9.

The Speaker search screen can be configured to allow users to add an HCP as a new Speaker directly from the screen rather than going through the nomination process. This saves the user time when adding Speakers as they do not have to switch out of the "add Speaker"

flow. When the feature is enabled, the user will be able to see an "Account Search" button in the Speaker search modal, which, when tapped, will open a basic version of the Account search window (i.e. users will not be able to see all usual features of the Account search screen, such as HCO Affiliations, System Generated Filters, etc.). This will filter Accounts by HCP only. From here, the user can select an Account to add as a Speaker and will be returned back to the Speaker window to continue their selections.

When an HCP is added as a Speaker, the following cases are possible:

- If there is no existing Speaker record for the HCP:
 - The Account record `IsSpeaker` field value is set to `TRUE` and the Speaker record is created.
 - The Meeting Member with a lookup to this Speaker record is created. If the Speaker was not created for some reason (e.g. a validation), an error message is shown: *"Speaker record has not been created."*
- If there is one existing Speaker record for the HCP:
 - The Meeting Member with a lookup to that Speaker record is created.
 - No duplicate Speaker record is created.
- If there are more than one Speaker records for the HCP:
 - The Speaker Reference field on the Account record is checked.
 - If the Speaker Reference field has a value, the Speaker it references is used to create the Meeting Member of Speaker record type.
 - If the Speaker Reference field is empty, the error message is shown: *"The Account you are attempting to nominate as Speaker already exists in the system. You can select it from the previous list."*

To activate this feature:

- Assign `OCE9.SpeakerAccountSearch` custom permission to required users.
- Ensure Sales Rep or other profiles that need to use this feature have Create/Read/Edit access to `Speaker__c` object.

- Go to Setup → Object Manager → Meeting → Lightning Page Layout → select active Lightning Page → find MeetingSpeakerNew Component and add to Lightning Page.
- Ensure the following trigger handler configuration:

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Speaker Populate Account	OCE9.SpeakerPopulateAccountHandler2	AccountSpeakerHandler (DEPRECATED)	OCE.AccountSpeakerHandler (DEPRECATED)
Speaker Duplicate Validation	OCE9.SpeakerDuplicateValidationHandler2	SpeakerPopulateAccountHandler (DEPRECATED)	OCE.SpeakerPopulateAccountHandler (DEPRECATED)
Populate Speaker Reference On Mobile MM	OCE9.MeetingMemberSpeakerReferenceHandler	SpeakerDuplicateValidation (DEPRECATED)	OCE.SpeakerDuplicateValidationHandler (DEPRECATED)
Account Info To Speaker	OCE9.AccountInfoToSpeakerHandler	Meeting Member Speaker Reference	OCE9.MeetingMemberSpeakerReferenceHandler

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Copy Account Info To Inactive Speaker	OCE9.CopyAccountInfoToInactiveSpeakerHandler	Account Speaker (DEPRECATED)	OCE9.AccountSpeakerHandler2 (DEPRECATED) May 2024 Monthly

- To use on mobile, run metadata cache.


Note: If the Eligible Speaker feature is enabled, the **Account Search** button won't be shown.

Configure 'Invite All' on Account Attendee (OCE9 Package)

The **Invite All** button extends the functionality of the Salesforce Account Attendee screen and allows for inviting multiple Meeting Members at once. This feature is available OOB on iPad, so the configuration mentioned below is to make the button available on Salesforce.

To configure this

- Ensure to add **Meeting Attendees Lwc** component from OCE9 package on Meeting Lightning page.
- Assign **Meetings - Invite All on SF** custom permission to user's profile or permission set that is assigned to the user.

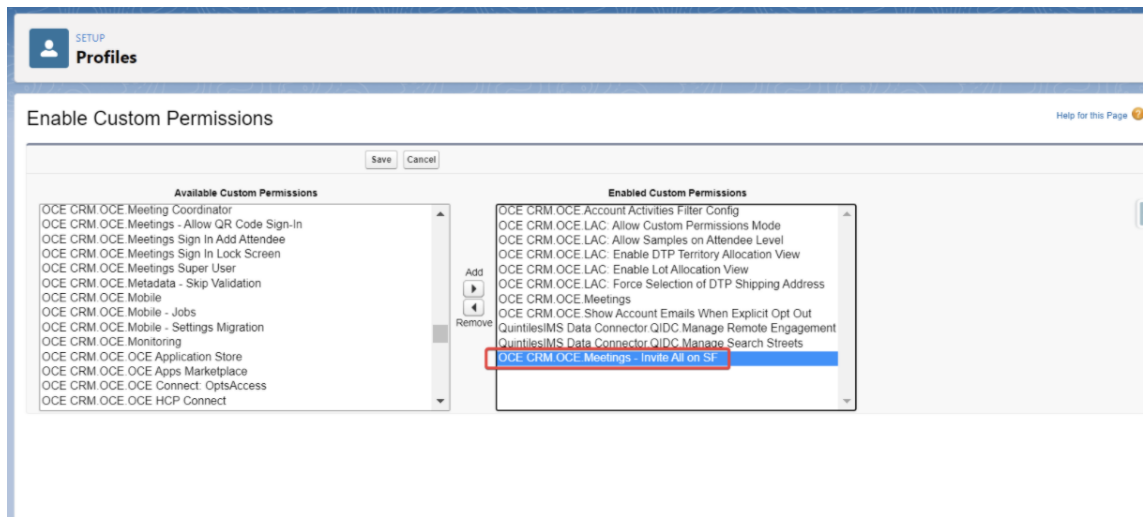

Once assigned, the user will see an 'Invite All' button on the Account Attendee screen on Salesforce. When 'Invite All' is clicked, the user will see a confirmation dialog with a number of records for selection. Only 100 Meeting Members or less can be invited at a time. Validations for Meeting Members will be applied on Save.

Once the user selects at least one new record to be added, a counter with the total number of Account Attendees to be added will be shown. The color of the counter will be red if the maximum allowed number (100) is exceeded. If the last record to be added is deselected, the counter will disappear.

If HCO Affiliations view is enabled, Invite All button will be available on HCO Affiliation view also. It will contain the same counter and share the limits with the initial Account Attendee screen as well as the selected Accounts. The counter within HCO Affiliation hierarchy view modal should show the same number as the counter within the base Add Meeting Attendee modal window. The number should be equal to the total number of Attendees to be selected and not limited to the HCP Attendees affiliated with the respective HCO.

Only Attendees who are about to be added will be counted. If the user deselects an Attendee that was already part of the Meeting, it is not counted towards the limit and the counter should ignore this. If the user has selected an Attendee after deselecting (without previously saving this change), such Attendee is also not counted towards the limit as no updates to the database are required for such Attendee.

On Sign In page in mobile, attendees who are about to be added to the Meeting via Invite All feature will be counted. Every time the user selects an additional Account the counter will be increased. Every time the user deselects an Account that was about to be added as a Meeting Member the counter will be decreased. If the user deselects and/or selects again an Attendee that was already part of the Meeting, the counter ignores such Attendees.

If the user deselects all selected Attendees that were about to be added (if their count is 0) - the counter will be hidden. Only if at least one Attendee is selected to be added the counter will be shown.

Note:

Due to differences in the nature of platforms, Salesforce and iPad process records differently when using 'Invite All' functionality. In Salesforce, if a record fails during the operation, any successful records will be processed and can be added to the Meeting. On iPad, if one failure occurs, the entire transaction will be rolled back (i.e. no records will be added).

Additionally, if the user invites more than 100 attendees at a time, a toast message will display on both platforms to refine the query to 100 attendees or less. On iPad, the message will only appear once and again on "Save" (if still over 100).

Configure Write-Ins and Reconciliation (OCE9 Package)

The Write-In feature allows for Meeting Members to be added to the Meeting as a 'Write-In' record type. This may be needed when a person comes to sign into a Meeting when they have not been added as a Meeting Member yet, thus needing to "write themselves in" to the Meeting. On both Salesforce and iPad, the Write-In can be added from a Write-In related list on the Meeting Member tab. Additionally, on iPad, there is an option to sign in the Write-In from the Sign In screen using the 'Not Listed?' button.

From a business perspective, Write-Ins must go through a process called **reconciliation** at the end of the Meeting, where the Write-Ins are converted to different record types of Meeting Member (either Speaker, Account Attendee, or Colleague). To do this, the user will choose a User, Customer, or Speaker from the corresponding look-up on the Write-In page layout, set the Reconciliation Status field appropriately, and save the record, which will convert the Write-In to one of these types. For Speaker and Account Attendee record types, the Name, Address, and Specialty fields will be copied from the Account/Speaker. For Colleague record type, the Name field will be copied from the User.

When changing the Write-In to an Account Attendee/Speaker/Colleague, the Reconciliation Status should be set to "Completed" by the user. However, this cannot be set to "Completed" unless one of those fields has been filled in (Customer/Speaker/User lookup).

If a Write-In needs to be moved to a Non-Profiled Attendee, the user will change the Reconciliation Status to "Complete - Non-Profiled". The user cannot set it to "Complete - Non-Profiled" if any of the 3 Customer/Speaker/User fields are populated.

Note: During the reconciliation process, workflow permissions and restricted product/consent validations will be ignored.

You must sync on mobile in order to see the Write-In convert to a different record type, as the conversion process happens through a trigger. However, if you are reconciling a Non-Profiled Attendee, you will not see them change to a Non-Profiled Attendee (they stay as-is in the Write-Ins section with the status of "Complete - Non-Profiled" available to designate that they have been reconciled. This is a current limitation.

It is possible to reconcile a Write-In to an Account Attendee/Speaker/Colleague and be able to link the same Account/Speaker/User more than once. When adding an Account Attendee/Speaker/Colleague to a Meeting through the usual process, a trigger handler can be enabled that will check for duplicates, but in the case of Write-Ins, it does not work.

To configure Write-Ins, follow the below steps:

- Make the Custom Setting **Enable Write-Ins** true in Admin Console > Meetings > General Settings.
- Activate validation rules on the MeetingMember__c object:
 - Several_lookup_fields_are_defined
 - No_one_lookup_field_is_defined
 - Lookup_fields_must_be_empty
- Ensure the following trigger handler configuration:

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
WriteIn To Attendee	OCE9.WriteInToAttendeeHandler2	WriteInToAttendeeHandler (DEPRECATED)	OCE.WriteInToAttendeeHandler (DEPRECATED)
WriteIn To Colleague	OCE9.WriteInToColleagueHandler2	WriteInToColleagueHandler (DEPRECATED)	OCE.WriteInToColleagueHandler (DEPRECATED)
WriteIn To Speaker	OCE9.WriteInToSpeakerHandler2	WriteInToSpeakerHandler (DEPRECATED)	OCE.WriteInToSpeakerHandler (DEPRECATED)
Meeting Member Duplicate Member	OCE9.MeetingMemberDuplicateMemberHandler2	MeetingMemberDuplicateMemberHandler (DEPRECATED)	OCE.MeetingMemberDuplicateMemberHandler (DEPRECATED)

- Add 'Write-Ins' related list (generic related list component) to the Attendee tab on the Meeting Lightning page. Example of how to configure:

Attribute	Namespace Org	Non Namespace Org
Object Name	OCE__MeetingMember__c	MeetingMember__c

Attribute	Namespace Org	Non Namespace Org
Field Set Name	from your org	from your org
Label	MeetingMember_WriteIns	MeetingMember_WriteIns
Icon Name	standard:visits	standard:visits
Handler for update/delete	OCE9:WriteInsUpdateDeleteHandlerNew	WriteInsUpdateDeleteHandlerNew
Where Clause	OCE__Meeting__c='{recordId}' AND RecordType.DeveloperName='WriteIn'	Meeting__c='{recordId}' AND RecordType.DeveloperName='WriteIn'
Component name for the 'New' action	OCE9:AddMeetingWriteInNew	AddMeetingWriteInNew
View All Component (used for mobile only)	MeetingWriteIn	MeetingWriteIn

- Assign Meeting Member record type Write-In to required permission sets/profiles.
- Assign new MeetingMember__c-Write-In Layout to Write-In record type for required profiles.
- Assign Meeting Admin or Meeting Admin2 or Meeting User or Meeting User2 permission set or give Edit permission for new fields on MeetingMember__c object. The following fields were added for Write-Ins:
 - IsWriteIn__c
 - PrimaryCountryOfPracticeResidence__c
 - AttendeeType__c
 - ReconciliationStatus__c
 - FirstName__c

- MiddleName__c
- LastName__c
- PrimaryStateProvinceOfPractice__c
- Prescriber__cColleagues
- SpecialtyPicklist__c
- ProfessionalDesignation__c
- Phone__c
- Email2__c
- Country__c
- StreetAddressLine1__c
- StreetAddressLine2__c
- City__c
- StateProvince__c
- PostalCode__c
- InstitutionName__c
- InstitutionDepartment__c
- InstitutionCountry__c

- InstitutionStreetAddressLine1__c
 - InstitutionStreetAddressLine2__c
 - InstitutionCity__c
 - InstitutionStateProvince__c
 - InstitutionPostalCode__c
 - ProfessionalLicenseNumber__c
- Configure the Generic Workflow for Write-Ins record type to control permissions to add/edit/delete Write-Ins (see section of this guide [Configuring Generic Workflow](#) for more information).

Configure Speaker and Attendee Recommendations (Connected Intelligence) (MVP) (OCE9 Package)

The Speaker and Attendee Recommendations (Connected Intelligence) feature allows users to view a list of recommendations for Speakers and Account Attendees provided by an external system. This is obtained by showing a special icon alongside the Speaker/Account Attendee name within +Speaker/+Account Attendee modal. By clicking the icon, users will see a popover with a list of recommendations for a specific Speaker/Account Attendee provided for this Meeting. Users will also have the ability to **Skip** recommendations for a particular Speaker/Account Attendee that will prevent them from appearing until new recommendations are provided. An **Enable** button will also be present to undo the skip (within the same session; i.e. once the modal is closed and re-opened, any skipped Speakers/Attendees will no longer appear as recommended. See note below on this). This feature is supported on Salesforce and iPad.

Note: Currently there is a limitation and behavior difference with Salesforce and iPad related to the Skip/Enable button on Recommendations.

On Salesforce

- When the user "Skips" a Recommendation, they will be able to continue to see the Recommendation icon when they scroll through the modal and come back to the item.
- The Recommendation icon will disappear once they search or filter, even when the modal has not been closed.

On iPad

- When the user "Skips" a Recommendation, they will not be able to see the Recommendation icon after they scroll away from the item on the modal. This is due to the way the page is refreshed on mobile.
- The Recommendation icon will disappear once they search or filter, even when the modal has not been closed.

Take note that in each scenario, it is possible to lose the Recommendation icon after skipping even when the modal has not been closed when the user searches and filters. On Salesforce if the user scrolls through the modal they will continue to see the icon, and on iPad they will not.

To activate the **Speaker Recommendations** feature, the following permissions should be granted:

- Read access:
 - OCE__Meeting__c object: OCE__RecommendedSpeakers__c
- Edit access:
 - OCE__MeetingMember__c object: OCE__RecommendationDetails__c

Additionally, to activate **Skip** and **Enable** actions:

- Edit access:
 - OCE__Meeting__c object: OCE__RecommendedSpeakers__c

To activate the **Attendee Recommendations** feature, the following permissions should be granted:

- Read access:
 - OCE__Meeting__c object: OCE__RecommendedAttendees__c
- Edit access:
 - OCE__MeetingMember__c object: OCE__RecommendationDetails__c

Additionally, to activate **Skip** and **Enable** actions:



- Edit access:
 - OCE__Meeting__c object: OCE__RecommendedAttendees__c

Remember to run cache.


Once the above permissions are granted and data is loaded from the external system (described more below), users will be able to see icons and filters for recommendations on the Speaker and Account Attendee modals for any Speakers/Attendees which are recommended.


Note:

On Speaker modal in Salesforce, a Recommendations list was added above the Speaker header when the feature is enabled (default is All). Note that this option is only available when the Recommendations feature is enabled and no other filtering/list options are available from this menu.

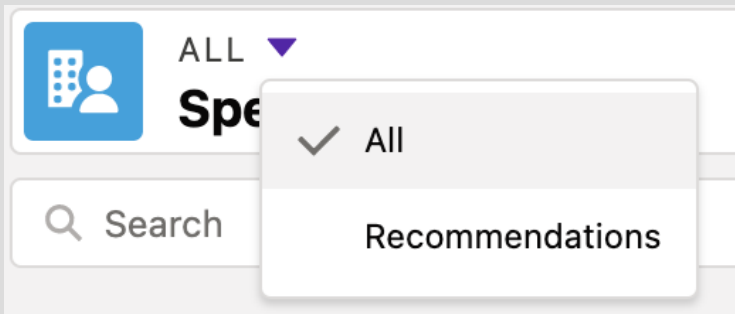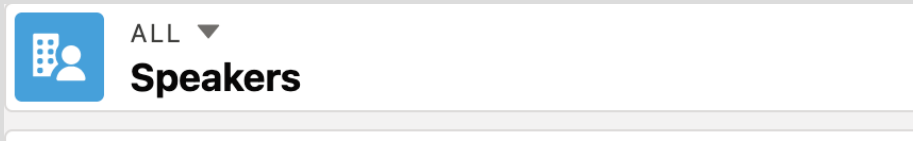


On iPad, a Lists button that contains a Recommendations option is available on Speaker modal when the feature is enabled. Note that this option is only available when the Recommendations feature is enabled and no other filtering/list options are available from this menu.

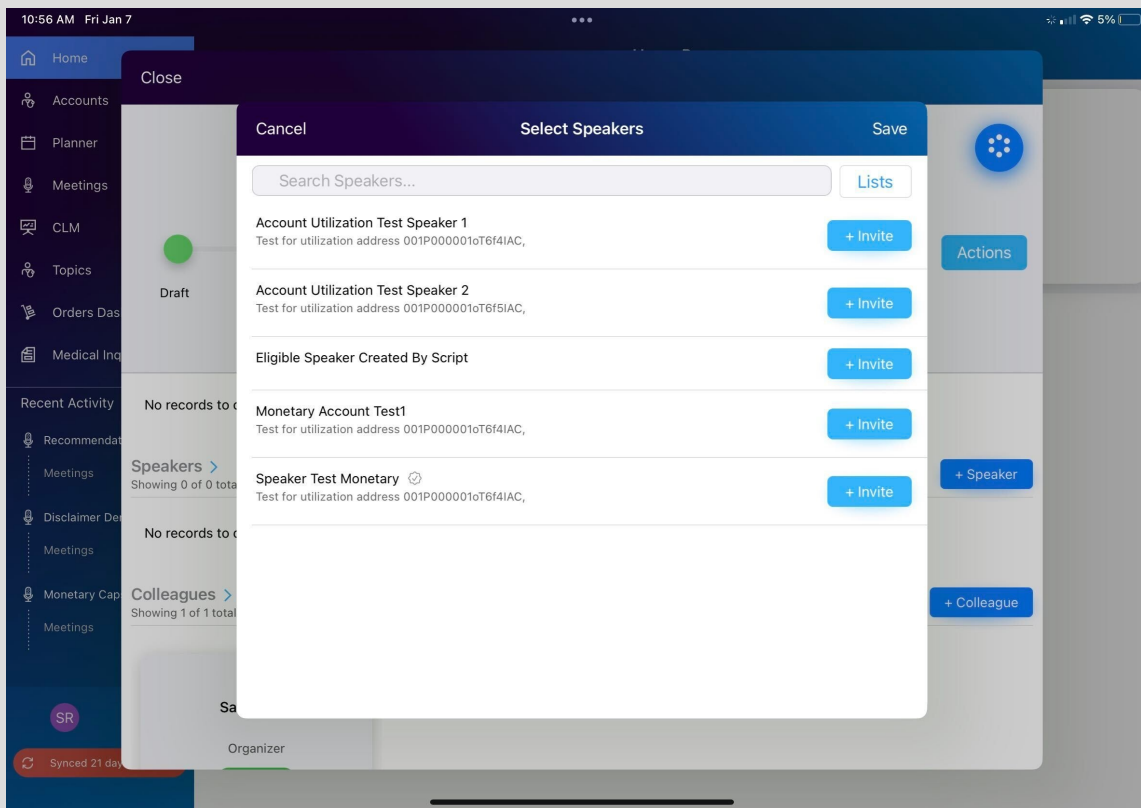


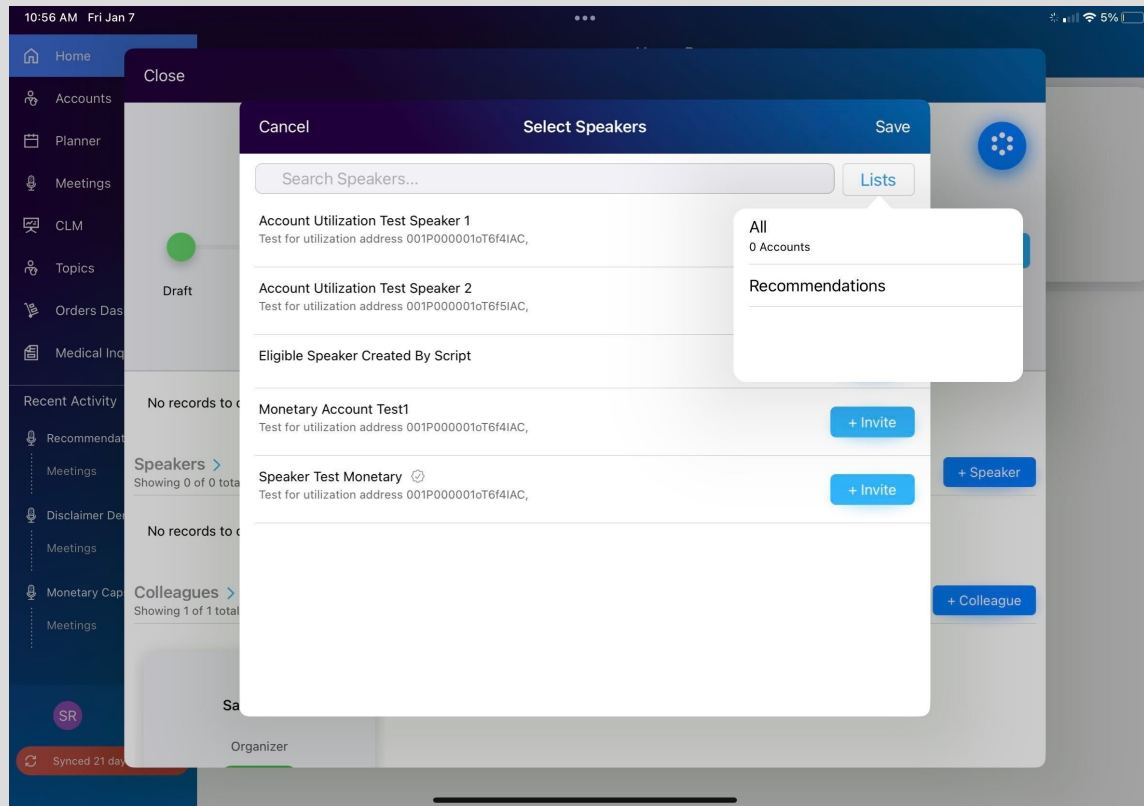

On Account Attendee modal in Salesforce, a Recommendations option was included in the list of available selections above the Accounts header when the feature is enabled. Please note that to see the entire lists/filter menu, the setting **Enable Attendees Filtering** should be turned on (can be found in Admin Console > Meetings > General Settings).

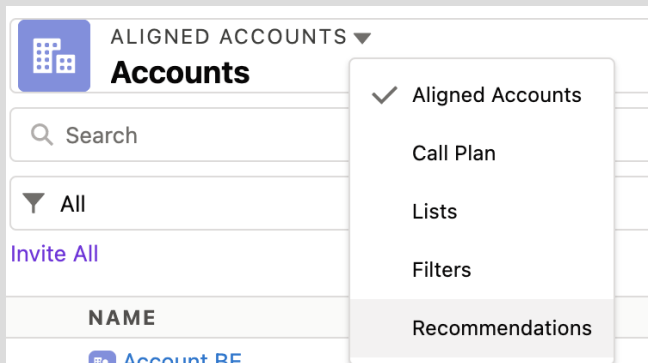

On iPad, a Recommendations option was added to the Lists button when the feature is enabled. Please note that to see the entire lists/filter menu, the setting **Enable Attendees Filtering** should be turned on (can be found in Admin Console > Meetings > General Settings).

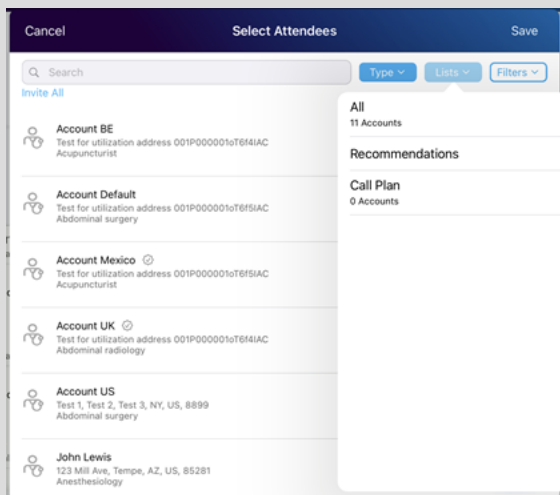

A list of recommendations should be provided by an external system and stored on a per Meeting basis in fields RecommendedSpeakers__c and RecommendedAttendees__c as a JSON (format below). The number of possible recommendations per Meeting is limited by field length.

The field RecommendationDetails__c on Meeting Member object is used to capture recommendation information for Speakers and Attendees at the time they are added to the Meeting to be further used for reporting, data for external system, etc.

JSON Schema (to be stored in RecommendedSpeakers__c, RecommendedAttendees__c)

- recId - string - required
- status - string - required - supported values:
 - new
 - skipped
- category - string
- reason - string
- src - string
- created - string - Date/Time ISO 860
- score - integer
- custom attributes - any primitive data type

Attribute Descriptions

JSON Attribute	Definition
recId	The SFDC record ID of Account or Speaker being recommended
status	Status of the recommendation; valid values are "new" or "skipped"
category	Category of the recommendation

JSON Attribute	Definition
reason	Reason for recommendation
src	Source/system from which the recommendation came
created	Date/time the recommendation was created • Date/Time ISO 8601 • YYYY-MM-DDThh:mm:ssZ
score	The score of recommendation
custom attributes	Any custom attributes with additional information. Note: value will not be shown in recommendations if it is any object (array, map, etc.)

JSON Example

```
[
  {
    "recId": "0014C00000ahFiVQAU",
    "status": "new",
    "category": "category",
    "reason": "reason",
    "src": "source",
    "created": "1999-01-01T23:01:01Z",
    "score": 10,
    "custom1": "some text",
    "custom2": "some text",
    ...
  }
]
```

```
}  
]
```

Users will be able to see warning/info messages if the JSON with recommendations has errors or invalid recommendations.

Messages can be configured using the following custom labels:

Label Name	Default Value	Description
RecommendationsInvalidConfiguration	Recommendations are not available due to the configuration. Please contact your administrator.	The message is shown if the value of Recommendation field is not a valid JSON.
RecommendationsWithInvalidData	Some Recommendations are hidden due to invalid data. Please contact your administrator.	The message is shown if the JSON has incorrect data (e.g. wrong IDs or timestamp in wrong format).

Configure Mobile Signature Disclaimer Text Based on Meeting Member Country (OCE9 Package)

On mobile, a signature page is present to capture the Meeting Member's signature at the Meeting. On iPad, this page contains disclaimer text at the bottom. The disclaimer text is taken from:

1. A custom label, whose name is stored in Meetings Config custom setting, Disclaimer Text field, by default.
2. A Compliance Statement record based on Meeting Member country - configurable per user. In case of a missing appropriate Compliance Statement record for Meeting Member's country or missing access to fields/objects, the first approach with a custom label is used (fall-back scenario).

To configure the second approach of using a Compliance Statement record based on Meeting Member's country, follow the below steps.

- On Compliance Statement page layout:
 - "Statement Label" field should be made "not required"
 - "Applicable Countries" field should be added
 - "Disclaimer Text" field should be added
- "Statement Type" picklist on "Compliance Statement" object should contain "Disclaimer Meeting Sign-In Sheet" value
- The "Sign In Sheet Country Field Name" field on the "Meeting Org Level Settings" custom setting should be populated. Default value is "OCE__SignInSheetCountry__c"
- Read access should be provided to "Compliance Statement" object and "Disclaimer Text", "Sort Order", "Statement Type", "Applicable Countries" fields is provided for users
- Read/Edit access to "Compliance Statement" object and "Disclaimer Text", "Sort Order", "Statement Type", "Applicable Countries" fields is provided for admins
- Read access to the field configured in the "Sign In Sheet Country Field Name" field on the "Meeting Org Level Settings" is provided for users. By default, it is "Sign In Sheet Country" field on Meeting Member
- DB Schema record for "Compliance Statement" object should be active

To configure country-based disclaimer text:

- Assign **Meetings_CountryBasedSignInDisclaimer** custom permission to users who will use the feature
- Create Compliance Statement records:
 - Statement Type should be "Disclaimer Meeting Sign-In Sheet"
 - Sort Order defines the order of appearance in cases when several texts are merged

- Applicable Countries should contain one or several countries for which this text is applicable
- Disclaimer Text field should contain the text itself
- Share Compliance Statement records with users
- Run cache

The logic for obtaining Meeting Member country is configurable. "Sign In Sheet Country Field Name" field on "Meeting Org Level Settings" setting in Admin Console contains default value "OCE__SignInSheetCountry__c", which is a formula field on Meeting Member. It is possible to choose another custom field from the list to obtain the country (only text, picklist, and formula(text) fields are supported).

The default logic set in OCE__SignInSheetCountry__c for obtaining the country is:

- Account Attendee: take Meeting Member country, if empty → Account country
- Speaker: take Meeting Member country, if empty → Speaker country, if empty → Account country if Account, or User country (MDM Preferred) if User
- Colleague: take Meeting Member country, if empty → User country (MDM Preferred)
- Non-Profiled: take Meeting Member country
- Write-In: take Meeting Member country

Configure Restricted Roles on Colleague (OCE9 Package)

The Restricted Roles feature provides the ability to control the list of available Roles that display for selection in the Colleague search. Additionally, Role validation will be applied when Meeting Member with Colleague record type is created/updated.

To activate this feature:

- Assign Permission Sets:
 - Meetings Admin (OCE9MeetingAdmin) to Admin user.
 - Meetings User (OCE9MeetingUser) to SR user and Admin user.
- Add the Colleague component:

If NOT using Generic Related List	If using Generic Related List
Add the component MeetingColleagueNew (OCE9) to Meeting Layout to the sub-tab Attendees.	Use standard Generic Related List configuration, but change the following for the Colleague component: • Update/Delete Handler - OCE9:MeetingColleaguesUpdateDeleteHandlerNew • Component Name For The 'New' Action - OCE9:AddColleagueNew

- Configure RestrictedRoles__c field on MeetingsConfig__c custom setting with the list of roles you wish to make unavailable for selection for the profile.
- Activate Colleague_Restricted_Roles validation rule.
- To use on mobile, run metadata cache.

Note: A validation rule was created to prevent the user from changing the Role to one that is restricted from the standard Meeting Member page layout. In web, there is a current limitation where the user is able to change Role to a restricted one for any Meeting Member who is marked as "System Generated" (e.g. Approver, Organizer) using standard Meeting Member edit page. This happens because the Colleague_Restricted_Roles validation rule doesn't trigger for Meeting Members with System Generated = true (this condition was added to avoid issues with Meeting creation in case a system role is restricted, e.g. Organizer).

Populate Territory field on Colleague for Custom Created Roles (OCE9 Package)

This feature allows user to see the Colleague Territory field populated with the linked user's territory for all roles, including custom created, except for the Organizer, Approver, Coordinator, Co-organizer and Host Organizer. If the Territory field character limit is exceeded, an error **Cannot add Meeting Member. Territories field character limit has been exceeded** is displayed.

Note: The Territory field population for Colleagues with Organizer, Approver, Coordinator, Co-organizer, and Host Organizer roles is handled by Meeting Member Sharing trigger handler, which is activated as part of the Basic Activation of the Meetings Module.

In case a user is realigned to a different territory, the meeting member record will not be updated unless there is an update operation on this Meeting Member record.

To activate the feature:

Enable MM Custom Role Territory Population trigger handler.

To populate the Territory field for existing Meeting Members you can run a one-time batch job. For this: deploy the content of the archive attached below to the org and execute the next line from the anonymous apex window.

```
Database.executeBatch(new MMCustomRoleTerritoryPopulationBatch());
```

Note: To successfully update Meeting Member records Territories using batch, ensure WorkflowPathPermissionHandler is disabled. After the job is successfully processed, enable WorkflowPathPermissionHandler again.

Note: To download the file **MMCustomRoleTerritoryPopulationBatch**, refer to the files section of the CSH (OCE Personal Library) of specific release folder.

Configure Account Attendee Record Types Validation (OCE9 Package)

Users can configure which Account record types are valid to be invited as Meeting Members (Account Attendees) based on selected Meeting Topics. When the feature is enabled, users will be validated both when adding Account Attendees and adding Meeting Topics if the Account has a record type that is not valid for the Meeting Topic.

Validation when adding Account Attendees:

- Is applied only when a new Account Attendee is added; any Attendee can be removed without validation.
- Is also applied when using **SBC in Meetings** feature. In this case, validation won't prevent the creation or alignment of an Account but will prevent it from being added as an Attendee if the record type is invalid.
- If **Invite All** feature is enabled - validation will occur upon clicking 'Save' button (similar to other Attendee validations) instead of validation upon adding every individual Account (as when **Invite All** is disabled).
- Validation is applied only if at least one Meeting Topic has **OCE__AccountRecordType__c** field populated.
- If users don't have read access to a field **OCE__AccountRecordType__c** on **OCE__Topic__c** but the feature is enabled in settings, validation will fail for any Account showing a respective error message explaining what access permission is required.
- The Account is considered valid if it has a record type that is populated in **OCE__AccountRecordType__c** field for at least one of the Meeting Topics.

Validation when adding Meeting Topics:

- Is applied only when a new Meeting Topic is added; any Meeting Topic can be removed without validation.
- Is applied only for Meeting Topics with populated **OCE__AccountRecordType__c** field. Meeting Topics with empty value can be added without any validations.

- If users don't have read access to a field **OCE__AccountRecordType__c** on **OCE__Topic__c** but the feature is enabled in settings, validation will fail for any Topic showing a respective error message explaining what access permission is required.
- The Topic is considered valid if, when combined with other Meeting Topics, it has a set of Account record types that is a superset of the set of all record types of Account Attendees added to this Meeting (if after adding such a Topic, the Meeting won't have any Account Attendee that is invalid).

To configure this feature:

- Ensure that **'Meeting Attendees Lwc'** component is configured
- Ensure 'New' and 'Delete' action overrides for Meeting Topic object are set as follows:
 - 'New' action override: for 'Salesforce Classic Override' -> 'Visualforce page' should be set to 'MeetingTopicCreationOverrideLwc' AND 'Lightning Experience Override'/'Mobile Override' should be set to 'Use the Salesforce Classic override'
 - 'Delete' action override: 'Salesforce Classic Override' -> 'Visualforce page' should be set to 'MeetingTopicDeletionOverrideLwc'
- Ensure **meeting-validation-currency-2-default** script is cloned & activated (Go to Admin Console > Workflow Configuration > Custom Scripts > **Clone & Activate 'meeting-validation-currency-2-default'** script (e.g Cloned meeting-validation-currency-2-default))
- Ensure **OCE__Meetingc** Context Type is updated (*Admin Console > Workflow Configuration > Context Type > Edit 'OCEMeeting__c'* Context Type > **Change Validation Custom Script value** from 'meeting-validation-currency-2-default' (or from any other) to 'Cloned meeting-validation-currency-2-default')
- Enable the setting **Enable Attendees RT Validation By Topics** in **Admin Console > Meetings > General Settings**.
- Ensure OCE9__MeetingTopicCreationOverrideLwc (Visualforce page) action override is configured for Topics (New and Edit): **Setup > Object Manager > Meeting Topic > Buttons, Links, and Actions**.

- Ensure that all applicable users have read access to field **OCE__AccountRecordType__c** on **OCE__Topic__c** object (already a part of **Meetings User** and **Meetings Admin** permission sets).
- Populate **OCE__AccountRecordType__c** field with allowed Account Attendee record types for respective **OCE__Topic__c** records.
- Run metadata cache for mobile.

Configure Share Meetings by Public Groups (Engage Feature) (MVP) (OCE9 Package)

Note: This feature is intended for Engage users only. It is documented in the OCE Configuration Guide to explain the trigger handler that was created in OCE9 package to support the feature, but is not recommended for OCE users.

This feature allows the Engage user to share the Meeting with public groups which the selected Colleague is part of. **Groups For Meeting Sharing** field on Meeting Member can contain semicolon-separated developer names of public groups to share the Meeting with.

To configure the feature:

- Activate "Sharing Meeting By Colleague Groups" trigger handler.
- Provide read/edit access to "Groups For Meeting Sharing" field on Meeting Member.

Note:

- "Groups For Meeting Sharing" field should contain **developer names** of public groups.
- Invalid group names are ignored by trigger handler.
- When renaming a public group used for Meeting sharing, it is important to retain the group's developer name, because otherwise there will be a mismatch between "Groups For Meeting Sharing" field value and the actual group name, thus sharing logic might work incorrectly.
- The feature uses its own custom sharing reason and does not interfere with other manual or automatic sharing logic.

Validate System Generated Field on Meeting Member Deletion

The feature prevents deletion of System Generated Meeting Members. This logic is executed in the 'Prevent System Generated MM Deletion' trigger handler, it is active OOB and not visible in Admin Console. Do not deactivate this trigger handler.

To enable the feature:

- Set `OCE__PreventSystemGeneratedMemberDeletion__c` field on `OCE__MeetingOrgLevelConfig__c` custom setting to true.

In order to be able to delete System Generated Meeting Members, make sure that `OCE__MeetingOrgLevelConfig__c.OCE__PreventSystemGeneratedMemberDeletion__c` custom setting field is set to false.

Custom Account Attendee Buttons (OCE9 Package)

To provide configurability option of massive update of information on Account Attendee screen in the iOS app and web, Admin should do the next steps:

1. Configure field set on Meeting Member object which should contain fields that should be updated on Account Attendee records (only those fields that are of the `picklist` or `checkbox` type and are editable will be visible to the user).
2. Go to **Admin Console > Meetings > General Settings**, add the above field set name to the **Attendee Bulk Update Actions** input, and press the **Save** button.

Open **Lightning App Builder** on the Meeting record page. Find the **meetingAttendeesLwc** component. Set the designer attribute **enableQuickEditAction** to `true`. In case the Generic Related List is utilized for account attendees, replace the **OCE9:AccountAttendeesUpdateDeleteHandlerNew** handlerForUpdateDelete designer attribute in the components configuration with the new one created for bulk updates - **OCE9:AttendeeUDH**.

After synchronization, if the device type is an iPad, the Field Set name is specified correctly, the Field Set exists, and it contains at least one editable field of the correct type, the user will see an edit button instead of the standard **Invitation Status**, **Attendance Status**, and **Meal Option** buttons. Users who need to edit fields from these buttons can add the required fields to the Field Set.

Configure Meeting and Meeting Member Services - Services by Rep in OCE Personal (Engage Feature)

Note: This feature is intended for users with Engage package installed. It is documented in the OCE Configuration Guide as the MMS component has been integrated with OCE Personal.

The feature enables OCE Sales Rep users working in OCE mobile to manage services for a Meeting Member in online-only mode, as long as the Meeting Member is synchronized to the Salesforce database. While in OCE mobile, the Sales Rep may now navigate to a standalone Meeting Member Services component in a mobile web browser via a Custom Action type Generic Workflow Action, where all MMS management functionality is exposed and available.

For configuration steps, please see the detailed information available at **Services by Rep in OCEP** section in HCP/O Engage Configuration Guide.

File Uploader component supported in IPAD (Engage Feature)

This feature allows to configure GW action to open the File Uploader component (from the Engage package) in a new browser tab when a User is using an iPad application. This feature works only when both OCE and Engage packages are installed on the org. When Admin configures this feature, Users can open File Uploader via GW action and attach files to Salesforce records. When the User is using the iPad app, user will be redirected to the browser where a new tab with the component will be displayed.

To enable this feature admin should do the next configuration steps:

1. Ensure Engage Core User and Engage Core Admin permission sets are assigned to appropriate Users.
2. Ensure Type picklist field on Workflow Action sObject definition contains the **Custom Action** value by
 - a. Navigate to **Setup** → **Object Manager**.
 - b. Search for Workflow Action.
 - c. Navigate to **Fields & Relationship** vertical navigation tab.

- d. Searching for Type field.
- e. Adding a new **Custom Action** value, if none exists.

3. Configure Multi-Level GDE.

- A. Navigate to **Admin Console** → **Dynamic UI** → **Multi-Level GDE**.
- B. Choose object for which you want to configure File Uploader feature.
- C. Press **Create** button. After Edit screen was opened, press **Add component** button.
- D. Choose **File Uploader** option in Component combobox. After that you can specify which categories should included or excluded, which types should be included or excluded, etc.

More information about configurations of File Uploader and Multi-Level GDE components is in the engage configuration documentation:

- File Uploader
- Multi-Level GDE

Note: To refer to the HCPO Engagement configuration guide, go to the **Documentation** section of the HCPO Engagement library in **CSH** to download the configuration guide.

4. Configure a Custom Action Definition

- a. Navigate to **Admin Console** → **Quick and Custom Action Administration** → **Custom Actions** → **Generic Workflow**.
- b. Click **New** and populate the input fields with the following values:

Field	Value
Entity Type	Generic Workflow
Target Type	Internal
Target Parameters	c__recordId=\$record.id&c__config=<CONFIG_NAME_OF_MGDE_CONFIGURATION>
Action Type	URL
Action Target	https://{your-domain}.lightning.force.com/lightning/cmp/ENGAGE__MgdeAddressableWrapper
Hide View in Browser Action	False

5. Update Generic Workflow Context Actions.

- a. Navigate to **Admin Console** → **Workflow Configuration** → **Workflow Paths** vertical tab.
- b. Choose the appropriate Workflow Path.
- c. Locate the Workflow node where the action should be added and navigate to the necessary context.
- d. Click into the **+** icon, select **Custom Actions** and add the GW Action created above.
- e. Repeat for all necessary contexts, click **Deploy**.
- f. Repeat for all necessary Workflows.

When adding a Custom Action type GW Actions, it is advised to create granular contexts for exposing the action only to OCE users, in order to avoid having the action show up in Engage, as it is unsupported there.

This may be achieved by creating context conditions on custom formula fields that reflect user's parameters, such as a custom permission assigned to the user.

Configure Locations (OCE9 Package)

When creating a meeting in the Meetings module, the user can select a location where the meeting will be held using the **Meeting Location** object. This can be either an HCO or a venue, and the user can also select caterers or A/V providers that may be used for the meeting.

The list of venues, A/V providers, and caterers that the user selects from **Meeting Location** are configured by the Admin in the **Location** object.

Prerequisites: Ensure that the **Location** tab is configured in your OCE org.

To configure locations

1. In the **App Launcher**, click the **Locations** tab in your organization.
2. The list view of your created locations, if any, displays. To create a new location, click the **New** button at the top right.

3. The New Location dialog box opens.

All ▾

Search Salesforce

×

New Location

Information

• Location Name

Type

--None-- ▾

Sub Type

--None-- ▾

GeoLocation ⓘ

Latitude

Longitude

Owner

Bob Campbell

Status

--None-- ▾

Start Date

Date

📅

Time

🕒

End Date

Date

📅

Time

🕒

Contact Information

Address Line 1

City

State

--None-- ▾

Main Contact Name

Contact Phone

Address Line 2

Country

--None-- ▾

Zip Code

Cancel

Save & New

Save

4. In the **Location Name** field, enter a name for the location.
5. From the **Type** dropdown, select the type of location. A location can be either a *Venue*, *Caterer*, *Venue & Caterer*, or *A/V Provider*.

Note:

Meeting Locations can also be HCOs. When a Sales Rep creates a Meeting Location record in the Meetings module, they will be able to select HCO as a record type of **Meeting Location** in addition to the other types of locations set up in the **Location** object. The **Meeting Location** object is the link between **Meeting** and **Location** objects.

When selecting HCO as the Meeting Location, if the address of the HCO is also associated with multiple HCPs, you will see duplicates of the same address appearing. There is an optional lookup filter that can be enabled to only show HCO addresses. A validation rule can also be enabled to warn that an HCP address was selected instead of HCO. Activate the validation rule AllowOnlyHcoAddresses in MeetingLocation__c.

6. GeoLocation information was added to the Location object to be able to display the location of the meeting on the map on mobile Home screen. If you have the information, enter the **Latitude** and **Longitude**.
7. Fill in other information for the location, such as contact details.

8. Once your fields are entered, click the **Save** button. Your location is created and will be available to select in the Meetings module.

Location J&J Catering

Edit Delete Clone

RELATED DETAILS

Location Name
J&J Catering

Type
Caterer

Sub Type
Restaurant

Owner
OCE Admin

Status
Nominated

Start Date
4/30/2018 12:00 PM

End Date
4/30/2019 12:00 PM

▼ Contact Information

Address Line 1
1287 East Parkway

City
Syracuse

State
New York

Contact Phone

Contact Email

Address Line 2

Country
United States

Zip Code

▼ Additional Information

No. of Private Rooms

Star Rating
4

Seating Options

Available A/V
☐

Note: Ensure "Skip RecordType" flag is checked for "New" button override in Meeting Location sObject.

To populate Location immediately on mobile in the highlights panel ensure the following trigger handler configuration:

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
MeetingLocation Update Meeting Address	OCE9.MeetingLocationUpdateMeetingAddrHandler2	MeetingLocation Update Meet.Address Handler (DEPRECATED)	OCE.MeetingLocationUpdateMeetingAddrHandler (DEPRECATED)
Meeting Location Validation	OCE9.MeetingLocationValidationHandler2	Meeting Location Validation Handler (DEPRECATED)	OCE.MeetingLocationValidationHandler (DEPRECATED)
		Meeting Location Validation Handler (DEPRECATED)	OCE.MeetingLocationWorkFlowHandler (DEPRECATED)

Configure Meeting Locations (OCE9 Package)

Meeting Location allows the user to choose a location where the Meeting will take place.

To activate this feature:

- Replace the Meeting Location object buttons with the following overrides
 - Edit - GenericEditActionOverride (Lightning component)
- Ensure the following trigger handler configuration:

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
MeetingLocation Update Meeting Address	OCE9.MeetingLocationUpdateMeetingAddrHandler2	MeetingLocation Update Meet.Address Handler (DEPRECATED)	OCE.MeetingLocationUpdateMeetingAddrHandler (DEPRECATED)
Meeting Location Validation	OCE9.MeetingLocationValidationHandler2	Meeting Location Validation Handler (DEPRECATED)	OCE.MeetingLocationValidationHandler (DEPRECATED)
		Meeting Location Validation Handler (DEPRECATED)	OCE.MeetingLocationWorkFlowHandler (DEPRECATED)

- Activate DB Schemas
 - Location__c
 - MeetingLocation__c
- Activate validation rule
 - AllowOnlyHcoAddresses
- Ensure value is given for all Meetings users in **MDM Preferred Country** field on User object.

Note: MeetingCreateActionOverride was previously recommended for Meeting Location 'New' button, but does not allow users to create new Locations from the Meeting Location screen itself and has other limitations. Therefore, it is recommended to not use an override on Meeting Location 'New' button.

When saving a Meeting Location record, users may see a success toast message verifying the Meeting Location was created and showing a Meeting Location ID instead of a name. This is due to standard Salesforce behavior, which displays names of data type auto-number as IDs. Meeting Location name field uses auto-number.

Configure Additional Venue Logistics (OCE9 Package)

In a later release, there are additional fields that can be provided for users creating Venue types of Meeting Locations.

To configure:

- Add permissions for the following fields of **MeetingLocation__c** object:
 - PrivateRoomRequired__c
 - RoomSetupPreferenceType__c
 - HandicapAccessible__c

- RequestedRoomName__c
- PreferenceOrder__c
- Assign **MeetingLocation__c - Venue Meeting Location Layout** page layout to profiles.

Configure Primary Meeting Locations (OCE9 Package)

Meeting Locations of all record types (Venue, HCO Location, Caterer, A/V Provider) can be designated as primary using the 'Is Primary' checkbox. There can only be one primary Meeting Location per record type. The first Meeting Location of that record type will automatically be marked as 'Is Primary', and if another is added and the user manually selects that one as 'Is Primary', the previous Meeting Location will no longer have the 'Is Primary' checkbox checked. Whichever is listed as the primary Venue or HCO Location will be populated in the Meeting highlights panel in the Location field. Only Venue or HCO Location record type can be added to a Meeting, not both at the same time. However, multiple HCO Locations or Venues can be added at a time now (prior to this feature only one of either type could be added). Multiple A/V Providers and Caterers can also be added.

To activate this feature:

- Add field "OCE__IsPrimary__c" to required "Meeting Location" page layouts.
- Provide edit access to "OCE__IsPrimary__c" field on "Meeting Location" sObject to required users through profiles/permission sets.
- Ensure the following trigger handler configuration:

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Primary Meeting Location	OCE9.PrimaryMeetingLocationHandler2	Meeting Location Validation Handler (DEPRECATED)	OCE.MeetingLocationHandler (DEPRECATED)

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Primary Meeting Location Denormalize	OCE9.PrimaryMeetingLocationDenormalizeHndlr2	Meeting Location Validation Handler (DEPRECATED)	OCE.MeetingLocationValidationHandler (DEPRECATED)
		Meeting Location Validation (DEPRECATED)	OCE9.MeetingLocationValidationHandler2 (DEPRECATED)
		MeetingLocation Update Meet.Address Handler (DEPRECATED)	OCE.MeetingLocationUpdateMeetingAddrHandler (DEPRECATED)
		MeetingLocation Update Meeting Address (DEPRECATED)	OCE9.MeetingLocationUpdateMeetingAddrHandler2 (DEPRECATED)
		PrimaryMeetingLocationHandler (DEPRECATED)	OCE.PrimaryMeetingLocationHandler (DEPRECATED)
		PrimaryMeetingLocationDenormalizeHandler (DEPRECATED)	OCE.PrimaryMeetingLocationDenormalizeHandler (DEPRECATED)

- Set OCE__MeetingLocationAddressFormulaField__c field on OCE__AddressSettings__c custom setting with appropriate field API name (e.g "OCE__MeetingLocation__c.OCE__AddressText__c").
- To use on mobile, run metadata cache from **Admin Console > Mobile**.

Note: In OCE package, the trigger handler MeetingLocationHandler (Triger Handler API Name: OCE.MeetingLocationHandler) was deprecated, thus when migrating to OCE9 package, only the new PrimaryMeetingLocation (Trigger Handler API Name: OCE9.PrimaryMeetingLocationHandler2) handler was created in its place. This trigger handler gives the additional functionality of the Primary Meeting Locations feature as described above. Therefore, please note that when moving from OCE to OCE9, clients will not have a one to one equivalent between these trigger handlers and will instead get the added functionality of the Primary Meeting Location feature in OCE9.

One Time Job Execution to Set Primary in Existing Meeting Locations

- Ensure Trigger Handlers PrimaryMeetingLocationHandler,(Triger Handler API Name: OCE9.PrimaryMeetingLocationHandler2) PrimaryMeetingLocationDenormalizeHandler (Triger Handler API Name: OCE.PrimaryMeetingLocationDenormalizeHandler) (DEPRECATED) are active.
- Open Developer Console, create and deploy new class PopulatePrimaryMeetingLocationBatch with code:

PopulatePrimaryMeetingLocationBatch

```
public without sharing class PopulatePrimaryMeetingLocationBatch implements Database.Batchable<SObject> {
    public Database.QueryLocator start(Database.BatchableContext bc) {
        return Database.getQueryLocator([ SELECT Id FROM OCE__MeetingLocation__c ]);
    }

    public void execute(Database.BatchableContext bc, List<SObject> records) {
        update records;
    }

    public void finish(Database.BatchableContext bc) {}
}
```

- Run below script to start job in Execute Anonymous (Developer Console):

```
Database.executeBatch(new PopulatePrimaryMeetingLocationBatch());
```

Note: This feature has only be tested using the Generic Workflow, not Legacy Workflow. Thus, it is recommended you use this feature with the Generic Workflow.

Consider Primary HCO Location in the Attendee System Generated Filter

System Generated Filter on Add Meeting Attendees screen can consider the primary HCO Location to filter related Attendees (previously, it was not guaranteed that the HCO Location used to filter was the primary).

To configure this feature:

- Add **Meeting Attendees Lwc** component to Meeting Lightning page.
- Enable the setting **Enable Advanced Search** in **Admin Console > Mobile > Applications Settings**.
- Provide at least Read access to **Is Primary** field on **Meeting Location** object to all relevant users. (This permission is already a part of **Meetings User** and **Meetings Admin** permission sets.)

Configure Topics (OCE9 Package)

Users can add a **Meeting Topic** to their meeting, which is the main subject to be discussed at the meeting. The list of topics the user can select from the **Meeting Topic** object come from those that the Admin has configured in the **Topic** object.

Prerequisites: Ensure that the **Topics** tab is configured in your org.

1. Click the **Topics** tab in your org.
2. The list view of your created topics, if any, displays. To create a new topic, click the **New** button at the right.

3. The New Topic dialog box opens.

All ▾

Search Salesforce

×

New Topic: Meeting

Information

* Name

Meeting Type

--None-- ▾

Parent Topic

Search Topics... 🔍

Delivery Format

--None-- ▾

Duration Type

--None-- ▾

Account Specialty ⓘ

Abdominal radiology

Abdominal surgery

Acupuncturist

Addiction medicine

Account Record Type ⓘ

Department

GPO

IDN

Institution

Speaker Type ⓘ

--None-- ▾

Suggested Meal ⓘ

Breakfast

Brunch

Owner

Bob Campbell

Status

--None-- ▾

Start Date

Date

Time

End Date

Date

Time

Cancel

Save & New

Save

4. In the **Name** field, enter a name for the topic.
5. In the **Meeting Type** dropdown, select which type of meeting this topic is intended for: *Speaker Meeting*, *Rep Presentation*, *Displays and Exhibits*, or *HCP Sponsorship*.

Note: Currently, there is no dependency between Meeting Type on Topic and what Meeting those Topics will be available for.

6. In the **Parent Topic** field, select a parent if this topic is a child of another.
7. Account Specialty and Account Record Type - add this information if you wish to specify for which types/specialties of Accounts this topic is intended.
8. Fill out other pertinent fields, such as the dates for the topic and the attendee information.
9. Once you have filled out the fields, click the **Save** button.
10. Because Topic is a private object, records need to be shared for users to see them. You can do this through data loads or manually using the **Sharing** button. To add this button, switch to Salesforce Classic mode and add the **Sharing** button to the Topic page layout. Once it has been added, the **Sharing** button appears on the Topic record (this button is not available in Lightning).

The screenshot displays the 'Kidney Disease Topic' record in Salesforce Classic. The record is titled 'Kidney Disease Topic' with a 'Topic' icon. Below the title is a breadcrumb trail: 'Back to List: Custom Object Definitions'. The record is shown in a table-like format with the following fields:

Topic Detail	
Name	Kidney Disease Topic
Meeting Type	Speaker Meeting
Parent Topic	
Delivery Format	
Duration Type	

Below the 'Topic Detail' section is the 'Attendees Information' section, which is expanded. It contains the following fields:

Attendee Type	HCP, Employees
Min. Speakers	1
Max. Speakers	5
Min. Attendees	5
Max. Attendees	200
Created By	OCE Admin, 4/11/2018 11:35 AM

At the bottom of the record, there are four buttons: 'Edit', 'Delete', 'Clone', and 'Sharing'. The 'Sharing' button is highlighted with a red box.

11. To open the Sharing Detail view, click the **Sharing** button. The system displays a list of users/territories/groups/roles with which you have shared the record. To share with someone new, click the **Add** button.

The screenshot shows the 'Sharing Detail' page for the 'Kidney Disease Topic'. At the top, there's a header with the topic name and a sub-header stating that the page lists users, groups, roles, and territories with sharing access. Below this, there's a 'View:' section with a dropdown menu set to 'All' and links for 'Edit' and 'Create New View'. To the right of the 'View:' section is a list of letters: A | B | C | D | E | F | G | H. Below the header, there's a table titled 'User and Group Sharing'. The table has columns for 'Action', 'Type', 'Name', and 'Access Level'. There are four rows of data: two for 'Territory and Subordinates' (one for 'TM - SPC - Athens 20A06T10' and one for 'TM - SPC - Akron 20A06T14', both with 'Read Only' access) and two for 'User' (one for 'Janara SalesRep' with 'Read Only' access and one for 'OCE Admin' with 'Full Access' access). Above the table, there are two buttons: 'Add' (highlighted with a red box) and 'Expand List'. Below the table, there's a section titled 'Explanation of Access Levels' with four bullet points: 'Full Access - User can view, edit, delete, and transfer the record. User can also extend sharing access to other users.', 'Read/Write - User can view and edit the record, and add associated records, notes, and attachments to it.', 'Read Only - User can view the record, and add associated records to it. They cannot edit the record or add notes or attachments.', and 'Private - User cannot access the record in any way.'


Action	Type	Name	Access Level
Edit Del	Territory and Subordinates	TM - SPC - Athens 20A06T10	Read Only
Edit Del	Territory and Subordinates	TM - SPC - Akron 20A06T14	Read Only
Edit Del	User	Janara SalesRep	Read Only
	User	OCE Admin	Full Access

Explanation of Access Levels

- Full Access - User can view, edit, delete, and transfer the record. User can also extend sharing access to other users.
- Read/Write - User can view and edit the record, and add associated records, notes, and attachments to it.
- Read Only - User can view the record, and add associated records to it. They cannot edit the record or add notes or attachments.
- Private - User cannot access the record in any way.

12. The New Sharing screen opens.
13. From the **Search** dropdown, specify with whom the record should be shared:
- *Public Groups*
 - *Roles*
 - *Roles and Internal Subordinates*
 - *Roles, Internal and Portal Subordinates*
 - *Territories*
 - *Territories and Subordinates*

- individual *Users*

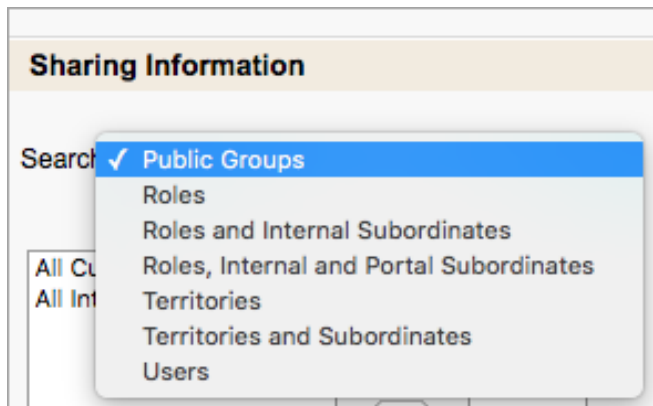

Depending on what you select, you can choose the corresponding group/role/territory/user with which to share.

14. Once you have made your sharing selection, click the **Save** button. The topic is shared and can be used in the Meetings module.

Configure Meeting Topics (OCE9 Package)

Meeting Topic allows the user to associate a Topic (or Topics) to a Meeting.

Ensure the custom UI component for Meeting Topic is being used instead of standard. Standard Meeting Topic UI is no longer supported/is deprecated (see below for information on relevant overrides).

To activate this feature:

- Replace the Meeting Topic object buttons with the following overrides
 - New - OCE9__MeetingTopicCreationOverrideLwc (Visualforce page)
 - Edit - GenericEditActionOverride (Lightning component)
 - Delete - OCE9__MeetingTopicDeletionOverrideLwc (Visualforce page)

- Deactivate trigger handler
 - TriggerHandler.MeetingTopicHandler (Trigger Handler API Name:OCE.MeetingTopicHandler)

Note: Engage clients may still continue to use MeetingTopicHandler as it is used in Engage functionality.

- Activate DB Schemas
 - MeetingTopic_c
 - Topic_c
 - TopicProduct_c
 - TopicMaterial_c
- Configure custom setting
 - Populate Topic on Meetings
- Create a schedule-able apex class with MeetingProductsAlignmentBatch. Please see the code sample as below:

```
global class MeetingProductsAlignmentScheduleBatch implements Schedulable {
    private static final Integer SCOPE_COUNT = 200;

    global void execute(SchedulableContext sc) {
        OCE.MeetingProductsAlignmentBatch batchObj = new OCE.MeetingProductsAlignmentBatch();

        database.executeBatch( batchObj, SCOPE_COUNT );
    }
}
```

- Schedule MeetingProductsAlignmentBatch job to run every day for a week to handle any data inconsistency online/offline.

Configure Multiselect Meeting Record Types on Topic (OCE9 Package)

Meeting Topic custom UI has the ability to enable a 'System Generated Filter' (using Enable Advanced Search custom setting) which will filter based on a field called Meeting Type on Topic object. This filter will ensure the record type of the Meeting matches the Meeting Type on Topic to allow users to only see Topics that are intended for the Meeting. This field is single select.

In a later release, a multiselect picklist field called Meeting Record Types on Topic object has been added to allow Administrators to associate multiple Meeting record types to a single Topic. If you want to use the Meeting Record Types multiselect picklist field in the Meeting Topic filter instead of the single select Meeting Type, follow the below steps:

- Ensure the user/profile has at least Read access to OCE__MeetingRecordTypes__c field on OCE__Topic__c sObject.
- Ensure OCE__MeetingRecordTypes__c field is added to required OCE__Topic__c sObject page layouts.
- Configure Topics using the new field.

Note: When the Meeting Type field is used in the System Generated Filter, the Meeting Type column will also appear on the Meeting Topic UI. When Meeting Record Types field is used, this column will not be displayed on the UI due to the possibility for many record types to be populated, thus causing spacing issues.

Configure Multiselect Meeting Subtypes on Topic (OCE9 Package)

This feature allows Meeting Topics to be filtered and searched by Topic's Meeting Subtypes multiselect picklist field. When Read access to Meeting Subtypes is given, Topic's advanced search and system generated filtering will be performed considering Topic's Meeting Subtypes field.

If the value of Meeting Subtypes is empty, a record will not be included in search results. If there is no Read access to Meeting Subtypes field on Topic, users will not be able to search or filter on this field.

Follow the below steps to configure the feature:

- Ensure the user has at least Read access to OCE__MeetingSubtypes__c field on OCE__Topic__c sObject.
- Ensure OCE__MeetingSubtypes__c field is added to required OCE__Topic__c sObject page layouts.
- Configure Topics using the new field.
- Run cache.

Note: When Meeting Subtypes field is used, this column will not be displayed on the UI due to the possibility for many subtypes to be populated, thus causing spacing issues.

Configure Meeting Topic Columns (OCE9 Package)

Meeting Topic screen's columns are configurable via field sets on Topic object (both Salesforce and iPad/iPhone are supported). One can be configured for fields that will be displayed/filtered, and another for fields used in search.

To configure this feature:

- Go to **Setup > Object Manager > Meeting Topic > Buttons, Links, and Actions** and set (if needed):
 - New - OCE9__MeetingTopicCreationOverrideLwc (Visualforce page)
 - Edit - Same as New.
- Go to **Setup > Object Manager > Topic > Field Sets**. Create and save two new field sets to be used for display/filter and search on the new Meeting Topic screen.

Note: The maximum supported fields are 10, including Name, which is a hardcoded field and will always be displayed.

- Navigate to Admin Console to configure the name of the field sets to be used by profile: **Admin Console > Meetings > Search Settings**:
 - Select the Location where the field sets will be applied (e.g., org/profile).
 - Populate **Topic Display and Filter Field Set** with the developer name of the field set which will be used for displaying and filtering.
 - Populate **Topic Search Field Set** with the developer name of the field set which will be used for searching (this can be the same as above).
 - Save the results.
 - Run metadata cache for mobile

Note: Ensure at least Read access is provided to fields used in the field sets, otherwise some columns might not be displayed to the users.

The first 9 accessible fields in the field set will be displayed in order of the field set config (not including Name, which is always displayed first).

Search and display nuances between SF and iOS:

- Salesforce and iOS show Lookup fields as ID.
- Salesforce doesn't support search by ID due to platform limitations.
- iOS supports search by ID because it's just a string in mobile.
- Currency fields are filtered by numeric value ignoring currency code.
- **As a best practice:** To search by parent record's name, Admins should put parent object's name field (like ParentObject__r.Name) in the search field set.
- Fields from related Owner record are partially supported for display and search. List of supported fields: Name, Email, Type.
- Record Id field cannot be displayed as a separate column due to technical limitations.

When the display/filter field set is configured (i.e. name is saved in Topic Search Field Set setting), a filter icon will appear on the Add Meeting Topic screen (Salesforce and iPad/iPhone).

In case the configured field set does not exist, an error message will be displayed: "Field Set does not exist: <NAME>".

Filters can be created only for fields that are displayed and their types are also supported by filtering functionality (see the list below).

List of Supported Field Types

+ = *Supported*

- = Not Supported

Salesforce Field Type	Salesforce Data Type	Search		Filter		Display	
		SF	iOS	SF	iOS	SF	iOS
Auto Number	String	+	+	+	+	+	+
Address	String	-	-	-	-	+	+
Checkbox	Boolean	-	-	+	+	+	+
Currency	Double	-	-	+	+	+	+
Date	String	-	-	+	+	+	+
Date/Time	String	-	-	+	+	+	+
Time	String	-	-	-	-	+	+
Email	String	+	+	+	+	+	+
External Lookup	String	-	-	-	-	+	+
Formula (Text)	String	+	+	+	-	+	+
Formula (Checkbox)	Boolean	-	-	+	-	+	+
Formula (Number)	Double	-	-	+	-	+	+
Formula (Percent)	Double	-	-	+	-	+	+
Formula (Currency)	Double	-	-	+	-	+	+
Formula (Date)	String	-	-	+	-	+	+
Formula (Date/Time)	String	-	-	+	-	+	+

Salesforce Field Type	Salesforce Data Type	Search		Filter		Display	
		SF	iOS	SF	iOS	SF	iOS
Formula (Time)	String	-	-	-	-	+	+
Lookup relationship	Id	-	+	-	-	+	+
Number	Double	-	-	+	+	+	+
Percent	Double	-	-	+	+	+	+
Phone	String	+	+	-	-	+	+
Picklist	String	+	+	+	+	+	+
Picklist (Multi-select)	String	+	+	-	-	+	+
Text	String	+	+	+	+	+	+
Text (Encrypted)	String	-	-	-	-	-	-
Text Area	String	+	+	-	-	+	+
Text Area (Long)	String	-	-	-	-	+	+
Text Area (Rich)	String	-	-	-	-	+	-
URL	String	-	-	-	-	+	+

List of Supported Operators per Field Type

+ = Supported

- = Not Supported

N/A = Not Applicable

The equivalent of the operator for iOS is in parentheses.

Salesforce Field Type	equal (is)		not equal (is not)		contains (like)		does not contain (not like)		less than (<)		greater than (>)		less or equal (<=)		greater or equal (>=)		starts with		in	
	SF	iOS	SF	iOS	SF	iOS	SF	iOS	SF	iOS	SF	iOS	SF	iOS	SF	iOS	SF	iOS	SF	iOS
Text	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	N/A	N/A
Auto-number	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	N/A	N/A
Email	+	+	+	+	+	+	+	+	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	+	+	N/A	N/A
Number	+	+	+	+	N/A	N/A	N/A	N/A	+	+	+	+	+	+	+	+	N/A	N/A	N/A	N/A
Percent	+	+	+	+	N/A	N/A	N/A	N/A	+	+	+	+	+	+	+	+	N/A	N/A	N/A	N/A
Currency	+	+	+	+	N/A	N/A	N/A	N/A	+	+	+	+	+	+	+	+	N/A	N/A	N/A	N/A
Date	+	+	+	+	N/A	N/A	N/A	N/A	+	+	+	+	+	+	+	+	N/A	N/A	N/A	N/A
Date/Time	+	+	+	+	N/A	N/A	N/A	N/A	+	+	+	+	+	+	+	+	N/A	N/A	N/A	N/A
Picklist	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	+	+
Checkbox	+	+	+	+	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Meeting Topic System Generated Filter Configurable (OCE9 Package)

This feature allows Admins to configure a custom system generated filter condition on the Topic Search screen. After the feature is configured Users can see records filtered by custom condition on the Topic search screen. The condition can be configured both for Meeting record type and Profile level, so for different profiles and meeting record types Admin can configure different conditions. The feature will work only if the Advanced Search feature is enabled. If a custom system generated filter is not configured, the system generated filter on Topics will use standard hardcoded conditions.

To configure the **Meeting Topic System Generated Filter Configurable** feature, Admin should ensure that Advanced Search is enabled in Application Settings.

A **New** button override should be configured on the Topic object to use the OCE9__MeetingTopicCreationOverrideLwc Visualforce page.

Ensure Admin has access to **SystemGeneratedSettingsController** class (included into OCE9 Meetings Admin permission set).

To configure the Custom System Generated filter condition Admin should go to **Admin Console > Meetings > Search Settings** and open the **Topics** section, choose the profile and a meeting record type for which he wants to create a custom condition, and enter the condition using SOQL syntax. If the Admin wants to remove an existing custom condition and use a standard system generated filter, the Admin should clear the condition area.

In the criteria, Admin can use standard fields, packaged fields, and custom fields from the OCE__Topic__c object. Also, it is possible to use values from the current Meeting and User records in the custom filter condition on the Topic screen. Admin can use **\$meeting** and **\$user** variables with specified field API names (for example \$user.Id, \$meeting.Name etc). When the Topic screen is opened, these variables will be substituted with real values from Meeting and User records. Admin can use all fields from Meeting and User objects. When real values are added to the condition, quotes are not automatically added (regardless of the field type), so if you use fields with type String, Id, etc. (fields whose values should be enclosed in quotes in SOQL query), ensure that the variable is within quotes. For example:

1. This condition is not valid: **Name = \$meeting.Name**. To be valid \$meeting.Name should be enclosed in quotes (because the Name field type is String). Valid condition should look like: Name = '\$meeting.Name'
2. This condition is valid: **OCE__StartDate__c <= \$meeting.OCE__StartDateTime__c**, because the OCE__StartDate__c field type is DateTime and should not be enclosed in quotes.

Note: Custom filter condition supports all fields from the Topic object and all operators from SOQL, except related fields and subqueries.

On the Topic Search screen User can see the info icon next to the system generated filter. In case the custom filter is configured, the icon will show the filter condition where only field API names are substituted with their labels in the user's language, the rest of the criteria are not translated.

Additional Text (255) Field in Meeting Topic search screen result (OCE9 Package)

This feature provides an option to hide the first mandatory column (Name field) on the Topic Search screen and configure which field will be shown first using the Topic Display and Filter field set. When the feature is configured, the complete content of the first column will be shown and won't be cut. Users will be able to truncate the text if needed using the Show Less link. The feature is available only when the Topic Display and Filter field set is configured.


To configure this feature Admin should go to **Admin Console > Meetings > Search Settings** and configure **Topic Display and Filter** field set and also populate **Enforce Topic Display Field Set Config** checkbox.

Configure Topic Products (OCE9 Package)

Topics discussed at Meetings are generally associated to a product. To make this connection, Meeting Admins can set up **Topic Products** to link a product in the system with a chosen Topic.

Prerequisites: Ensure that a **Topic** has been configured in your org.

- 1. In the Topics list view, click the topic record to which you want to tie a product.

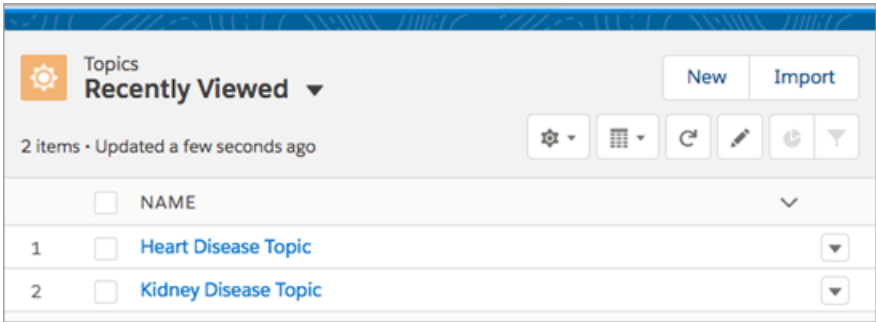

- 2. On the topic record, click the **RELATED** tab.

3. The **RELATED** tab opens. From the **Topic Products** list, click **New**.

 Topic

Kidney Disease Topic

[Change Owner](#) [Edit](#) [Delete](#) 

RELATED

DETAILS

 Topics (1)

[New](#)

NAME	START DATE	END DATE	
Topic related list test 1	4/17/2018 12:00 PM	4/25/2018 12:00 PM	

[View All](#)

 Topic Products (1)

[New](#)


TOPIC PRODUCT: TOPIC PRODUCT NAME	DISPLAY NAME	
TP-000005	PLOMAX 20 MCG PEN 2 PACK	

[View All](#)

 Meeting Topics (5)

MEETING TOPIC NAME	MEETING	
MT-000028	Kidney Disease Symposia	
MT-000029	Kidney Disease Webinar	
MT-000031	Sign in sheet testing -Speakers	
MT-000033	Meryem test	

4. The New Topic Product dialog box opens. The **Topic** field shows the name of the topic from which you initiated the new topic product.

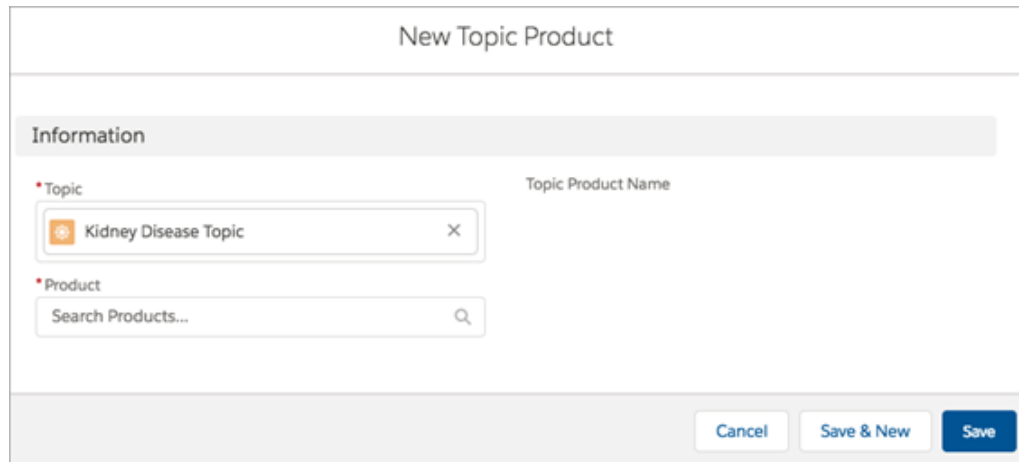

5. In the **Product** field, select the product with which you want to associate this topic.
6. Click **Save**. The topic product is added to the **Topic Products** list.
7. When a user creates a new meeting and selects a topic, the topic product associated to the topic is populated in the **Meeting Products** list on the meeting. This gives users a clear view of products tied to the meeting.

A validation exists to use only unique combination of Topic and Product, so the same Product is used only once for the same Topic. When user selects the product twice for the same topic, there will be an error. It will be possible to add several different products to the Topic or add the same product for different Topics.


The feature is enabled by default, and is controlled by *TopicProductUniquenessHandler* (Trigger Handler API Name: OCE.TopicProductUniquenessHandler) trigger handler in OCE.

Configure Topic Materials (OCE9 Package)

Meeting Admins can select materials to link to topics using the **Topic Material** object.

Prerequisites: Ensure that a **Topic** has been configured in your org.

1. From the Topics list view, click the topic record for which you want to create a material.
2. On the topic record, click the **RELATED** tab.
3. The **RELATED** tab opens. At the top right of the **Topic Materials** list, click the **New** button.
4. The New Topic Material dialog box opens.

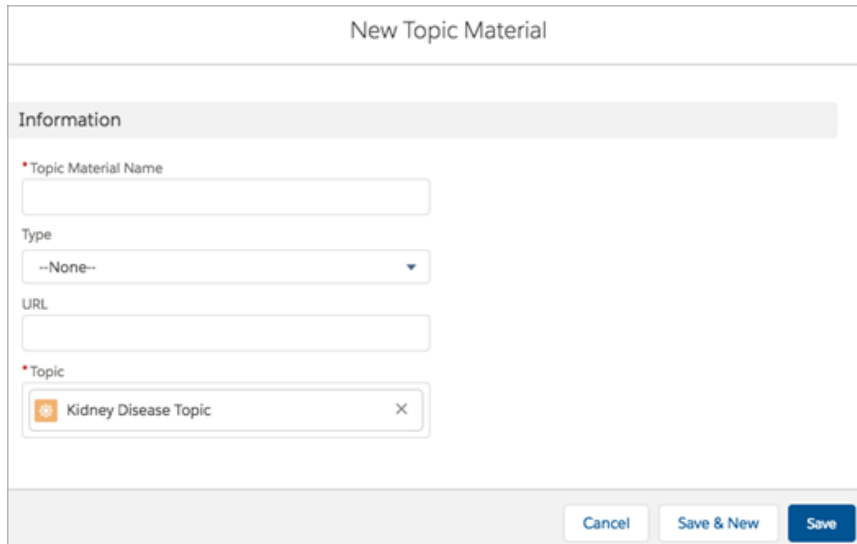

5. Enter a **Topic Material Name**.
6. Enter a type in the **Type** dropdown.
7. Enter a **URL**, if applicable.
8. Click **Save**. The topic material associated with the topic is created and can be viewed in the **Topic Materials** list.

Depending on the selected type of topic material it is possible to show related to meeting:

- Content
- Invitation Template
- Email Template
- Sign-In Template
- Presentation

Configure Expense Types (OCE9 Package)

When a user creates a meeting in the Meetings module, they can record expenses incurred. Expenses are either **Estimates** or **Actuals**, depending on the stage of the meeting.

- Estimated expenses are provided for a *category* of expenses, such as Travel.
- Actual expenses are provided for a *specific* expense line item, such as Plane Ticket.

Keep this model in mind when setting up your data.

Meeting Admins configure these expense types using the **Expense Type** object.

Prerequisites: Ensure that the **Expense Types** tab is configured in your org and that **Meetings Admin** permission set has been assigned to the Admin user.

To create an estimated expense type

1. Click the **Expense Types** tab in your org.
2. The list view of your created expense types, if any, displays. To create a new expense type, click the **New** button at the right.
3. The New Expense Type dialog box opens. For **Select a record type**, select *Category* and click **Next**.

4. The New Expense Type: Category dialog box opens.

New Expense Type: Category

Information

* Name

Parent Category

Search Expense Types...

Distribution Type

--None--

Status

--None--

Start Date

Date Time

End Date

Date Time

Lightning Icon Name ⓘ

Cancel Save & New Save

5. In the **Name** field, enter a name for the expense type. Since we are creating a category, it should be broad (for example, *Lodging*).
6. If the category you are creating is the child of another, select the parent in the **Parent Category** field.

7. In the **Distribution Type** field, select a value. This field determines how the expense can be allocated to participants of the meeting.
- *All*: The amount entered is distributed evenly among all Meeting Members added to a Meeting (who have appropriate statuses to be included in allocations). Users will not see the option to allocate for this expense, as they should not be selecting any specific Meeting Members.

Note: Meeting Expense Allocation records are not created in the backend when Distribution Type = All unless your org is using Concur (see [Concur Integration with Meetings](#) section of this guide).

Example: Expense Type = Food; Expense Amount = \$1,000; Total Meeting Members (with appropriate status to be included in allocations) = 10; Allocation Amount = \$100 per Meeting Member.

- *Individual*: The amount entered will be allocated to one individual Meeting Member selected by the meeting's organizer/co-organizer when they enter expense allocations.

Example: Expense Type = Speaker Fee; Expense Amount = \$1,000; Total Meeting Members (with appropriate status to be included in allocations) = 10; Selected Meeting Member = John Smith; Allocation Amount = \$1,000 allocated to John Smith.

- *Multiple*: The amount entered will be divided evenly or unevenly and allocated to multiple Meeting Members selected by the meeting's organizer/co-organizer when they enter expense allocations.

Example: Expense Type = Travel; Expense Amount = \$1,000; Total Meeting Members (with appropriate status to be included in allocations) = 10; Selected Meeting Members = John Smith, Jane Doe; Allocation Amount = \$500 allocated to John Smith and \$500 allocated to Jane Doe.


- *Not Applicable*: Allocations are not required, so users will not see any option to allocate.

Example: Expense Type = Paper Supplies; Expense Amount = \$50; no allocation needed.

8. In the **Start Date** and **End Date** fields, enter the dates that the expense type is valid. Also enter a **Status** for the expense type, either *Active* or *Inactive*.

9. In the **Lightning Icon Name** field, enter the name of a Lightning icon you want to display next to this expense type in the **Expenses** tab of a meeting (on Salesforce). You must enter it in the appropriate format per Lightning Design System (see this site with list of icons: <https://www.lightningdesignsystem.com/icons/>).

Example of format: *custom:custom11*

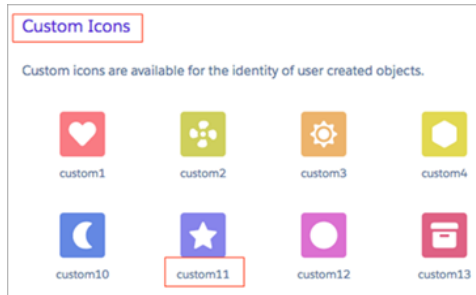

The screenshot shows a list of icons from Lightning Design System. For the **Lightning Icon Name** field text, give the main section name first (omit the word “Icons”), followed by a : and the name of the icon. Do not include spaces. All letters should be lowercase.

10. Once you have filled in the fields, click **Save**. The expense type is created and is available to use in the Meetings module.

To create an actual expense type

1. Click the **Expense Types** tab in your org.
2. The list view of your created expense types, if any, displays. To create a new expense type, click the **New** button at the right.
3. The New Expense Type dialog box opens. For **Select a record type**, select *Line Item* and click **Next**.

4. The New Expense Type: Line Item dialog box opens.

New Expense Type: Line Item

Information

*Name

Parent Category

Search Expense Types...

Distribution Type

--None--

Status

--None--

Start Date

Date Time

End Date

Date Time

Lightning Icon Name

Cancel Save & New Save

5. In the **Name** field, enter a name for the line item. Since this will be used to record actual expenses, it should be a more specific name that fits within a broader category (such as *Hotel Room* within a *Lodging* category).
6. Select the **Parent Category**. This is a lookup to the category you want to tie to this line item (in the example, *Lodging* would be the parent category for the *Hotel Room* line item).

Note: Be sure to select the parent category to which the line item belongs.

7. Fill out the remaining fields (**Distribution Type**, **Status**, **Start Date**, **End Date**, and **Lightning Icon Name**). These function the same as for the expense type.
8. Once your fields are filled in, click **Save**. The expense type is created and available to use in the Meetings module.

Note:

If different currency codes are displayed in the Meeting Expense grid, it is because the Totals section uses the CurrencyISOCode set on the Meeting object, while each estimated expense category and actual expense line item can have its own CurrencyISOCode. This is expected behavior on the iPad and online.

Configure Meeting Expenses/ Meeting Expense Allocations (OCE9 Package)

Meeting Expenses are how Meetings users record the expenses incurred on a Meeting, and Meeting Expense Allocations allow users to allocate these expenses to Meeting Members.

To activate this feature ensure the following trigger handler configuration:

- Enable trigger handlers:

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
MEA To Meeting Relation	OCE9.MEAToMeetingRelationHandler2	MeetingExpenseAllocationCreator (DEPRECATED)	OCE.MeetingExpenseAllocationCreator (DEPRECATED)
Meeting Calculation Event	OCE9.MeetingCalculationEventHandler2	MeetingExpenseAllocationCalcHandler (DEPRECATED)	OCE.MeetingExpenseAllocationCalcHandler (DEPRECATED)
Meeting Expense	OCE9.MeetingExpenseHandler2	MEAToMeetingRelationHandler (DEPRECATED)	OCE.MEAToMeetingRelationHandler (DEPRECATED)
Meeting Expense Allocation Calculation	OCE9.MeetingExpenseAllocationCalcHandler2	MeetingExpenseAllocationLockerHandler (DEPRECATED)	OCE.MeetingExpenseAllocationLockerHandler (DEPRECATED)
Meeting Expense Allocation Creator	OCE9.MeetingExpenseAllocationCreator2	MeetingExpenseCalculationHandler (DEPRECATED)	OCE.MeetingExpenseCalculationHandler (DEPRECATED)

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Meeting Expense Allocation Locker	OCE9.MeetingExpenseAllocationLockerHandler2	MeetingExpenseAllocationRecalcHandler (DEPRECATED)	OCE.MeetingExpenseAllocationRecalcHandler
MEA Recalculation on ME change	OCE9.RecalculateMEAonMEChangeHandler	MeetingExpenseHandler (DEPRECATED)	OCE.MeetingExpenseHandler (DEPRECATED)
Meeting Expense Calculation	OCE9.MeetingExpenseCalculationHandler2	MeetingExpenseLockerHandler (DEPRECATED)	OCE.MeetingExpenseLockerHandler (DEPRECATED)
Meeting Expense Locker	OCE9.MeetingExpenseLockerHandler2	MeetingCalculationEventHandler (DEPRECATED)	OCE.MeetingCalculationEventHandler (DEPRECATED)
Meeting Member Expense Calculation	OCE9.MeetingMemberExpenseCalculationHandler2	MeetingMemberExpenseCalculationHandler (DEPRECATED)	OCE.MeetingMemberExpenseCalculationHandler (DEPRECATED)
		Meeting Expense Allocation Recalculation (DEPRECATED)	OCE9.MeetingExpenseAllocationRecalcHandler2 (DEPRECATED)

- If migrating from OCE to OCE9, replace 'MeetingExpenses' (OCE) (DEPRECATED) component on Meeting Lightning page with 'Meeting Expenses Lwc' (OCE9) component.

Note: 'Needs Reallocation' label will be displayed regardless of user permissions for Uneven Allocation feature. This is a non-transparent change. This is applicable only for LWC component. The Aura component is not impacted.

- Ensure DB Schemas are active
 - MeetingExpense_c
 - MeetingExpenseAllocation_c
- Ensure the following validation rule is active (if your org uses currency)
 - Forbid_changing_the_currency
- Configure custom settings (see more in **Admin Console - Meeting Settings** section of this guide)
 - Allocation: allowed Invitation Statuses
 - This setting determines which Meeting Members of certain Invitation Statuses will appear on the Allocations screen.
 - Allocation: allowed Attendance Statuses
 - This setting determines which Meeting Members of certain Attendance Statuses will appear on the Allocations screen.
 - Allocation: Allowed Meeting Member Record Types
 - This setting determines which Meeting Member record types will appear on the Allocations screen.
 - Enable Attach Receipts (if using Receipts functionality)

Note:

It is possible 2 Meeting Expenses of the same Expense Type can be created on Salesforce and on mobile while the app is offline. This will cause a sync transaction failure on Salesforce when the app goes online since 2 Meeting Expenses of the same Expense Type cannot be created on the same Meeting. Please monitor sync transactions for such failures and manually adjust.

Changing the currency of Meeting Expense Allocations is not supported. Meeting Expense Allocations inherit the currency from Meeting Expense.

The OCE functionality does not support allocating 0 expenses to budgets.

Expense Related Field Logic (OCE9 Package)

There are several expense related calculated fields in Meetings. To use these:

- Go to Setup > Object Manager > Meetings.
- Remove the following fields from the page layout:
 - DEPRECATED Average Actual Expenses
 - DEPRECATED Average Estimated Expenses
 - DEPRECATED Memb. alloc. to estim. Expense
 - DEPRECATED Members alloc. to act. Expense
- Add to the layout the following fields:
 - Average Actual Expense
 - Average Estimated Expense

- Total Actual Expenses
- Total Estimated Expenses
- Ensure that trigger handlers are activated (as mentioned in [Configure Meeting Expenses/ Meeting Expense Allocations](#) section):
 - Meeting Expense Calculation
 - Meeting Expense Allocation Calculation
 - Meeting Member Expense Calculation
- Ensure that the following trigger handlers are deactivated (as mentioned in [Configure Meeting Expenses/ Meeting Expense Allocations](#) section):
 - MeetingExpenseCalculationHandler (DEPRECATED)
 - MeetingExpenseAllocationCalcHandler (DEPRECATED)
 - MeetingMemberExpenseCalculationHandler(DEPRECATED)

WorkflowPathContainer refresh when Expense information is updated (OCE9)

The WorkflowPathContainer component on Web now automatically refreshes when Meeting Expense information is updated. Workflow actions that depend on expense-related conditions are now fetched without requiring manual page refresh.

Configuration steps:

- Activate Workflow Path Refresh On Meeting Update (GwpRefreshOnMeetingUpdateHandler - API name).
- Put the Meeting Calculation Event Listener (DataChangeListener - API name) component for listening MeetingCalculationEvents on a meeting page beside the WorkflowPathContainer component.

Algorithm for Calculation

- *Total Estimated Expenses* = Total amount of all Estimated Expenses (includes all 'Distribution Types' of Expense Types).
- *Total Actual Expenses* = Total amount of all Actual Expenses (includes all 'Distribution Types' of Expense Types).
- *Average Estimated Expense* = Total amount of Estimated Expenses (excludes Distribution Type = Not Applicable) divided by Meeting Members with applicable Invitation Statuses (as set in the AllocationInvitationStatuses__c Custom Setting).
- *Average Actual Expense* = Total amount of Actual Expenses (excludes Distribution Type = Not Applicable) divided by Meeting Members with applicable Attendance Statuses (as set in the AllocationAttendanceStatuses__c Custom Setting).

Example of Calculation

- Configured Invitation Status to include in allocations = Invited
- Configured Attendance Status to include in allocations = Attended-eSigned
- MM1 – Invitation Status: Invited; Attendance Status: Attended-eSigned
- MM2 – Invitation Status: Not Applicable; Attendance Status: Not Applicable
- MM3 - Invitation Status: Invited; Attendance Status: Attended-Paper Signed

Meeting Expense	Distribution Type	Type	Amount	Allocation
Expense 1	Individual	Estimated	100	MM1
Expense 2	Multi	Estimated	200	MM1, MM3
Expense 3	All	Estimated	100	
Expense 4	Not applicable	Estimated	200	
Line item 1	Individual	Actual	100	MM1

Meeting Expense	Distribution Type	Type	Amount	Allocation
Line item 2	Multi	Actual	300	MM1
Line item 3	All	Actual	100	
Line item 4	Not applicable	Actual	400	

- Total Estimated Expenses = 600
- Total Actual Expenses = 900
- Average Estimated Expense = $400/2 = 200$
- Average Actual Expense = $500/1 = 500$

Note:

As described above, calculations take into consideration the Attendance and Invitation Statuses that can be included in allocations (per Custom Settings). Although the settings can be set at a profile level, the calculations take into account only the org level setting. If no org level setting is created, the calculation will take the defaults, as follows:

For Estimates, "Allocations: Allowed Invitation Statuses" =

'Nominated',

'Invited',

'Accepted',

'Walk In'

For Actuals, "Allocations: Allowed Attendance Statuses" =

'Attended-eSigned',

'Attended-Paper Signed',

'Attended-Did Not Sign',

'Attended-QR Code'

Configure Multiselect Meeting Record Types on Expense Type (OCE9 Package)

Meeting Expense selection custom UI has the ability to enable a 'System Generated Filter' (using Enable Advanced Search custom setting) which will filter based on a field called Meeting Type on Expense Type object. This filter will ensure the record type of the Meeting matches the Meeting Type on Expense Type to allow users to only see Expense Types that are intended for the Meeting. This field is single select.

In a later release, a multiselect picklist field called Meeting Record Types on Expense Type object has been added to allow Administrators to associate multiple Meeting record types to a single Expense Type. If you want to use the Meeting Record Types multiselect picklist field in the Meeting Expense filter instead of the single select Meeting Type, follow the below steps:

- Ensure the user/profile has at least Read access to OCE__MeetingRecordTypes__c field on OCE__ExpenseType__c sObject.
- Replace OCE__MeetingType__c with OCE__MeetingRecordTypes__c field on Expense Type object layout.
 - Use MeetingRecordTypes global picklist as values for ExpenseType__c.MeetingRecordTypes__c field.
- Configure Expense Types using the new field.

Note: When the Meeting Type field is used in the System Generated Filter, the Meeting Type column will also appear on the Expense selection UI. When Meeting Record Types field is used, this column will not be displayed on the UI due to the possibility for many record types to be populated, thus causing spacing issues.

Inactive Expense Types will always be excluded from Meeting Expense search, whether 'Enable Advanced Search' setting is enabled or not.

Configure 'View Comments' on Meeting Expense (OCE9 Package)

If you would like users that do not have Workflow permissions on Meeting Expense to still be able to view comments on the Meeting Expense record, provide at least Read access to OCE__MeetingExpense__c.OCE__Comments__c field. This will allow users to see a 'View Comments' option in line with the Meeting Expense, which will open a pop-up with the comments. This is available on Salesforce and iPad.

Configure Meeting Expense Allocation Columns (OCE9 Package)

This feature allows Admins to configure the fields/columns displayed on the Meeting Expense Allocation component for both Salesforce and iPad.

Add fields of your choosing to the following fields sets on the Meeting Member object:

- **OCE__ActualMeetingExpenseAllocation** - fields displayed during allocation of Actual Expenses.
- **OCE__EstimatedMeetingExpenseAllocation** - fields displayed during allocation of Estimated Expenses.

OOB field sets contain the following fields (Full Name and Amount are hardcoded so do not need to be included in the field set):

- Specialty (from Meeting Member)
- Record Type (from Meeting Member)

Provide a minimum of Read access to fields in the field sets above and remember to run cache to use the feature on mobile.

Note: Only a maximum of 10 fields can be configured in the field set, which includes 2 hardcoded fields: Full Name and Amount. The first 8 accessible fields in the field set will be displayed in order of the field set config (not including Full Name and Amount, which are always displayed first and last, respectively).

Currently Currency fields from Meeting Member related objects (e.g. Customer>Budget__c) are only displayed as numbers with no code or symbol.

Configure Uneven Allocations (OCE9 Package)

OOB, OCE supports allocating Meeting Expenses evenly among qualified Meeting Members (when Expense Type has Distribution Type field set as 'Multiple'). However, certain business scenarios require dividing an expense unevenly to accurately reflect a specific Meeting Member's portion.

OCE has provided the ability to allocate Meeting Expenses unevenly (for Expense Types with Distribution Type field set as 'Multiple' only).

To activate this feature

- Provide **Edit** access to **Uneven Allocation** field on **Meeting Expense** object (can be done through cloning OOB Meetings User permission set).

- Go to **Setup > Custom Metadata Types > Trigger Handlers** > Ensure 'MeetingExpenseAllocationRecalcHandler' (Trigger Handler API Name: OCE.MeetingExpenseAllocationRecalcHandler) is deactivated and 'Meeting Expense Allocation Recalculation' (Trigger Handler API Name: OCE9.MeetingExpenseAllocationRecalcHandler2) is active.

Once the feature is active, users will begin seeing an Uneven Allocation toggle on the Meeting Expense Allocation screen (for Expense Types with Distribution Type field set as 'Multiple'). They can toggle between even and uneven mode. This is available on Salesforce and mobile.

Some items to note..

On mobile, when a user does not have Read access to the Uneven Allocation field and 'Meeting Expense Allocation Recalculation' handler is enabled:

- Whether the Meeting Expense was previously allocated unevenly or not, an update of expense amount will lead to redistribution of related Meeting Expense Allocation amounts **evenly**.

When a user does not have Read access to the Uneven Allocation field and they open the Meeting Expense Allocation:

- Whether the Meeting Expense was previously allocated evenly or unevenly, the original OOB UI will be shown (no toggle, only Even mode is available).

When a user does not have Edit access to the Uneven Allocation field but has Read access and they open the Meeting Expense Allocation:

- Whether the Meeting Expense is allocated unevenly or evenly, the user will see the modal in read only mode and an error message will appear.

When a user has Edit access to the Uneven Allocation field and they open the Meeting Expense Allocation:

- The user can see the 'Uneven Allocation' toggle and can use the feature.
- When the toggle is off, Amounts are read only, checkboxes to select Meeting Members are shown.

- When the toggle is on, Amounts are editable, no checkboxes are shown next to Meeting Members.
- If a Meeting Expense was allocated unevenly and then its amount was changed, it will be marked as 'Needs Reallocation'.
- If a user was working with Uneven Allocation mode and has some allocated amounts, a prompt will be shown when switching to Even Allocation mode. A confirmation message will ask 'Are you sure you want to toggle? Your current allocations will be lost'. User will also be validated if their allocations don't add up to the Meeting Expense amount.

Configure Partial Allocation of Expenses to Meeting Members (Estimated/Actual) (OCE9 Package)

It is possible for users to only partially allocate the amount of Meeting Expenses to Meeting Members when using Uneven Allocation mode.

To configure this:

- Assign **"Allow Partial Meeting Expense Allocations"** custom permission to users who are allowed to do partial allocations.
- Add **Meeting Expenses Lwc** component to Meeting Lightning page.

If the custom permission is not assigned and the user attempts to partially allocate an expense, an error message is shown: "Please adjust your allocations to equal the expense amount."

The "Needs Reallocation" message is used to indicate partial allocation is done on the custom Meeting Expenses related list.

DISTRIBUTION TYPE	ESTIMATE	ACTUAL
Multiple	USD 200.00  Needs Reallocation  1	USD 100.00

Configure Fields to Search and Filter/Display on Expense Type Selection Screen (OCE9 Package)

The Expense Type selection screen's columns are configurable via field sets on Expense Type object (both Salesforce and iPad/iPhone are supported). One can be configured for fields that will be displayed/filtered, and another for fields used in search.

To configure this feature:

- Add **Meeting Expenses Lwc** component to Meeting Lightning page.
- Enable the setting **Enable Advanced Search** in **Admin Console > Mobile > Applications Settings**.
- Go to **Setup > Object Manager > Expense Type > Field Sets**. Create and save two new field sets to be used for Display/Filter and Search on the new Meeting Expense screen. (Note: The maximum supported fields are 10, including Name, which is a hardcoded field and will always be displayed).
- Navigate to Admin Console to configure the name of the field sets to be used by profile: **Admin Console > Meetings > Search Settings**:
 - Select the Location where the field sets will be applied (e.g. org/profile)
 - Populate **Expense Display and Filter Field Set** with the developer name of the field set which will be used for displaying and filtering.
 - Populate **Expense Search Field Set** with the developer name of the field set which will be used for searching (this can be the same as above).
 - Save the results.
 - Run metadata cache for mobile.

Note:

Ensure at least Read access is provided to fields used in the field sets, otherwise the columns will not be displayed to the users.

The first 9 accessible fields in the field set will be displayed in order of the field set config (not including Name, which is always displayed first).

Search and display nuances between Salesforce and iOS:

- Salesforce and iOS show Lookup fields as ID.
- Salesforce doesn't support search by ID due to platform limitations.
- iOS supports search by ID because it's a string in mobile.
- Currency fields are filtered by numeric value, ignoring currency code.
- **As a best practice:** To search by parent record's name, Admins should put parent object's name field (like ParentObject__r.Name) in the search field set.
- Fields from related Owner record are partially supported for display and search. List of supported fields are: Name, Email, Type.
- Record ID field cannot be displayed as a separate column due to technical limitations.

When the Display/Filter field set is configured (i.e., its name is saved in Expense Search Field Set setting), a filter icon will appear on the Expense Type selection screen (Salesforce and iPad/iPhone).

In case a configured field set does not exist, an error message is displayed: "Field Set does not exist: <NAME>".

Filters can be created only for fields that are displayed and their types are also supported by filtering functionality (see the list below).

List of Supported Field Types

+ = *Supported*

- = Not Supported

Salesforce Field Type	Salesforce Data Type	Search		Filter		Display	
		SF	iOS	SF	iOS	SF	iOS
Auto Number	String	+	+	+	+	+	+
Address	String	-	-	-	-	+	+
Checkbox	Boolean	-	-	+	+	+	+
Currency	Double	-	-	+	+	+	+
Date	String	-	-	+	+	+	+
Date/Time	String	-	-	+	+	+	+
Time	String	-	-	-	-	+	+
Email	String	+	+	+	+	+	+
External Lookup	String	-	-	-	-	+	+
Formula (Text)	String	+	+	+	-	+	+
Formula (Checkbox)	Boolean	-	-	+	-	+	+
Formula (Number)	Double	-	-	+	-	+	+
Formula (Percent)	Double	-	-	+	-	+	+
Formula (Currency)	Double	-	-	+	-	+	+
Formula (Date)	String	-	-	+	-	+	+
Formula (Date/Time)	String	-	-	+	-	+	+

Salesforce Field Type	Salesforce Data Type	Search		Filter		Display	
		SF	iOS	SF	iOS	SF	iOS
Formula (Time)	String	-	-	-	-	+	+
Lookup relationship	Id	-	+	-	-	+	+
Number	Double	-	-	+	+	+	+
Percent	Double	-	-	+	+	+	+
Phone	String	+	+	-	-	+	+
Picklist	String	+	+	+	+	+	+
Picklist (Multi-select)	String	+	+	-	-	+	+
Text	String	+	+	+	+	+	+
Text (Encrypted)	String	-	-	-	-	-	-
Text Area	String	+	+	-	-	+	+
Text Area (Long)	String	-	-	-	-	+	+
Text Area (Rich)	String	-	-	-	-	+	-
URL	String	-	-	-	-	+	+

List of Supported Operators per Field Type

+ = Supported

- = Not Supported

N/A = Not Applicable

The equivalent of the operator for iOS is in parentheses.

Salesforce Field Type	equal (is)		not equal (is not)		contains (like)		does not contain (not like)		less than (<)		greater than (>)		less or equal (<=)		greater or equal (>=)		starts with		in	
	SF	iOS	SF	iOS	SF	iOS	SF	iOS	SF	iOS	SF	iOS	SF	iOS	SF	iOS	SF	iOS	SF	iOS
Text	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	N/A	N/A
Auto-number	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	N/A	N/A
Email	+	+	+	+	+	+	+	+	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	+	+	N/A	N/A
Number	+	+	+	+	N/A	N/A	N/A	N/A	+	+	+	+	+	+	+	+	N/A	N/A	N/A	N/A
Percent	+	+	+	+	N/A	N/A	N/A	N/A	+	+	+	+	+	+	+	+	N/A	N/A	N/A	N/A
Currency	+	+	+	+	N/A	N/A	N/A	N/A	+	+	+	+	+	+	+	+	N/A	N/A	N/A	N/A
Date	+	+	+	+	N/A	N/A	N/A	N/A	+	+	+	+	+	+	+	+	N/A	N/A	N/A	N/A
Date/Time	+	+	+	+	N/A	N/A	N/A	N/A	+	+	+	+	+	+	+	+	N/A	N/A	N/A	N/A
Picklist	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	+	+
Checkbox	+	+	+	+	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Configure Deletion of Meeting Expense Allocations Upon Meeting Member Deletion (OCE9 Package)

This feature allows the user to automatically delete Meeting Expense Allocations when the respective Meeting Member is deleted. By design, a user should have GW access to delete Meeting Expense Allocation records if they have access to delete Meeting Member records.

The feature has the following limitations:

- Only Estimated Meeting Expense Allocations are deleted.
- Only manually created Meeting Expense Allocations are deleted (Is Auto Generated = false).

Note: The automatic creation of Meeting Expense Allocations is an Engage feature; in OCE, all Meeting Expense Allocations are manually created.

To configure the feature:

- Activate 'Delete MEA On MM Delete' (Trigger Handler API Name: OCE9.DeleteMEAOnMMDeleteHandler) trigger handler.
- Provide read access to the field isautogenerated__c on the object MeetingExpenseAllocation__c

Delete Meeting Expense Allocations on Meeting Member Delete - Add Reallocate Button

The feature adds a 'Reallocate' button on the Meeting Expense Allocation screen when an Expense record needs to be reallocated. The 'Reallocate' button is displayed in Even Allocation mode for Estimated Expenses when there is a discrepancy between the Expense amount and the sum of MEA amounts (when the 'Needs Reallocation' label is displayed in the Expenses related list). Reallocation may be needed after a deletion of Meeting Expense Allocations via the 'Delete MEA On MM Delete' trigger handler logic.

To enable the feature:

- Add Meeting Expense Lwc component on Meeting flexipage.

Allow Manual Allocation of Expenses with 0 Amount (OCE9 Package)

This feature allows to allocate 0 amounts to budgets (MEBA) when entering the amount manually or using the checkbox from the Expense allocation screen.

This feature does not require special configuration steps, as the basic behavior of the meeting expense budget allocation component is being modified.

Currently, checkboxes next to each budget row are used only for **Split Between Selected** button and do not take part in any calculations. This logic is changed by the feature in the next way:

- When User opens MEBA screen, for already existing records checkbox will be set to True. If User tries to change amount, checkbox remains True.
- If User wants to remove MEBA record he should uncheck this row (even if amount is 0, if checkbox is set to True this MEBA records will be updated to amount 0 and won't be deleted).
- If User makes some changes in amount input, checkbox will be automatically set to *True*.
- When User unchecks an already checked row, amount of this row will be set to 0 on Web (cleared out on iPad and iPhone, displaying the **Amount** placeholder and representing that no amount is distributed to given budget).
- Validation, saving of records, amount/percent mode change and logic of **Split Between Selected** button will work as is, but User will be able to create MEBA records with amount 0.

Changes based on using of checkboxes allow user to create MEBA records when Expense amount is 0. Logic will work in a similar way as above, but there are some differences in this case:

- **Amount** and **Percent** buttons will be disabled since there is no need to switch between amount/percent mode when user tries to allocate expense with 0 amount.
- **Amount** input will be always disabled too, since there is no need to change it (MEBA amounts should always be 0 on web and blank on mobile in this case).
- **Split Between Selected** also will be disabled, since there is nothing to split between different budgets.
- The progress bar is empty if no budgets are selected and filled if at least one budget is selected.

Configure Meeting Budgets (OCE9 Package)

A second version of Budgets/Meeting Budgets has been released in OCE. The following objects have been introduced:

- **Meeting Budget 2** - used to assign a Budget to a Meeting, this new object was created instead of using the existing Meeting Budget object in order to support proper visibility of the Budget to all Colleagues on the Meeting
- **Meeting Expense Budget Allocation** - used to allocate a Meeting Expense to a Meeting Budget 2

The following steps should be taken to use Budgets with Meetings:

- Configure Budgets for your org (see [Configuring Budgets](#) section of this guide).
- Set up currencies for your org (see **Admin Console - Meeting Settings > Meetings Org Level Settings > Manage Currencies** sub section of this guide to learn how to manage currencies).
- Enable the **Enable Currency** and, if using advanced currency, **Enable Advanced Currency** Custom Settings (see **Admin Console - Meeting Settings > Meetings Org Level Settings > Enable Currency/Enable Advanced Currency** sub sections of this guide).
- Enable the **Enable Budgets** setting (see **Admin Console - Meeting Settings > General Settings > Enable Budgets** sub section of this guide).
- For the users administering and using this module, assign Meetings Admin/Meetings User permission sets.
- Ensure the users using this module have 'OCE Budget Admin'/'OCE Budget Manager'/'OCE Budget User' permission set assigned or have read access to the following fields on Budget__c object:
 - EstimatedAmount__c
 - ActualAmount__c
 - ChildrenEstimatedAmount__c
 - ChildrenActualAmount__c

- ChildrenAllocatedAmount__c
 - ConsumptionBudget__c
 - AggregatedRemaining__c
 - Remaining__c
 - TotalAmount__c
- Ensure that all profiles have at least read access to MeetingBudget2__c object and MeetingExpenseBudgetAllocation__c object.
 - Enable DB Schema MeetingExpenseBudgetAllocation_c, MeetingBudget2_c, CurrencyType, DatedConversionRate, MeetingsOrgLevelConfig_c.
 - In Generic Workflow, configure the Status To Calculate Actuals field when creating a new Workflow Path in Admin Console (OOB values: Concluded;Closed;Cancelled). Object selected must be 'Meetings' and controlling field must be 'Status'. See more information in **Configuring Generic Workflow** section of the guide.
 - Configure Create/Edit/Delete permissions for Meeting Budget and Meeting Expense Budget Allocation in the Generic Workflow. See more information in **Configuring Generic Workflow** section of the guide.
 - In Meeting Expense object page layout, replace Amount__c with CurrencyAmount__c.
 - In Meeting Expense Allocation object page layout, replace Amount__c with CurrencyAmount__c.
 - Enable the validation rule Forbid_changing_the_currency in MeetingExpense__c.
 - Activate/deactivate trigger handlers:

Note: **Configuration 1** is based on using platform events, whereas **Configuration 2** is based on synchronous trigger handlers and we recommend using **Configuration 2** since it is more stable and predictable.

Configuration 1: Meeting Budgets Basic Config

Ensure the following trigger handler configuration:

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
MEBA To Meeting Relation	OCE9.MEBAToMeetingRelationHandler2	MEBAUpdateMeetingBudgetHandler (DEPRECATED)	OCE.MEBAUpdateMeetingBudgetHandler (DEPRECATED)
Meeting Expense Budget Allocation Create	OCE9.MeetingExpenseBudgetAllocCreateHandler2	BudgetUpdateMeetingBudgetHandler (DEPRECATED)	OCE.BudgetUpdateMeetingBudgetHandler (DEPRECATED)
Meeting Calculation Event	OCE9.MeetingCalculationEventHandler2	MeetingBudgetUpdateBudgetHandler (DEPRECATED)	OCE.MeetingBudgetUpdateBudgetHandler (DEPRECATED)
MEBA Duplicate Check	OCE9.MEBADuplicateCheckHandler2	MeetingUpdateMeetingBudgetHandler (DEPRECATED)	OCE.MeetingUpdateMeetingBudgetHandler (DEPRECATED)
MEA To Meeting Relation	OCE9.MEAToMeetingRelationHandler2	MEBAToMeetingRelationHandler (DEPRECATED)	OCE.MEBAToMeetingRelationHandler (DEPRECATED)

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Meeting Expense	OCE9.MeetingExpenseHandler2	MeetingBudgetDmlHandler (DEPRECATED)	OCE.MeetingBudgetDmlHandler (DEPRECATED)
Meeting Expense Allocation Calculation	OCE9.MeetingExpenseAllocationCalcHandler2	MeetingExpenseBudgetAllocCreateHandler (DEPRECATED)	OCE.MeetingExpenseBudgetAllocCreateHandler (DEPRECATED)
Meeting Expense Allocation Creator	OCE9.MeetingExpenseAllocationCreator2	MeetingExpenseDeleteHandler (DEPRECATED)	OCE.MeetingExpenseDeleteHandler (DEPRECATED)
Meeting Expense Allocation Locker	OCE9.MeetingExpenseAllocationLockerHandler2	MebaAmountValidationHandler (DEPRECATED)	OCE.MebaAmountValidationHandler (DEPRECATED)
MEA Recalculation on ME change	OCE9.RecalculateMEAonMEChangeHandler	MeetingCalculationEventHandler (DEPRECATED)	OCE.MeetingCalculationEventHandler (DEPRECATED)

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Meeting Expense Calculation	OCE9.MeetingExpenseCalculationHandler2	BudgetCalculationHandler (DEPRECATED)	OCE.BudgetCalculationHandler (DEPRECATED)
Meeting Expense Locker	OCE9.MeetingExpenseLockerHandler2	MEBADuplicateCheckHandler (DEPRECATED)	OCE.MEBADuplicateCheckHandler (DEPRECATED)
Meeting Member Expense Calculation	OCE9.MeetingMemberExpenseCalculationHandler2	Meeting Budget2 Update Budget Handler (DEPRECATED)	OCE.MeetingBudgetUpdateBudgetHandler (DEPRECATED)
MEBA Update Meeting Budget	OCE9.MEBAUpdateMeetingBudgetHandler2	MeetingExpenseAllocationCreator (DEPRECATED)	OCE.MeetingExpenseAllocationCreator (DEPRECATED)
Budget Update Meeting Budget	OCE9.BudgetUpdateMeetingBudgetHandler2	MeetingExpenseAllocationCalcHandler (DEPRECATED)	OCE.MeetingExpenseAllocationCalcHandler

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Meeting Update Meeting Budget	OCE9.MeetingUpdateMeetingBudgetHandler2	MEAToMeetingRelationHandler (DEPRECATED)	OCE.MEAToMeetingRelationHandler (DEPRECATED)
Meeting Budget Dml	OCE9.MeetingBudgetDmlHandler2	MeetingExpenseAllocationLockerHandler (DEPRECATED)	OCE.MeetingExpenseAllocationLockerHandler (DEPRECATED)
Meeting Expense Delete	OCE9.MeetingExpenseDeleteHandler2	MeetingExpenseCalculationHandler (DEPRECATED)	OCE.MeetingExpenseCalculationHandler (DEPRECATED)
Meba Amount Validation	OCE9.MebaAmountValidationHandler2	MeetingExpenseAllocationRecalcHandler (DEPRECATED)	OCE.MeetingExpenseAllocationRecalcHandler (DEPRECATED)
Budget Calculation	OCE9.BudgetCalculationHandler2	MeetingExpenseHandler (DEPRECATED)	OCE.MeetingExpenseHandler (DEPRECATED)
Meeting Budget2 Update Budget	OCE9.MeetingBudgetUpdateBudgetHandler2	MeetingExpenseLockerHandler (DEPRECATED)	OCE.MeetingExpenseLockerHandler (DEPRECATED)

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
		MeetingMemberExpenseCalculationHandler (DEPRECATED)	OCE.MeetingMemberExpenseCalculationHandler (DEPRECATED)
		Meeting Expense Allocation Recalculation	OCE9.MeetingExpenseAllocationRecalcHandler2

Configuration 2: If It Is Planned To Use Validate Estimated and Actual Meeting Expense Budget Allocations

Note: Before activating the below trigger handlers, run one time job for updating historical data on Meeting Budget 2 records. Execute '*Database.executeBatch(new OCE9.MeetingBudgetUpdateAmountsBatch());*' code snippet in developer console. Note: Ensure the user who runs the batch has edit permissions for Meeting Budget 2 according to Generic Workflow configuration (this permission is supposed to be skipped when running the batch but it is currently not working. It will be fixed in Mar. 2024 release). Also during the batch execution “Meeting Budget2 Update Budget New” trigger handler should be temporarily disabled (will also be fixed in Mar. 2024 release)

Ensure the following trigger handler configuration:

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
MEBA To Meeting Relation	OCE9.MEBAToMeetingRelationHandler2	MEBAUpdateMeetingBudgetHandler (DEPRECATED)	OCE.MEBAUpdateMeetingBudgetHandler (DEPRECATED)

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Meeting Expense Budget Allocation Create	OCE9.MeetingExpenseBudgetAllocCreateHandler2	BudgetUpdateMeetingBudgetHandler (DEPRECATED)	OCE.BudgetUpdateMeetingBudgetHandler (DEPRECATED)
Meeting Calculation Event	OCE9.MeetingCalculationEventHandler2	MeetingBudgetUpdateBudgetHandler (DEPRECATED)	OCE.MeetingBudgetUpdateBudgetHandler (DEPRECATED)
MEBA Duplicate Check	OCE9.MEBADuplicateCheckHandler2	MeetingUpdateMeetingBudgetHandler (DEPRECATED)	OCE.MeetingUpdateMeetingBudgetHandler (DEPRECATED)
MEA To Meeting Relation	OCE9.MEAToMeetingRelationHandler2	MEBAToMeetingRelationHandler (DEPRECATED)	OCE.MEBAToMeetingRelationHandler (DEPRECATED)
Meeting Expense	OCE9.MeetingExpenseHandler2	MeetingBudgetDmlHandler (DEPRECATED)	OCE.MeetingBudgetDmlHandler (DEPRECATED)
Meeting Expense Allocation Calculation	OCE9.MeetingExpenseAllocationCalcHandler2	MeetingExpenseBudgetAllocCreateHandler (DEPRECATED)	OCE.MeetingExpenseBudgetAllocCreateHandler (DEPRECATED)

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Meeting Expense Allocation Creator	OCE9.MeetingExpenseAllocationCreator2	MeetingExpenseDeleteHandler (DEPRECATED)	OCE.MeetingExpenseDeleteHandler (DEPRECATED)
Meeting Expense Allocation Locker	OCE9.MeetingExpenseAllocationLockerHandler2	MebaAmountValidationHandler (DEPRECATED)	OCE.MebaAmountValidationHandler (DEPRECATED)
MEA Recalculation on ME change	OCE9.RecalculateMEAonMEChangeHandler	MeetingCalculationEventHandler (DEPRECATED)	OCE.MeetingCalculationEventHandler (DEPRECATED)
Meeting Expense Calculation	OCE9.MeetingExpenseCalculationHandler2	BudgetCalculationHandler (DEPRECATED)	OCE.BudgetCalculationHandler (DEPRECATED)
Meeting Expense Locker	OCE9.MeetingExpenseLockerHandler2	MEBADuplicateCheckHandler (DEPRECATED)	OCE.MEBADuplicateCheckHandler (DEPRECATED)

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Meeting Member Expense Calculation	OCE9.MeetingMemberExpenseCalculationHandler2	Meeting Budget2 Update Budget Handler (DEPRECATED)	OCE.MeetingBudgetUpdateBudgetHandler (DEPRECATED)
MEBA Update Meeting Budget2	OCE9.CalculateBudget_MEBA	MeetingExpenseAllocationCreator (DEPRECATED)	OCE.MeetingExpenseAllocationCreator (DEPRECATED)
Meeting Budget2 Update Budget New	OCE9.CalculateBudget_MB2	MeetingExpenseAllocationCalcHandler (DEPRECATED)	OCE.MeetingExpenseAllocationCalcHandler (DEPRECATED)
Meeting Update Budget	OCE9.CalculateBudget_Meeting	MEAToMeetingRelationHandler (DEPRECATED)	OCE.MEAToMeetingRelationHandler (DEPRECATED)
Meeting Expense Update Meeting Budget2	OCE9.CalculateBudget_MeetingExpense	MeetingExpenseAllocationLockerHandler (DEPRECATED)	OCE.MeetingExpenseAllocationLockerHandler (DEPRECATED)

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Budget Calculation and denormalization	OCE9.CalculateBudget_Budget	MeetingExpenseCalculationHandler (DEPRECATED)	OCE.MeetingExpenseCalculationHandler (DEPRECATED)
Validate Auto Meba	OCE9.ValidateAutoMebaHandler	MeetingExpenseAllocationRecalcHandler (DEPRECATED)	OCE.MeetingExpenseAllocationRecalcHandler (DEPRECATED)
Note: Ensure to configure the feature Validate Estimated and Actual Meeting Expense Budget Allocations (MEBA) on Mobile (OCE9 Package) after enabling the above trigger handlers.		MeetingExpenseHandler (DEPRECATED)	OCE.MeetingExpenseHandler (DEPRECATED)

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
		MeetingExpenseLockerHandler (DEPRECATED)	OCE.MeetingExpenseLockerHandler (DEPRECATED)
		MeetingMemberExpenseCalculationHandler (DEPRECATED)	OCE.MeetingMemberExpenseCalculationHandler (DEPRECATED)
		Meeting Expense Allocation Recalculation	OCE9.MeetingExpenseAllocationRecalcHandler2
		MEBA Update Meeting Budget	OCE9.MEBAUpdateMeetingBudgetHandler2
		Budget Update Meeting Budget	OCE9.BudgetUpdateMeetingBudgetHandler2
		Meeting Update Meeting Budget	OCE9.MeetingUpdateMeetingBudgetHandler2
		Meeting Budget Dml	OCE9.MeetingBudgetDmlHandler2
		Meeting Expense Delete	OCE9.MeetingExpenseDeleteHandler2
		Meba Amount Validation	OCE9.MebaAmountValidationHandler2
		Budget Calculation	OCE9.BudgetCalculationHandler2

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
		Meeting Budget2 Update Budget	OCE9.MeetingBudgetUpdateBudgetHandler2

- Change 'New' button to OCE9.MeetingBudget2NewActionOverride page (go to Setup > Object Manager > Meeting Budget > Button, Links and Actions).
- Activate 'Meeting Expense Budget Allocation Create' (Trigger Handler API Name: OCE9.MeetingExpenseBudgetAllocCreateHandler2) trigger handler for OCE__DataChangeEvent__e (ensure MeetingExpenseBudgetAllocCreateHandler is disabled).
- Enable 'Meeting Expense Budget Allocation Create' (Trigger Handler API Name: OCE9.MeetingExpenseBudgetAllocCreateHandler2) record of 'Data Change Event Setting' custom metadata type.
- Replace MeetingBudgetDmlListener (OCE) component with MeetingBudgetDmlListenerNew (OCE9) component.
- Replace 'MeetingExpenses' (OCE) component with 'Meeting Expenses Lwc' (OCE9) component on the Meeting Lightning page.
- Add component "Related List - Single" to whichever tab in Meetings you would like to access the Meeting Budget 2 related list from and set the Related List = Meeting Budget 2.
- As the validations on iOS for Meetings business rules (Custom Script) will also be affected by this change, if the org is using the Custom Script validations, the steps listed below need to be followed:
- For orgs using only OOB script:

- Deactivate the one cloned from **meeting-validation-default**.
- Clone the record **meeting-validation-currency-default**.
- Activate the cloned record.
- For orgs using their own customized script:hasExceededAllowedEstimatePerAccount() function and areAllocationsValid() function need to be replaced with the version from **meeting-validation-currency-default**.

Note: The functions referred to by these two functions also need to be copy/pasted. Check the other client written scripts. If any of them use out of box Amount field with number data type, need to upgrade the steps to support the currency data type added in this release.

- Run one time job for updating historical data on Meeting Budget 2 records. Execute '*Database.executeBatch(new OCE9.MeetingBudgetUpdateAmountsBatch());*' code snippet in developer console.

The field replacements are as follows:

- Meeting Object: AverageActualExpense__c → AverageActualExpenseCurrency__c, AverageEstimatedExpense__c → AverageEstimatedExpenseCurrency__c
- Meeting Expense Object: Amount__c → CurrencyAmount__c
- Meeting Expense Allocation Object: Amount__c → CurrencyAmount__c
- Run one time job for updating historical data on Meeting Budget 2 records (note: this should be completed before activating the trigger handlers as mentioned in the **Configuration 2** section of the table above). Execute '*Database.executeBatch(new OCE9.MeetingBudgetUpdateAmountsBatch());*' code snippet in developer console.

Note: Ensure the user who runs the batch has edit permissions for Meeting Budget 2 according to Generic Workflow configuration (this permission is supposed to be skipped when running the batch but it is currently not working. It will be fixed in Mar. 2024 release). Also during the batch execution “Meeting Budget2 Update Budget New” trigger handler should be temporarily disabled (will also be fixed in Mar. 2024 release).

The following flow describes how the end user will use Budgets in Meetings:

- User will create a Meeting, then select a **Meeting Budget 2** from the Meeting Budget 2 custom component (Salesforce and iPad are both supported). The list of the user's available Budgets will be displayed to select.

Note: Meeting Budget 2 custom component has a system generated filter and search capability that will only be available when the Custom Setting **Enable Advanced Search** is true.

- Once the Meeting Budget 2 has been created, the user can begin adding Meeting Expenses. For every Estimated and Actual Meeting Expense the user adds, a corresponding **Meeting Expense Budget Allocation (MEBA)** record will be created automatically to allocate the amount of the expense to the Meeting Budget 2. The Meeting Budget 2 that will be used to associate with the MEBA record will be the first Meeting Budget 2 added to the Meeting by the Organizer or Coordinator role. This means that if a Co-Organizer also adds a Meeting Budget 2, that one will not be used when creating the MEBA automatically, only the first one added by Organizer or Coordinator will be used.
 - If an Organizer and Co-Organizer are both creating Meeting Expenses at the same time, there is a chance of a concurrency issue because they are both updating the same record, Meeting Budget 2. This could lead to an inaccurate calculation on the Meeting Budget 2 which may erroneously let the user create the MEBA even though they did not have the funds to do so. This will be handled in a future release, but at this time is a known issue.
- If multiple Meeting Budget 2s have been added to the Meeting, the user has the option to split their Meeting Expenses among the different budgets. They can tap the Allocate Budget button on Salesforce and iPad (on Expenses screen), which will open the Meeting Expense Budget Allocation screen. They will see a list of the Meeting Budget 2s added to the Meeting and can split their expense amount accordingly. This will create Meeting Expense Budget Allocation records upon save.

- OOB, the user will be validated if they do not have enough in the Remaining__c field on the Budget to allocate to a Meeting Expense for Estimated Expenses only (to warn for Actual Expenses, see below feature **Warn for Actual Meeting Expense Budget Allocations**).
- The Meeting Status is used to understand when Actual Expenses should be rolled up to the Budget vs. using Estimated Expenses. We take this data from OCE__Parameters__c field of OCE__WorkflowPath__c object. There is a JSON string there with a statusToCalculateActuals attribute that will be used to consider the Actual Expenses instead of the Estimated Expenses based on the Meeting Status. For example, when the Meeting is in 'Draft' status, only Estimated Expenses will be rolled up to the Budget OOB. However, once the Meeting reaches 'Concluded' status, then only the Actual Expenses will be rolled up to the Budget.
 - If the statuses mentioned in the StatusToCalculateActuals parameter is changed, the job that runs to do the Budget calculations will not adjust for it.

Note:

- When creating Meeting Budget 2s and Meeting Expense Budget Allocations (MEBAs), please use only the custom components developed for these and not the standard layout. There will be no logic or validations done if using the standard layout.
- Automatic MEBA creation on web is handled by 'Meeting Expense Budget Allocation Create' handler. Budget Remaining validations are handled by 'Validate Auto Meba' handler. On mobile, automatic MEBA creation and Budget Remaining validations are handled irrespective of handler configuration. In case the trigger handlers on web are deactivated, mobile will continue to automatically create and validate MEBAs, whereas web will not perform the same.
- Meeting Estimated Amount and Meeting Actual Amount fields on Meeting Budget 2 record are populated regardless of Meeting Status and contain sum of allocated Estimated or Actual Expenses to the Budget. But only one field is used in calculation of Budget Remaining based on Meeting Status and GW configuration.

Additional notes to keep in mind:

- **Currency**

- Meeting Budget 2 follows the currency from parent Budget.
- Meeting Expense Budget Allocation and Meeting Expense Allocation follow the currency from Meeting Expense.
- Budget and Meeting Expense can have different currencies; they will be converted. Meeting and Meeting Expense can have different currencies; they will be converted.
 - Conversion of currency will follow the standard Salesforce multi-currency conversion.
 - If currency was active a month ago and a new Meeting Expense was added with the currency that was active but is inactive now, no conversion will take place.
- When the **Enable Currency** setting is true, all custom screens that use amount fields in Meetings will display the currency data type of amount instead of the number data type of amount. If these settings are false, the number data type of amount will be used. Please ensure that for standard page layouts, like Meeting Expense, the correct amount field is added to the page layout (i.e. if using Budgets, ensure the currency data type amount field is used instead of number and vice-versa).
- **Enable Currency** and **Enable Budgets** settings must both be true to use the latest Budget module with Meetings.

Warn for Actual Meeting Expense Budget Allocations (OCE9 Package)

OOB, users will be validated if they do not have enough in the Remaining__c field on the Budget to allocate to a Meeting Expense for Estimated Expenses. If you would like users to also see a warning for Actual Expenses, you can activate this feature.

To enable this feature:

- Assign **WarnActualMEBA** custom permission to the appropriate user(s).
- To use on mobile, run metadata cache.

Warn for Auto-Actual Meeting Expense Budget Allocations (OCE9 Package)

This feature will validate and warn the user if the **automatically created** Meeting Expense Budget Allocation exceeds the Budget Remaining amount.

- For Estimated Expenses the operation will always be blocked.
- For Actual Expenses the operation will always be allowed and additionally the user can be warned if **WarnActualMeba** custom permission is assigned to the user.

To configure the feature:

- Activate trigger handlers: **Validate Auto Meba** (Trigger Handler API Name: OCE9.ValidateAutoMebaHandler) and **Meeting Expense Budget Allocation Create** (Trigger Handler API Name:OCE9.MeetingExpenseBudgetAllocCreateHandler2).
- Ensure **Meeting Expenses Lwc** (substitute for Meeting Expenses and Meeting Expenses New components) and **MeetingBudgetDmlListenerNew** components are added to Meetings Lightning page.
- Assign **WarnActualMeba** custom permission to users who should see the warning message.
- To use on mobile, run metadata cache.

Note: **WarnActualMeba** custom permission should be assigned through permission sets only, not profiles.

Recalculate Meeting Expense Budget Allocations (MEBA) on Meeting Expense Change (OCE9 Package)

This feature is available only in OCE9.

This feature provides the ability to automatically update MEBA amount when the user changes the Meeting Expense amount.

To activate the feature:

- Activate **Meeting Expense Change MEBA Recalculate** (Trigger Handler API Name: **OCE9.RecalculateMEBAOnMEChangeHandler**) trigger handler on Meeting Expense.
- Ensure **MeetingBudgetDmlListenerNew** component was added to the Meeting page (Meeting Expenses tab).
- Ensure **Needs Reallocation** field on MEBA is editable for users (in case using non-OCE or cloned permission sets).
- Modify existing or create new validation custom script for Meetings, which will forbid changing Meeting Status if there are any MEBA records needing to be reallocated. An example of a custom script is attached.

Note: Refer to the files section of CSH (OCE Personal Library) to find *customScriptExample.js*.zip files.

Note: This is a limited version of the custom script and it is supposed to be improved according to customer requirements.

How the validation works

When there is one related MEBA record:

- In case of decreasing Meeting Expense amount, MEBA amount will be updated automatically without validation.
- In case of increasing Meeting Expense amount of Estimated Expense, if Budget Remaining is less than Meeting Expense amount change, the user will see an error message, otherwise, MEBA record will be updated.
- In case of increasing Meeting Expense amount of Actual Expense and if "Warn Actual MEBA" feature is active, the user will see a warning message if Budget Remaining is less than Meeting Expense change, but MEBA record will be updated.

When there are multiple related MEBA records, they will be marked as "Needs Reallocation" and their amount won't change. The user should manually reallocate them.

Note: The validation does not take into account the current status of Meeting.

When changing the sum of Meeting Expense, Meeting Budget related list does not update automatically. To see changes, you should manually refresh the page.

Validate Estimated and Actual Meeting Expense Budget Allocations (MEBA) on Mobile (OCE9 Package)

The feature provides more accurate Budget Remaining calculation on both Salesforce and mobile.

On Salesforce, new calculation logic includes unprocessed data from mobile.

On mobile, local Budget Remaining calculation is introduced for offline mode. For online mode, REST API calls to Salesforce can be used to get more accurate data.

To activate the feature:

- Ensure all the platform events are processed before disabling handlers.
- Ensure **Enable Sync Transaction MEBA Calculations** custom permission is assigned to users to enable advanced Budget calculation on Salesforce including unprocessed data.
- Ensure **Enable MEBA Mobile Online REST Calls** custom permission is assigned to users who are allowed to use REST API calls on mobile for more accurate Budget recalculation.
- Ensure the users have edit access to the **Status Used In Budget Calculation** field on Meeting in case of using non-OCE or cloned permission sets.
- Manually run a one-time job to populate **Status Used In Budget Calculation** field on existing Meeting records. Execute this command in Developer Console: `new OCE9.UniversalJobRunner('OCE9.PopulateStatusOnMeetingBatchJob').runNow();`
- Class access should be provided for **OCE9.BudgetRemainingRestApi** class.

Note: The feature takes into account the data that was not yet processed and shows more accurate data than that is stored on the records. If there are some unprocessed transactions on the org, it can cause discrepancy for Remainings displayed on the budget allocation screen and the budget record itself. The discrepancy for such cases is expected.

Configure Meeting Budget Columns (OCE9 Package)

The new Meeting Budget screen's columns are configurable via field sets on Budget object (both Salesforce and iPad/iPhone are supported). One can be configured for fields that will be displayed/filtered, and another for fields used in search.

To configure this feature:

- Set **OCE9__MeetingBudget2NewActionOverride** Visualforce page as New action override on Meeting Budget 2 object.
- Enable the setting **Enable Advanced Search** in **Admin Console > Mobile > Applications Settings**.
- Go to **Setup > Object Manager > Budget > Field Sets**. Create and save two new field sets to be used for Display/Filter and Search on the new Meeting Budget screen. (Note: The maximum supported fields are 10, including Name, which is hardcoded field and will always be displayed).
- Navigate to Admin Console to configure the name of the field sets to be used by profile: **Admin Console > Meetings > Search Settings**:
 - Select the Location where the field sets will be applied (e.g. org/profile).
 - Populate **Budget Display and Filter Field Set** with the developer name of the field set which will be used for displaying and filtering.
 - Populate **Budget Search Field Set** with the developer name of the field set which will be used for searching (this can be the same as above).
 - Save the results.
 - Run metadata cache for mobile.

Note:

Ensure at least Read access is provided to fields used in the field sets, otherwise, some columns might not be displayed to the users.

The first 9 accessible fields in the field set will be displayed in order of the field set config (not including Name, which is always displayed first).

Search and display nuances between SF and iOS:

- Salesforce and iOS show Lookup fields as ID.
- Salesforce doesn't support search by ID due to platform limitations.
- iOS supports search by ID because it's just a string in mobile.
- Currency fields are filtered by numeric value ignoring currency code.
- **As a best practice:** To search by parent record's name, Admins should put parent object's name field (like ParentObject__r.Name) in the search field set.
- Fields from related Owner record are partially supported for display and search. List of supported fields are: Name, Email, Type.
- Record Id field cannot be displayed as a separate column due to technical limitations.
- Filtering for CurrencyIsoCode field is only possible by currency code, not label.

When the Display/Filter field set is configured (i.e. name is saved in Budget Search Field Set setting), a filter icon will appear on the new Meeting Budget screen (Salesforce and iPad/iPhone).

In case the configured field set does not exist, an error message is displayed: "Field Set does not exist: <NAME>".

List of Supported Field Types

+ = *Supported*

- = Not Supported

Salesforce Field Type	Salesforce Data Type	Search		Filter		Display	
		SF	iOS	SF	iOS	SF	iOS
Auto Number	String	+	+	+	+	+	+
Address	String	-	-	-	-	+	+
Checkbox	Boolean	-	-	+	+	+	+
Currency	Double	-	-	+	+	+	+
Date	String	-	-	+	+	+	+
Date/Time	String	-	-	+	+	+	+
Time	String	-	-	-	-	+	+
Email	String	+	+	+	+	+	+
External Lookup	String	-	-	-	-	+	+
Formula (Text)	String	+	+	+	-	+	+
Formula (Checkbox)	Boolean	-	-	+	-	+	+
Formula (Number)	Double	-	-	+	-	+	+
Formula (Percent)	Double	-	-	+	-	+	+
Formula (Currency)	Double	-	-	+	-	+	+
Formula (Date)	String	-	-	+	-	+	+
Formula (Date/Time)	String	-	-	+	-	+	+

Salesforce Field Type	Salesforce Data Type	Search		Filter		Display	
		SF	iOS	SF	iOS	SF	iOS
Formula (Time)	String	-	-	-	-	+	+
Lookup relationship	Id	-	+	-	-	+	+
Number	Double	-	-	+	+	+	+
Percent	Double	-	-	+	+	+	+
Phone	String	+	+	-	-	+	+
Picklist	String	+	+	+	+	+	+
Picklist (Multi-select)	String	+	+	-	-	+	+
Text	String	+	+	+	+	+	+
Text (Encrypted)	String	-	-	-	-	-	-
Text Area	String	+	+	-	-	+	+
Text Area (Long)	String	-	-	-	-	+	+
Text Area (Rich)	String	-	-	-	-	+	-
URL	String	-	-	-	-	+	+

List of Supported Operators per field type:

+ = Supported

- = Not Supported

N/A - Not Applicable

The equivalent of the operator for iOS is in parentheses.

Salesforce Field Type	equal (is)		not equal (is not)		contains (like)		does not contain (not like)		less than (<)		greater than (>)		less or equal (<=)		greater or equal (>=)		starts with		in	
	SF	iOS	SF	iOS	SF	iOS	SF	iOS	SF	iOS	SF	iOS	SF	iOS	SF	iOS	SF	iOS	SF	iOS
Text	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	N/A	N/A
Auto-number	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	+	N/A	N/A
Email	+	+	+	+	+	+	+	+	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	+	+	N/A	N/A
Number	+	+	+	+	N/A	N/A	N/A	N/A	+	+	+	+	+	+	+	+	N/A	N/A	N/A	N/A
Percent	+	+	+	+	N/A	N/A	N/A	N/A	+	+	+	+	+	+	+	+	N/A	N/A	N/A	N/A
Currency	+	+	+	+	N/A	N/A	N/A	N/A	+	+	+	+	+	+	+	+	N/A	N/A	N/A	N/A
Date	+	+	+	+	N/A	N/A	N/A	N/A	+	+	+	+	+	+	+	+	N/A	N/A	N/A	N/A
Date/Time	+	+	+	+	N/A	N/A	N/A	N/A	+	+	+	+	+	+	+	+	N/A	N/A	N/A	N/A
Picklist	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	+	+
Checkbox	+	+	+	+	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A

Meeting Budget 2 related lists refresh after expense update (Engage feature)

To activate the feature for the Engage package, the Admin should do the next steps:

- Remove **MeetingBudgetDmlListenerNew** component from Meeting flexipages
- Add a new component **OCE LMS Listener** to the Meeting flexipages

- Set **Meeting Expense LWC** components design attributes *Skip Standard Refresh Event* and *Enable Meeting Budget Dml Listening* to *True* (this also should be done when changing Meeting flexipages)

Configure To Do in Meetings (OCE9 Package)

To set up To Do for a Meeting

- **TacticsNotBlank** validation rule must be inactive.
- If using KAM, update the page layout (To-Do Page Layout) to make **Tactic** a required field.
 - Provide field-level visibility to the following fields in **To-Do** object: **AssignedTo__c**, **DueDate__c**, **AssignedToName__c**
 - Provide field-level visibility to the following fields in **To-Do** object if you want to use the mobile function: **OfflineCreatedById__c**, **OfflineCreatedDate__c**, **OfflineLastModifiedById__c**, **OfflineLastModifiedDate__c**, **OfflineUniqueld__c**
- If assigning To-Do to profiles other than KAM, you can either use the existing OCE DB Schema or create a new To-Do DB Schema.
- To create a new DB Schema:
 - Create new DB Schema for **To-Do** sObject with the following where clause: "CreatedById ='{USER.ID}'".
 - Assign it to profiles using To-Do.
- To use the existing DB Schema:
 - Provide field level visibility to **Territories** field on **Account** object for DM profile.
 - Give the profile Read access to the **AccountObjective__c** and **AccountPlan__c** objects.
 - Assign To-Do Master Page Layout to the profile. Remove **Account**, **Account Objective**, and **Tactic** fields from layout.
 - Edit DB Schema for **OCE__ToDo__c** object and add the profile name into **PermittedProfiles__c** field. Ensure where clause is "(CreatedById ='{USER.ID}' OR OCE__AccountObjective__r.OCE__AccountPlan__r.OCE__Account__r.OCE__Territories__c LIKE '%;{USER.TERRITORY};%')".

Configure Emails on Meeting (OCE9 Package)

It is possible to send emails directly from a Meeting on mobile. There are two ways to do this: from a quick action on the bulk update screen (Account Attendee and Speaker) or from a Generic Workflow Action. By default, all Topic Materials are available for Email Templates. For filtering of Topic Materials and showing only Topic Materials with type **Email template**, enable Template filtering (please refer to point below).

Note: Related email templates are available when the Meeting has linked Topic Materials.
Speaker should have a link to an Account to be able to send an email.

Emails Using Quick Action

To activate emails in Meetings using the quick action:

1. Add **Message Transactions** related list to Account Attendee and/or Speaker Meeting Member page layouts. Please refer to [Configuring Related Lists](#).
2. Add **Email** quick action to Account Attendee and/or Speaker:
 - Open **Admin Console - Quick and Custom Action Administration**
 - Select **Meetings** tab
 - Activate **Email** action metadata record(s). There are 2 possibilities, one for Speaker (Name: **SpeakerEmail**) and one for Account Attendee (Name: **MeetingsEmail**). Please refer to [Quick Actions](#)
3. Add **Email Template** field in **Topic Material** layout. See [Page Layout](#)
4. Update **Where SOQL** fields:
 - For **Email Template** entity (**Admin Console - Mobile - Entities - Edit EmailTemplate__c - Where SOQL - OCE__**
`IsActive__c = true AND (OCE__EndDate__c = NULL OR OCE__EndDate__c >= TODAY)`

- For **Topic Material** entity (**Admin Console - Mobile - Entities - Edit TopicMaterial__c - Where SOQL - OCE__**
`IsActive__c = true`)

5. Enable Email template filtering on the Meeting

- Open **Admin Console – Email**
- Select **Settings** tab
- Deactivate the checkbox **Disable Template Filtering On Meetings**

6. Change the feature **Required** for the **Call** field:

- Enter **Setup – Object Manager**
- Select **Call Presentation** object
- Open **Fields & Relationships** tab
- Edit **Call** field
- Deactivate **Required** checkbox

Note: The visibility of the Email button (quick action) is dependent on the user having Edit access to Meeting Member through the Generic Workflow.

Emails Using Quick Action (OCE9 Package)

To activate emails in Meetings using the quick action:

- Add **Message Transactions** related list to Account Attendee and/or Speaker Meeting Member page layouts. Please refer to [Configuring Related Lists](#)

- Add **Email** quick action to Account Attendee and/or Speaker:
 - Open **Admin Console - Quick and Custom Action Administration**
 - Select **Meetings** tab
 - Activate **Email** action metadata record(s). There are 2 possibilities, one for Speaker (Name: **SpeakerEmail**) and one for Account Attendee (Name: **MeetingsEmail**). Please refer to [Quick Actions](#)
- Add **Email Template** field in **Topic Material** layout. See [Page Layout](#)
- Update **Where SOQL** fields:
 - For **Email Template** entity (**Admin Console - Mobile - Entities - Edit EmailTemplate__c - Where SOQL - OCE__**
IsActive__c = true AND(OCE__EndDate__c = NULL OR OCE__EndDate__c >= TODAY)
 - For **Topic Material** entity (**Admin Console - Mobile - Entities - Edit TopicMaterial__c - Where SOQL - OCE__**
IsActive__c = true)
- Enable Email template filtering on the Meeting
 - Open **Admin Console – Email**
 - Select **Settings** tab
 - Deactivate the checkbox **Disable Template Filtering On Meetings**
- Change the feature **Required** for the **Call** field:
 - Enter **Setup – Object Manager**
 - Select **Call Presentation** object
 - Open **Fields & Relationships** tab

- Edit **Call** field
- Deactivate **Required** checkbox

Note: The visibility of the Email button (quick action) is dependent on the user having Edit access to Meeting Member through the Generic Workflow.

Emails Using Generic Workflow Action (OCE9 Package)

To activate emails in Meetings using the Generic Workflow Action:

- Ensure basic Meeting settings and Generic Workflow setup is completed.
- Ensure Email (force.com or Sparkpost a MessageBird Company) feature is activated and Email jobs are scheduled in client org.
- Assign OCE Email Administration permission set to Admin users and OCE Email User permission set to non-Admin users (e.g. Reps).
- Ensure [Email Templates](#) are configured for Meetings, activated, and shared with user territories (see above steps from quick action setup).
- Add "Send Emails" Action to the required Generic Workflow to let user initiate Emails from Meetings.
 - Create new component type Action "Send_Emails" and add to required contexts in existing Workflow(s).
 - "Send Email" Action configurations.
 - Label: "Send Emails"
 - Custom Label Name: "OCE.Send_Emails"
 - Context Type: Meeting

- Component name: OCE:meetingMembersEmailing
- Set "Component parameters" with Meeting Member - Invitation Statuses in below given format.

```
{"invitationStatuses":["Nominated","Invited"]}
```

- Run metadata cache.

Configure History Tab (OCE9 Package)

The **History** tab on **Meeting** contains information about presentations that have been shown in the Meeting and sent emails from the Meeting. By default the tab should be added for all layouts after installing or upgrading. If the tab is absent on the layout, it can be added manually by the Admin.

To add the **History** tab:

- Open **Setup - Lightning App Builder**
- Edit **Meeting**
- Add a **History** tab to the layout. Please refer to Salesforce articles [Customize Tabs on Lightning Experience Record Pages Using the Lightning App Builder](#)
- Add **Presentations** and **Email Transactions** related list - single to the **History** tab. Please refer to Salesforce articles [Customize Related Lists](#) and [Related List - Single](#)
- Click **Save**

Configure Meeting Business Hours (OCE9 Package)

Refer to the section in the Configuration Guide regarding [Territory Administration](#) titled [Configuring Business Hours](#) for information on how to configure business hours for specific modules, including Meetings.

To activate the feature ensure the following trigger handler configuration:

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Meeting Business Hours	OCE9.MeetingBusinessHoursHandler2	MeetingBusinessHoursHandler (DEPRECATED)	OCE.MeetingBusinessHoursHandler (DEPRECATED)

Configure CLM in Meetings (OCE9 Package)

It is possible to launch a CLM presentation from a Meeting.

To activate this feature:

- **Prerequisites:** Steps from the CLM portion of the Configuration Guide for [CLM in Meetings](#) should first be performed.
- Add the Launch Presentation Quick Action button to Quick Actions in the Salesforce Classic Publisher section of the corresponding Meeting page layout.
- If [Dynamic Actions](#) enabled use Lightning App Builder against Salesforce Classic Publisher section of the corresponding Meeting page layout to add Launch Presentation Quick Action button to Quick Actions.
- Check MeetingDateVerificationEnabled__c in CLMTrainingMode__c to determine if the button should only display on the day of the Meeting (Admin Console → CLM → Settings → Meeting Date Verification Enabled).

Configure Consent in Meetings (OCE9 Package)

The Consent feature in Meetings allows Meetings users to capture consent from Accounts to be invited to or attend the Meeting. The **Enable Consent** custom setting will determine if Consent to Invite and Consent to Attend columns appear on both mobile and Salesforce in the Meeting Member bulk edit screen/custom Meeting Member sections (respectively). It will also determine if you can see an 'Upload Document' option next to an Account Attendee/Speaker on Salesforce, and a set of 3 dots that allow you to generate a signed Document or upload a Document on mobile (see more in the [Documents Management](#) section of the Configuration Guide).

If this feature is being used, validations will be done when attempting to change the Meeting Member's Invitation Status or Attendance Status if 'Consent to Invite' or 'Consent to Attend' has not been given by the Account Attendee/Speaker. There are also settings that allow you to bypass those validations based on Invitation and Attendance Status (see below).

To activate this feature:

- Ensure users that will use the Meetings module have the Meetings Admin/Meetings User permission sets assigned or have edit access to Consent to Attend (ConsentToAttend__c), Consent to Attend Signature Date/Time (ConsentToAttendSignatureDateTime__c), Consent to Invite (ConsentToInvite__c), and Consent to Invite Signature Date/Time (ConsentToInviteSignatureDateTime__c) fields on MeetingMember__c object.
- Ensure Document Admin/Document User permission set has been assigned to the user.
- Enable the **Enable Consent** (EnableConsent__c) Custom Setting in Admin Console > Meetings > Consent Settings.
- Pick the proper values for Non Consent: Allowed Attendance Statuses (OOB values: 'Declined;Waitlisted;Cancelled Late;Tentative;Not Applicable') and Non Consent: Allowed Invitation Statuses (OOB values: 'No Show;Cancelled Late;Not Applicable').
- Ensure the following trigger handler configuration:

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Consent Fields Validation	OCE9.ConsentFieldsValidationHandler2	ConsentFieldsValidationHandler (DEPRECATED)	OCE.ConsentFieldsValidationHandler (DEPRECATED)

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Meeting Member Consent	OCE9.MeetingMemberConsentHandler2	MeetingMemberConsentHandler (DEPRECATED)	OCE.MeetingMemberConsentHandler (DEPRECATED)
Prevent Consent Document Delete	OCE9.PreventConsentDocumentDeleteHandler2	PreventConsentDocumentDelete (DEPRECATED)	OCE.PreventConsentDocumentDeleteHandler (DEPRECATED)

Configure "On Behalf Of" (OCE9 Package)

In Meetings, you have the ability to create a Meeting on behalf of another user. This will perform the following logic:

- The user added in the **On Behalf Of User** lookup field (lookup to User object) on the Meeting will be added as the Organizer of the Meeting (Role on Meeting Member).
- The creator of the Meeting will be added as the Coordinator.
- The Organizer's manager will be added as Approver (if workflow configuration metadata allows).
- The Organizer will be the Owner of the record.
- The default Invitation Status for the Coordinator will be 'Not Applicable'.
- The Meeting will be shared to the Coordinator's active territory when they create the Meeting. If manually adding a Meeting Member with 'Coordinator' role, the Meeting will be shared to all of that user's territories.

- In the event that a manager is creating a Meeting on behalf of one of their reports (and the workflow configuration metadata is configured to create the manager as the Approver), the manager will be created as the Approver role and not Coordinator.
- A user cannot create a Meeting on behalf of themselves.
- A user cannot create a Meeting on behalf of someone unless they have the 'Meeting Coordinator' custom permission assigned.

Follow the below steps to configure this feature:

- Assign Meeting_Coordinator custom permission to the required permission set/profile.
- Ensure the following trigger handler configuration:

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Meeting Sharing New	OCE9.MeetingSharingNewHandler2	Meeting Sharing Handler (DEPRECATED)	OCE.MeetingSharingHandler (DEPRECATED)
Meeting Member Create	OCE9.MeetingMemberCreateHandler2	MeetingMemberCreateHandler (DEPRECATED)	OCE.MeetingMemberCreateHandler (DEPRECATED)
		MeetingSharingNewHandler (DEPRECATED)	OCE.MeetingSharingNewHandler (DEPRECATED)

- Add picklist value 'Coordinator' to the Type__c field on MeetingMember__c object.
- Activate validation rules on the Meeting__c object:
 - Cannot_create_on_behalf_of_yourself

- Meeting_cannot_be_created_on_behalf_of
- Ensure OCE9MeetingAdmin/OCE9MeetingUser permission is set or give Edit permission for OnBehalfOfUser__c field on Meeting__c object.
- Add OnBehalfOfUser__c field to Meeting page layouts (for upgrades only).
- Configure the generic workflow for the Coordinator role to control the permissions they have on the Meeting (see section of this guide [Configure Generic Workflow](#) for more information).

Configure External User Meeting Creation (OCE9 Package)

Note: The following feature is intended for use in Engage package. OCE9 does not offer a way for external users to create Meetings.

External types of users can create Meetings as a "Requestor" using Salesforce Digital Experience Sites. The flow is as follows:

External user creating Meeting

- External user creates a Meeting from Digital Experience Site.
- External user will have Meeting Member record type = **External** and Role = **Requestor**, with external user ID set.
- External user will be the **Owner**.

Internal user creating Meeting

- Internal user (e.g. Sales Rep) adds an external user as *On Behalf Of User* on Meeting.
- Internal user will be the **Owner** of Meeting and Role = **Organizer** (Colleague Meeting Member record type).
- External user will have Meeting Member record type = **External** and Role = **Requestor**, with external user ID set.

Sharing

- If required, Engage/client can share this Meeting to external user through Sharing Sets by using Account lookup field on Meeting (not OOB).

To activate this feature:

- Add new picklist value "Requestor" to existing field OCE__MeetingMember__c.OCE__Type__c.
- Assign permissions to required users (profiles/permission sets) for the new record type "External" (or your custom profile if you are going to use different record type) on Meeting Member sObject.
- Configure picklist value assignments for all existing picklist fields for the new record type "External" on Meeting Member sObject.
- For "External" record type picklist assignments, assign only "Requestor" picklist value for the field OCE__Type__c (Role).
- Provide Read access to external users for the following metadata objects:
 - OCE__TOTRule__mdt
 - OCE__TriggerHandler__mdt
 - OCE__ActivityPlanConfig__mdt
- The default external and internal access to the sObjects listed below should be set to "public read-only":
 - Object Workflow Path Association
 - Workflow Action
 - Workflow Context
 - Workflow Context Action
 - Workflow Context Condition
 - Workflow Context Type

- Workflow Path
- Workflow Path Node.
- Ensure the following trigger handler configuration:

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Meeting Sharing New	OCE9.MeetingSharingNewHandler2	Meeting Sharing Handler (DEPRECATED)	OCE.MeetingSharingHandler (DEPRECATED)
Meeting Member Create	OCE9.MeetingMemberCreateHandler2	MeetingMemberCreateHandler (DEPRECATED)	OCE.MeetingMemberCreateHandler (DEPRECATED)
		MeetingSharingNewHandler (DEPRECATED)	OCE.MeetingSharingNewHandler (DEPRECATED)

- Run metadata cache.

Note: There is a current integration use case limitation with this feature for orgs using OCE Meetings and Engage. OCE has a batch job, CreateMissingMeetingMembersBatch, which creates missing Organizers and Approvers on Meetings. To create the 'Organizer' role, the batch looks at the Owner of the Meeting record and sets that user as 'Organizer'. When using the feature from Engage to allow external users to create Meetings, the external user is set with role 'Requestor' and is the Owner of the record. Thus, when running the batch in this scenario, if the MeetingMemberDuplicateMemberHandler (DEPRECATED) is enabled to check for duplicate Meeting Members, the batch will fail because it finds the same user being added to the Meeting twice (the external Owner and the new 'Organizer' Owner).

Configure Search Before Create in Meetings (OCE9 Package)

Looking for an Account to add as a Meeting Member but can't find them in the list? **Search Before Create** functionality can be launched directly from the Account Attendee screen in Meetings. This will allow users to search for, and if not found, create an Account that will then be automatically added as a Meeting Member (only available for Account Attendee record type). To configure this, in Salesforce go to **Setup > Custom Code > Custom Permissions** and find the permission called **SBC in Meetings**. When this is assigned to a profile or permission set, the user belonging to that profile or permission set will see a **New Account** button on the Account Attendee screen. Search Before Create should also be configured in your org to utilize this functionality.

In addition to custom permission assignment, to activate this feature on web:

- Add SbcContainer component to Meeting Lightning page.
- Replace 'MeetingAttendeesNew' (DEPRECATED) component with 'Meeting Attendees Lwc' component on Meeting Lightning page.
- For Generic Related List use AddAttendeeWrapper service component for New action.

Note: When the setting "Restrict Record Types" is enabled (Data Change Request Settings) and after creating an Account from SBC, the user is redirected to the Account page and out of their Meeting. In this case, the Account Attendee is not created and not added to the Meeting.

OCE1 SBC Migration Support in Meetings (MVP)

The feature provides the user with the ability to use migrated OCE1 package component OCE1:OCE1SbcCreateAccount instead of OCE:SbcCreateAccount for *SBC in Meetings* feature.

The steps to activate this feature are the following:

- The new component *OCE9:SbcContainerForOCE1* should be placed on Meeting flexipage.
- The old component *OCE9:SbcContainer* should be removed from the Meeting flexipage.

- The OCE1 SBC feature should be configured on org (**OCE1 Sbc Admin** or **OCE1 Sbc User** should be assigned to the user).
- **SBC in Meetings** custom permission should be assigned to the user.
- The user should have access to the new *OCE9.SbcContainerForOCE1Controller* class (will be included in **Meeting User** and **Meeting Admin** permission sets in the OCE9 package).

If all configurations are done, the user can go to the Meetings screen > Attendees tab, click on the '+ Attendee' button, and open the Meeting Attendee screen. The user will be able to see the 'Create Account' button on the search panel and after clicking this button, OCE1 component for the creation of an account will be opened as a modal screen.

Note: Applicable only for OCE9 LWC component.

Configure Share Content Button in Meetings (OCE9 Package)

A **Share Content** button was created that can be added to bulk edit screens of Account Attendee and Speaker in order to share WeChat content with an Account (available on mobile only).

To configure this:

1. In Salesforce, setup a new Quick Action with the following properties:
 - a. Label: **Meetings ShareContent**
 - b. Action Name: **Share Content**
 - c. Location: **Meetings**
 - d. Record Types: ;Attendee;Speaker;
 - e. Profiles: *include allowed profiles*
 - f. QuickActionName: **MeetingsShareContent**

g. Order: *any number will do as this isn't used*

h. Is Active: **TRUE**

2. Ensure you have a device registered to use WeChat and use the **Subscribe** button to link your device to an HCP.
3. Run cache.

Configure Surveys in Meetings (OCE9 Package)

Surveys can be launched from Meetings using a Generic Workflow Action type to open a component.

To activate this feature:

- Ensure basic Meeting and Generic Workflow setup are completed.
- Ensure Surveys feature is activated and configured in the org.
- Assign OCE9SurveyUser permission set to required users
- Assign OCE9SurveyAdmin and SurveyCreator permission sets to Admins.
- Schedule OCE.SurveySyncBatch job to run frequently to create cloned custom Survey Responses for all applicable standard SF Survey Responses.
- Ensure Surveys are created and activated.
- Ensure Survey Invitations are created and shared manually to users (i.e. share with user territories).
- Follow one of the below two approaches to add "Survey" Action to the required Generic Workflow to let user take Surveys from Meeting:

- Clone and Deploy new Workflow Path "WFPPath Speaker Meeting R9" from Admin Console.
 - New Workflow activation is not required for just adding new "Action" to an existing Workflow.
 - Add available Action "Survey" (Component type) to required Generic Workflow Context(s).
 - Deploy changes.
- Create new component type Action "Survey Action" and add to required Contexts in your existing Workflow.
 - No need to deploy "WFPPath Speaker Meeting R9" workflow in this case.
 - "Survey Action" configurations:
 - Label: Survey
 - Custom Label Name: Survey
 - Component name: OCE9:meetingSurveyListView
 - Set "Component parameters" with Survey Record developer names in below list format
 - Component: Add Component Action to the WFP
 - Go to Admin Console > Workflow Configuration > WFPPath Speaker Meeting R9:
 - Go to Draft Node> SM Draft Org Meeting Survey Context > Context Actions > Add Survey Component
 - Go to Execute Node> SM Execution Org Meeting Survey Context > Context Actions > Add Survey Component
 - Go to Concluded Node> SM Concluded Org Meeting Survey Context > Context Actions > Add Survey Component
 - Component should be added for Approver, Organizer & Coorganizer
 - Deploy

- Assign Create permission on Data Change Event (Platform Event) to users using Profiles/Permission Sets.
- Ensure the following trigger handler configuration:

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Survey DataRelation Sharing Async	OCE9.SurveyDataRelationSharingAsyncHandler2	SurveyDataRelationSharingAsyncHandler (DEPRECATED)	OCE.SurveyDataRelationSharingAsyncHandler(DEPRECATED)
Survey Response Archiving	OCE9.SurveyResponseArchivingHandler2	SurveyResponseArchivingHandler (DEPRECATED)	OCE.SurveyResponseArchivingHandler (DEPRECATED)
SurveyInvitationSharingHandler	OCE.SurveyInvitationSharingHandler	Colleague Survey Data Sharing Handler (DEPRECATED)	OCE.ColleagueSurveyDataSharingHandler (DEPRECATED)
Colleague Survey Data Sharing	OCE9.ColleagueSurveyDataSharingHandler2		
DataChangeEventHandler	OCE.DataChangeEventHandler		

- Navigate to **Admin Console > Data Change Events** tile and activate/deactivate the below (note: Admin should have Data Change Event Administration custom permission to access this):
 - Activate
 - Survey Invitation Record Based Sharing
 - Survey Response Record Based Sharing

- Deactivate
 - SurveyInvitationRecordBasedSharing
 - SurveyResponseRecordBasedSharing
- Add new role "Archived" to OCE__SurveyResponse__c custom sObject field OCE__Status__c.
- Add new fields to required "Survey Invitation" page layouts:
 - OCE__RelatedRecordId__c
 - OCE__RelatedRecordSubjectType__c
- Add new picklist value "Archived" to OCE__SurveyResponse__c sObject field OCE__Status__c.
- Add "List View" component to display "Survey Responses" in "Meeting" Lightning Page (Flexi Page).
 - Create a Field Set in OCE__SurveyResponse__c sObject for new list view in Meetings record page.
 - Open "Meeting" Lightning record page in Lightning App Builder.
- Add new tab "Surveys" to page and then add "ListView" custom component to new tab. Set below component property values:
 - fieldName : <SurveyResponse_FieldSetName>
 - objectName : OCE__SurveyResponse__c
 - whereClause : OCE__InvitationRelatedRecordId__c = '{recordId}'
 - handlerForUpdateDelete : StandardUpdateDeleteHandler
 - viewAllComponent: StandardViewAll

- label: Survey Responses
- iconName: standard:survey
- Clone existing "DBSchema" custom metadata record for OCE__SurveyResponse__c sObject and append "OwnerId" to "mandatory fields" value (comma separated list of field names). Deactivate original DBSchema record and activate cloned DBSchema record.
- Ensure that edit access to Type_c and IsDefault_c fields on the SurveyInvitation object is provided for respective profiles (OCE Admin, Sales Representative).
- To use on mobile, run metadata cache from **Admin Console > Mobile**.

Configure Retake Surveys (MVP) (OCE9 Package)

Admins can configure the ability to retake surveys in Meetings module. You can also choose to copy the last responses when retaking the survey (for mobile only).

To configure this feature, create new component type Action "Survey Action" and add it to the required Contexts in your existing Generic Workflow. Or, you may update existing component type Action "Survey Action". If needed, several actions with different Retake configurations and/or Labels can be created.

If you are using cloned permission sets, provide edit access to SurveyInvitation.OCE__Type__c and SurveyInvitation.OCE__IsDefault__c fields. To reflect these changes in mobile, the app should be updated to the latest version and metadata cache should be generated.

"Survey Action" configurations:

- Label: Survey
- Custom Label Name: Survey
- Component name: OCE9:meetingSurveyListView

- Set "Component parameters" in below format:
 - {"enableRetake":true} to enable Retake feature
 - {"enableRetakeWithCopyingLastResponses":true} to enable Retake feature with populating answers from the last response for this Survey
 - if surveys developer names were populated, both parameters should be combined: i.e. {"enableRetake":true, "surveysDeveloperNames":["survey_one","survey_two"]}

Note: Retake feature with populating answers from the last response for a survey is available only for mobile. If the respective parameter is set, it will be treated as the basic retake feature on web (i.e. without copying last responses).

Configure Print Invitations (OCE9, OCE2 Packages)

A 'Print Invitations' component can be launched using the new Generic Workflow Action type to launch a component. Users can select an invitation (configured as a Document Template) and print it directly from the Meeting workflow on iPad (on Salesforce a placeholder component will appear explaining this functionality is only available on iPad as of the current release).

To activate this feature:

- Meetings & Document Management setup should be completed as prerequisites to activate this feature.
- Ensure user is assigned with Document User permission set.
- Ensure "Document Templates" are created (with below details), activated, and shared to required user territories:
 - RecordType = "MeetingInvitation"
 - Signature Type = "Physical"
 - Available For = "Meeting"
- Ensure Document Templates are linked to Topics (Topic Material) and those Topics are associated with Meeting (Meeting Topic).

- Follow one of the below two approaches to add "Print Invitation" Action to the required Generic Workflow:
 - Clone and Deploy new Workflow Path "WFPath Speaker Meeting R9" from Admin Console.
 - New Workflow activation is not required for just adding new "Action" to an existing Workflow.
 - Add available action "Print Invitation" (Component type) to required Generic Workflow Context(s).
 - Deploy changes.
 - Create new component type Action "Print Invitation Action" and add to required Contexts in existing Workflow.
 - No need to deploy "WFPath Speaker Meeting R9" Workflow in this case.
 - "Print Invitation Action" configurations:
 - Label: Print Invitations
 - Custom Label Name: Print_Invitations
 - Component name: OCE2:DocumentAction
 - Set "Component parameters" with Salesforce IDs of DocumentTemplates in below list format


```
{"documentTemplateIds":["a4v0U000000H1BDQA0","a4v0U000000H1BCAB0"]}
```
 - When DocumentTemplateIDs are configured in Action parameter, the user can only pick Document Templates which are part of the configured list and linked with Topics associated to the Meeting.
 - When DocumentTemplateIDs are not configured, user can pick any Document Template which is linked with Topics associated to the Meeting.
- Provide OCE__Document__c sObject's Record Type - "MeetingInvitation" access to users.
- Assign "Document__c-Meeting Invitation" page layout to required user profiles, just for "Meeting invitation" record type.

- Provide field edit access to required user profiles for the field OCE__Document__c.OCE__Meeting__c.
- To use on mobile, run metadata cache from **Admin Console > Mobile**.

Configure Document Template Filtering (OCE9 Package)

From May 2023 release, The admin can enable/disable Document Template filtering on Meetings to control which Document Templates can be selected by users within a Meeting. When the setting "Enable Template Filtering on Meetings" is enabled in Salesforce, users are able to see filtered document templates (based on Meeting Topic's Topic Materials) from the Meeting Members bulk list on iPad/iPhone.

To activate this feature:

- Go to Admin Console > Meetings tile > Search Settings.
- Enable the checkbox "Enable Template Filtering on Meetings".
- Run metadata cache.

Configure Attendee Quotas (OCE9 Package)

Attendee Quota validations can be set for Colleagues to limit how many Account Attendees/Non Profiled Attendees they can add to the Meeting. The 'Colleague Attendee Quota' can be set on a Meeting level, which will then be copied to any Colleague that has role of 'Contributor.' This number can be changed, and can also be set manually for other Colleague roles, if needed. As the Colleague adds Account Attendees/Non Profiled Attendees, a field called 'Attendees Accrued' will be calculated to keep track of how many attendees have been added by the Colleague (each Account Attendee/Non Profiled Attendee record will be stamped with an 'Attributed to Colleague' field to trace who the attendee was added by). A validation will fire when the limit is reached.

To activate this feature:

- Meetings setup should be completed as a prerequisite to activate this feature.
- Ensure user has Write permission for Meeting Member field - OCE__AttributedToColleague__c.

- Ensure the following trigger handler configuration:

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Meeting Member Attribute d To Colleagu e	OCE9.MeetingMemberAttrToColleague Handler2	MeetingMemberAttrToColleague Handler (DEPRECATED)	OCE.MeetingMemberAttrToColleague Handler (DEPRECATED)
Attendee Quota Calculati on	OCE9.AttendeeQuotaCountOfAttendee sHandler2	AttendeeQuotaCountOfAttendees Handler (DEPRECATED)	OCE.AttendeeQuotaCountOfAttendee sHandler (DEPRECATED)
Meeting Member Set Attendee Quota	OCE9.MeetingMemberSetAttendeeQuo taHandler2	MeetingMemberSetAttendeeQuot aHandler (DEPRECATED)	OCE.MeetingMemberSetAttendeeQu otaHandler (DEPRECATED)

- Deactivate validation rule:
 - Attendee_invited_more_than_quota

- Activate validation rules:
 - AttendQuota_cannot_be_less_AttendAccrued
 - Can_not_enter_negative_numbers
- Add new fields to required OCE__MeetingMember__c page layouts:
 - OCE__AttendeeQuota__c
 - OCE__AttendeesAccrued__c (Read Only in layout)
 - OCE__AttendeeQuotaDiscrepancyReason__c (Read Only in layout)
- Add new field(s) to required OCE__Meeting__c page layouts:
 - OCE__ColleagueAttendeeQuota__c
- Configure "Quota Exempt" statuses from **Admin Console > Meetings > Quota Settings**.
- To use on mobile, run metadata cache from **Admin Console > Mobile**.

Note: This feature has only be tested using the Generic Workflow, not Legacy Workflow. Thus, it is recommended you use this feature with the Generic Workflow.

Configure Call in Meetings (OCE9 Package)

Call functionality can be launched from Meetings. When the user has Edit access to the Meeting lookup field on Call object, they will see a 'Start Call' button in line with Account Attendees on the Attendees tab on Salesforce (this will also be available if using the generic related list for Account Attendees). On iPad, they will see the 'Start Call' button on the bulk update screen for Account Attendees. When they click the button, Call module will launch so the user can log Calls on Account Attendees from the Meeting. On iPad, multiple Account Attendees can be selected at a time to start a Group Call. The first Account Attendee from the list that is selected will be designated as the primary Account on the Call.

To activate this feature:

- Meetings and Call setup should be completed as a prerequisite to activate this feature.
- Provide edit permission for OCE__Meeting__c field in OCE__Call__c sObject to users through Profiles/Permission Sets.
- Add new field "OCE__Meeting__c" to required OCE__Call__c page layouts.
- Add "List View" component to display "Attendee Calls" in "Meeting" Lightning Page (Flexi Page).
 - Create a Field Set in Call sObject for new list view in Meetings record page.
 - Open "Meeting" Lightning record page in Lightning App Builder.
 - Add "ListView" custom component to an existing tab or a new tab. Set below component property values:
 - fieldSetName : <MeetingCalls_FieldSetName>
 - objectName : OCE__Call__c
 - whereClause : OCE__Meeting__c = '{recordId}'
 - viewAllComponent: StandardViewAll
 - label: Attendee Calls
 - iconName: standard:call_history
- "LAC: Enable Call 2.0" must be assigned to desired users using profiles or permission set in order to use the Call 2.0 feature.
- To use on mobile, run metadata cache from **Admin Console > Mobile**.

By default, "Is Call 1.0 Enforced on Mobile?" custom setting is disabled for the user profile and Call 2.0 component is opened from the Meeting. If the custom setting "Is Call 1.0 Enforced on Mobile?" is enabled, then Call 1.0 component will be opened.

Note: The "Start Call" action in the action list on Attendee related list is displayed only when the user has at least Create access for the Call object and Edit access to Meeting, Account, and Parent Call fields on the Call object.

Configure Satellite Meetings (OCE9 Package)

Satellite Meetings can be created from a Host Meeting, to allow for people to join the Meeting from decentralized locations. The user flow of this functionality is outlined below:

- User will create a Meeting and designate it as a 'Host Meeting' in the Meeting Structure field.
- Once user has filled in the pertinent details, they will share the Meeting with other territories using a custom territory selection component launched from the Generic Workflow.
- Next, the user will mark the Host Meeting as being open for registration using a Generic Workflow Action.
- Once the Meeting has been shared and is open for registration, users in the shared territories can begin the registration process.
- Satellite users will click/tap the 'Register as Satellite' Generic Workflow Action, which will copy details from the Host Meeting and create a Satellite Meeting. Details that are copied from Host to Satellite are:
 - Meeting
 - StartDateTime__c
 - EndDateTime__c
 - Subtype__c
 - RecordTypeId
 - VirtualMeetingType__c
 - VirtualMeetingUrl__c
 - VirtualCallInNumbers__c

- VirtualMeetingId__c
- VirtualMeetingPasscode__c
- Meeting Member(s) (Speaker record type and Colleague record type with role = 'Organizer'). From Speaker, the list of fields that are copied (if populated) are:
 - ATFRestrictedProducts__c
 - AccountAddress__c
 - AccountRestrictedProducts__c
 - AddressText__c
 - AttendanceStatus__c
 - AttendeeReason__c
 - AttendeeType__c
 - City__c
 - Comments__c
 - ConsentToAttendSignatureDateTime__c
 - ConsentToAttend__c
 - ConsentToInviteSignatureDateTime__c

- ConsentToInvite__c
- Country__c
- Customer__c
- DeliveryFormat__c
- DiscrepancyReason__c
- Email2__c
- FirstName__c
- InstitutionCity__c
- InstitutionCountry__c
- InstitutionDepartment__c
- InstitutionName__c
- InstitutionPostalCode__c
- InstitutionStateProvince__c
- InstitutionStreetAddressLine1__c
- InstitutionStreetAddressLine2__c
- InvitedDate__c
- LastName__c

- MealOption__c
- Meal__c
- MiddleName__c
- Phone__c
- PostalCode__c
- Prescriber__c
- PrimaryCountryOfPracticeResidence__c
- PrimaryStateProvinceOfPractice__c
- ProfessionalDesignation__c
- ProfessionalLicenseNumber__c
- Ranking__c
- ReconciliationStatus__c
- RestrictedProductsOverride__c
- Salutation__c
- Speaker__c
- SpecialtyPicklist__c
- StateProvince__c

- Status__c
- StreetAddressLine1__c
- StreetAddressLine2__c
- SystemGenerated__c
- Territory__c
- TravelNeeds__c
- Meeting Topic

Note: Meeting Products are not copied.

- Topic__c
- Meeting Structure field will be set to 'Satellite' on the Satellite Meeting, Parent Meeting field will be set to the Host Meeting ID, and Owner ID will be set to the current logged in user that created the Satellite.
- On the Satellite Meeting, any Speakers copied from the Host Meeting will have role = 'Host Speaker'. Any Meeting Topics copied from the Host Meeting will be flagged as 'Is Host Topic'. The Organizer of the Host Meeting will be marked as 'Host Organizer' in the Colleagues section and all Satellite Meeting creators will be marked as 'Satellite Organizer' on the Host Meeting.

Note: Ensure field access is given to the above mentioned fields that are copied or the user will receive an error when creating the Satellite Meeting.

To activate this feature:

- Meetings and Generic Workflow setup should be completed as a prerequisite to activate this feature.
- Territory Model "ETM" should be enabled and completely configured in org.
- Ensure the following trigger handler configuration:

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Validate Satellite Count	OCE9.ValidateSatelliteCountHandler2	ValidateSatelliteCountHandler (DEPRECATED)	OCE.ValidateSatelliteCountHandler (DEPRECATED)
Meeting Satellite Colleague Creation	OCE9.MeetingSatelliteColleagueCreationHdl2	MeetingSatelliteColleagueCreationHandler (DEPRECATED)	OCE.MeetingSatelliteColleagueCreationHandler (DEPRECATED)
Meeting Sharing Additional Async	OCE9.MeetingSharingAdditionalAsyncHandler2	MeetingSharingAdditionalAsyncHandler (DEPRECATED)	OCE.MeetingSharingAdditionalAsyncHandler (DEPRECATED)
Meeting Sharing Additional	OCE9.MeetingSharingAdditionalHandler2	MeetingSharingAdditionalHandler (DEPRECATED)	OCE.MeetingSharingAdditionalHandler (DEPRECATED)

- Activate the following validation rules in Meetings sObject
 - Satellite_Cannot_Update_EndDate2
 - Satellite_Cannot_Update_MeetingStr2
 - Satellite_Cannot_Update_PrntMeeting2
 - Satellite_Cannot_Update_RecordType2
 - Satellite_Cannot_Update_StartDate2
 - Satellite_Cannot_Update_Subtype2
- Ensure the following validation rules are deactivated in Meetings sObject
 - Satellite_Cannot_Update_EndDate
 - Satellite_Cannot_Update_MeetingStr
 - Satellite_Cannot_Update_PrntMeeting
 - Satellite_Cannot_Update_RecordType
 - Satellite_Cannot_Update_StartDate
 - Satellite_Cannot_Update_Subtype
- Add new picklist values to MeetingMember__c sObject field Type__c (Role):

- "Satellite Organizer"
- "Host Organizer"
- "Host Speaker"
- Enable DB Schema for the entity - "Territory2" from **Admin Console > Mobile** tile.
- Add new fields to required "Meeting__c" page layouts:
 - OCE__MaxSatellites__c
 - OCE__MeetingStructure__c
 - OCE__OtherInstructions__c
 - OCE__ParentMeeting__c (Read Only in Layout)
 - OCE__RegistrationStatus__c
 - OCE__SatelliteDiscrepancy__c (Read Only in Layout)
 - OCE__SatellitesCount__c (Read Only in Layout)
 - OCE__AdditionalTerritoriesForSharing__c (Read Only in Layout)
 - OCE__VirtualCallInNumbers__c
 - OCE__VirtualMeetingId__c
 - OCE__VirtualMeetingPasscode__c
 - OCE__VirtualMeetingType__c

- OCE__VirtualMeetingUrl__c
- OCE__RegisterByDate__c
- Add new fields to required "Meeting Topic" page layouts:
 - OCE__IsHostTopic__c
- Configure Satellite Exempt Statuses from **Admin Console > Meeting > Satellite Meeting Settings**.
- Follow one of the below two approaches to add "Share Meeting" Action to the required Generic Workflow to let user Share Host Meeting to other territories for registration:
 - Clone and Deploy new Workflow Path "WFPATH Speaker Meeting R9" from Admin Console.
 - New workflow activation is not required for just adding new "Action" to an existing Workflow.
 - Add available Action "Share Meeting" (Component type) to required the Generic Workflow Context(s).
 - Deploy changes.
 - Create new component type Action "Share Meeting Action" and add to required Contexts in existing Workflow.
 - No need to deploy "WFPATH Speaker Meeting R9" Workflow in this case.
 - "Share Meeting Action" configurations are the following:
 - Label: "Share Meeting"
 - Custom Label Name: "ShareMeeting"
 - Context Type: Meeting

- Component name: "OCE9:meetingTerritoriesSelectionLwc"
- Leave "Component parameters" as empty
- Follow one of the below two approaches to add "Register As Satellite" Action to required Generic Workflow to let users create Satellite Meetings:
 - Clone and Deploy new Workflow Path "WFPATH Speaker Meeting R9" from Admin Console (if not deployed earlier).
 - New workflow activation is not required for just adding new "Action" to an existing Workflow.
 - Add available Action "Register As Satellite" (Component Type) to required Context(s).
 - Deploy changes.
 - Create new component type Action "Register As Satellite Action" and add to required contexts in existing Workflow.
 - No need to deploy "WFPATH Speaker Meeting R9" workflow in this case.
 - "Register As Satellite Action" configurations:
 - Label: Register As Satellite
 - Custom Label Name: Register_As_Satellite
 - Component name: OCE9:satelliteMeetingCreationLwc
- Add "List View" component to display "Satellite Meetings" in "Meeting" Lightning Page (Flexi Page).
 - Create a FieldSet in OCE__Meeting__c sObject for Satellites list view in Meetings record page.
 - Open "Meeting" Lightning record page in Lightning App Builder.
 - Add "ListView" custom component to one of the existing tabs (e.g. Related).

- Set below component property values:
 - fieldSetName : <SatelliteMeeting_FieldSetName>
 - objectName : OCE__Meeting__c
 - whereClause : OCE__ParentMeeting__c='{recordId}' AND OCE__MeetingStructure__c='Satellite'
 - handlerForUpdateDelete : StandardUpdateDeleteHandler
 - viewAllComponent: StandardViewAll
 - label: Satellites
 - iconName: standard:events
- Set Lightning Component visibility criteria: "MeetingStructure__c EQUAL Host".
- To use on mobile, run metadata cache from **Admin Console > Mobile**.

Satellite Notification Setup (OCE9 Package)

Orgs may wish to setup notifications on iPad to notify users when someone has registered for a Satellite Meeting on their Host Meeting, and also notify users when registration is open on a Host Meeting. A recipe is provided for this:

- Deploy flows to org using the provided attachment (can be deployed using Workbench).

Note: Refer to the files section of CSH (OCE Personal Library) to find *SatelliteNotification.zip* files.

- Give Create permission for OCE__Notification__c object to needed users.
- Activate NotificationTerritorySharingHandler.

Satellite Meeting Record Type Selection (OCE9 Package)

Orgs may wish to allow users to choose the record type of the Satellite Meeting before it is auto-created from the Host Meeting to differentiate record types between Satellite and Host. This can be achieved through use of a Generic Workflow component launched when clicking the "Register As Satellite" action.

The flow for this is as follows:

- When Satellite Meetings is configured and no record type parameters are configured in the Component type of GW Action for registering Satellites, no record type selection screen or Edit Meeting window displays when user clicks 'Register as Satellite' action and the Satellite creation process happens as usual. All applicable fields are copied from Host to Satellite (Meeting Structure (set as Satellite), Record Type, Subtype, Dates, Virtual fields, Meeting Topic, Speaker, etc.).
- When some record type parameters are configured in the Component type of GW Action for registering Satellites, a record type selection screen opens with a list of available record types as configured in the component's parameters (plus the Host Meeting's RT displays as the default selected).
- When the same record type as the Host Meeting is chosen, no Edit Meeting window opens and the Satellite creation process happens as usual. All applicable fields are copied from Host to Satellite (Meeting Structure (set as Satellite), Record Type, Subtype, Dates, Virtual fields, Meeting Topic, Speaker, etc.).
- When a different record type from the Host Meeting is chosen, the Edit Meeting window opens with the applicable layout for the record type selected (page layout should be configured to include any key fields as the Host Meeting's record type layout). Certain fields are pre-populated, such as Meeting Structure (Satellite), Dates, Name and Virtual fields (Subtype will be null).
- User can fill in a different value in the 'Subtype' and 'Name' fields than what was on the original Host Meeting; these fields will be saved with the selection, but all the Virtual fields and Meeting Dates are inherited from the Host Meeting and cannot be changed. Meeting Structure is Satellite.
- The following fields will be displayed as read only on new Satellite Meeting creation screen:

- Meeting Start Date Time
- Meeting End Date Time
- Meeting Structure
- Parent Meeting

To activate this feature:

- Activate "Satellite Meetings" feature (see above).
- Create new component type Action "Register As Satellite Action" or update existing "Register As Satellite Action" with below details:
 - Label: Register As Satellite
 - Custom Label Name: Register_As_Satellite
 - Component name: OCE9:satelliteMeetingCreationLwc
 - Set "Component parameters" with value: {"allowedRecordTypes":["HCP_Sponsorship","Displays_Exhibits"]}
 - Replace record types in above example with required client record types.
- Add "Action" to required contexts in existing Workflow.
- Run metadata cache

Configure Fields to Inherit from Host During Satellite Meeting Creation (MVP) (OCE9 Package)

Orgs can configure which fields from the Host Meeting should be inherited on the Satellite Meeting. A field added to a field set will be copied from parent (Host) Meeting to child (Satellite) Meeting, populating the same field on Satellite Meeting.

To enable this feature:

- Activate "Satellite Meetings" feature (see above).
- Create a field set with required fields on Meeting object.
- Assign write access for user to fields added to the field set to allow their population.
- Update Generic Workflow Actions:
 - Go to Admin Console > Workflow Configuration > Actions > Component
 - Edit "Share Meeting" Action:
 - Set "Component name" with value: OCE9:meetingTerritoriesSelectionLwc
 - Save.
 - Edit "Register As Satellite" Action:
 - Set "Component name" with value: OCE9:satelliteMeetingCreationLwc
 - Set "Component parameters" with value:
 - If "Satellite Meeting Record Type Selection" feature is enabled (**Change record type flow**): {"fieldSetToCopy": "FieldSetNameCreatedonMeetingObject", "allowedRecordTypes": ["HCP_Sponsorship", "Displays_Exhibits"]}
 - If "Satellite Meeting Record Type Selection" feature is not enabled (**Default flow**): {"fieldSetToCopy": "FieldSetNameCreatedonMeetingObject"}
 - Set *fieldsetToCopy* parameter equal to created fieldset name.
 - Save and Deploy.
- To use on mobile, run metadata cache.

Note:

Satellite Meeting will inherit the provided fields from the field set, with the following items to note:

- Unsupported field types, default fields (i.e. fields that are already being copied from the previous releases of Satellites), or non-editable fields are not copied from the field set. Supported field types:
 - Checkbox, Currency, Date, Date/Time, Email, Lookup, Number, Percent, Phone, Picklist, Multiselect Picklist, Text, Text Areas, Time, URL
- When user is changing the record type on the Satellite Meeting (i.e. record type change flow):
 - Picklist and multipicklist fields are skipped.
- Inherited fields will be pre-populated on Satellite Meeting edit form and cannot be overwritten by the user (they can attempt to edit them but the changes will not be saved).

Configure Approval Inquiries (Cross-Org Approvals) (OCE9 Package)

See [Approval Inquiries \(Cross-Org Approvals\)](#).

Configure Remote Meetings (MVP) (OCE9 Package)

The Remote Engagement feature has been integrated with the Meetings module, to allow for creation of Remote Meetings. A Remote Meeting can be launched from iPad and Salesforce using the Generic Workflow.

The following describes the flow for Remote Meetings:

- Meeting user will check a box called 'Remote Meeting' to define the Meeting as remote.
 - Session Key will be generated for Meeting and Meeting Members.
 - User cannot create Remote Meeting if Twilio Allocated Mins are less than Twilio Used Minutes on OCESecuredConfig__c.
- Custom settings and field set will determine when to send emails to Meeting Members (more details on email sending are outlined below).

- Remote Meeting Eligible Invitation Statuses custom setting - used for sending invitation emails
- Remote Meeting Statuses for Cancellations custom setting - used for sending cancellation emails
- RMUpdateEmailTriggeringFields field set on Meeting - used for sending update emails
- Invitation link leads to SF Experience Cloud site.
- Lookup field to Meeting Member added on Email Transaction to track emails related to Meeting Members.
- Meeting Member responses will be captured in Invitation Status field (Accepted, Tentative, Declined).
 - There is a job called 'Track Email Status Regularly' that is used to update this field. Please note that only **Sparkpost a MessageBird Company Email Service** currently supports tracking this.
- Generic Workflow Action will "Launch Remote Meeting" (not shipped OOB).
- In Salesforce and iPad:
 - Meeting Topic with Topic Materials must be added to Meeting in order to filter appropriate presentations to display.
 - If session token is found for Meeting Member, CLM player will be launched.
 - On mobile side, if no token is found, REST call will be made to get it from Salesforce, and if token is received, CLM player will be launched.
 - If no token is found on mobile side, REST call will be made to get it from SF.
 - If token is found, CLM player will be run. If not, error message will be displayed.
 - All unrestricted presentations linked to the Meeting Topic's Topic Materials will appear in the player for user to choose from (displayed in footer).

- All non-targeted presentations will be shown (presentation is considered non-targeted if it has IsTargeted__c flag set to false).
- This is based on Targeting Context custom setting (CLM Settings) (for presentations that have IsTargeted__c flag set to true).
 - This is based on Targeting Context custom setting (CLM Settings)
 - When Targeting Context = Restriction: Only presentations (linked to Topic Materials) that added Accounts have in 'Targeted Presentations JSON' field will display. This is an intersection of all added Accounts' targeted presentations; if a presentation is not targeted for any single Account, it will not be shown in the player.
 - When Targeting Context = Suggestion: All presentations linked to Topic Materials will display in the player with a warning message that appears on non-targeted presentations.
 - When Targeting Context = None: All presentations linked to Topic Materials will display in the player.
- Clickstream Metrics will be tracked.
- Upon ending Remote Meeting, Twilio used minutes will be updated directly if used on Salesforce side or by REST API call from mobile side.
- Attendance Method on Meeting Member will be updated to 'Virtual' and Attendance Status will be updated to 'Attended - Did Not Sign'.

Note: This only happens when user has access to these fields.

- If user has access to Attendance Method field but does not have access to the Attendance Status field while using Remote Meetings, an error is logged that the status cannot be set.

Sending Emails

The following describes more information on how emails are sent for Remote Meetings:

Invitation Emails

- Configurations for when to send the initial invitation email are stored in a custom setting (Remote Meeting Eligible Invitation Statuses). This allows Admins to configure which Invitation Statuses on Meeting Members will trigger the invitation email to go out. For example, if the value 'Invited' is configured and a Meeting Member has an Invitation Status of 'Invited', an invitation email will be automatically sent for the Remote Meeting.

Important:

It is important that orgs think through the implementation of which Invitation Statuses to include, since emails will be sent automatically based on the Invitation Status value. If a certain status is not intended to have emails sent for it, it should not be configured in this setting.

- Email Templates of 'Meeting' type only and 'Create' Invitation Method will be used to send the invitation emails. Ensure this is configured properly in your org.
 - If there are multiple Email Templates shared with the same territory and of the same type, the last modified will be used.
- Invitation Email Status field on Meeting Member will be updated based on the email's status (e.g. Sent).
- Upon sending an email, a standard event will be deleted, depending on if the setting "Create OCE Connect Meeting Event" is configured. This will delete a standard Salesforce calendar event for the HCP.

Note: Certain Meeting Members' (Colleagues) Invitation Statuses are automatically set when they are added to the Meeting:

- Organizer - automatically set to Accepted
- Approver - automatically set to Accepted
- Coordinator - automatically set to N/A
- Satellite Organizer - automatically set to Accepted

What this means is that if the user wants any of these to get an invitation email, they would need to manually set their Invitation Status to whatever is configured in the custom setting (Remote Meeting Eligible Invitation Statuses). Orgs need to ensure their workflows allow editing of the Colleague in this case.

Additionally, orgs need to ensure custom scripts, if used, take into account that OCE will be automatically setting the response of the Meeting Members based on how they respond to the email (Accepted, Declined, Tentative) in the Invitation Status field, so take care to ensure this does not break anything in the script.

Update Emails

- RMUpdateEmailTriggeringFields field set on Meeting allows orgs to choose what fields will trigger an update email (e.g. Meeting Start Date). Field set is hardcoded in the trigger handler, so it is shipped OOB. OOB field set will contain Start Date/Time and End Date/Time.
- Email Templates of 'Meeting' type only and 'Update' Invitation Method will be used to send the update emails. Ensure this is configured properly in your org.
 - If there are multiple Email Templates shared with the same territory and of the same type, the last modified will be used.
- Update emails will only be sent to Meeting Members that received an Invitation email.
- Upon sending email, a standard event will be deleted, depending on if the setting "Create OCE Connect Meeting Event" is configured. This will delete a standard Salesforce calendar event for the HCP.

Cancellation Emails

- Configurations for when to send a cancellation email are stored in a custom setting (Remote Meeting Statuses for Cancellations). This means that when the Meeting is in a status that is mentioned in the setting, the cancellation email will be automatically sent (e.g. Cancelled).
- If a Meeting Member is deleted and/or if a Meeting is changed from Remote to non-Remote, cancellation emails will also be sent automatically.
 - User cannot delete a Meeting unless it has been cancelled (Cancellation emails sent).

Note: This validation is performed on Salesforce but is not possible to be performed on iPad. Therefore, a sync failure may occur if a Meeting is deleted before it is cancelled on iPad when cancellation emails have not yet been sent out.

- Email Templates of 'Meeting' type only and 'Cancel' Invitation Method will be used to send the cancellation emails. Ensure this is configured properly in your org.
 - If there are multiple Email Templates shared with the same territory and of the same type, the last modified will be used.
- Cancellation emails will only be sent to Meeting Members that received an Invitation email.
- Upon sending email, a standard event will be deleted, depending on if the setting "Create OCE Connect Meeting Event" is configured. This will delete a standard Salesforce calendar event for the HCP.

To activate this feature:

- Ensure OCE 3 package is installed (you can create a CSM case to have this installed by IQVIA Support).
- Ensure basic Meeting settings and [Generic Workflow](#) setup is completed.
- Get Twilio provisioning completed in org and ensure org has available Twilio minutes. (see [Remote Engagement](#).)
- Ensure the "Service Provider" setting is set to 'ExternalRemote' (Setup -> Custom Settings -> Remote Call Setting).

- Create a Salesforce Experience Cloud Site and configure Invitation URL (Remote Call Setting):
 - [Create Site](#)
 - [Site Configurations](#) (Steps 1, 2, 3, & 4)
 - Navigate to Setup -> Custom Settings -> Remote Call Setting, Update "Invitation Url" with Experience Cloud Site URL.

URL Format: "Org_Domain_Name/s/remote-engagement"

- For guest users, add Read permission to MeetingMember__c.RemoteSessionKey__c field in community guest user profile. This profile can be opened through **Setup > Digital Experiences > All Sites > {current Site} > Builder > Settings > General**.
- Ensure Email (force.com or Sparkpost a MessageBird Company) feature is activated and Email jobs are scheduled in org.
- Open Support case to complete setup of ICS tracking (for RSVPs).
- Ensure [Presentation \(CLM\)](#) feature is configured and is activated.
- Ensure [Presentations](#) are associated to Topic Materials that will be used in the Meeting (see [CLM on Meetings](#) section in the hyperlink).
- Ensure [Click Stream \(CLM\)](#) feature is activated.
- Ensure Admin Users are assigned with below listed permission sets:
 - OCE9MeetingRemoteEngagement
 - RemoteEngagementAdmin
- Ensure non-Admin users are assigned with below listed permission sets:
 - EmailUser
 - OCE9MeetingRemoteEngagement

- Ensure that all users that are permitted to use this feature on Salesforce are assigned with the below listed permission sets:
 - Launch Remote Engagement
 - Web CLM
- To activate for Mobile users - ensure the below entity (DB Schema) is activated from Admin Console > Mobile:
 - Remote Call Setting
- Ensure the following trigger handler configuration:

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Meeting Member Session Key	OCE9.MeetingMemberSessionKeyHandler2	MeetingMemberSessionKeyHandler	OCE.MeetingMemberSessionKeyHandler
Remote Meeting Session Token	OCE9.RemoteMeetingSessionTokenHandler2	RemoteMeetingSessionTokenHandler	OCE.RemoteMeetingSessionTokenHandler
Meeting Email Creation	OCE9.MeetingEmailCreationHandler2	MeetingEmailCreationHandler	OCE.MeetingEmailCreationHandler

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Remote Meeting Email	OCE9.RemoteMeetingEmailHandler2	RemoteMeetingEmailHandler	OCE.RemoteMeetingEmailHandler
Remote Meeting Member Email	OCE9.RemoteMeetingMemberEmailHandler2	RemoteMeetingMemberEmailHandler	OCE.RemoteMeetingMemberEmailHandler

- Add below listed fields to page layouts of various sObjects:
 - Meeting sObject page layouts
 - OCE__RemoteMeeting__c
 - Meeting Member sObject page layouts
 - OCE__RemoteSessionKey__c
 - OCE__InvitationEmailStatus__c
- Configure the below custom settings from Admin Console > Meetings > "Remote Meeting Settings" tab:
 - Remote Meeting Eligible Invitation Statuses
 - Remote Meeting Statuses for Cancellations
- Configure Meeting field set "RMUpdateEmailTriggeringFields" with fields which should trigger Update Email Invitations when there is a change in field value.

- Template Setup
 - Create [Email Templates](#) with "Invitation For" set to "Meeting" and for all three "Invitation Methods" i.e. Create, Update, & Cancel.
 - Check "Default Invitation" field for Email Templates which should be default, per method (Create/Update/Cancel).
 - If there are no Default Invitations, configure Email Templates in Territory Config.
 - Email Templates must be shared to appropriate Territories.
 - Ensure users have access to fields/sObjects referred to in Template Mustache variables.
 - Meeting Invitation type Email Templates can have below variables (built-in functions (e.g dateFormat) are not supported):
 - meeting - To access Meeting__c record fields (meeting.oce__startdatetime__c)
 - recipient - MeetingMember__c record who receives an email (recipient.name)
 - sender - User record who is the Owner of the Meeting record
 - remotesession.url - link for joining Remote Meeting
- Standard Event Setup
 - Ensure "Allow Activities" flag is enabled on "Meeting Member" sObject (SF Setup > Edit Object).
 - Ensure standard Activities related list is added to Meeting Member page layout(s).
 - Enable custom setting "Create OCE Connect Meeting Event" from Admin Console > Meetings Tile > "Meetings Org Level Settings" tab.

- Add "Launch Remote Meeting" Action to the required [Generic Workflow](#) to let user launch Remote Meeting.
 - Create new component type Action "Launch_Remote_Meeting" and add to required contexts in existing Workflow(s).
 - "Launch Remote Meeting" Action configurations.
 - Label: "Launch Remote Meeting"
 - Custom Label Name: "OCE.Launch_Remote_Meeting"
 - Context Type: Meeting
 - Component name: "OCE9:RemoteMeetingsLauncher"
 - Leave "Component parameters" as empty
- To use on mobile, run metadata cache.

Configure Lock on Sign In (OCE9 Package)

To configure a lock button on the iPad Sign In screen which will allow users to lock the iPad when capturing signatures, follow the below step:

- Assign **Meetings Sign In Lock Screen** custom permissions to user's profile or permission set that is assigned to the user.

When this permission is assigned, the user will see a lock icon on the Sign In screen.

- Close and Print buttons are disabled while the Sign In screen is locked.
- Add Attendee button is disabled when screen is locked (see [Configuring Add Attendee on Sign In](#) section of this guide).
- QR Code and Sign In buttons will work when in locked mode.
- Tapping on the Lock button will initiate a security challenge and upon success, screen will be "unlocked."

Configure Add Attendee on Sign In (OCE9 Package)

To allow users to add Account Attendees directly from the iPad Sign In screen, follow the below step:

- Assign **Meetings Sign In Add Attendee** custom permissions to user's profile or permission set that is assigned to the user.

When this permission is assigned, the user will see an **Add Attendee** button on the Sign In screen on iPad, allowing them to launch the Account Attendee component and select multiple Accounts at a time.

Note: All existing validations will be respected when adding a Meeting Member and signing them in.

Configure QR Code Scanning in Meetings (Pilot) (OCE9 Package)

To allow for a contactless Meeting sign in experience on iPad, orgs can enable the QR code scanning feature. When enabled, the Meetings user will see a QR code icon on the iPad Sign In screen that will launch the device's camera to allow them to scan a QR code. This will sign in the Meeting Member and set their Attendance Status to "Attended-QR Code", while also capturing the date in the Signature Date field.

To activate this feature:

- Add new picklist value "Attended-QR Code" to existing field OCE__MeetingMember__c.OCE__AttendanceStatus__c and assign new picklist value to all Meeting Member record types.
- Assign new custom permission "Meetings - Allow QR Code Sign-In" to all required profiles/permission sets to enable the feature for users.
- If required, update MeetingsConfig__c (Meetings) Custom Setting records associated to required profiles from Admin Console with the below given values:

- append ";Attended-QR Code;" to custom setting field "Sign In: allowed Attendance Statuses"
- append ";Attended-QR Code;" to custom setting field "Attend. Statuses For Topic Compliance"
- append ";Attended-QR Code;" to custom setting field "Allocation: allowed Attendance Statuses"
- Run metadata cache.

Note: For the printed Sign In sheet, orgs will need to configure Meeting Member Attendance Status or Signature Date fields on the sheet to show that those using QR Codes signed in, as it will not be apparent OOB (i.e. no signature will display like it does for electronic signatures).

OCE does not provide an OOB solution to generate the QR codes or send emails. Instead, a recipe is provided for how orgs can achieve this by adding a piece of code as a trigger or a batch with the QR provider.

Generate QR Codes (OCE9 Package)

To generate QR codes

- Create field on Meeting Member object to store QR code in base64 format:
 - Field Type - Text Area (Long)
 - Field Label - custom (e.g. QR Code)
 - Field Name - custom (e.g. QRCode)
 - Length - depends on QR code size (up to 300 characters for QR code 10x10px, up to 4000 for QR-code 1000x1000px)
- Give edit permission to this field to all users who update Meeting Members.
- In the archive, modify MeetingMemberQrCodeService. Add field name from step 1 to the variable on line 3.

```

1 public with sharing class MeetingMemberQrCodeService {
2     private static final Integer CHUNK_SIZE = 20;
3     private static final String QR_CODE_FIELD = 'QrCode__c';

```

- Deploy archive to org. Archive contains:
 - Remote Site Settings:
 - QR_Code_API
 - Apex Classes:
 - MeetingMemberQrCodeHandler
 - MeetingMemberQrCodeService
 - Apex Trigger:
 - MeetingMemberQrTrigger

Important: Change file names and references in archive before deploying if org contains metadata with the same names.

The provided code sample (QrCodeGenerationSample.zip) generates QR codes for Meeting Members and stores them in the text area field in base64 format. QR codes will be generated on Meeting Member insert or when Meal/Meal Option field has been updated.

Note: Codes will be generated in async queueable context because the code sample uses an external service for creating QR codes, so it will take some time to process and populate code data on Meeting Member.

Refer to the files section of CSH (OCE Personal Library) to find *QrCodeGenerationSample* files.

Important: OCE will not provide any kind of support or bug fixing for this code. It is only meant as a sample code to show how QR codes can be generated.

Send Emails to Meeting Members with QR Code (OCE9 Package)

The following recipe provides different ways to send emails with QR codes; one is using standard Salesforce email template setup, and the other is a piece of Apex code that can be customized to automatically send emails. Additionally, with the standard Salesforce email template approach, there are 2 variations: one using the image in base 64 format, and another to host the image on an outside server. The approach to take depends on the email client; many email clients (such as Gmail) will not support base 64 format, so the QR code will not appear as an image in the email. In that case, the option for hosting the image on an outside server would be optimal. Both ways are outlined below.

Send Emails Using Standard Salesforce Templates (Base 64 Approach) (OCE9 Package)

- Choose an sObject that will contain QR code image in a Long Text Area field (e.g. Meeting Member, Image__c field).
- Allow Activities for selected sObject (e.g. Meeting Member). Go to **Setup > Object Manager > Meeting Member > Details > Edit > Allow Activities**.
- Add Activity History related list to page layout (and Lightning record page, if needed).
- Ensure Deliverability is set to **All Email**. Go to **Setup > Email > Deliverability**.

Setup Email Template


- Navigate to **Setup > Email > Classic Email Template**.
- Select **New Template** and choose **Custom**.
- Set the following HTML body value (replace example merge field with chosen image field). Please note that data URI is dependent on image type (e.g. data:image/jpeg):

```


```

Send Email From Record

- Create Meeting Member record and populate Image field with base64 encoded image (attained through following steps in **Generate QR Codes** section).
- Select **Email** button on Activity History related list.

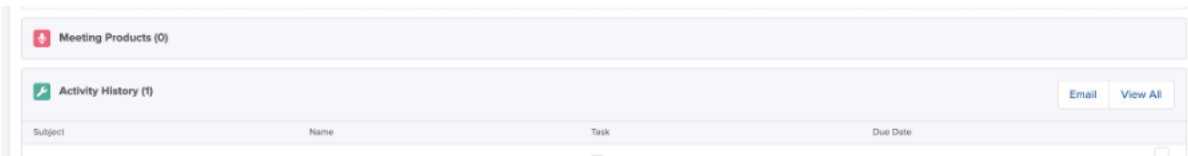

- Choose your created email template.

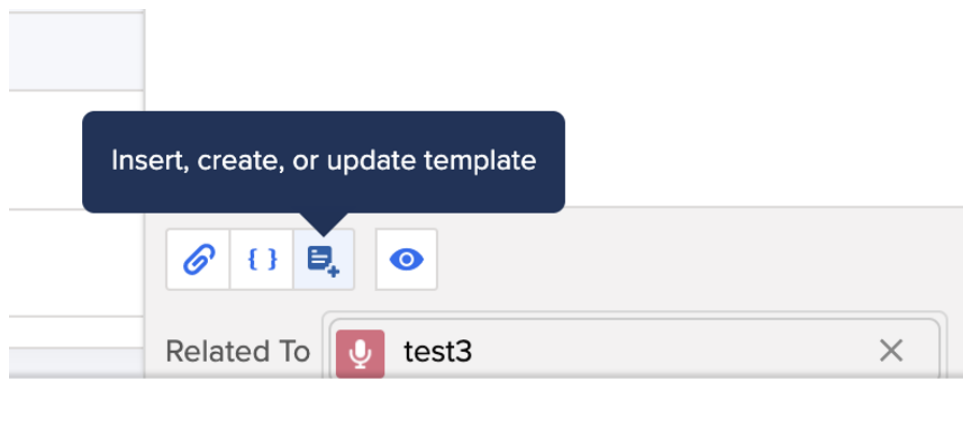

- Populate **To:** and press **Send**.

Example image:



Send Emails Using Standard Salesforce Templates (Host Image on Outside Server Approach)

- Choose an sObject that will contain QR code image in a Long Text Area field (e.g. Meeting Member, Image__c field).
- Allow Activities for selected sObject (e.g. Meeting Member). Go to **Setup > Object Manager > Meeting Member > Details > Edit > Allow Activities**.
- Add Activity History related list to page layout (and Lightning record page, if needed).
- Ensure Deliverability is set to **All Email**. Go to **Setup > Email > Deliverability**.

Setup Email Template

- Navigate to **Setup > Email > Classic Email Template**.
- Select **New Template** and choose **Custom**.
- Set the following HTML body value (replace example merge field with chosen image field): ``

Send Email From Record

- Generate QR Code image (attained through following steps in **Generate QR Codes** section) and put it on a hosting site of your choosing.
- On a record which you want to contain the QR code image, set Image field (e.g. Meeting Member, Image__c field) with a link to the image.
- Select **Email** button on Activity History related list and choose the email template for sending QR codes.
- Populate **To:** and press **Send**.

Note: These approaches will only work on Salesforce; there is no support for sending standard Salesforce emails from mobile.

Send Emails Using Apex Code

The following is a code sample for sending emails with an attachment from Apex code:

```
//Get Meeting Members for sending emails
Map<Id, OCE__MeetingMember__c> meetingMembersByIds = new Map<Id, OCE__MeetingMember__c>([SELECT Id, QrCode__c, OCE__Email2__c
From OCE__MeetingMember__c WHERE <Condition(s)>]);
//QrCode__c - custom field to store QR-code in Base64 format, not in package

List<Messaging.Email> emails = new List<Messaging.Email>();
List<Attachment> attachments = new List<Attachment>();

for(OCE__MeetingMember__c meetingMember : meetingMembersByIds.values()) {
    if (meetingMember.QrCode__c != null) { //check that QR-code has been created
        attachments.add(new Attachment(Name = 'QR.png', Body = EncodingUtil.base64Decode(meetingMember.QrCode__c), ParentId =
meetingMember.id));
    }
}

insert attachments; //save QR-codes as attachment for Meeting Members

for(Attachment att : attachments) {
```

```

    OCE__MeetingMember__c meetingMember = meetingMembersByIds.get(att.ParentId); //get Meeting Member, related to current
Attachment

    Messaging.SingleEmailMessage emailMessage = new Messaging.SingleEmailMessage();

    //Set current User as sender
    emailMessage.setSenderDisplayName(UserInfo.getName()); //set sender name
    emailMessage.setReplyTo(UserInfo.getUserEmail()); // set email for answering

    emailMessage.setToAddresses(new List<String>{meetingMember.OCE__Email2__c}); // set recipient email

    emailMessage.setSubject('QR-code'); // set email Subject
    emailMessage.setPlainTextBody('QR-code in attachment'); // set email body

    emailMessage.setEntityAttachments(new List<String>{att.Id}); // add SF Attachment as attachment for email
    emails.add(emailMessage);
}

Messaging.sendEmail(emails, false); //send emails

```

Note: OCE will not provide any kind of support or bug fixing for this code. It is only meant as a sample code.

Configure Meeting Creation from Plan (OCE9 Package)

As a lead to up to conducting engagements and meetings, life science companies conduct an assessment/planning exercise during which they validate the intent, desired outcome, funding, potential effectiveness and audience. Once the strategy is validated, a tactical direction is documented in the plan (e.g. the type of meetings to conduct, the type of people to invite, the type of outcome to expected, # of meetings etc.). Once a plan is validated and approved, it is then shared with the plan recipients so they can start planning their meetings against them.

Orgs can allow creation of Meeting records directly from a Plan record and apply the following validations:

- Meeting has a record type listed in Plan **Supported Meeting Types** field.
- Meeting **Start Date** and **End Date** entered are within the Plan **Start Date** and **End Date**.
- Plan **Registration Status** is 'Open'.

Note: If any date field is empty on Plan it means no validation is needed.

If Supported Meeting Types field is empty on Plan, it means that no type is supported, hence all validations will fail. No validation can be achieved by providing all possible values here.

This is supported on Salesforce and iPad.

To configure this

- Assign **OCE9 Meetings Plan User** permission set to the appropriate user and ensure **OCE Meetings Plan User** is not assigned.
- Ensure **MeetingCreationFromPlanHandler** (Trigger Handler API Name: OCE.MeetingCreationFromPlanHandler) trigger handler is deactivated.
- Activate **MeetingCreationFromPlan** (Trigger Handler API Name: OCE9.MeetingCreationFromPlanHandler2) trigger handler.
- Create OCE__Plan__c tab.
- Add Meeting related list to Plan layout.
- If needed, add Meeting related list to Plan flexipage.
- In **Plan_c DBSchema** remove OCE__MeetingsPlanUser permission set and add OCE9__OCE9MeetingsPlanUser permission set.
- Activate **Plan_c DBSchema** record and generate metadata cache.

Configure Alternate Dates (OCE9 Package)

In Meetings management, when working with a logistics partner, it becomes increasingly important for the meeting requestor to provide sufficient information about their meeting needs so that the partner can effectively plan and adapt to changes while doing their best to minimize constant disruption to the rep and maintain a compliant meeting setup.

To optimize the meeting planning process and reduce back-and-forth, commercial operations and logistical planners often request or require meeting requestors (e.g. field sales reps) to provide more than one option for a location, speaker and date. This is done so that in the event that the requestor's preferred/primary location, speaker or date - or some combination of the three - is unavailable or doesn't work out.

The Alternate Dates feature can be configured to allow Reps to provide alternate dates for their Meeting.

Access to Alternate Dates related fields is delivered OOB in the following permission sets:

- Meetings User
- Meetings Admin

To configure this

- Enable **AlternateDate** record type for **MeetingDetail__c** object.
- Assign **MeetingDetail__c - Alternate Date** page layout to profile.
- Configure [Generic Related List](#) to show Meeting Detail records of Alternate Date record type.
- To use on mobile, create a DB Schema record for MeetingDetail__c object. Run cache.

Configure Additional Territory Fields for Meetings (OCE9 Package)

This feature is available only in OCE9.

The Meetings module stamps the territories of certain Colleagues (based on Role) onto the Meeting to provide them access, which presents the need for multiple Territory fields in order to fit all characters. 3 Territory fields (Text(255)) have been provided to accommodate multiple territories.

To activate the feature:

- Give Edit access to additional Meeting object territory fields:
 - OCE__Territories1__c
 - OCE__Territories2__c
- Ensure the following trigger handler configuration:

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Meeting Sharing New	OCE9.MeetingSharingNewHandler2	MeetingSharingNewHandler (DEPRECATED)	OCE.MeetingSharingNewHandler (DEPRECATED)
Meeting Member Sharing	OCE9.MeetingMemberSharingHandler2	Meeting Member Sharing Handler (DEPRECATED)	OCE.MeetingMemberSharingHandler (DEPRECATED)
Meeting Member Create	OCE9.MeetingMemberCreateHandler2	MeetingMemberCreateHandler (DEPRECATED)	OCE.MeetingMemberCreateHandler (DEPRECATED)

This feature may also impact some modules that rely on Meeting Territories data to properly filter or display Meeting records, so they must be configured as well.

Settings for Activity History (OCE9 Package)

Default Meeting Member OCE__ActivityHistoryUserObjectSelection__c record is configured with OCE__TerritoryFieldName__c = 'Meeting__r.Territories__c'.

To include new Meeting territories data, change the value of OCE__TerritoryFieldName__c field to MeetingTerritories__c.

DB Schema for Call Presentation (OCE9 Package)

To include new Meeting territories data, change DbSchema.CallPresentation__c WhereSql to include new Territory formula

Old value:

```
(OCE__Call__r.OCE__Territory__c = &apos;{USER.TERRITORY}&apos; OR OCE__Meeting__r.OCE__Territories__c LIKE &apos;%;  
{USER.TERRITORY};%&apos;)
```

New value:

```
(OCE__Call__r.OCE__Territory__c = &apos;{USER.TERRITORY}&apos; OR OCE__Meeting__r.OCE__TerritoriesAll__c LIKE &apos;%;  
{USER.TERRITORY};%&apos;)
```

Settings for Activity Plan Config (OCE9 Package)

To include new Meeting territories data, change ActivityPlanConfig custom metadata RepRepresentation and SpeakerMeeting records OCE__ActivityTerritoryField__c field from:

Old value

OCE__MeetingTerritory__c

New value

OCE__MeetingTerritories__c

Note: Ensure you are activating the feature for all users of the Meetings module so there won't be any discrepancies if a user not using the feature modifies Meeting Territories in some way.

Configure Ability to Change Meeting Owner (MVP) (OCE9 Package)

Admins can configure the ability to retain Meeting sharings when the owner of the Meeting is changed.

To activate this feature ensure the following trigger handler configuration:

Active Handler Label	Active Handler API Name
Meeting Sharing Preserving	OCE9.MeetingSharingPreservingHandler
Meeting Sharing Preserving Async	OCE9.MeetingSharingPreservingAsyncHandler

Note: This functionality does not recreate sharing for the previous Owner. So, if the previous Meeting Owner does not have additional sharing through Territory or Group, they will lose access to the Meeting.

Configure Meeting Share Management After Account Realignment (OCE9 Package)

From May 2023 release, The admin can configure the ability for users to access all Meeting related activities on Account, even if the Meeting is created for a territory to which the user is not aligned.

To activate this feature, enable the following trigger handlers:

- Meeting Account Based Sharing (Trigger Handler API Name: OCE9.MeetingAccountBasedSharingHandler) on OCE__MeetingMember__c
- Account Related Meeting Sharing Async (Trigger Handler API Name: OCE9.AccountRelatedMeetingSharingAsyncHandler) on OCE_DataChangeEvent__e

Admin can run a job for recalculating Meeting shares based on added Accounts from **Admin Console Territories Tile > Meeting Share Management:**

Configure Compliance Statements (MVP) (OCE9 Package)

This feature is available only in OCE9.

The Compliance Statements feature provides the ability for Meeting Organizers to see and agree to Compliance Statements assigned to them when working with a Meeting.

To activate this feature:

- Assign permission sets:
 - MeetingComplianceStatementAdmin to Meeting Admins
 - MeetingComplianceStatementUser to Meeting Users
- Add two new picklist values into OCE__ComplianceStatement.OCE__StatementType__c field:
 - Compliance Note - should be controlling value for None value of Statement Validation Type field
 - Compliance Agreement - should be controlling value for Optional and Required values of Statement Validation Type field
- Activate trigger handlers for OCE9:
 - MeetingComplianceStatements (Trigger Handler API Name: OCE9.MeetingComplianceStatementsHandler)
- Add Compliance Statements component to Meeting flexipage.
- Optionally, set the number of accessible statements of the Compliance Agreement type for which applies auto-saving of changes in statements checkboxes and hiding of the **Accept** button in the **Threshold for Auto-Save** parameter.

Note: For example, an admin can set a value of the **Threshold for Auto-Save** property as 2. In such case the **Accept** button will be hidden and automated saving will be enabled, if there are one or two accessible statements of the *Compliance Agreement* type which are mandatory or optional. If there are 3 and more accessible statements of this type, then saving will be disabled, and user will have to use the Accept button to save changes.

This setting will prevent cases when admin incidentally shares multiple (e.g. 5+) compliance statements and this may increase significantly number of sync transactions from mobile and number of used asynchronous Salesforce apex.

Admin should keep in mind that automated saving will generate one sync transaction per check or uncheck. Each transaction requires one slot of asynchronous Salesforce apex that has limitations per 24 hours. E.g. if client has 1000 meetings per day and there 2 compliance statements per meeting to check, then it will require 2000 slots of asynchronous apex per day. If client has 100-500 meetings per day, then the Threshold for Auto-Save property can be 5 or 10. It will require just 500 to 5000 slots of asynchronous apex per day. If client has 100,000 meetings per day, then 2 compliance statements will use 200.000 slots of asynchronous apex per day and this may block asynchronous apex on instance.

Once automated saving is enabled, it is recommended to monitor asynchronous apex on an instance to be sure it doesn't affect sync and other background processes.

- Add Module field to the Compliance Statement layout.
 - Populate Meeting value in the Module field on Compliance Statement record.

Note: OOB there is no validation when changing Meeting Status without agreeing to Compliance Statements. This validation could be done in Custom Scripts.

An example of a function that validates Compliance Agreement Status field on Record Update Action:

```
function areComplianceStatementsAgreed(){
  const complianceAgreementStatus = meeting.stringValue('OCE__ComplianceAgreementStatus__c');
  const complianceStatementAgreed = complianceAgreementStatus != "Agreement Required";
  return {
    title: "All required compliance statements need to be agreed" ,
    status: complianceStatementAgreed ? "success": "error"
  };
}
```

For detailed information on Custom Script configuration, see [Configure Meeting Business Rules - \(Custom Script\)](#).

Note: The component for Compliance Statements will have different behavior on web and mobile if Organizer does not have edit permissions to Compliance Statements and Compliance Agreement Status fields:

- On web, the component will be displayed in edit mode, but when a user tries to submit, an error about missing permissions will be shown.
- On mobile, the component will be displayed in read-only mode.

The Compliance Statements component displays a warning message if there are unchecked mandatory statements of the Compliance Agreement type and the component is displayed in editable mode. By default, text of the message is displayed as following: There are mandatory Compliance Agreements that require your acceptance. If a client needs to use a custom message, then required translation overrides have to be applied to the ComplianceStatementsWarningMsg custom label.

Configure Account Utilization Limits in Meetings (OCE9 Package)

There is a growing set of compliance regulations across the world which is designed to limit the number of instances a certain type of individual (e.g. HCP) participates in engagements. These limits are designed so that life science companies invite people to the engagements for the sole purpose of receiving or providing medical education.

To start complying with this need in Meetings module, orgs can calculate an Account's utilization limits using Activity Plan configuration. This will allow users to be notified if an Account has reached their limit of how many Meetings they can attend.

OCE has built the capacity to:

- Limit the attendance of an Account to a Meeting
 - This is cross territories
 - This is for a given period
- Limit based on certain criteria
 - On Meetings
 - On Meetings Members
 - Any Meeting Member linked to an Account, such as Speakers and Account Attendees
- Calculate based on 3 different stages
 - Estimation phase
 - Commitment phase
 - Actual phase

This feature is supported in Salesforce and iPad. The following information provides the overall flow of this feature:

- Administrators will configure ActivityPlanConfig metadata with information on context conditions and rule conditions to determine which Meetings/Meeting Members will be considered to be counted and validated against.

- Context condition example: Meeting Record Type = HCP Sponsorship; Meeting Member Record Type = Account Attendee, Speaker
- Rule condition example for "Estimated Utilization": Meeting Member Invitation Status = Nominated, Invited
- Administrators can configure Alert Behavior as 'Block' or 'Warn' .
- Admin will create Activity Plan records which reference the metadata. This will contain the limit (in a JSON). These will also link to Account Goals, which link to Account and Plan Cycle.
- Once configuration is complete, OCE will begin tracking Account utilization in Meetings.
- Users will create Meetings and add Meeting Members.
- If Meeting and Meeting Member (any Meeting Member linked to Account) meet the criteria, the system will keep a running count of the Accounts on Activity Plan.
- Once the utilization limit on an Activity Plan is reached, the system will throw a blocking or warning message when the user tries to perform an action on the Meeting/Meeting Member.
 - "Action" means creation of or update to the record that would put the Meeting Member over the utilization limit. If any action taken on Meeting or Meeting Member does this (based on checks against applicable Activity Plans), that action would be blocked/warned. Thus, some updates would be relevant and blocked/warned, whereas others would not.
 - If there are no matching Activity Plans based on criteria, the action will not be blocked/warned. (Note: Opposite behavior from Call module.)
- Once a Meeting Member is counted towards the limit once (i.e. not blocked), they can be moved through the entire lifecycle of the Meeting.

- Due to the possibility of count discrepancies between online/offline, the system will mark applicable records as discrepant in MeetingMember__c.DiscrepancyReason__c for administrators to later rectify. The below summarize some exceptions/hardcoded scenarios:
 - Walk-In types of Meeting Members (Invitation Status = Walk-In) will always be allowed to be added to Meeting, but will be marked as discrepant in MeetingMember__c.DiscrepancyReason__c, if applicable.
 - Write-Ins will not be blocked from being reconciled to Accounts/Speakers, only marked as discrepant, if applicable.
 - If Account is RSVPing to a Meeting through email (e.g. Remote Meetings), no validation error will occur, they will only be marked as discrepant, if applicable.
- Admin can run a job to process Activity Plans and recalculate limits.

Note: As timezones are respected here, there could be a case when the job takes the current Plan Cycle for processing, but according to Meeting Organizer's timezone, the Meeting starts in previous/next Plan Cycle. These Meetings will not be processed by the job. To process these Meetings, Admin must run the job passing the Plan Cycle ID which is applicable for those Meetings.

Read on to learn more about configuring this feature.

Activation Steps (OCE9 Package)

- Assign permission sets OCE9 Meeting Account Limits Admin to Admin user.
- Assign permission sets OCE9 Meeting Account Limits User to all non-Admin users.
- Ensure that OCE Meeting Account Limits Admin is not assigned to Admin.
- Ensure that OCE Meeting Account Limits User is not assigned to Sales Rep or to Admin.
- Ensure the following trigger handler configuration:

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Meeting Account Utilization	OCE9.MeetingAccountUtilizationHandler2	MeetingAccountUtilizationHandler (DEPRECATED)	OCE.MeetingAccountUtilizationHandler (DEPRECATED)
Meeting Member Account Utilization	OCE9.MeetingMemberAccountUtilizationHandler2	MeetingMemberAccountUtilizationHandler (DEPRECATED)	OCE.MeetingMemberAccountUtilizationHandler (DEPRECATED)
PlanCycleTerritoryValidationHandler	OCE.PlanCycleTerritoryValidationHandler		

- Add new picklist value "AccountLimits" to existing field OCE__PlanCycle__c.OCE__Type__c.
- Add new picklist value "Exceeded Account Utilization Limit Block" to existing field OCE__MeetingMember__c.OCE__DiscrepancyReason__c and assign new picklist value to the record types Attendee, Write-In, and Speaker.
- Assign new page layout "Account Utilization Limit Layout" to required user profiles for the ActivityPlan__c sObject new record type "AccountUtilizationLimit".
- Add new field OCE__Criteria__c to page layout "Activity Plan Config Layout" for custom metadata OCE__ActivityPlanConfig__mdt.
- Set OCE__Territory__c field as "Not Required" in all Plan Cycle sObject page layouts.
- Update where conditions in DB Schema for the following sObjects:

s O bj ec t Ty pe	Where Condition
O C E_ _ Pl an Cy cl e_ _c	Existing: <pre>OCE__Active__c = true AND OCE__Territory__c = '{USER.TERRITORY}'</pre> To Be: <pre>OCE__Active__c = true AND (OCE__Territory__c = '{USER.TERRITORY}' OR OCE__Type__c = 'AccountLimits')</pre>

s O b j e c t T y p e	Where Condition
O C E_ - Ac co un tG oa l_ -c	Existing: <pre>OCE__PlanCycle__r.OCE__Active__c = true AND OCE__PlanCycle__r.OCE__Territory__c = '{USER.TERRITORY}' AND OCE__Account__c IN (SELECT OCE__Account__c FROM OCE__AccountTerritoryFields__c WHERE (OCE__AvailableOffline__c =true OR OCE__OfflineDownloadOverride__c = true) AND OCE__Territory__c = '{USER.TERRITORY}')</pre> To Be: <pre>OCE__PlanCycle__r.OCE__Active__c = true AND (OCE__PlanCycle__r.OCE__Territory__c = '{USER.TERRITORY}' OR OCE__PlanCycle__r.OCE__Type__c = 'AccountLimits') AND OCE__Account__c IN (SELECT OCE__Account__c FROM OCE__AccountTerritoryFields__c WHERE (OCE__AvailableOffline__c = true OR OCE__OfflineDownloadOverride__c = true) AND OCE__Territory__c = '{USER.TERRITORY}')</pre>

s O b j e c t T y p e	Where Condition
O C E_ _A c t i v i t y P l a n_ _c	Existing: <pre>OCE__AccountGoal__r.OCE__PlanCycle__r.OCE__Active__c = true AND OCE__AccountGoal__r.OCE__PlanCycle__r.OCE__Territory__c = '{USER.TERRITORY}'</pre> To Be: <pre>OCE__AccountGoal__r.OCE__PlanCycle__r.OCE__Active__c = true AND (OCE__AccountGoal__r.OCE__PlanCycle__r.OCE__Territory__c = '{USER.TERRITORY}' OR OCE__AccountGoal__r.OCE__PlanCycle__r.OCE__Type__c = 'AccountLimits')</pre>

Note: Plan Cycles associated to "AccountLimits" must be shared to Users manually as there will be no Territory information on Plan Cycle record.

- Deactivate validation rule on Plan Cycle, **PlanCycle_TypeIsAccountGoal**.
- Run metadata cache.

Configure Activity Plan Config Metadata (OCE9 Package)

A Meeting Member will be counted against Utilization Limits if and only if field values of Meeting Member meet criteria configured in OCE__ActivityPlanConfig__mdt. Therefore, Admins must configure Activity Plan Config metadata records to use this feature.

- As an Admin., go to **Setup > Custom Metadata Types > Activity Plan Config**.
- Click **New** to create a new record.
- Give the record a label/name in the **Label** field and in the **Activity Plan Config Name** field.
- Check the **Is Active** checkbox when you are ready to make the record active for use.
- Set the **Activity** field to **Meeting Member**.
- Set the **Alert** Behavior as either **Block** or **Warn**.
 - Alert Behavior is set to Block – Meeting Member is not added to the Meeting, an error message is shown.
 - Alert Behavior is set to Warn – Meeting Member is added to the Meeting, a warning message is shown, Discrepancy Reason “Exceeded Account Utilization Limit – Warning” is set.
 - Alert Behavior is blank – the default option (Block) is applied.

Note: Block behavior has a higher priority than Warn. So, if a Meeting Member matches criteria from Account Utilization with both Block and Warn behavior, only a blocking error will be shown and Account Utilization with warning behavior will be ignored.

- Ensure the **Criteria** field is added to the page layout. This should be populated with the following JSON structure:

```
{
  "contextCondition": {
    "conditions": [
      {
        "field": "<fieldPath>",
        "operator": "<operator>",
        "value": "<fieldValue>"
      },
      ...
    ]
  },
  "utilizationTypes": {
    "estimated": {
      "conditions": [
        {
          "field": "<fieldPath>",
          "operator": "<operator>",
          "value": "<fieldValue>"
        },
        ...
      ]
    },
    "committed": {
      "conditions": [
        {
          "field": "<fieldPath>",
          "operator": "<operator>",
          "value": "<fieldValue>"
        },
        ...
      ]
    },
    "actual": {
      "conditions": [
        {
          "field": "<fieldPath>",
          "operator": "<operator>",
          "value": "<fieldValue>"
        },
        ...
      ]
    }
  }
}
```

- **fieldPath** - Meeting Member or its parent field (e.g. OCE__Status__c, OCE__Meeting__r.OCE__Status__c).
- **operator** - one of the supported operators (see *Supported Operators by Field Type* table below).
- **fieldValue** - single value for EQUALS/NOT_EQUALS operators, or list of values separated by semicolons for IN/NOT_IN operators.

- **contextCondition** - section contains conditions that determine if the record should be counted into limits.

For example, the below configuration is applicable only to Account Attendees:

```
{
  "contextCondition": {
    "conditions": [
      {
        "field": "RecordType.DeveloperName",
        "operator": "EQUALS",
        "value": "Attendee"
      }
    ]
  }...
}
```

- **utilizationTypes** - section contains separated rule conditions for different buckets (estimated, committed, and actual). At least one bucket should be specified.

You can find some sample JSONs below (*config1_namespaces.json* and *config2namespaces.json*).

config1_namespaces.json

```
{
  "contextCondition": {
    "conditions": [
      {
        "field": "OCE__Meeting__r.RecordType.DeveloperName",
        "operator": "EQUALS",
        "value": "Rep_Presentation"
      }
    ]
  }
}
```

```

    },
    {
      "field": "RecordType.DeveloperName",
      "operator": "EQUALS",
      "value": "Speaker"
    },
    {
      "field": "OCE__Country__c",
      "operator": "IN",
      "value": "US;CA;GB"
    },
    {
      "field": "OCE__Speaker__r.OCE__Account__r.OCE__IsActive__c",
      "operator": "EQUALS",
      "value": true
    },
    {
      "field": "OCE__Meal__c",
      "operator": "EQUALS",
      "value": true
    },
    {
      "field": "OCE__Meeting__r.OCE__Subtype__c",
      "operator": "IN",
      "value": "Lunch;Follow-up"
    },
    {
      "field": "OCE__Speaker__r.OCE__Account__r.OCE__PrimaryAccountAddress__r.OCE__Address__r.OwnerId",
      "operator": "NOT_EQUALS",
      "value": ""
    }
  ]
},
"utilizationTypes": {
  "estimated": {
    "conditions": [
      {
        "field": "OCE__Status__c",
        "operator": "EQUALS",
        "value": "Nominated"
      },
      {
        "field": "OCE__AttendanceStatus__c",
        "operator": "EQUALS",

```

```

        "value": "Attended-Did Not Sign"
    },
    {
        "field": "OCE__Meeting__r.OCE__Status__c",
        "operator": "NOT_IN",
        "value": "Cancelled;Closed"
    },
    {
        "field": "OCE__ConsentToInvite__c",
        "operator": "NOT_IN",
        "value": "eSigned;Paper Signed"
    }
]
},
"committed": {
    "conditions": [
        {
            "field": "OCE__Status__c",
            "operator": "EQUALS",
            "value": "Accepted"
        },
        {
            "field": "OCE__AttendanceStatus__c",
            "operator": "IN",
            "value": "Attended-Paper Signed;Attended-eSigned"
        },
        {
            "field": "OCE__Meeting__r.OCE__Status__c",
            "operator": "IN",
            "value": "Closed"
        },
        {
            "field": "OCE__ConsentToInvite__c",
            "operator": "NOT_IN",
            "value": "eSigned;Paper Signed"
        }
    ]
},
"actual": {
    "conditions": [
        {
            "field": "OCE__Status__c",
            "operator": "EQUALS",
            "value": "Accepted"
        }
    ]
}

```



```

    },
    {
      "field": "OCE__AttendanceStatus__c",
      "operator": "IN",
      "value": "Attended-Paper Signed;Attended-eSigned"
    },
    {
      "field": "OCE__Meeting__r.OCE__Status__c",
      "operator": "IN",
      "value": "Draft;PendingApproval;Approved"
    },
    {
      "field": "OCE__ConsentToInvite__c",
      "operator": "IN",
      "value": "eSigned;Paper Signed"
    }
  ]
}
}
}

```

config2namespaces.json

```

{
  "contextCondition": {
    "conditions": [
      {
        "field": "OCE__Meeting__r.RecordType.DeveloperName",
        "operator": "EQUALS",
        "value": "Rep_Presentation"
      },
      {
        "field": "RecordType.DeveloperName",
        "operator": "EQUALS",
        "value": "Speaker"
      },
      {
        "field": "OCE__Country__c",
        "operator": "IN",

```

```

        "value": "US;CA;GB"
    },
    {
        "field" : "OCE__Speaker__r.OCE__Account__r.OCE__IsActive__c",
        "operator" : "EQUALS",
        "value" : true
    },
    {
        "field" : "OCE__Meal__c",
        "operator" : "EQUALS",
        "value" : true
    },
    {
        "field" : "OCE__Meeting__r.OCE__Subtype__c",
        "operator" : "IN",
        "value" : "Lunch;Follow-up"
    },
    {
        "field" : "OCE__Speaker__r.OCE__Account__r.OCE__PrimaryAccountAddress__r.OCE__Address__r.OwnerId",
        "operator" : "NOT_EQUALS",
        "value" : ""
    }
]
},
"utilizationTypes": {
    "estimated": {
        "conditions": [
            {
                "field": "OCE__Status__c",
                "operator": "EQUALS",
                "value": "Nominated"
            },
            {
                "field": "OCE__AttendanceStatus__c",
                "operator": "EQUALS",
                "value": "Attended-Did Not Sign"
            },
            {
                "field": "OCE__Meeting__r.OCE__Status__c",
                "operator": "NOT_IN",
                "value": "Cancelled;Closed"
            },
            {
                "field": "OCE__ConsentToInvite__c",

```

```

        "operator": "NOT_IN",
        "value": "eSigned;Paper Signed"
    }
]
},
"committed": {
    "conditions": [
        {
            "field": "OCE__Status__c",
            "operator": "EQUALS",
            "value": "Accepted"
        },
        {
            "field": "OCE__AttendanceStatus__c",
            "operator": "IN",
            "value": "Attended-Paper Signed;Attended-eSigned"
        },
        {
            "field": "OCE__Meeting__r.OCE__Status__c",
            "operator": "IN",
            "value": "Closed"
        },
        {
            "field": "OCE__ConsentToInvite__c",
            "operator": "NOT_IN",
            "value": "eSigned;Paper Signed"
        }
    ]
},
"actual": {
    "conditions": [
        {
            "field": "OCE__Status__c",
            "operator": "EQUALS",
            "value": "Accepted"
        },
        {
            "field": "OCE__AttendanceStatus__c",
            "operator": "IN",
            "value": "Attended-Paper Signed;Attended-eSigned"
        },
        {
            "field": "OCE__Meeting__r.OCE__Status__c",
            "operator": "IN",

```

```

    "value": "Draft;PendingApproval;Approved"
  },
  {
    "field": "OCE__ConsentToInvite__c",
    "operator": "IN",
    "value": "eSigned;Paper Signed"
  }
]
}
}
}


```

Supported Operators by Field Type

Field Type	Operators			
	EQUALS	NOT_EQUALS	IN	NOT_IN
Auto Number	Yes	Yes	Yes	Yes
Formula	n/a	n/a	n/a	n/a
Roll-Up Summary	n/a	n/a	n/a	n/a
Lookup Relationship	Yes	Yes	Yes	Yes
Master-Detail Relationship	Yes	Yes	Yes	Yes
External Lookup Relationship	Yes	Yes	Yes	Yes
Checkbox	Yes	Yes	n/a	n/a
Currency	Yes	Yes	Yes	Yes
Date	n/a	n/a	n/a	n/a
Date/Time	n/a	n/a	n/a	n/a

Field Type	Operators			
	EQUALS	NOT_EQUALS	IN	NOT_IN
Email	Yes	Yes	Yes	Yes
Number	Yes	Yes	Yes	Yes
Percent	Yes	Yes	Yes	Yes
Phone	Yes	Yes	Yes	Yes
Picklist (Multi-Select)	Yes	Yes	Yes	Yes
Text	Yes	Yes	Yes	Yes
Text Area	Yes	Yes	Yes	Yes
Time	n/a	n/a	n/a	n/a
URL	Yes	Yes	Yes	Yes

- Click **Save** once configurations are complete. The below screenshot shows an example of a configured record:

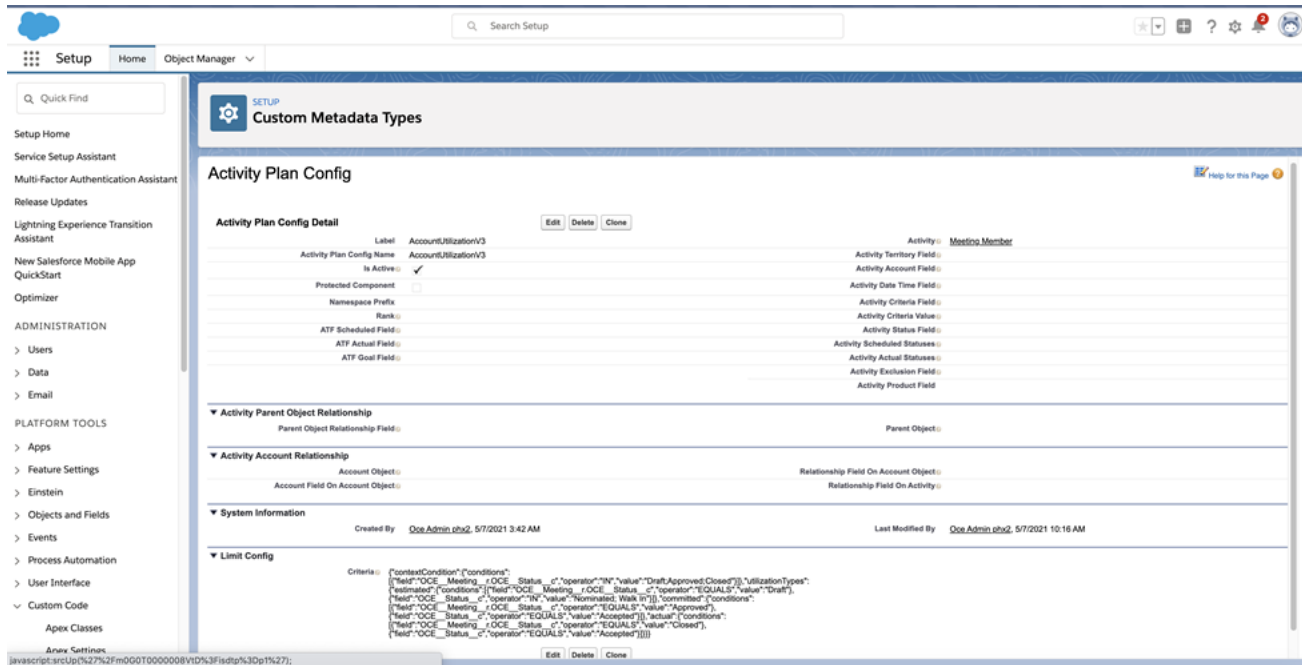

A Meeting Member will be counted into limits only if it meets all conditions from the 'contextCondition' section and all conditions from any bucket from the 'utilizationTypes' section.

Note: If the conditions section is not populated in the JSON structure or has an empty array of conditions, then the whole config condition will evaluate to false.

If configuring a field as a condition in the JSON that gets denormalized onto Meeting Member (for example: Speciality, Country), the relevant trigger handler (MeetingMemberPopulateFieldsHandler (DEPRECATED)) should be enabled first to denormalize the data properly before using this feature.

Configure Plan Cycle/Account Goal/Activity Plan (OCE9 Package)

Once the metadata is configured, you must also set up the Plan Cycle, Account Goal, and Activity Plan records.


On the Activity Plan record is where you will configure what each Meeting limit is for the Account. This will be set up in a JSON in the Limit Data field. For example, if the Account can only be added to 5 total Meetings, you will configure 5 in this field. Once the Account is added to 5 different Meetings, they will reach the limit and the user will receive a blocking /warning message if trying to add them again. Remember, once an Account has been counted as a Meeting Member towards an Activity Plan once, they can be moved through the entire lifecycle of the Meeting through different phases (estimated, committed, actual) without being blocked.

Continue reading to learn about configuring these records.

- Create Plan Cycles with Type 'Account Limits'.
 - Leave Territory field blank; these Plan Cycles should be shared manually to required territories.
 - The Meeting's Start Date should be within the Plan Cycle Start Date and End Date for Monetary Caps logic to work.
- Create Account Goals for Accounts per Plan Cycle.
- Create Activity Plans with record type 'Account Utilization Limit' using Account Goals created in previous step.
 - **Activity Plan Config Name** field should be populated with the developer name of Activity Plan Config metadata record which holds conditions for utilization calculations.
 - **Limit Data** field should be populated in the below format:

```
{"utilizationLimit": <number of allowed Meetings, e.g. 5>}
```

Note: An Account can be added to an unlimited number of Meetings if Limit Data field is empty or contains null.
e.g. '{"utilizationLimit":null}'

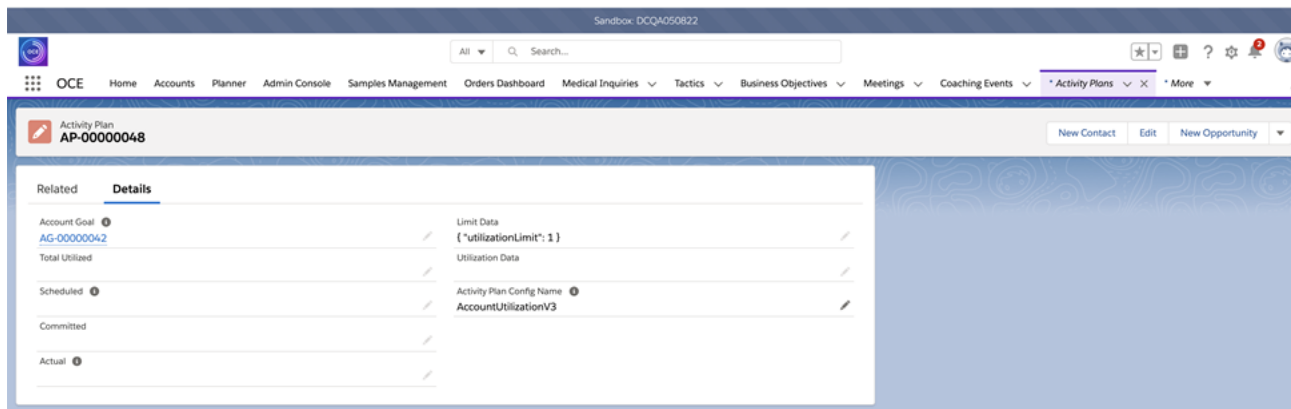

- To view information about how many **Scheduled**, **Committed**, and **Actual** Meetings the Account has been added, ensure these fields are on the Activity Plan page layout. They will be populated appropriately depending on which utilization bucket the Account falls into.
 - *Estimated* utilization bucket from Activity Plan Config's Criteria JSON = *Scheduled* on Activity Plan
 - *Committed* utilization bucket from Activity Plan Config's Criteria JSON = *Committed* on Activity Plan
 - *Actual* utilization bucket from Activity Plan Config's Criteria JSON = *Actual* on Activity Plan
- The **Total Utilized** field tallies the total amount of Meetings the Account has been added to (in which they have met the criteria to be counted towards the limit), which is a sum of Scheduled, Committed, and Actual.
- You can also add the **Utilization Data** field to the page layout. This will keep track of the Meeting Member IDs that the Account is associated with and in which utilization bucket they belong, for tracking purposes.

Job (OCE9 Package)

A job can be run to recalculate utilization limits to correct any discrepancies that may arise or if Plan Cycle dates change. Follow the below steps, depending on if you are running for an active Plan Cycle or an inactive Plan Cycle.

Note: OCE Admin user who runs "Meeting - Account Utilization Limits Job" must have access to all fields used in Activity Plan Config.

Run *Meeting - Account Utilization Limits Job* for Active Plan Cycles

- As an OCE Admin user, navigate to **Admin Console > Activity Plan > Activity Plan Jobs** tab.
- Run "Meeting Account Utilization Limit Calculation" job.

Run *Meeting - Account Utilization Limits Job* for Inactive Plan Cycles

- As an OCE Admin user, in Developer Console, run AccountUtilizationLimitsBatch Job by using code snippet below:

```
OCE9.UniversalJobRunner runner = new OCE9.UniversalJobRunner('OCE9.AccountUtilizationLimitsBatch', 50);
```

```
Map<String, Object> params = new Map<String, Object>{
```

```
    OCE9.UniversalJobRunner.PARAM_EXTRA_PARAMS => new Map<String, Id> {  
  
        'planCycleIds' => new Set<Id>{<planCycle1>, <planCycle2>...}  
  
    }
```

```
};
```

```
runner.configure(params);  
runner.runNow();
```

- Here, PlanCycle1 and PlanCycle2 are Salesforce IDs of inactive Plan Cycles.

Move Account Utilization and Monetary Caps Recalculation Jobs to Meetings Tile (OCE9 Package)

The feature provides the ability to launch OCE9 Account Utilization and Monetary Caps Recalculation jobs from Meetings Admin Console.

To activate the feature:

- Assign Custom Permission Meetings Activity Plan Management.

Note: Assigning this custom permission will remove Account Utilization and Monetary Caps Recalculation jobs from Activity Plan tile and add a new section, Activity Plan Jobs, under OCE9 **Meetings** tile.

Configure Account Utilization and Monetary Cap UI Component (OCE9 Package)

The component, Utilization Tracker, permits visualizing Account Utilization and Monetary Cap progress on an Account/Speaker. It can be added to the Account Lightning page or Speaker Lightning page (when Speaker is linked to an Account).

Note: Orgs must create a Lightning page for Speaker; it is not provided OOB.

To activate the feature:

- Activate Account Utilization and Monetary Caps features for OCE9 package ([Configure Account Utilization Limits in Meetings \(OCE9 Package\)](#), [Configure Monetary Caps in Meetings \(OCE9 Package\)](#)).
- Ensure users have read access to the following fields on the OCE__ActivityPlan__c object:
 - OCE__ActivityPlanConfigName__c
 - OCE__LimitData__c
 - OCE__TotalUtilized__c
 - OCE__TotalSpent__c
 - OCE__UtilizationData__c
- Ensure users have read access to the following fields on the OCE__PlanCycle__c object:
 - OCE__StartDate__c
 - OCE__EndDate__c

- Go to Account Lightning Page → Edit Page → find UtilizationTracker component and add to Lightning page → Save and activate.
- Go to Speaker Record Page → Edit Page → find UtilizationTracker component and add to Lightning page → Save and activate.
 - Ensure you create a Lightning page for Speaker.
- Ensure CurrencyIsoCode is in the mandatory field of Account and Activity Plan DB Schema records.
- To use on mobile, run metadata cache.

Account Utilization table and Monetary Caps table contain the following columns:

- Activity Plan Config Label (will just say Activity Plan as the column name)
- Start Date
- End Date
- Limit
- Utilized
- % Utilized
- Available

If the user doesn't have permission to fields, an error toast message is shown.

Note: Only limits for an **active** Plan Cycle are displayed in the table.

Currency Conversion

- All data in the table is shown according to the user's locale.
- The Account's currency is available next to the user's currency.

- If 'Enable Currency' setting is enabled, an active conversion rate from the Currency Type table is used.
- If 'Enable Currency' AND 'Enable Advanced Currency' settings are enabled, rates from the Dated Exchange Rates table are used.
- If 'Enable Currency' is disabled, a "No records to display" message appears in the table.
- If there is no data to be displayed, the component shows a "No records to display" message.

Offline Mode (No Internet Connection or Without Syncing iPad)

On iPad/iPhone the feature also works in offline/no sync mode.

For the Account Utilization table:

- When an Account/Speaker is added to a Meeting locally on the iPad, the Utilization Tracker component is updated accurately to reflect the count.
- When an Account/Speaker is removed from a Meeting, you do not see it reflected in the table (a toast message will appear from the existing Account Utilization logic telling you need to sync).

For the Monetary Caps table:

- When Meeting Expense is added to a Meeting locally on the iPad, the Utilization Tracker component is updated accurately to reflect the count.
- When a Meeting Expense is removed from a Meeting, you do not see it reflected in the table (a toast message will appear from the existing Monetary Caps logic telling you need to sync).

Configure Monetary Caps in Meetings (OCE9 Package)

Government and regulatory scrutiny about the financial relationships between HCPs/HCOs and the life science industry has increased.

In many countries or regions, life science companies are required by law (e.g. Sunshine Act in the U.S.) or regulatory code (e.g. EFPIA in Europe) to publicly disclose the nature/type, date and amount of value/benefit/money transferred or paid to HCPs/HCOs. This is intended

to provide transparency into the relationships HCPs/HCOs have with life science companies, reduce conflicts of interest, and increase the level of trust patients have in the recommendations provided by their healthcare professionals. Examples of transfers of value can be: 1) honoraria payments for speaking on behalf of a life science company's products, 2) compensation for services rendered as part of a consultancy contract, or 3) sponsorship to attend a scientific/medical event including registration fees, travel and accommodations.

As a response to this regulation and scrutiny, life science companies have instituted compensation caps and limits on the transfers of value to HCPs and institutions. OCE strives to help customers stay compliant with spend caps they want to institute.

OCE has built the capacity to:

- Track and limit the amount of monetary spend to an account (HCP/HCO) for services rendered on Meetings in a given time period
- Support configurability of the criteria that determine when and what kinds of expenses are capped and enforced
- Warn about HCPs/HCOs that will exceed any defined cap rules
- Provide visibility into the total spend amount utilized and keep track of spend accrued against limits

Activate this feature to calculate the Monetary Caps limits in Meetings using Activity Plan configuration. This feature is supported in Salesforce and iPad.

The following information provides the overall flow of this feature:

- Administrators will configure ActivityPlanConfig metadata:
 - 'Activity' field should be set as 'Meeting Expense Allocation'
 - 'Criteria' field should be set in a JSON
- Admin will create Activity Plan records which reference the metadata. This will contain the limit (in a JSON). These will also link to Account Goals, which link to Account and Plan Cycle.
- Admin will configure Expense Type records and set 'Include in Cap' checkbox to true for expenses they wish to count towards Monetary Cap limits.

- Once configuration is complete, OCE will begin tracking Monetary Caps in Meetings.
- Users will create Meetings and add Meeting Members, then allocate Estimated and Actual Expenses to Meeting Members.
- If Meeting, Meeting Member (any Meeting Member linked to Account), Meeting Expense or Meeting Expense Allocation meet the criteria, the system will keep a running count of the expenses allocated to the Account on Activity Plan.
- Once the utilization limit on an Activity Plan is reached, the system will throw a warning* message when the user tries to perform an action on the Meeting/Meeting Member/Meeting Expense/Meeting Expense Allocation.
 - Block applies to Meeting Member only.
 - "Action" means creation of or update to the record that would put the Meeting Member over the cap limit. If an action taken on Meeting, Meeting Member, Meeting Expense, or Meeting Expense Allocation does this (based on checks against applicable Activity Plans), a warning message is thrown, transaction is not blocked, and Meeting Member field 'Discrepancy Reason' is updated.
 - On Salesforce
 - Each create/update (any field) on MEA will trigger Monetary Caps recalculation. If as a result of this recalculation Monetary Cap limit is overused, warning message is shown.
 - Any update on Meeting, Meeting Member, Meeting Expense configured fields (all active configs for Monetary Caps) will trigger Monetary Caps recalculation. If as a result of this recalculation Monetary Cap limit is overused, warning message is shown.
 - If as a result of Monetary Cap recalculation limit is not changed and MEA remains in the same bucket, warning message won't be shown.
 - If limit is not changed and MEA changes its bucket, warning message will be shown.

- On iPad
 - Each create/update on MEA will trigger Monetary Caps recalculation. If limit on any Activity Plan will be exceeded, warning message is shown. Note: iPad does not store (in JSON) which bucket was for MEA that was created locally. iPad doesn't store new total spend and always calculates it.
 - Any update on Meeting, Meeting Member, Meeting Expense will trigger Monetary Caps recalculations and if limit for any Activity Plan will be exceeded, warning message is shown (iPad doesn't have the proper method to check what fields were changed.)
 - Any deletion of Meeting, Meeting Member, Meeting Expense and MEA will show info message asking to run sync if any related MEA is included in JSON.
- When a Meeting Member exceeds the monetary cap limit, the system will mark the record as discrepant in MeetingMember__c.DiscrepancyReason__c for administrators to later rectify.
 - The Discrepancy Reason field will not be cleared if a change happens to exclude the Meeting Member from the monetary cap limit (or a change that puts them under the limit).
- Admin can run a job to process Activity Plans, recalculate limits, and update/remove Discrepancy Reason field on Meeting Member.

Note: As timezones are respected here, there could be a case when the job takes the current Plan Cycle for processing, but according to Meeting Organizer's timezone, the Meeting starts in previous/next Plan Cycle. These Meetings will not be processed by the job. To process these Meetings, Admin must run the job passing the Plan Cycle ID which is applicable for those Meetings.

Read on to learn more about configuring this feature.

Activation Steps (OCE9 Package)

- Assign permission sets:

OCE	OCE9
• Assign MeetingAccountLimitsAdmin to all Admin users. • Assign MeetingAccountLimitsUser to all non-Admin users.	• Assign OCE9 Meeting Account Limits Admin to all Admin users. Ensure MeetingAccountLimitsAdmin is not assigned. • Assign OCE9 Meeting Account Limits User to all non-Admin users. Ensure MeetingAccountLimitsUser is not assigned.

- Add component Instant Action Event Message to the following flexipages:
 - Meeting Recordpage
 - Meeting Member Recordpage
 - MeetingExpense Recordpage

Note: The recommended place for InstantActionEventMessage component is header/footer section and not any collapsible/dynamic sections.

- Ensure the following trigger handler configuration:

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Expense Allocation Monetary Caps	OCE9.ExpenseAllocationMonetaryCapsHandler2	ExpenseAllocationMonetaryCapsHandler (DEPRECATED)	OCE.ExpenseAllocationMonetaryCapHandler (DEPRECATED)
Meeting Expense Monetary Caps	OCE9.MeetingExpenseMonetaryCapsHandler2	Meeting Expense Monetary CapsHandler (DEPRECATED)	OCE.MeetingExpenseMonetaryCapsHandler (DEPRECATED)
Meeting Member Monetary Caps	OCE9.MeetingMemberMonetaryCapsHandler2	(DEPRECATED)	OCE.MeetingMemberMonetaryCapsHandler (DEPRECATED)
Meeting Monetary Caps	OCE9.MeetingMonetaryCapsHandler2	MeetingMonetaryCapsHandler	OCE.MeetingMonetaryCapsHandler
MEA To Meeting Relation	OCE9.MEAToMeetingRelationHandler2 (DEPRECATED)	MEAToMeetingRelationHandler (DEPRECATED)	OCE.MEAToMeetingRelationHandler (DEPRECATED)

- Add new values to existing field OCE__MeetingMember__c.OCE__DiscrepancyReason__c and assign a new picklist value to the record types Attendee, Write-In, and Speaker (label/value).
 - Exceeded Monetary Caps Limit - Block/Exceeded Monetary Caps Limit Block
 - Exceeded Monetary Caps Limit - Warning/Exceeded Monetary Caps Limit Warning
 - Exceeded Monetary Caps Limit - Warning Meeting Member Creation/Exceeded Monetary Caps Limit Warning Meeting Member Creation
- Add new picklist value "MonetaryCaps" (use API name) to existing field OCE__PlanCycle__c.OCE__Type__c.
- Add field OCE__AlertBehavior__c field to page layout Activity Plan Config Layout for custom metadata OCE__ActivityPlanConfig__mdt.
- Add field OCE__Criteria__c to page layout Activity Plan Config Layout for custom metadata OCE__ActivityPlanConfig__mdt.
- Set OCE__Territory__c field as "Not Required" in all Plan Cycle sObject page layouts.
- Set "Include in Cap" checkbox on Expense Type records.
- Configure **Closed Statuses** setting in **Admin Console > Meetings > Meetings Org Level Settings**.
- Enable currency in **Admin Console > Meetings > Meetings Org Level Settings > Enable Currency** or **Enable Advanced Currency**.
- Update where conditions in DB Schema for the following sObjects:

sObjectType	Where Condition
OCE__PlanCycle__c	- Existing: OCE__Active__c = true AND OCE__Territory__c = '{USER.TERRITORY}' - To Be: OCE__Active__c = true AND (OCE__Territory__c = '{USER.TERRITORY}' OR OCE__Type__c = 'MonetaryCaps')
OCE__ActivityPlan__c	- Existing: OCE__AccountGoal__r.OCE__PlanCycle__r.OCE__Active__c = true AND OCE__AccountGoal__r.OCE__PlanCycle__r.OCE__Territory__c = '{USER.TERRITORY}' - To Be: OCE__AccountGoal__r.OCE__PlanCycle__r.OCE__Active__c = true AND (OCE__AccountGoal__r.OCE__PlanCycle__r.OCE__Territory__c = '{USER.TERRITORY}' OR OCE__AccountGoal__r.OCE__PlanCycle__r.OCE__Type__c = 'MonetaryCaps')

sObjectType	Where Condition
OCE__AccountGoal__c	- Existing: OCE__PlanCycle__r.OCE__Active__c = true AND OCE__PlanCycle__r.OCE__Territory__c = '{USER.TERRITORY}' AND OCE__Account__c IN (SELECT OCE__Account__c FROM OCE__AccountTerritoryFields__c WHERE (OCE__AvailableOffline__c = true OR OCE__OfflineDownloadOverride__c = true) AND OCE__Territory__c = '{USER.TERRITORY}') - To Be: OCE__PlanCycle__r.OCE__Active__c = true AND (OCE__PlanCycle__r.OCE__Territory__c = '{USER.TERRITORY}' OR OCE__PlanCycle__r.OCE__Type__c = 'MonetaryCaps') AND OCE__Account__c IN (SELECT OCE__Account__c FROM OCE__AccountTerritoryFields__c WHERE (OCE__AvailableOffline__c = true OR OCE__OfflineDownloadOverride__c = true) AND OCE__Territory__c = '{USER.TERRITORY}')

Note: Plan Cycles associated to "MonetaryCaps" must be shared to users manually as there will be no Territory information on Plan Cycle record.

- Deactivate validation rule on Account Goal, **PlanCycle_TypelsAccountGoal**.
- Continue following the rest of the configuration steps in this section of the guide, and when complete, run metadata cache.

Configure Activity Plan Config Metadata (OCE9 Package)

A Meeting Member will be counted against Utilization Limits if and only if field values of Meeting Member meet criteria configured in OCE__ActivityPlanConfig__mdt. Therefore, Admins must configure Activity Plan Config metadata records to use this feature.

- As an Admin., go to **Setup > Custom Metadata Types > Activity Plan Config**.
- Click **New** to create a new record.

- Give the record a label/name in the **Label** field and in the **Activity Plan Config Name** field.
- Check the **Is Active** checkbox when you are ready to make the record active for use.
- Set the **Activity** field to **Meeting Member**.
- Set the **Alert Behavior** as either **Block** or **Warn**.
 - Alert Behavior is set to Block – Meeting Member is not added to the Meeting, an error message is shown.
 - Alert Behavior is set to Warn – Meeting Member is added to the Meeting, a warning message is shown, Discrepancy Reason “Exceeded Account Utilization Limit – Warning” is set.
 - Alert Behavior is blank – the default option (Block) is applied.

Note: Block behavior has a higher priority than Warn. So, if a Meeting Member matches criteria from Account Utilization with both Block and Warn behavior, only a blocking error will be shown and Account Utilization with warning behavior will be ignored.

- Ensure the **Criteria** field is added to the page layout. This should be populated with the following JSON structure:

```
{
  "contextCondition": {
    "conditions": [
      {
        "field": "<fieldPath>",
        "operator": "<operator>",
        "value": "<fieldValue>"
      },
      ...
    ]
  },
  "utilizationTypes": {
    "estimated": {
      "conditions": [
        {
          "field": "<fieldPath>",
          "operator": "<operator>",
          "value": "<fieldValue>"
        },
        ...
      ]
    },
    "committed": {
      "conditions": [
        {
          "field": "<fieldPath>",
          "operator": "<operator>",
          "value": "<fieldValue>"
        },
        ...
      ]
    },
    "actual": {
      "conditions": [
        {
          "field": "<fieldPath>",
          "operator": "<operator>",
          "value": "<fieldValue>"
        },
        ...
      ]
    }
  }
}
```

- **fieldPath** - Meeting Expense Allocation or its parent field (e.g. OCE__IntegrationStatus__c, OCE__MeetingMember__r.OCE__AttendeeType__c).

- **operator** - one of the supported operators (see *Supported Operators by Field Type* table below).
- **fieldValue** - single value for EQUALS/NOT_EQUALS operators, or list of values separated by semicolons for IN/NOT_IN operators.
- **contextCondition** - section contains conditions that determine if the record should be counted into limits.

You can find a sample JSON attached (*monetary_cap_config.json*).

```
{
  "contextCondition": {
    "conditions": [
      {
        "field": "OCE__Meeting__r.RecordType.DeveloperName",
        "operator": "EQUALS",
        "value": "Rep_Presentation"
      },
      {
        "field": "OCE__MeetingMember__r.RecordType.DeveloperName",
        "operator": "EQUALS",
        "value": "Speaker"
      },
      {
        "field": "OCE__MeetingMember__r.OCE__Country__c",
        "operator": "IN",
        "value": "US;CA;GB"
      },
      {
        "field": "OCE__MeetingMember__r.OCE__Speaker__r.OCE__Account__r.OCE__IsActive__c",
        "operator": "EQUALS",
        "value": true
      },
      {
        "field": "OCE__MeetingMember__r.OCE__Meal__c",
        "operator": "EQUALS",
        "value": true
      },
      {
        "field": "OCE__Meeting__r.OCE__Subtype__c",
        "operator": "IN",
        "value": "Lunch;Follow-up"
      }
    ]
  }
}
```

```

    ],
    },
    "utilizationTypes": {
      "estimated": {
        "conditions": [
          {
            "field": "OCE__MeetingMember__r.OCE__Status__c",
            "operator": "EQUALS",
            "value": "Nominated"
          },
          {
            "field": "OCE__MeetingMember__r.OCE__AttendanceStatus__c",
            "operator": "EQUALS",
            "value": "Attended-Did Not Sign"
          },
          {
            "field": "OCE__MeetingMember__r.OCE__Meeting__r.OCE__Status__c",
            "operator": "NOT_IN",
            "value": "Cancelled;Closed"
          },
          {
            "field": "OCE__MeetingMember__r.OCE__ConsentToInvite__c",
            "operator": "NOT_IN",
            "value": "eSigned;Paper Signed"
          }
        ]
      },
    },
    "committed": {
      "conditions": [
        {
          "field": "OCE__MeetingMember__r.OCE__Status__c",
          "operator": "EQUALS",
          "value": "Accepted"
        },
        {
          "field": "OCE__MeetingMember__r.OCE__AttendanceStatus__c",
          "operator": "IN",
          "value": "Attended-Paper Signed;Attended-eSigned"
        },
        {
          "field": "OCE__Meeting__r.OCE__Status__c",
          "operator": "IN",
          "value": "Closed"
        }
      ]
    }
  }
}

```



```

    },
    {
      "field": "OCE__MeetingMember__r.OCE__ConsentToInvite__c",
      "operator": "NOT_IN",
      "value": "eSigned;Paper Signed"
    }
  ]
},
"actual": {
  "conditions": [
    {
      "field": "OCE__MeetingMember__r.OCE__Status__c",
      "operator": "EQUALS",
      "value": "Accepted"
    },
    {
      "field": "OCE__MeetingMember__r.OCE__AttendanceStatus__c",
      "operator": "IN",
      "value": "Attended-Paper Signed;Attended-eSigned"
    },
    {
      "field": "OCE__Meeting__r.OCE__Status__c",
      "operator": "IN",
      "value": "Draft;PendingApproval;Approved"
    },
    {
      "field": "OCE__MeetingMember__r.OCE__ConsentToInvite__c",
      "operator": "IN",
      "value": "eSigned;Paper Signed"
    }
  ]
}
}
}
}

```

Supported Operators by Field Type

Field Type	Operators			
	EQUALS	NOT_EQUALS	IN	NOT_IN
Auto Number	Yes	Yes	Yes	Yes
Formula	n/a	n/a	n/a	n/a
Roll-Up Summary	n/a	n/a	n/a	n/a
Lookup Relationship	Yes	Yes	Yes	Yes
Master-Detail Relationship	Yes	Yes	Yes	Yes
External Lookup Relationship	Yes	Yes	Yes	Yes
Checkbox	Yes	Yes	n/a	n/a
Currency	Yes	Yes	Yes	Yes
Date	n/a	n/a	n/a	n/a
Date/Time	n/a	n/a	n/a	n/a
Email	Yes	Yes	Yes	Yes
Number	Yes	Yes	Yes	Yes
Percent	Yes	Yes	Yes	Yes
Phone	Yes	Yes	Yes	Yes
Picklist (Multi-Select)	Yes	Yes	Yes	Yes
Text	Yes	Yes	Yes	Yes
Text Area	Yes	Yes	Yes	Yes

Field Type	Operators			
	EQUALS	NOT_EQUALS	IN	NOT_IN
Time	n/a	n/a	n/a	n/a
URL	Yes	Yes	Yes	Yes

- Click **Save** once configurations are complete. The below screenshot shows an example of a configured record:

The screenshot shows the Salesforce Setup page for Custom Metadata Types. The left sidebar contains navigation links for various setup areas, including Email, Platform Tools, Apps, Feature Settings, Einstein, Objects and Fields, Events, Process Automation, User Interface, Custom Code, Apex Classes, Apex Settings, Apex Test Execution, Apex Test History, Apex Triggers, Canvas App Previewer, Custom Metadata Types (selected), Custom Permissions, Custom Settings, Email Services, Lightning Components, Platform Cache, Remote Access, Static Resources, and Tools.

The main content area is titled 'Custom Metadata Types' and shows the configuration for 'Activity Plan Config'. The configuration is divided into several sections:

- Activity Plan Config Detail:** Includes fields for Label (MonetaryCaps), Activity Plan Config Name (MonetaryCaps), Is Active (checked), Protected Component (unchecked), Namespace Prefix (blank), Rank (blank), ATF Scheduled Field (blank), ATF Actual Field (blank), ATF Goal Field (blank), Activity (Meetings Expense Allocation), Activity Territory Field (blank), Activity Account Field (blank), Activity Date Time Field (blank), Activity Criteria Field (blank), Activity Criteria Value (blank), Activity Status Field (blank), Activity Scheduled Statuses (blank), Activity Actual Statuses (blank), Activity Exclusion Field (blank), and Activity Product Field (blank).
- Activity Parent Object Relationship:** Includes Parent Object Relationship Field (blank) and Parent Object (blank).
- Activity Account Relationship:** Includes Account Object (blank), Relationship Field On Account Object (blank), Account Field On Account Object (blank), and Relationship Field On Activity (blank).
- System Information:** Includes Created By (Oce Admin phs2, 9/9/2021, 2:42 AM) and Last Modified By (Oce Admin phs2, 9/9/2021, 2:42 AM).
- Limit Config:** Includes Criteria (a JSON array of conditions and utilization types) and buttons for Edit, Delete, and Close.

A Meeting Expense allocated to a Meeting Member will be counted into limits only if it meets all conditions from the 'contextCondition' section and all conditions from any bucket from the 'utilizationTypes' section.

Note: If the conditions section is not populated in the JSON structure or has an empty array of conditions, then the whole config condition will evaluate to false.

If configuring a field as a condition in the JSON that gets denormalized onto Meeting Member (for example: Speciality, Country), the relevant trigger handler (MeetingMemberPopulateFieldsHandler (DEPRECATED)) should be enabled first to denormalize the data properly before using this feature.

Configure Plan Cycle/Account Goal/Activity Plan (OCE9 Package)

Once the metadata is configured, you must also set up the Plan Cycle, Account Goal, and Activity Plan records.

On the Activity Plan record is where you will configure what each monetary limit is for the Account. This will be set up in a JSON in the Limit Data field. For example, if we set Limit Data field of Activity Plan to be = { "utilizationLimit": 100.0 }, then only the amount of expenses no greater than 100 can be allocated to Meeting Members without a warning message (once all applicable criteria are met). If user reaches the limit (>100), they will receive a warning message, the transaction will not fail, and Discrepancy Reason field of the Meeting Member will be populated with the value "Exceed Monetary Cap Limit - Warning".

Continue reading to learn about configuring these records.

- Create Plan Cycles with Type 'Monetary Caps'.
 - Leave Territory field blank; these Plan Cycles should be shared manually to required territories.
 - The Meeting's Start Date should be within the Plan Cycle Start Date and End Date for Monetary Caps logic to work.
- Create Account Goals for Accounts per Plan Cycle.
- Create Activity Plans with record type 'Monetary Caps Limit' using Account Goals created in previous step.
 - **Activity Plan Config Name** field should be populated with the developer name of Activity Plan Config metadata record which holds conditions for limit calculations.
 - **Limit Data** field should be populated in the below format:

```
{ "utilizationLimit": <monetary amount allowed, e.g. 100.0> }
```

Note: Expenses can be allocated to a Meeting Member an unlimited amount if Limit Data field is empty or contains null.
e.g. '{"utilizationLimit":null}'

Sandbox: DCQA070814

OCE

Home Accounts Planner Admin Console Samples Management Orders Dashboard Medical Inquiries Tactics Business Objectives

Activity Plan
AP-00000021

Related Details

Account Goal ⓘ AG-00000009	Limit Data { "utilizationLimit": 100.0 }
Total Spent ⓘ USD 300.00	Utilization Data { "a470k0000013U7LAAU": { "isFinal": false, "estimated": { "a3t0k000000XbO1AAK": { "rate": 1.0, "amount": 100.0 }, "committed": { "a3t0k000000XbO2AAK": { "rate": 1.0, "amount": 100.0 }, "a3t0k000000XbOBAA0": { "rate": 1.0, "amount": 200.0 } } } } }
Estimated Spent ⓘ USD 100.00	Activity Plan Config Name ⓘ MonetaryCaps
Committed Spent ⓘ USD 0.00	Currency USD - U.S. Dollar
Actual Spent ⓘ USD 300.00	

- To view information about how many Estimated and Actual Expenses have been allocated to the Account, ensure the below fields are on the Activity Plan page layout. They will be populated appropriately depending on which bucket the Meeting Expense Allocation falls into.

- *Estimated* bucket from Activity Plan Config's Criteria JSON = *Estimated Spent* on Activity Plan
- *Committed* bucket from Activity Plan Config's Criteria JSON = *Committed Spent* on Activity Plan
- *Actual* bucket from Activity Plan Config's Criteria JSON = *Actual Spent* on Activity Plan
- The **Total Spent** field is calculated in the following way:
 - *Total Spent* = *Greater of (Estimated + Committed) or Actuals* until a Meeting has reached a status considered to be closed (as configured in **Closed Statuses** field in **Meetings Org Level Settings** custom setting).
 - *Total Spent* = *Actuals* as soon as Meeting has reached status considered to be closed (as configured in **Closed Statuses**).
- You can also add the **Utilization Data** field to the page layout. This includes information about Meeting Expense Allocations that the Account is associated with and in which bucket they belong, for tracking purposes.

Configure Expense Types with 'Include in Cap' (OCE9 Package)

For any expenses you wish to count towards Monetary Caps, select the 'Include in Cap' checkbox on the **Expense Type** record.

This is a hardcoded condition – any expenses that are **not** flagged to be included in the cap will **not be** included (even if all other criteria is met in the JSON in Activity Plan Config).

Note: For Monetary Caps, certain Expense Types may be cap eligible in one country but not another. An additional multiselect picklist field, Countries__c, has been added to Expense Type to allow customers to associate an Expense Type with one or more countries and manage cap config aspects separately.

Configure Closed Statuses (OCE9 Package)

As described in the **Configure Plan Cycle/Account Goal/Activity Plan** section, the Total Spent field on Activity Plan will be configured in the following way:

- *Total Spent = Greater of (Estimated + Committed) or Actuals* until a Meeting has reached a status considered to be closed (as configured in **Closed Statuses**).
- *Total Spent = Actuals* as soon as Meeting has reached status considered to be closed (as configured in **Closed Statuses**).

You can configure the statuses to be considered "closed" on the Meeting in **Admin Console > Meetings > Meetings Org Level Settings > Closed Statuses**.

Note: This can only be set at the org level.

Job (OCE9 Package)

A job can be run to recalculate Monetary Caps limits to correct any discrepancies that may arise or if Plan Cycle dates change. Follow the below steps, depending on if you are running for an active Plan Cycle or an inactive Plan Cycle.

Note: OCE Admin user who runs "Meeting - Monetary Caps Calculation Limit Job" must have access to all fields used in Activity Plan Config.

Run Meeting - Monetary Caps Recalculation Job for Active Plan Cycles

- As an OCE Admin user, navigate to **Admin Console > Activity Plan > Activity Plan Jobs** tab.
- Run "Monetary Caps Recalculation Job".

Run Meeting - Monetary Caps Limit Calculation Job for Inactive Plan Cycles

- As an OCE Admin user, in Developer Console, run Monetary Caps Recalculation Job by using code snippets below:

For current Plan Cycle (not active, but in a current period):

```
new OCE9.UniversalJobRunner('OCE9.MonetaryCapsRecalculationJob',50).runNow();
```

For non-current Plan Cycle:

```
OCE9.UniversalJobRunner runner = new OCE9.UniversalJobRunner('OCE9.MonetaryCapsRecalculationJob', 50);

Map<String, Object> params = new Map<String, Object>{

    OCE9.UniversalJobRunner.PARAM_EXTRA_PARAMS => new Map<String, Id> {
        'planCycleId' => <Plan Cycle Id>
    }
};
runner.configure(params);
runner.runNow();
```

For several Plan Cycles:

```
OCE9.UniversalJobRunner runner = new OCE9.UniversalJobRunner('OCE9.MonetaryCapsRecalculationJob', 50);

Map<String, Object> params = new Map<String, Object>{

    OCE9.UniversalJobRunner.PARAM_EXTRA_PARAMS => new Map<String, Id> {

        'planCycleIds' => new Set<Id>{<Plan Cycle Id 1>, <Plan Cycle Id 1>...}

    }
};

runner.configure(params);
runner.runNow();
```

Here, PlanCycle1 and PlanCycle2 are Salesforce IDs of inactive Plan Cycles.

Admin Console - Meeting Settings (OCE9 Package)

Note: To provide users with access to the **Meetings** tile in the Admin Console, assign to the users the **OCE9.MeetingsAdminConsole** custom permission. See [Configuring Admin Console Access](#).

In the **Meetings** tile of the **Admin Console**, Meeting Admins can configure an array of settings to use in the Meetings module. These have been broken up into different sections.

General Settings

1. Go to the **Admin Console**.
2. Click the **Meetings** tile.
3. The **General Settings** setup screen opens.

The screenshot shows the OCE Admin Console interface. The top navigation bar includes a search bar and various menu items like OCE, Home, Accounts, Planner, Admin Console, Samples Management, Orders Dashboard, Medical Inquiries, Tactics, Business Objectives, Meetings, Coaching Events, Form Templates, Questions, Orders, Insights, and More. The left sidebar lists various settings categories under 'General Settings', including Default Meeting Duration Settings, Compliance Settings, Allocations Settings, Sign in Sheet Settings, Consent Settings, Search Settings, Quota Settings, Satellite Meeting Settings, Remote Meeting Settings, Meeting Validation Settings, Eligible Speaker Settings, and Meetings Org Level Settings. The main content area is titled 'General Settings' and contains several sections: a 'Location' dropdown menu set to 'Profile: OCE Admin', a 'Disclaimer text' dropdown menu set to '-- none --', a large text area for a disclaimer, and a section with checkboxes for enabling various features: 'Enable Attendee Filtering', 'Enable HCO Affiliations View', 'Enable Sign in Date Validation', 'Capture Location On Signature', 'Populate Topic On Meetings', 'Enable Write-ins', 'Enable Budgets', 'Enable Attach Receipts', and 'Enable Attendees RT Validation By Topics'. There is also a 'Default Invitation Status' dropdown menu. A 'Save' button is located at the bottom left of the settings area.

4. In the **Location** dropdown, select where these settings should apply (either org-wide or to a specific profile).

Note: Meeting Settings uses the GetValue method to retrieve the settings, meaning that it looks at the lowest level in the hierarchy (User, Profile, Org) and takes the values from the fields for that record. This means that if you have values set at the User level, the Profile level, and the Org level, OCE takes the values from the User level. Pay special attention to at what level Custom Setting records are created.

SETUP
General Settings

Location
Org: clientDemo

✓ Org: clientDemo

- Profile: District Manager
- Profile: Key Account Manager
- Profile: Medical Science Liaison
- Profile: National Account Manager
- Profile: OCE Admin
- Profile: Regional Manager
- Profile: Sales Representative
- Profile: Sales Representative QA

Disclaimer Text (OCE9 Package)

In the **Disclaimer text** dropdown, select a custom label that houses the disclaimer text you would like to use on the iPad signature screen in the Meetings module. To configure logo for sign page, refer to [Configuring Logo for the Signature Page](#).

General Settings

Disclaimer text ⓘ

-- none --

Note: Only custom labels categorized as *Meeting* or *Disclaimer* can be used as disclaimer text.

After you create a custom label with the *Meeting* or *Disclaimer* category, you must [generate metadata cache](#) for the label to become available for selection in the Admin Console.

☒ Enable Attendees Filtering ⓘ	☐ Capture Location On Signature ⓘ	☒ Enable Budgets ⓘ
☒ Enable HCO Affiliations View ⓘ	☒ Populate Topic On Meetings ⓘ	☒ Enable Attach Receipts ⓘ
☒ Enable Sign In Date Validation ⓘ	☒ Enable Write-Ins ⓘ	☐ Enable Attendees RT Validation By Topics ⓘ

Default Invitation Status ⓘ

Nominated ▼

Save

Enable Attendees Filtering (OCE9 Package)

- You can turn on or off the option to show filters when adding an Account Attendee to a meeting. For new installs, default value = TRUE. For upgrades, default value = FALSE.

Note: On Salesforce, when users add Account Attendees and the Meetings custom setting **Enable Attendees Filtering** is disabled, the screen is filtered by default based on record types configured in AccountRecordTypeAPIName__c. OCE recommends enabling **Enable Attendees Filtering** in order to see the full list of available Accounts. (Mobile does not respect AccountRecordTypeAPIName__c.)

- If setting is NULL, lists and filters will be hidden.

Capture Location on Signature (OCE9 Package)

You can turn on or off the option to capture the location of a Meeting Member when signing them into a meeting. Default value = FALSE.

If setting is NULL, location will not be captured.

Enable Budgets (OCE9 Package)

Determines if the Budgets 2.0 module will be used in Meetings. See more on configuring Budgets.

Enable HCO Affiliations View (OCE9 Package)

You can turn on or off the option to view HCO/HCP Affiliations on the new Account Attendee screen. If the setting is true, an org hierarchy icon will appear next to HCOs that have directly affiliated HCPs (on both SF and iPad) when opening the + Account Attendee window. If

false, no icon will appear and HCO/HCP Affiliations will not be viewable on the Account Attendee window. For new installs, default value = TRUE. For upgrades, default value = FALSE.

Enable Attach Receipts (OCE9 Package)

You can turn on or off the ability to attach receipts (on iPad) to a Meeting Expense. If the setting is true, a **+ Receipt** button will appear in line with a mobile Meeting Expense, which gives the user the option to attach a receipt from their photo library or from any Meeting attachments they have. On Salesforce side, this setting will allow the **Notes and Attachments** button to be clicked in line with a Meeting Expense (from the downward arrow icon), which will direct to the **Files** screen in Salesforce. There is no way to view the receipt from within the Meeting Expense on Salesforce, but on iPad you can. If the setting is false, no **+ Receipt** button will be present on iPad and the **Notes and Attachments** option will not be selectable from a Meeting Expense on Salesforce. For new installs, default value = TRUE. For upgrades, default value = FALSE.

Note: If using this functionality, ensure Content Document is being used instead of Attachments to save the records (otherwise there may be duplicate attachments created). You can enable this through **Admin Console > Mobile > Application Settings > Document Creation Entity Type** and select **ContentDocument** option. When using this option, ensure that the **Attachment DB Schema** record is still active and all **Content Document related DB Schemas** are active (ContentDocument, ContentVersion, ContentDocumentLink). Also select 'Cache' or 'Background' based on your needs from the Meeting Expense DB Schema file.

If there was selected **ContentDocument** option, it is necessary to activate *ContentVersionEmailTransactionHandler* (Trigger Handler API Name: OCE.ContentVersionEmailTransactionHandler) trigger handler:

- Open **Setup - Custom Code - Custom Metadata Types**
- Manage *Trigger Handler* record
- Edit *ContentVersionEmailTransactionHandler* trigger handler
- Populate the **Active** checkbox and click **Save** button

See [Managing Attachments](#) for more information.

Populate Topic On Meetings (OCE9 Package)

You can turn on or off the ability to populate the Meeting Topic on the highlights panel of the Meeting (on both Salesforce and iPad). If this setting is true, when adding a Meeting Topic to the Meeting, it will automatically populate in the **Topic** field on the highlights panel (heading of Meeting). If this setting is false, adding a Meeting Topic will not populate in the highlights panel and no Topic field will be visible there. For new installs, default value = TRUE. For upgrades, default value = FALSE.

Note: If using this functionality, ensure the Topic field is added to the compact layout on Meetings.

Enable Write-Ins (OCE9 Package)

Determines if the Write-Ins feature will be used, allowing the mobile user to see a 'Not Listed?' button on the Sign In screen to capture a Write-In type of Meeting Member.

Enable Sign In Date Validation (OCE9 Package)

You can enable a validation that will prevent the user from signing in a Meeting Member on mobile if it is outside the Start Date/End Date of the Meeting. This will also fire when tapping the 'Not Listed?' button when outside the Start/End Dates (when Enable Write-Ins is true).

Default Invitation Status

You can set the Invitation Status that will be used as default when adding a Meeting Member to the Meeting on mobile and Salesforce. Note that for Speaker Meetings, if it is the date of the Meeting or later, the Invitation Status will continue to default to 'Walk In'.

Note: Ensure you save your changes when all General Settings have been configured to your choosing.

Enable Attendees Record Type Validation (OCE9 Package)

You have the ability to switch on/off the option of Meeting Member Account record type validation and configure which Account record types are valid for Meeting users to invite to Meetings (as Account Attendees) based on selected Meeting Topics.

Default Meeting Duration Settings (OCE9 Package)

The next section in Meetings Admin Console that can be configured is the **Default Meeting Duration Settings**.

The screenshot shows the Salesforce Setup interface for 'Default Meeting Duration Settings'. The left sidebar lists various setup categories, with 'Default Meeting Duration Settings' currently selected. The main panel shows a 'Location' dropdown menu set to 'Org: clientDemo'. Below this, the 'Default Meeting Duration Settings' section contains five input fields for configuring meeting durations in minutes: 'Displays & Exhibits' (120), 'HCP Sponsorship' (120), 'Rep Presentation' (60), 'Speaker Meeting' (240), and 'Master' (0). A 'Save' button is located at the bottom of the configuration area.


For each record type, enter the amount of time (in minutes) that should be the Meeting's default duration. Once this is configured, on iPad side when selecting the **Start Date/Time** of the Meeting, the **End Date/Time** will default based on the number of minutes configured for that record type. For example, if a Rep Presentation type is configured to 60, then when a user creates a Rep Presentation type of Meeting on iPad and enters a Start Date/Time of 5/7/2019, 10:00 a.m., then the End Date/Time will default to 5/7/2019, 11:00 a.m. The defaulting functionality only works on iPad due to limitations with standard page layouts on Salesforce. Out-of-box, the values given for each type of Meeting are as pictured in the above screenshot.

Note: You must also activate DB Schema MeetingMetadata_mdt for this.

Ensure you save your changes when all Default Meeting Duration Settings have been configured to your choosing.

Compliance Settings (OCE9 Package)

Next to configure in Meetings – **Compliance Settings**.

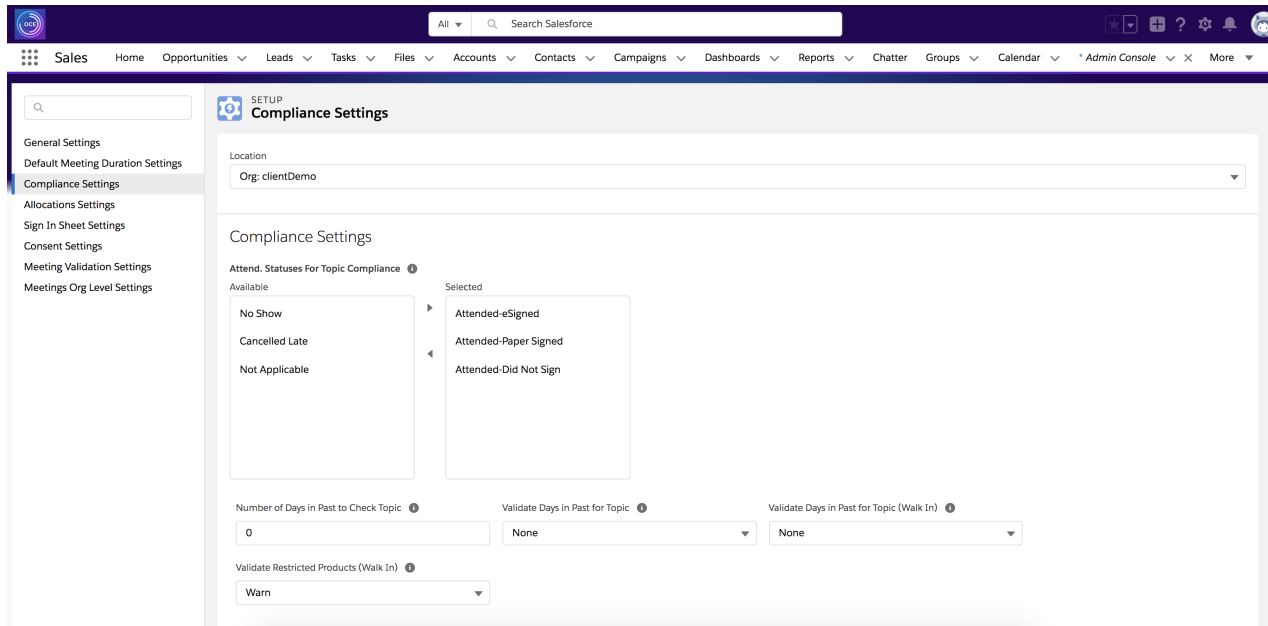

Restricted Roles ?

Available

Organizer
Co-organizer
Participant
Approver
Contributor
Satellite Organizer

Selected

Coordinator

Compliance related settings were added to validate restricted products and number of days in past an Account Attendee can hear a Topic (see section titled [Meeting Restricted Products and Topic Compliance Validations](#) of this guide for more detailed information on what these settings do). Additionally, you can configure the list of restricted Roles for a Colleague in this section (available in OCE9 only).

Attend. Statuses for Topic Compliance (OCE9 Package)

Allows Admin. to choose which Attendance Statuses will be considered when validating Topic compliance.

- Default value = Attended-eSigned; Attended-Paper Signed; Attended-Did Not Sign
- If NULL, no validation will fire

Number of Days in Past to Check Topic (OCE9 Package)

Determines how many days in the past to validate if an Account Attendee was present at a Meeting where the same Meeting Topic was discussed.

- Default value = 0
- If NULL, no validation will fire

Validate Days in Past for Topic (OCE9 Package)

Can be set to None, Block, or Warn. If Block is selected, a blocking message will be thrown if there is a Topic compliance violation (Meeting Member cannot be added to Meeting). If Warn is selected, a warning message will be thrown if there is a Topic compliance validation. If None is selected, no validations will be thrown for Topic compliance violations.

- Default value = None
- If NULL, no validation will fire

Validate Days in Past for Topic (Walk In) (OCE9 Package)

Can be set to None, Block, or Warn. Same logic applies as mentioned directly above, but for Account Attendees in 'Walk In' Invitation Status only.

- Default value = None
- If NULL, no validation will fire

Validate Restricted Products (Walk In) (OCE9 Package)

Can be set to Warn or Block. If Warn is selected, a warning message will be thrown for Account Attendees or Speakers in 'Walk In' Invitation Status that have restricted products violations. If Block is selected, a blocking message will be thrown (i.e. cannot add the Account Attendee or Speaker).

- Default value = Warn
- If NULL, warn for Walk Ins

Note: Ensure you save your changes when all Compliance Settings have been configured to your choosing.

Restricted Roles (OCE9 only) (OCE9 Package)


- List of Roles that will be unavailable to the user to select when adding a Colleague to a Meeting (on both Salesforce and mobile). Add Roles to the 'Selected' column to restrict them/make them unavailable to users.

Note: Ensure you save your changes when all Compliance Settings have been configured to your choosing.

Allocations Settings (OCE9 Package)

Allocation Settings allow you to choose which Meeting Members' Invitation Statuses and Attendance Statuses will be allowed to appear on the Meeting Expense Allocations screen (values are statuses to **include** on this screen).

This also allows you to choose what Meeting Member record types can appear for allocations.

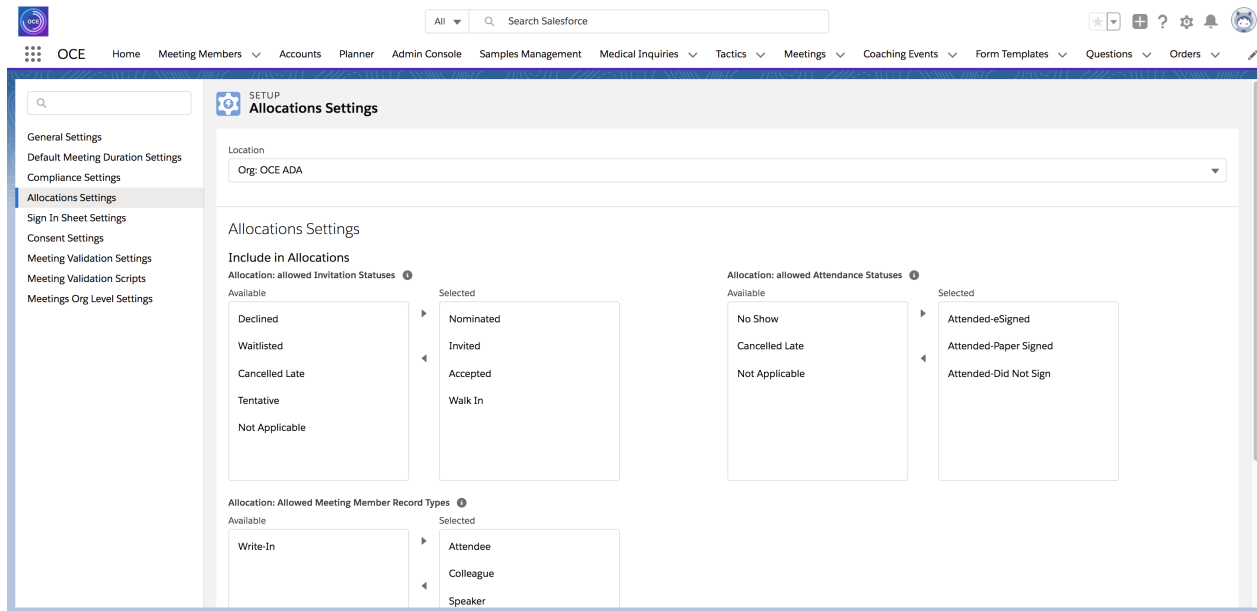

Allocation: allowed Invitation Statuses

- This setting determines which Meeting Members of certain Invitation Statuses will appear on the Allocations screen
- Default value = Nominated; Invited; Accepted; Walk In
- If NULL, Meeting Members of the following Invitation Statuses will be shown on Estimated Expense Allocations screen: Nominated; Invited; Accepted; Walk In (these statuses selected due to backward compatibility)

Allocation: allowed Attendance Statuses

- This setting determines which Meeting Members of certain Attendance Statuses will appear on the Allocations screen
- Default value = Attended-eSigned; Attended-Paper Signed; Attended-Did Not Sign
- If NULL, Meeting Members of the following Attendance Statuses will be shown on Actual Expense Allocations screen: Attended-eSigned; Attended-Paper Signed; Attended-Did Not Sign (these statuses selected due to backward compatibility)

Allocation: Allowed Meeting Member Record Types

- This setting determines which Meeting Member record types will appear on the Allocations screen
- Default value = Attendee, Colleague, Speaker, Non-Profiled Attendee
- If Meeting Populate Allowed MM Types (Trigger Handler API Name: OCE9.MeetingPopulateAllowedMMtypesHandler2) trigger handler is active and the user has access to AllowedMMRecordTypesForAllocation__c field on Meeting object, these record types will be verified for Allocations. If this setting is NULL, the user will see no Meeting Members in the Meeting Expense Allocation creation screen. If Meeting Populate Allowed MM Types (Trigger Handler API Name: OCE9.MeetingPopulateAllowedMMtypesHandler2) is inactive or the user does not have access to the AllowedMMRecordTypesForAllocation__c field, the user can allocate Meeting Expenses to any Meeting Member

Note: Ensure you save your changes when all Allocation Settings have been configured to your choosing.

Sign In Sheet Settings (OCE9 Package)

Sign In Sheet Settings allow you to choose which Meeting Members' Invitation Statuses and Attendance Statuses will be allowed to appear on the Sign In sheet (values are statuses to **include** on this screen).

The sign-in page for attendees of a Meeting can also be changed per organization. You can store a link to your organization's sign-in sheet using a custom setting, so that the **Print** button on a Meeting directs to the correct page when you print the sheet from iPad.

There is also a setting to correct an issue where there can be an overlap of the Sign In sheet logo with text on the page.

Default Meeting Duration Settings
Compliance Settings
Allocations Settings
Sign In Sheet Settings
Consent Settings
Search Settings
Quota Settings
Satellite Meeting Settings
Remote Meeting Settings
Meeting Validation Settings
Eligible Speaker Settings
Meetings Org Level Settings

Location
Org: Client Demo 2 Org (aka chnDemo2)

Sign In Sheet Settings

Sign In: allowed Invitation Statuses

Available: Not Applicable

Selected: Nominated, Invited, Accepted, Declined, Waitlisted, Cancelled Late

Sign In: allowed Attendance Statuses

Available: Not Applicable

Selected: Attended-eSigned, Attended-Paper Signed, Attended-Did Not Sign, Attended-QR Code, No Show, Cancelled Late

Attendee Sign In Page: OCE_SignInSheet

Sign In Sheet Attendee Field Set:

☐ Copy Meal to Sign In Page

Sign In: allowed Invitation Statuses

- Default value = Nominated; Invited; Accepted; Declined; Waitlisted; Cancelled Late; Walk In; Tentative
- If NULL, Meeting Members of the following statuses will be shown on Sign In sheet: Nominated; Invited; Accepted; Declined; Waitlisted; Cancelled Late; Walk In; Tentative

Sign In: allowed Attendance Statuses

- Default value = Attended-eSigned; Attended-Paper Signed; Attended-Did Not Sign; No Show; Cancelled Late
- If NULL, Meeting Members of the following statuses will be shown on Sign In sheet: Attended-eSigned; Attended-Paper Signed; Attended-Did Not Sign; No Show; Cancelled Late

Additional notes about the Sign In settings behavior:

SignInInvitationStatuses != NULL and SignInAttendanceStatuses != NULL:

- Sign In screen will include Meeting Members with specified invitation statuses OR specified attendance statuses

SignInInvitationStatuses != NULL and SignInAttendanceStatuses = NULL:

- Sign In screen will include Meeting Members with specified invitation statuses OR any attendance status
- This is the same as including all Meeting Members regardless of invitation/attendance status

SignInInvitationStatuses = NULL and SignInAttendanceStatuses != NULL:


- Sign In screen will include Meeting Members with any invitation status OR specified attendance statuses
- This is the same as including all Meeting Members regardless of invitation/attendance status

SignInInvitationStatuses = NULL and SignInAttendanceStatuses = NULL:

- Sign In screen will include Meeting Members with any invitation status OR any attendance status
- This is the same as including all Meeting Members regardless of invitation/attendance status

Attendee Sign In Page

Next to the **Attendee Sign In Page** label, enter your org's sign-in sheet link in the text box.

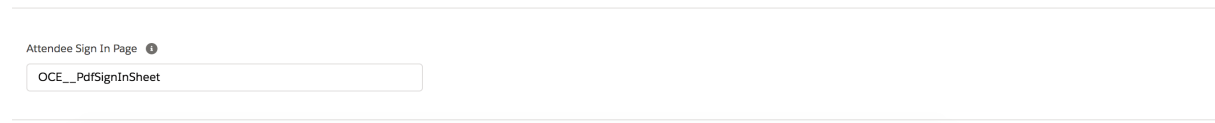

Attendee Sign In Page ⓘ

OCE__PdfSignInSheet

Settings for OCE9

- Replace Sign In Sheet (OCE) quick action by Sign In Sheet (OCE9) on Meeting page layout (OCE__Meeting__c.OCE9__SignInNavigator).
- Go to Admin Console > Meetings > Sign In Sheet Settings > Fill in 'Attendee Sign In Page' with value = OCE9__SignInSheet or OCE9__PdfSignInSheet.
- Go to Admin Console > Meetings > Sign In Sheet Settings > Enter the field set name in the "Sign In Sheet Attendee Field Set" field.

Note: The logo that displays on the top of the **mobile(iPad only)** Meetings signature screen uses the **SignatureAreaLogo** Static Resource (same logo as the Call signature) if it exists; if not then it uses a default IQVIA logo.

The logo that displays on the top of the Meetings Sign In sheet on Salesforce (which is viewable on mobile when pressing the "Print" button) uses the logo from **Document** object, record name **CompanyLogo**.

Ensure Meetings Admin / Meetings User permission sets have access to VF page PdfSignInSheet.

Ensure users have at least read access to the fields that are part of the field set and generate metadata cache after adding "Sign In Sheet Attendee Field Set" field.

Sign In Sheet Attendee Field Set (OCE9 Package)

- Name of field set from Meeting Member sObject that will appear on the mobile Sign In screen in the Attendee list view.


Note: Ensure you save your changes when all Sign In Sheet Settings have been configured to your choosing.

Copy Meal to Sign In Page (OCE9 Package)

The Admin can configure if the value in the "Meal" field (or "Meal Option", if configured) from Meeting Member will be copied to Sign In Signature component on mobile. If the setting field "Copy Meal to Sign In Page" is set to true for the current user profile, it means values will be copied. Default value is false.

Consent Settings (OCE9 Package)

Settings related to the Consent feature, **Consent Settings**, can be configured to both enable this feature and determine which Invitation and Attendance Statuses can be changed when a Meeting Member has not given consent to be invited to/attend the Meeting.

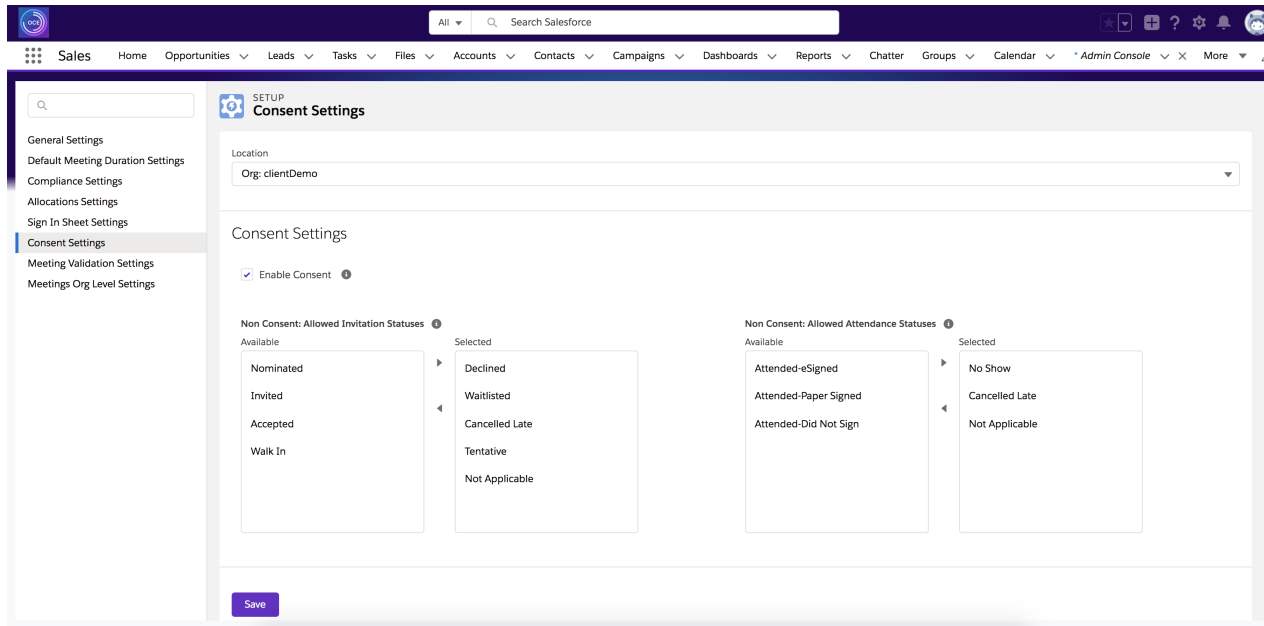

Enable Consent

You can turn on or off the Consent feature in Meetings using this checkbox setting. This will determine if Consent to Invite and Consent to Attend columns appear on both mobile and Salesforce in the Meeting Member bulk edit screen/custom Meeting Member sections (respectively). It will also determine if you can see an 'Upload Document' option next to an Account Attendee/Speaker on Salesforce, and a set of 3 dots that allow you to generate a signed Document or upload a Document on mobile (see more in the [Documents Management](#) section of the Configuration Guide).

If this feature is being used, validations will be done when attempting to change the Meeting Member's Invitation Status or Attendance Status if 'Consent to Invite' or 'Consent to Attend' has not been given by the Account Attendee/Speaker. However, the below settings allow you to bypass that validation.

Non Consent: Allowed Invitation Statuses

If 'Consent to Invite' is not given, the app will allow the user to change the Account Attendee's/Speaker's Invitation Status to any value mentioned in this field.

Non Consent: Allowed Attendance Statuses

If 'Consent to Attend' is not given, the app will allow the user to change the Account Attendee's/Speaker's Attendance Status to any value mentioned in this field.

Note: Ensure you save your changes when all Consent Settings have been configured to your choosing.

Search Settings (OCE9 Package)

Settings related to Search functionality in Meetings are described next in the **Search Settings** section.

The screenshot shows the 'Search Settings' configuration page. On the left is a sidebar with a search bar and a list of settings categories: General Settings, Default Meeting Duration Settings, Compliance Settings, Allocations Settings, Sign In Sheet Settings, Consent Settings, Search Settings (highlighted), Quota Settings, Satellite Meeting Settings, Remote Meeting Settings, Meeting Validation Settings, Eligible Speaker Settings, and Meetings Org Level Settings. The main content area is titled 'SETUP Search Settings' and includes a 'Location' dropdown menu set to 'Org: OCE Development'. Below this are two columns of text input fields for configuring search and display field sets: 'Account Attendee Display Field Set', 'Account Attendee Search Field Set', 'Speaker Display And Filter Field Set', 'Speaker Search Field Set', 'Colleagues Display And Filter Field Set', 'Colleagues Search Field Set', 'Budget Display And Filter Field Set', 'Budget Search Field Set', 'Expense Display And Filter Field Set', 'Expense Search Field Set', 'Topic Display And Filter Field Set', and 'Topic Search Field Set'. At the bottom, there are five toggle switches: 'Toggle System Generated Filter on Speaker' (checked), 'Toggle System Generated Filter on Colleague' (checked), 'Toggle System Generated Filter on Meeting Budget' (checked), 'Toggle System Generated Filter on Expense' (checked), and 'Enable Template Filtering on Meetings' (unchecked). A 'Save' button is located at the bottom left of the main content area.

Account Attendee Display Field Set

- Used to configure the field set that will be used for display/output on the Account Attendee screen in both Salesforce and iPad.

Account Attendee Search Field Set

- Used to configure the field set that will be used for searching on the Account Attendee screen in both Salesforce and iPad.

Speaker Display And Filter Field Set

- Used to configure the field set that will be used for display/output and filtering on the Speaker screen in both Salesforce and iPad.

Speaker Search Field Set

- Used to configure the field set that will be used for searching on the Speaker screen in both Salesforce and iPad.

Note: Ensure you save your changes when all Search Settings have been configured to your choosing.

Colleague Display And Filter Field Set

- Used to configure the field set that will be used for display/output and filtering on the Colleagues screen in both Salesforce and iOS.

Colleague Search Field Set

- Used to configure the field set that will be used for searching on the Colleagues screen in both Salesforce and iOS.

Note: Ensure you save your changes when all Search Settings have been configured to your choosing.

Budget Display And Filter Field Set

- Used to configure the field set that will be used for display/output and filtering on the Budget screen.

Budget Search Field Set

- Used to configure the field set that will be used for searching on the Budget screen.

Expense Display And Filter Field Set

- Used to configure the field set that will be used for display/output and filtering on the Meeting Expense screen.

Expense Search Field Set

- Used to configure the field set that will be used for searching on the Meetings Expense screen.

Topic Display And Filter Field Set

- Used to configure the field set that will be used for display/output and filtering on the Meeting Topic screen.

Topic Search Field Set

- Used to configure the field set that will be used for searching on the Meetings Topic screen.

Toggle System Generated Filter on Speaker

- Determines if user is able to remove Meeting Speaker System Generated Filter on mobile and Salesforce. When the parameter is enabled, the user can remove the filter.

Toggle System Generated Filter on Colleague

- Determines if user is able to remove Meeting Colleague System Generated Filter on mobile and Salesforce. When the parameter is enabled, the user can remove the filter.

Toggle System Generated Filter on Meeting Budget

- Determines if user is able to remove Meeting Budget System Generated Filter on mobile and Salesforce. When the parameter is enabled, the user can remove the filter.

Toggle System Generated Filter on Expense

- Determines if user is able to remove Meeting Expense System Generated Filter on mobile and Salesforce. When the parameter is enabled, the user can remove the filter.

Enable Template Filtering on Meetings

- Determines if a user is able to see Document Templates filtered by Meeting Topic on Sign Documentation action.

Note: Ensure you save your changes when all Search Settings have been configured to your choosing.

Quota Settings (OCE9 Package)

Settings related to Attendee Quota functionality in Meetings are described next in the **Quota Settings** section.

The screenshot displays the 'Quota Settings' configuration interface. On the left is a sidebar with a search bar and a list of settings categories: General Settings, Default Meeting Duration Settings, Compliance Settings, Allocations Settings, Sign In Sheet Settings, Consent Settings, Quota Settings (highlighted), Satellite Meeting Settings, Meeting Validation Settings, Meeting Scripts, and Meetings Org Level Settings. The main panel is titled 'SETUP Quota Settings' and includes a 'Location' dropdown menu currently set to 'Org: clientDemo'. Below this is the 'Quota Exempt Invitation Statuses' section, which contains two columns: 'Available' and 'Selected'. The 'Available' column lists 'Nominated', 'Invited', 'Accepted', 'Waitlisted', and 'Walk In'. The 'Selected' column lists 'Cancelled Late', 'Tentative', 'Not Applicable', and 'Declined'. A 'Save' button is located at the bottom left of the main panel.

Quota Exempt Invitation Statuses

This setting determines which Invitation Statuses (on Meeting Member) will be treated as exempt and therefore will not count towards the quota limit. For example, if a Meeting Member has an Invitation Status of 'Declined' and 'Declined' is mentioned in this setting, that Meeting Member will be not be counted in Attendees Accrued for the Colleague that added them (and therefore will not be validated against for hitting the quota limit).

Note: If these settings are changed once Meeting Members have already been added to a Meeting, OCE does not recalculate Attendees Accrued or any other quota related fields.

Ensure you save your changes when all Quota Settings have been configured to your choosing.

Satellite Meeting Settings (OCE9 Package)

Satellite Meeting Settings is the next section in the Meetings Admin Console.

The screenshot shows the 'Satellite Meeting Settings' page in the OCE9 Package Meetings Admin Console. The page has a top navigation bar with 'OCE' and various menu items like 'Home', 'Accounts', 'Planner', 'Admin Console', 'Samples Management', 'Orders Dashboard', 'Medical Inquiries', 'Tactics', 'Business Objectives', 'Meetings', 'Coaching Events', 'Form Templates', and 'More'. A search bar is also present. On the left, there is a sidebar with a search bar and a list of settings: 'General Settings', 'Default Meeting Duration Settings', 'Compliance Settings', 'Allocations Settings', 'Sign In Sheet Settings', 'Consent Settings', 'Quota Settings', 'Satellite Meeting Settings' (highlighted), 'Meeting Validation Settings', 'Meeting Scripts', and 'Meetings Org Level Settings'. The main content area is titled 'SETUP Satellite Meeting Settings'. It features a 'Location' dropdown menu set to 'Org: clientDemo'. Below this, the 'Satellite Meeting Settings' section contains a 'Satellite Exempt Meeting Statuses' configuration. This configuration has two columns: 'Available' and 'Selected'. The 'Available' column lists: 'Draft', 'Draft Revision', 'Pending Approval', 'Approved', 'Execute', and 'Concluded'. The 'Selected' column lists: 'Cancelled', 'Abandoned', 'Rejected', and 'Closed'. A 'Save' button is located at the bottom of the settings area.

Satellite Exempt Meeting Statuses

This setting determines which Meeting Statuses will not count towards the Satellites Count field on Meeting. For example, if a Satellite Meeting Status is 'Cancelled' and 'Cancelled' is mentioned in this setting, that Meeting will not be counted towards the Host Meeting's Satellites Count field.

Note: If these settings are changed after Satellite Meetings have already been created, OCE will not recalculate the Satellites Count.

Ensure you save your changes when all Satellite Meeting Settings have been configured to your choosing.

Remote Meeting Settings (OCE9 Package)

Remote Meeting Settings are used to configure settings related to Remote Engagement integration in Meetings module.

SETUP Remote Meeting Settings

Location
Org: clientDemo

Remote Meeting Settings

Remote Meeting Eligible Invitation Statuses ⓘ

Available

- Nominated
- Accepted
- Declined
- Waitlisted
- Cancelled Late
- Walk In

Selected

- Invited

Remote Meeting Statuses for Cancellations ⓘ

Available

- Execute
- Concluded
- Pending Close
- Closed
- Rejected
- Abandoned

Selected

- Cancelled

Save

Remote Meeting Eligible Invitation Statuses

- This setting determines which Meeting Member Invitation Statuses will be considered eligible to receive an invitation email to a Remote Meeting. When the Meeting Member has an Invitation Status that matches a value in this setting, an invitation email will automatically be sent to them.


Remote Meeting Statuses for Cancellations

- This setting determines which Meeting Statuses will trigger a cancellation email to be sent for a Remote Meeting (sent to Meeting Members that have received an invitation email only). If the Meeting Status matches a value in this setting (e.g. Cancelled), a cancellation email will be automatically sent to all Meeting Members that received the invitation email.

Note: Ensure you save your changes when all Remote Meeting Settings have been configured to your choosing.

Eligible Speaker Settings (OCE9 Package)

Eligible Speaker Settings are used in the Eligible Speakers feature in Meetings, which validates if a Speaker type of Meeting Member is eligible to speak at the Meeting based on the Topic added. These Speakers should have valid agreements and training to speak at the Meeting. Additionally, you can validate the Speaker has valid compliance training on a Topic.

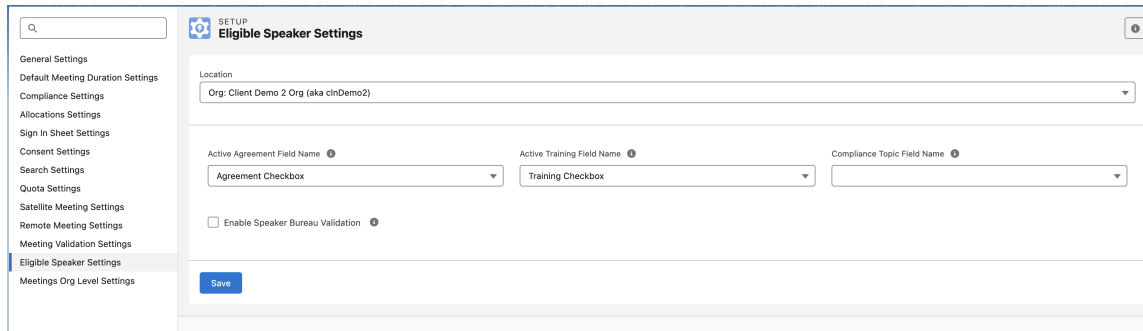

The screenshot shows the 'Eligible Speaker Settings' configuration page. On the left is a sidebar with a search bar and a list of settings categories: General Settings, Default Meeting Duration Settings, Compliance Settings, Allocations Settings, Sign In Sheet Settings, Consent Settings, Search Settings, Quota Settings, Satellite Meeting Settings, Remote Meeting Settings, Meeting Validation Settings, Eligible Speaker Settings (highlighted), and Meetings Org Level Settings. The main content area is titled 'Eligible Speaker Settings' and includes a 'Location' dropdown menu set to 'Org: Client Demo 2 Org (aka cinDemo2)'. Below this are three dropdown menus: 'Active Agreement Field Name' (set to 'Agreement Checkbox'), 'Active Training Field Name' (set to 'Training Checkbox'), and 'Compliance Topic Field Name' (empty). There is an unchecked checkbox for 'Enable Speaker Bureau Validation' and a 'Save' button at the bottom.

Active Agreement Field Name

- This setting allows Admins to configure a field name, from Agreement Member object, that will be used to determine additional criteria for considering the Agreement "active". This is a dropdown that only allows selection of boolean fields.

Active Training Field Name

- This setting allows Admins to configure a field name, from Training object, that will be used to determine additional criteria for considering the Training "active". This is a dropdown that only allows selection of boolean fields.

Note: Ensure you save your changes when all Eligible Speaker Settings have been configured to your choosing.

Compliance Topic Field Name (OCE9 only)

- This setting allows Admins to configure a field name, from Topic object, that will be used to determine a Compliance Topic. Should be the API name of a field that stores external IDs of the Topic(s).

Note: Ensure you save your changes when all Eligible Speaker Settings have been configured to your choosing.


Enable Speaker Bureau Validation (OCE9 Package)

- This setting determines if Speakers should be validated for restrictions that are hosted in Engage package.

Note: Ensure you save your changes when all Eligible Speaker Settings have been configured to your choosing.

Meeting Validation Settings (OCE9 Package)

Meeting Validation Settings are used in custom business rules for Meetings.

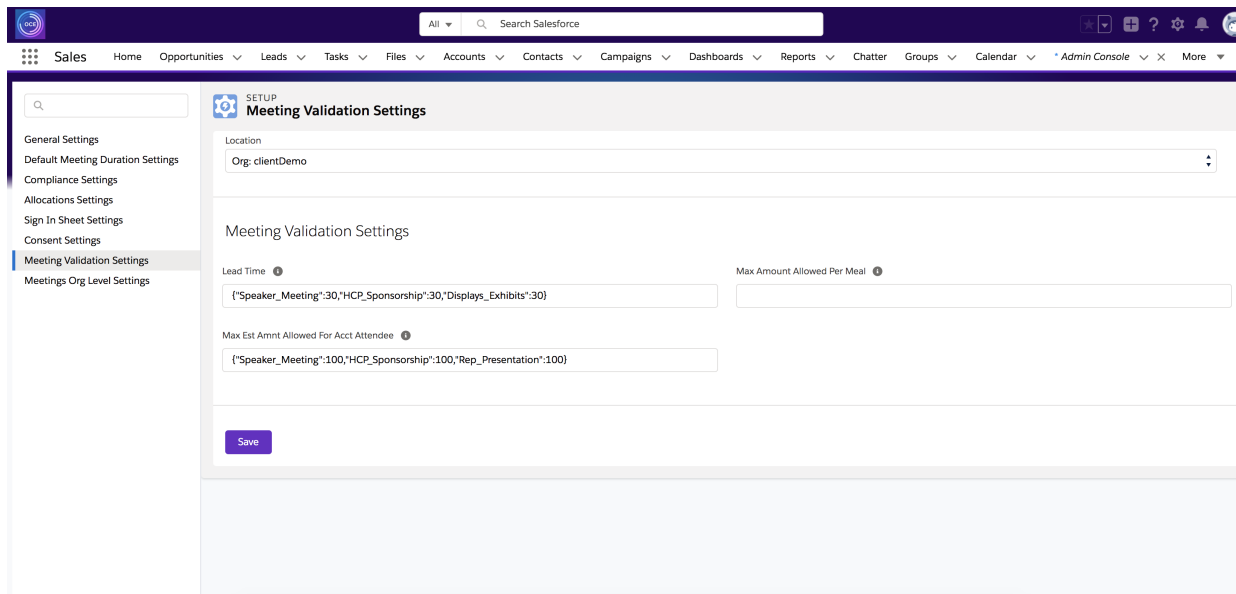

The screenshot shows the Salesforce Setup interface for 'Meeting Validation Settings'. The left sidebar contains a search bar and a list of settings categories: General Settings, Default Meeting Duration Settings, Compliance Settings, Allocations Settings, Sign In Sheet Settings, Consent Settings, Meeting Validation Settings (highlighted), and Meetings Org Level Settings. The main content area is titled 'SETUP Meeting Validation Settings' and includes a 'Location' dropdown menu set to 'Org: clientDemo'. Below this is the 'Meeting Validation Settings' section with three input fields: 'Lead Time' (containing '{\"Speaker_Meeting\":30,\"HCP_Sponsorship\":30,\"Displays_Exhibits\":30}'), 'Max Amount Allowed Per Meal' (empty), and 'Max Est Amnt Allowed For Acct Attendee' (containing '{\"Speaker_Meeting\":100,\"HCP_Sponsorship\":100,\"Rep_Presentation\":100}'). A 'Save' button is located at the bottom of the settings section.

The intended use of these settings is described in more detail in the section of the Configuration Guide titled [Configuring Meeting Business Rules](#) (Custom Script). For now, let's take a look at the settings.

Lead Time

- Used to set the Lead Time the user can plan for a Meeting. If in violation of the Lead Time set in this setting, a business rule will fire (again, see [Configuring Meeting Business Rules - \(Custom Script\)](#)).

Max Amount Allowed Per Meal

- Used to set the maximum amount that is allowed per meal for Meeting Members.

Note: OOB, no business rule was created that is tied to this setting. Orgs will have to write their own rule if you want to reference this setting, as described in [Configuring Meeting Business Rules - \(Custom Script\)](#) section.

Max Est Amnt Allowed For Acct Attende

- The maximum amount that is allowed to be spent on Account Attendees for the Meeting. If the sum of all Meeting Expense Allocations exceeds the amount given here, a business rule will fire.

Note: To enter values for these fields, it must be listed in .json format. Please see the following example for what is given as default:

- **Lead Time:** {"Speaker_Meeting":30,"HCP_Sponsorship":30,"Displays_Exhibits":30}
- **Max Est Amnt Allowed For Acct Attendee:** {"Speaker_Meeting":100,"HCP_Sponsorship":100,"Rep_Presentation":100}

In each of these examples, the record type of the Meeting is mentioned followed by the number value. So in the Lead Time example, for a Speaker Meeting, HCP Sponsorship Meeting, and Displays and Exhibits Meeting, you must give 30 days of lead time or the corresponding business rule will fire.

Ensure you save your changes when all Meeting Validation Settings have been configured to your choosing.

Meetings Org Level Settings (OCE9 Package)

The final section in the Meetings Admin Console is **Meetings Org Level Settings**. Starting from v6.0, any Meetings settings that can only be set at an org level and not a profile/user level will be created in the object OCE__MeetingsOrgLevelConfig__c and shown in this Admin Console UI. Any Meetings settings added prior to v6 still remain in the Meetings Config (OCE__MeetingsConfig__c) object.

SETUP
Meetings Org Level Settings

Location
Org: OCE Development

☒ Enable Currency ⓘ ☐ Enable Advanced Currency ⓘ ☒ Populate Colleagues Before Sync ⓘ ☐ Create OCE Connect Meeting Event ⓘ ☒ Prevent System Generated Member Deletion ⓘ ☐ Organizer Active Terr Sharing on Mobile ⓘ

[Manage Currencies](#)

Meal Field Type ⓘ
Picklist

Sign-in Sheet Country Field Name ⓘ
SigninSheetCountry__c

Closed Statuses ⓘ

Available	Selected
Draft	Closed
Draft Revision	
Pending Approval	

Note: You can only set these settings at the Org level.

SETUP
Meetings Org Level Settings

Location
✓ Org: clientDemo

Enable Currency

Determines if currency fields will be used in Meetings instead of number fields for amounts. The active conversion rate will come from the Currency Type table if this setting is true and 'Enable Advanced Currency' is false. If there is no active conversion rate, rate will be regarded as 1.

Enable Advanced Currency

Determines if the conversion rate will come from the Dated Conversion Rate table instead of the Currency Type table. The Currency Code field in Currency Type table must be active. If it is not, conversion rate will be regarded as 1.

Note: If 'Enable Currency' and 'Enable Advanced Currency' settings are false, currency will not be considered in Meetings.

If 'Enable Currency' setting is false and 'Enable Advanced Currency' setting is true, currency will not be considered in Meetings.

Manage Currencies

Click this button to be brought to **Manage Currencies** section in Salesforce Setup to set up the currencies for your org.

The screenshot shows the Salesforce Setup interface for 'Manage Currencies'. The left sidebar contains navigation links for Setup, Home, and Object Manager. The main content area is titled 'Manage Currencies' and includes a 'Currency' section. This section contains two toggle switches: 'Advanced Currency Management' (currently disabled) and 'Parenthetical Currency Conversion' (currently enabled). Below these toggles is a table titled 'Active Currencies' with columns for Action, Currency Code, Currency Name, Corporate, Conversion Rate, Decimal Places, and Last Modified By. The table contains one row for the USD (U.S. Dollar) with a conversion rate of 1.000000 and 2 decimal places.

Action	Currency Code	Currency Name	Corporate	Conversion Rate	Decimal Places	Last Modified By
Edit Deactivate	USD	U.S. Dollar	✓	1.000000	2	Automated Process, 9/26/2018 7:06 AM

Populate Colleagues Before Sync

Determines if Colleagues that are automatically added to the Meeting (e.g. Organizer and Approver) will populate as Colleague cards on mobile before syncing. If setting is false, the original behavior will remain where a sync is required before these appear.

Create OCE Connect Meeting Event

Determines if a standard Salesforce calendar event will be created when a Remote Meeting email (Create/Update/Cancel) is sent (for HCPs using OCE Connect).

Prevent System Generated Member Deletion

- Determines if the user will be prevented from removing Meeting Members flagged as 'System Generated' (checkbox that gets set on Meeting Member) on mobile and Salesforce. The 'System Generated' checkbox will be set whenever a Meeting Member is automatically added to the Meeting, such as the Organizer and Approver OOB.
- Enable **MeetingMemberCreateHandler** (Trigger Handler API Name: OCE9.MeetingMemberCreateHandler2) for the population of the System Generated field on Meeting Member.
- Ensure users that will use the Meetings module have the Meetings Admin/Meetings User permission sets assigned or that they have access to MeetingMember__c.SystemGenerated__c field.

Note: There is currently a known issue where there is no equivalent trigger handler in OCE9 (as there was in OCE) to validate users cannot delete system generated Meeting Members. The users will not see the "Delete" button next to these Meeting Members when the "Prevent System Generated Member Deletion" setting is enabled, however, they can still delete system generated Meeting Members from the backend or from standard layouts without the trigger handler. This will be fixed in an upcoming release and the trigger handler name will be mentioned above.

Organizer Active Terr Sharing on Mobile

- This setting was introduced to correct a discrepancy between how Meetings are shared between Salesforce and mobile. When this setting is enabled and MeetingSharingHandler (deprecated) is used, Territories field population behavior between Salesforce and mobile will match, meaning that during mobile sync, the Meeting will be shared only to the Organizer's active territory and not all territories. When the setting is disabled, mobile populates all territories during sync.
- When using MeetingSharingNewHandler (Trigger Handler API Name: OCE9.MeetingSharingNewHandler2) and MeetingMemberCreateHandler (Trigger Handler API Name: OCE9.MeetingMemberCreateHandler2), this setting is ignored as behavior matches between Salesforce and mobile when using these handlers.

Meal Field Type

Determines whether the “Meal Option” picklist field or the “Meal?” checkbox field will be used to track a Meeting Member’s meal on mobile and Salesforce. Depending on what is chosen, the custom UI where these fields are displayed will be updated. Administrators should make sure to manually update the Meeting Member standard page layout to reflect the field that corresponds with this value. For example, if using the 'Meal Option' picklist, make sure the 'Meal Option' field is added to Meeting Member page layout instead of 'Meal?'.

Note: Ensure you save your changes when all Meetings Org Level Settings have been configured to your choosing.

Sign-In Sheet Country Field Name

Contains the name of the field on Meeting Member which is used to define the member's country and display respective disclaimer text on Sign-In page on iPad.

Closed Statuses

The statuses considered "closed" on a Meeting that define when to switch from Estimated to Actual expenses in Monetary Caps calculations.

Note: Ensure you save your changes when all Meetings Org Level Settings have been configured to your choosing.

Meeting Scripts (OCE9 Package)

Prior to July 2021 release, you could configure the Custom Script used to fire Meetings business rule validations and checklists from the Admin. Console Meeting Scripts section. This section was moved to Workflow Configuration Admin Console, so a message can be seen when selecting this tab. See details about configuring scripts in the section of this guide titled Meeting Business Rules (Custom Scripts) > Configuring Custom Scripts from Admin Console.



Admin Console - Mobile - Enable Advanced Search (for Meetings) (OCE9 Package)

Users can perform more advanced search/filter capabilities in certain areas of the application. This is controlled by a Custom Setting called **Enable Advanced Search** (found in the **Mobile** tile of the Admin Console under **Application Settings**). In the Meetings module specifically, this affects:

- New Account Attendee screen (SF and mobile)
 - Columns added: Status, OneKey ID
 - Filter added: HCO Location (if the Meeting Location selected is of type 'HCO', the HCO selected as the primary location ['Is Primary' field is checked on Location] will default when opening the Account Attendee screen, when the feature is configured to filter by primary Location. Otherwise, any HCO Location will be used in the filter, selected at random)
- New Colleague screen (SF and mobile)
 - Columns added: Title, Department, Country
 - Filter added: User Country = Colleague Country (Country checked on User object comes from **MDM Preferred Country** field)

Note: Fields Title and Department should be added as mandatory fields on User DB Schema to be able to search by Title and Department on mobile.

- New Speaker screen (SF and mobile)
 - Columns added: Specialty, Professional Designation, Status
 - Filter added: User Country = Speaker Country (Country checked on User object comes from **MDM Preferred Country** field)
- New Meeting Topic screen (SF and mobile)
 - Columns added: Start Date, End Date
 - Filter added: Topic Record Type = Meeting, Topic Meeting Type = Meeting Record Type, Status = Approved, Start Date <= Meeting Start Date or empty and End Date >= Meeting Start Date or empty

Note:

- If Read access is given to field OCE__MeetingRecordTypes__c on OCE__Topic__c sObject, Meeting Record Types will be used instead of Meeting Type (from Topic object)
- If Read access is given to field OCE__MeetingSubtypes__c n OCE__Topic__c sObject is given, Topic's advanced search and system generated filtering will be performed considering Topic's Meeting Subtypes field.

- New Meeting Expense screen (Estimate & Actual - Category & Line Item selection screen) (SF and mobile)
 - Columns added: Type, Meeting Type, Distribution Type, Type Code, Status
 - Filter added: Expense Type Meeting Type = Meeting Record Type and Expense Type Meeting Subtype contains Meeting Subtype
- New Meeting Budget 2 screen (SF and mobile)
 - Filter added: Budget Status = Active, Consumption Budget = true, Meeting record type exists in Meeting Type field on Budget, Budget Start Date <= Meeting Start Date and Budget End Date >= Meeting Start Date

If the **Enable Advanced Search** Custom Setting is true, the above mentioned screens will have a search capability that will search on all the available columns. The new columns mentioned above will also be visible on the UI (only when setting is true). There will also be filters visible (via a **System Generated Filter** button that can be deselected), as mentioned above.

Note:

The filters use the API names of fields (when comparing against a record type, they use Record Type Name, or DeveloperName in DB). Record Type Names cannot be created with non-English language characters.

The user can search Topic, Attendee, Colleague, and Speaker fields by the field's label (as opposed to the field's value)


Ensure that API Names and Record Type Names match. If translations are needed, use the Translation Workbench to accomplish this.

Ensure profiles using this feature have access to the fields used in the filter criteria and the fields displayed on the screens, otherwise they will not see those fields and the filters will not function. If using your own custom permission set, ensure user has access to all Meetings related fields. Specific fields that are not given in the out-of-box permission set that are used in the search and filter are QIDC__OneKeyId_IMS__c and QIDC__MDM_PREFERRED_Country_ims__c. Access should be given to these explicitly.

Inactive Expense Types will always be excluded from Meeting Expense search, whether 'Enable Advanced Search' setting is enabled or not.

For filters using dates, such as Meeting Topic, dates get saved with seconds in the database (platform behavior). This could create a scenario where the Meeting Start Date could be saved with seconds that are later than Topic End Date seconds and cause results not to display in the filter. This is an edge case but should be noted.

To enable this setting, go to **Admin Console > Mobile > Application Settings** and check the field called **Enable Advanced Search**.

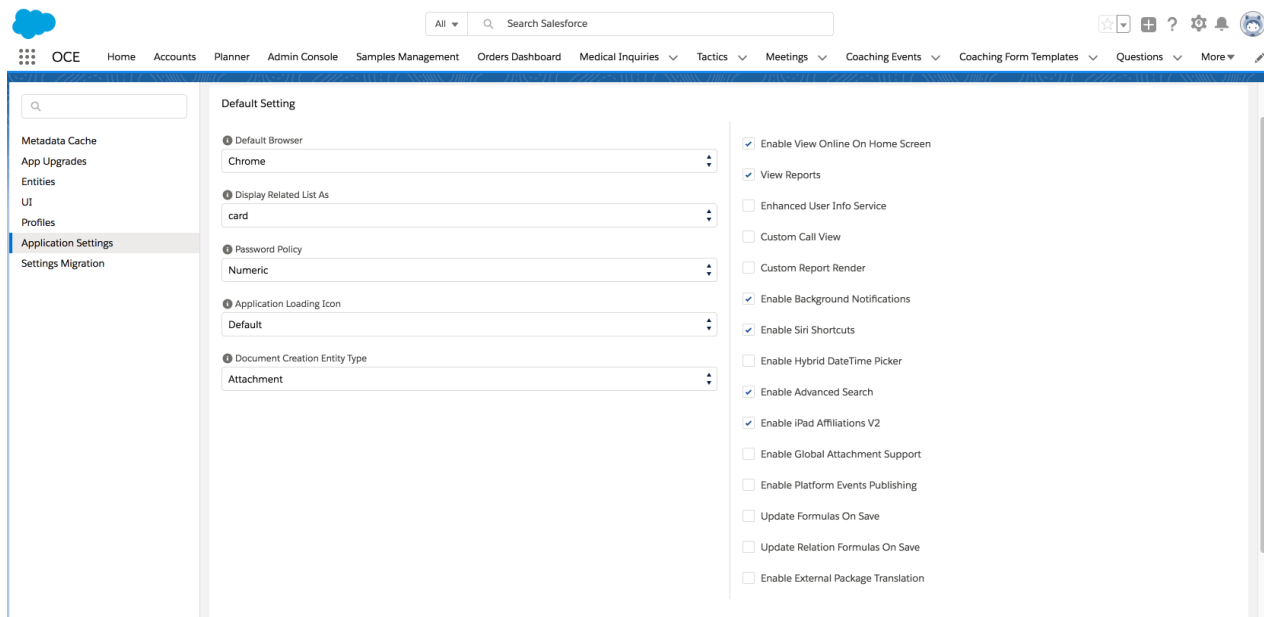

Ensure you run the metadata cache for the changes to reflect on mobile.

Though this Custom Setting is set at an application level, if any records exist at the profile or user level they will take priority. Take care to check under **Setup > Custom Settings > Application Settings** that there are not records existing at the profile or user level, and if there are, that the settings are configured properly in those areas as well.

Note: On the new Meeting Topic screen, columns for Start Date and End Date were added. Those are not searchable, only visible on the UI if **Enable Advanced Search** is true.

By default, the application will always filter by Topic record type = Meeting on the Meeting Topic screen. That filter criteria cannot be removed even when deselecting the **System Generated Filter** button that removes the other filter criteria.

Prevent Users from Disabling System Generated Filter on Speaker (OCE9 Package)

The Admin can configure who can disable (untoggle) System Generated Filter on the add Speaker modal. If the respective custom setting field "Toggle System Generated Filter on Speaker", which is located in Admin Console > Meetings > Search Settings, is set to true for the

current user profile, it means the user can disable the filter. Otherwise, System Generated Filter will be always active.

To activate this feature:

- Replace 'MeetingSpeakersNew' (DEPRECATED) component by 'Meeting Speakers Lwc' component on Meeting Lightning page.
- Use 'OCE9:AddMeetingSpeakerWrapper' component name for Generic Related List action component for 'New' action.
- Disable the checkbox "Toggle System Generated Filter on Speaker" (by default the checkbox is active) from Admin Console > Meetings > Search Settings.
- To use on mobile, run metadata cache from **Admin Console > Mobile**.

Note:

For mobile:

- This feature will work if either 'MeetingSpeakersNew' (DEPRECATED) or 'Meeting Speakers Lwc' components are added on the Meeting Lightning page, but it is recommended to use 'Meeting Speakers Lwc' only.
- Feature is supported for both components 'OCE9:AddMeetingSpeakerNew' and 'OCE9:AddMeetingSpeakerWrapper', but it is recommended to use 'OCE9:AddMeetingSpeakerWrapper'.

Prevent Users from Disabling System Generated Filter on Colleagues (MVP) (OCE9 Package)

From May 2023 release, The Admin can configure who can disable (untoggle) System Generated Filter on the add Colleague modal. If the respective custom setting field "Toggle System Generated Filter on Colleague", which is located in Admin Console > Meetings > Search Settings, is set to true for the current user profile, it means the user can disable the filter. Otherwise, System Generated Filter cannot be toggled by the user and will remain enabled.

To activate this feature:

- Replace 'MeetingColleaguesNew' (DEPRECATED) component with 'Meeting Colleagues Lwc' component on Meeting Lightning page.

- Use 'OCE9:AddMeetingColleagueWrapper' component name for Generic Related List action component for 'New' action.
- To use on mobile, run metadata cache from **Admin Console > Mobile**.

Note:

For mobile:

- This feature will work if either 'MeetingColleaguesNew' (DEPRECATED) or 'Meeting Colleagues Lwc' components are added on the Meeting Lightning page, but it is recommended to use 'Meeting Colleagues Lwc' only.
- Feature is supported for both components 'OCE9:AddColleagueNew' and 'OCE9:AddMeetingColleagueWrapper', but it is recommended to use 'OCE9:AddMeetingColleagueWrapper'.

Prevent Users from Disabling System Generated Filter on Meeting Budget (MVP) (OCE9 Package)

From May 2023 release, The Admin can configure who can disable (untoggle) System Generated Filter on the add Meeting Budget modal. If the respective custom setting field "Toggle System Generated Filter on Meeting Budget", which is located in Admin Console > Meetings > Search Settings, is set to true for the current user profile, it means the user can disable the filter. Otherwise, System Generated Filter cannot be toggled by the user and will remain enabled.

To activate this feature:

- Replace OCE9:MeetingBudget2CreationOverride Visualforce page with OCE9:MeetingBudget2NewActionOverride on Meeting Budget 2 New action override.
- To use on mobile, run metadata cache from **Admin Console > Mobile**.

Note:

Feature is supported for both action overrides 'OCE9:MeetingBudget2CreationOverride' and 'OCE9:MeetingBudget2NewActionOverride' on mobile, but it is recommended to use 'OCE9:MeetingBudget2NewActionOverride'.

Prevent Users from Disabling System Generated Filter on Meeting Expense (MVP) (OCE9 Package)

From May 2023 release, The Admin can configure who can disable (untoggle) System Generated Filter on the add Meeting Expense modal. If the respective custom setting field "Toggle System Generated Filter on Expense", which is located in Admin Console > Meetings > Search Settings, is set to true for the current user profile, it means the user can disable the filter. Otherwise, System Generated Filter cannot be toggled by the user and will remain enabled.

To activate this feature:

- Replace 'MeetingExpensesNew' (DEPRECATED) component with 'Meeting Expenses Lwc' component on Meeting Lightning page.
- To use on mobile, run metadata cache from **Admin Console > Mobile**.

Note: Feature is supported for both components 'MeetingExpensesNew' (DEPRECATED) and 'Meeting Expenses Lwc' on mobile, but it is recommended to use 'Meeting Expenses Lwc'.

Prevent Users from Disabling System Generated Filter on Topic Search (OCE9 Package)

This feature allows Admins to restrict users from disabling the System Generated filter on the Topic Search screen. For more information, see [Admin Console - Mobile - Enable Advanced Search \(for Meetings\) \(OCE9 Package\)](#).

Approach 1 (Recommended)	To configure the Prevent Users from Disabling System Generated Filter on Topic Search (OCE9 Package) feature, the Admin can use the Toggle SG Filter on Topic checkbox in Admin Console > Meetings > Search Settings. To prevent users of a particular profile from disabling System Generated Filter on Topics, Admin should go to Admin Console > Meetings > Search Settings and uncheck the Toggle SG Filter on Topic checkbox.
-----------------------------	---

Approach 2 (Not recommended)	To configure this feature: Assign MeetingTopicSearchEnforceSystemFilter custom permission to Meeting User. Override New button on Meeting Topic: - Go to Setup → Object Manager → Meeting Topic → Buttons, Links, and Actions → New button → Edit: - For Salesforce Classic Override (Visualforce page) select: OCE9__MeetingTopicCreationOverrideLwc - For Lightning Experience Override select: Use the Salesforce Classic override - For Mobile Override select: Use the Salesforce Classic override Enable Advanced Search: - Go to Setup → Custom Settings → Application Settings → Manage → select Profile → Edit → Enable Advanced Search checkbox set to <i>true</i>.
--	---

Note:

It is recommended to use Approach 1 in order to have the similar config experience for all the screens.

For backward compatibility, an option to prevent users from disabling the filter via custom permission wasn't removed. Currently, if a User has assigned custom permission, he won't be able to disable System Generated Filter even if **Toggle SG Filter on Topic** in Admin Console is checked. Ensure to utilize only one of the approaches. It is recommended to unassign **Meeting - Topic Search Enforce System Filter** custom permission from users and replicate the configuration with the 'Toggle SG Filter on Topic'.

Meeting Location Filter (Not Controlled By Enable Advanced Search) (OCE9 Package)

A lookup filter has been added to Meeting Location to filter the user's country by the Location or Account Address (if record type is HCO Location) country. The field checked against on the User object is **MDM Preferred Country**.

Note: This is not controlled by the **Enable Advanced Search** setting like other Meeting filters are; this filter has been added as a standard Salesforce lookup filter and cannot be removed by clients. Because of this, it is imperative that with this change, all users of Meetings have an **MDM Preferred Country** set up on their User record (and that they have **field access** given for this field), otherwise they will not see any results available when attempting to search for a Meeting Location on mobile (on Salesforce, Locations/Account Addresses with blank Country will be returned when no MDM Preferred Country is set). However, if the **Enable Advanced Search** setting is true, the user can tap the Advanced Search option (on mobile only), which will open the advanced search screen where they can remove the filter. Thus, it is important to have at least one, if not both, of these items setup to not inhibit the user from using Meeting Locations.

Example of what user will see when they have **MDM Preferred Country** set – a list of locations that have a country that matches their MDM Preferred Country will appear in the Location field. In this example, **Enable Advanced Search** is not turned on, as there is no **Advanced Search** link visible in the dropdown results.

Cancel

New Meeting Location

Save

Record Type

Caterer

* - Required Fields

Information

Location *

+

Search

DD_LOC_Test

DD_Loc_Test2

DD_Loc_Test3

Location Country Test

Q

Meeting *

Test323391

Contact Name

Reservation

Meal Type

Special Meal

Status

Delivery Method

Pick Up / Delivery Time

Comments

Example of what user will see when they do not have **MDM Preferred Country** set – they will not see any results in the Location lookup on mobile. In this example, **Enable Advanced Search** is not turned on, as there is no **Advanced Search** link visible in the dropdown results. This means the user has no way of searching for a location.

Cancel
New Meeting Location
Save

Record Type
Venue

* - Required Fields

Information

Location * ⓘ
+

Meeting * ⓘ
Test323391

Contact Name ⓘ
Search

Status ⓘ

Reservation ⓘ

Meal Type ⓘ

Special Meal ⓘ

Comments ⓘ

Admin Console - Address Administration (for Meetings) (OCE9 Package)

OCE Personal offers the ability to customize addresses using formula fields and select which formulas to use in different areas for certain modules. For the Meetings module, you can configure Attendee, Speaker, and Meeting Location addresses.

Prerequisites: Ensure that the **Meetings Admin** permission set has been assigned to the Admin user. Ensure that the formulas you want to use to display addresses for attendees, speakers, and locations in the Meetings module have been added to the **Account Address**, **Speaker**, and **Meeting Location** objects.

1. Go to the **Admin Console**.
2. Click the **Address Administration** tile.
3. The Address Setup screen opens. In the **Location** dropdown, select a location (either org-wide or profile) to determine where your address settings will apply.
4. The Account Address page opens. The three areas that pertain to meetings are **Account Address**, **Speaker Address**, and **Meeting Location**.

The screenshot displays the 'Address Administration' configuration page with four panels, each for a different object type. The 'Account Address' and 'Speaker Address' panels have their titles highlighted with red boxes.

- Account Address**:
 - Formula dropdown: FullAddress__c
 - Formula text area:

```
SUBSTITUTE(
  SUBSTITUTE(
    IF(Workplace__c!="", Workplace__r.AccountFullName__c, "") &
    AddressLine1__c &
    IF(AddressLine2__c!="", ' & AddressLine2__c') &
    IF(AddressLine3__c!="", ' & AddressLine3__c') &
```
 - Link: [Modify formulas on Account Address object](#)
- Samples Management Address**:
 - Formula dropdown: -- none --
 - Formula text area: (Empty)
 - Link: [Modify formulas on Samples Management Address object](#)
- Speaker Address**:
 - Formula dropdown: DisplayAddress__c
 - Formula text area:

```
SUBSTITUTE(
  SUBSTITUTE(
    IF(AddressLine1__c!="", AddressLine1__c, "") &
    IF(AddressLine1__c!="", ' & AddressLine2__c, AddressLine2__c) &
    IF(OR(City__c!="", TEXT(State__c)!="", TEXT(Country__c)!="", Zip__c!=""),
      " " &
```
- Meeting Location**:
 - Formula dropdown: AddressText__c
 - Formula text area:

```
IF(AccountAddress__c != null,
  AccountAddress__r.Account__r.AccountFullName__c
  & ', ' &
  AccountAddress__r.AddressLine1__c
  &
  IF(ISBLANK(AccountAddress__r.AddressLine2__c)) " " &
```


- In **Account Address** you can use formulas that you have set in the **Account Address** object to appear in different areas of the application. This address is used in the **Account Attendees** section of a meeting for any attendees that have an Account Address record.

Kidney Disease Symposia			Clone	Delete	Change Owner	▼
DETAILS ATTENDEES EXPENSES TASKS NOTES & ATTACHMENTS						
Account Attendees						
NAME	ADDRESS	STATUS				
Absolute Pharmacy Services	123, Mesa	Waitlisted				
ALAIN ANELLI	1203 S Alma School Rd, CUPERTINO, 95014	Accepted				
CHARLES DHYANCHAND	3232 Firefighter Rd. Chandler, AZ	Invited				
ALLAN FIGUEROA	10-11 Camberwell Green, London, SE5 7AF	Accepted				
DAVID RAY	1600 Pennsylvania Ave. Washington D.C.	Invited				
Athens Cancer Center Radiation Oncology	660 Rugby Road, Brooklyn, 11230	Invited				
Belpre Medical Campus	660 Rugby Road, Brooklyn, 11230	Invited				
CHE KUO	45 Beetle Dr. Katy, TX	Invited				
DOMINIOUE ALEZARD	1294 S Alma School Rd. MORLAAS. 64160	Invited				

To use a different formula that you have configured, select a new value from the **Formula** dropdown.

Location

- none --
- AddressLine1__c
- AddressLine2__c
- AddressLine3__c
- AddressLine4__c
- City__c
- Country__c
- DEAFormulaDashboard__c
- ✓ FullAddress__c
- GeoLocation__c
- LicenseFormulaPill__c
- SamplingFormulaDashboard__c
- State__c
- Suite__c
- ZipCode__c
- LicenseFormulaState__c
- FormattedAddress__c
- TDDDCategory__c
- TDDDLicenseNumber__c
- TDDDLicenseValidationIcon__c
- TDDDDSubcategory__c
- DEALicenseValidationIcon__c
- TDDDLicenseStatus__c
- DEALicense__c

Samples Management Address

Formula

-- none --

Modify formulas on Samples Management Address object

Meeting Location

- In **Speaker Address** you can select address formulas that you have set up in the **Speaker** object. This formula displays the address of a speaker in the **Speaker** section of a meeting.

To use a different formula, select a new value in the **Formula** dropdown of the **Speaker** section.

- In **Meeting Location** you can select address formulas that you have configured in the **Meeting Location** object. In the Meetings module, this address is displayed in the header of a meeting.

Meeting

Kidney Disease Symposia

Clone Delete Change Owner

Start Date/Time	End Date/Time	Created By	Location
4/30/2018 12:00 PM	4/30/2018 5:30 PM	Kate Verrill, 4/11/2018 11:38 AM	Plaza Hotel, 1234 Maple Lane, New York, NY, US, 01122

To use a different formula, select a new value in the **Formula** dropdown of the **Meeting Location** section.

6. Once all formulas have been set, click the **Save** button. Your address formulas will be used in the described areas in the Meetings module.

Note: When creating a Meeting Location of record type HCO, you can select an Account Address to use. Currently it only displays Address Line 1. If you would like the Account name to appear in the list of addresses as well (for example, HCO Name - Address Line 1):

1. Go to **Setup > Custom Code > Custom Metadata Types**.
2. Click **Manage Records** next to **Custom Lookup Name**.
3. Click **Edit** next to **Account Address**.
4. Select **Output Name** field value as Formatted Address. Ensure Formatted Address has appropriate field level security (it must have read access, otherwise it will only display the **Account Address** name field in the search).

Warning: If you change this, it changes the field everywhere you are using Account Address lookups, not just in the Meetings module.

Configure Generic Related List (OCE9 Package)

A generic component was created that can be used for related lists in OCE. It is supported on both Salesforce and mobile. The case for Meetings was specifically designed to work for the cards/sections that show Meeting Members, but the component can be used throughout the application for standard UI/permissions as well. This will allow orgs the ability to set up the fields they want to display in related lists across the application.

The description of the component is as such:

Data Table Component

Attribute Name	Field Type	Description
objectName	String	API name of the sObject, with namespace.
whereClause	String	Filter criteria for the query to display required records as SOQL where clause (currently can support only {recordId} variable). e.g. Meeting__c = '{recordId}' and RecordType.DeveloperName = 'Speaker'
fieldSetName	String	Name of field set. Must be related to the chosen sObject. The name must match the API name of the field set. Fields from it will be displayed on the DataTable.
HandlerForUpdateDelete	String	Custom Lightning component (e.g. c/namespace:customCmp1). This will be used to configure whether to display the edit/delete column and whether to display the edit/delete button for a specific row. Supports SF_PERMISSIONS and OCE Meeting Member permissions based on record type. e.g MEETING_ATTENDEE
label	String	The title of the tab. Checks the custom label first to handle translations.
NewActionComponent	String	Button component that will be on the top right of the data table (e.g. c/namespace:btnCmp1). Supports SFNew (standard record creation page) and OCE Meeting permissions (by record type), e.g. MEETING_ATTENDEE
iconName	String	The name of the SLDS icon https://lightningdesignsystem.com/icons/ that appears near the title on Salesforce (e.g. action:call).
ViewAllComponent	String	Supported on iOS only. Used to configure the VIEW_ALL / MEETING_BULK_UPDATE component while clicking the related list title in iOS.


To configure this

1. In Salesforce, go to the page you wish to add the generic related list to (e.g. Meetings > Attendees tab).
2. Click the Setup wheel in the top right corner and click **Edit Page**.

- Click the area you want to add the related list, for example, **Attendees** tab.
- If they exist, remove the existing custom components (e.g. remove Account Attendees, Speakers, Colleagues, Non-Profiled Attendees on the Attendees tab).
- From the left panel, select the component called **ListView** and insert it in place.

Note: To replace all the Meeting Member record types you must add this once for each type and configure separately for each.

- Begin configuring the criteria.

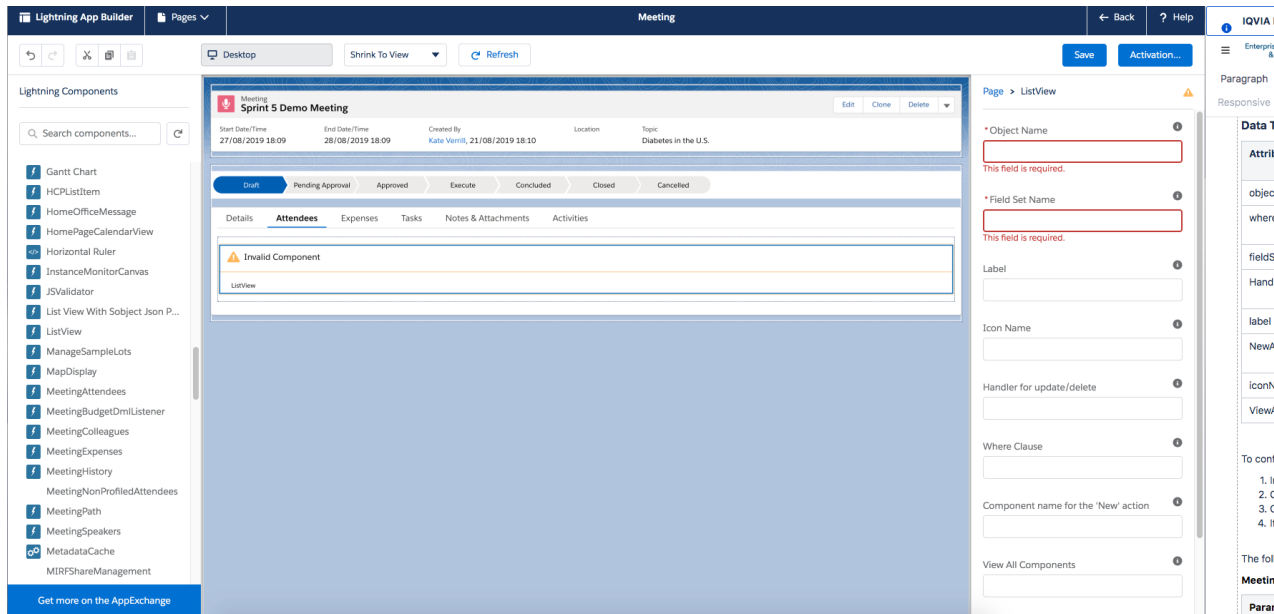

The following tables explain how to configure this for Meeting Members in both an org with a namespace and without a namespace, as well as for any other object:

Meeting Members Tab - Org Without Namespace

Parameter	Attendees	Speakers	Colleagues	Non-Profiled Attendee	Write-In
Object Name	OCE__MeetingMember__c	OCE__MeetingMember__c	OCE__MeetingMember__c	OCE__MeetingMember__c	OCE__MeetingMember__c
Field Set Name	from your org	from your org	from your org	from your org	from your org
Label	OCE.MeetingMember_AccountAttendees	OCE.MeetingMember_Speakers	OCE.MeetingMember_Colleagues	OCE.MeetingMember_NonProfiled Attendees	OCE.MeetingMember_WriteIns
Icon Name	standard:person_account	standard:customers	standard:team_member	standard:contact	standard:visits
Component Name For The 'New' Action	AddAccountAttendee	AddMeetingSpeakerNew	AddColleagueNew	AddNonProfiledAttendee	AddMeetingWriteIn
Update/Delete Handler	AccountAttendeesUpdateDeleteHandler	MeetingSpeakersUpdateDeleteHandlerNew	MeetingColleaguesUpdateDeleteHandlerNew	MeetingNonProfiledUpdateDeleteHandler	WriteInsUpdateDeleteHandler

Parameter	Attendees	Speakers	Colleagues	Non-Profiled Attendee	Write-In
Where Clause	OCE__Meeting__c='{recordId}' AND RecordType.DeveloperName='Attendee'	OCE__Meeting__c='{recordId}' AND RecordType.DeveloperName='Speaker'	OCE__Meeting__c='{recordId}' AND RecordType.DeveloperName='Colleague'	OCE__Meeting__c='{recordId}' AND RecordType.DeveloperName='NonProfiledAttendee'	OCE__Meeting__c='{recordId}' AND RecordType.DeveloperName='WriteIn'
View All Component	MeetingAttendee	MeetingSpeaker	MeetingColleague	MeetingNPAttendee	MeetingWriteIn

Note: When entering the where clause, please do not copy and paste it directly from this text, as browsers can reformat the quotations to make them incorrect and cause the where clause to error out. Type out the single quotations from your keyboard.

Meeting Members Tab - Org With Namespace

Parameter	Attendees	Speakers	Colleagues	Non-Profiled Attendee	Write-In
Object Name	OCE__MeetingMember__c	OCE__MeetingMember__c	OCE__MeetingMember__c	OCE__MeetingMember__c	OCE__MeetingMember__c
Field Set Name	from your org	from your org	from your org	from your org	from your org

Parameter	Attendees	Speakers	Colleagues	Non-Profiled Attendee	Write-In
Label	OCE.MeetingMember_AccountAttendees	OCE.MeetingMember_Speakers	OCE.MeetingMember_Colleagues	OCE.MeetingMember_NonProfiled Attendees	OCE.MeetingMember_WriteIns
Icon Name	standard:person_account	standard:customers	standard:team_member	standard:contact	standard:visits
Component Name For The 'New' Action	OCE9:AddAccountAttendeeWrapper	OCE9:AddMeetingSpeakerWrapper	OCE9:AddMeetingColleagueWrapper	OCE9:AddNonProfiledAttendee	OCE9:AddMeetingWriteInNew
Update/Delete Handler	OCE9:AccountAttendeesUpdateDeleteHandlerNew	OCE9:MeetingSpeakersUpdateDeleteHandlerNew	OCE9:MeetingColleaguesUpdateDeleteHandlerNew	OCE9:MeetingNonProfiledAttendeeUpdateDeleteHandlerNew	OCE9:WriteInsUpdateDeleteHandlerNew
Where Clause	OCE__Meeting__c='{recordId}' AND RecordType.DeveloperName='Attendee'	OCE__Meeting__c='{recordId}' AND RecordType.DeveloperName='Speaker'	OCE__Meeting__c='{recordId}' AND RecordType.DeveloperName='Colleague'	OCE__Meeting__c='{recordId}' AND RecordType.DeveloperName='NonProfiledAttendee'	OCE__Meeting__c='{recordId}' AND RecordType.DeveloperName='WriteIn'

Parameter	Attendees	Speakers	Colleagues	Non-Profiled Attendee	Write-In
View All Component	MeetingAttendee	MeetingSpeaker	MeetingColleague	MeetingNPAttendee	MeetingWriteIn

Note: When entering the where clause, please do not copy and paste it directly from this text, as browsers can reformat the quotations to make them incorrect and cause the where clause to error out. Type out the single quotations from your keyboard.

Any Object

Parameter	Value
Object Name	Object API name with namespace
Field Set Name	Field set name from your org

Parameter	Value
Label	Label API name or custom text Note: Generic Related List supports two label notations for custom labels which are not part of package (i.e., client created labels): <code>{!\$Label.<custom label name>}</code> and <code>c.<custom label name></code> examples: <code>{!\$Label.TestLabel}</code> and <code>c.TestLabel</code> Generic Related List supports two label notations for custom labels which are part of package (e.g. OCE/OCE9) <code>{!\$Label.<namespace prefix>__<custom label name>}</code> and <code><namespace prefix>.<custom label name></code> examples: <code>{!\$Label.OCE__MeetingMember_WriteIns}</code> and <code>OCE.MeetingMember_WriteIns</code>
Icon Name	Icon name in format 'group:name', for example : standard:person_account
Component Name For The 'New' Action	StandardNewAction
Update/Delete Handler	StandardUpdateDeleteHandler
Where Clause	Your SOQL query here to filter records
View All Component	StandardViewAll

Once the generic component is configured, activate the page. This will reflect on both Salesforce and mobile. If configuring for Meeting Members, the fields that show on mobile in the cards view will display the first 5 fields configured in the field set referenced in the component. When viewing all (bulk update screen), the order of the fields will be determined from the field set.

Meeting Restricted Products and Topic Compliance Validations (OCE9 Package)

Meetings will validate restricted products on Account Attendees and Speakers as well as validate if an Account Attendee has attended a Meeting with a Meeting Topic that has been heard x number of days in the past (configurable as to how many days).

Restricted products can be validated at both an Account level as well as an Account Territory level. If restricted products exist on both an Account and Account Territory level, the Account level validations will take precedence.

To activate this feature:

For Restricted Products at Account Level

- Ensure the **custom UI to create/delete Meeting Topics** has been activated. For details, please check **Configuring Meeting Topics** section of this guide.
- Add the restricted product information into RestrictedProductsJSON__c field in Account to trigger validation.
- For Walk In Meeting Members, set the value ValidateRestrictedProductsForWalkIns__c field in MeetingsConfig__c object to define if it is a warning or block message that will fire. (Admin Console → Meetings → Meeting Settings → Compliance Custom Settings → Validate Restricted Products (Walk In)). If not set up, it will default as Warn.
- Add RestrictedProductsOverride__c and AccountRestrictedProducts__c as read only fields to the corresponding Meeting Member page layout.
- Ensure the DiscrepancyReason__c field is on the MeetingMember__c - Attendee page layout and MeetingMember__c - Speaker page layout.

For Restricted Products at Account Territory Level

- Ensure the **custom UI to create/delete Meeting Topics** has been activated. For details, please check **Configuring Meeting Topics** section of this guide.
- Ensure the user has read access to **TerritoryRestrictedProductsJSON__c** field on Account object.

- Ensure the user has Meeting_Admin/Meeting_User or Meeting_Admin2/Meeting_User2 permission set assigned (for **OCE9** OCE9MeetingAdmin/OCE9MeetingUser permission set should be assigned) or has edit access to **ATFRestrictedProducts__c** field in Meeting Member object.
- Populate the TerritoryRestrictedProductsJSON__c field with proper Restricted Products JSON when AllowRestrictedProducts__c is false and RestrictedProductsJSON__c is empty.

For Topic Compliance

- Setup values for ValidateDaysInPastForTopic__c in MeetingsConfig with the correct validation type for non Walk In Account Attendees (Admin Console → Meetings → Meeting Settings → Compliance Custom Settings → Validate Days in Past for Topic).
- Setup values for ValidateDaysInPastForTopicForWalkIn__c in MeetingsConfig__c with the correct validation type for Walk In Account Attendees (Admin Console → Meetings → Meeting Settings → Compliance Custom Settings → Validate Days in Past for Topic (Walk In)).
- Setup values for AttendStatusesForTopicCompliance__c in MeetingsConfig with valid Attendance Statuses that Topic compliance will be validated on (Admin Console → Meetings → Meeting Settings → Compliance Custom Settings → Attend. Statuses For Topic Compliance).
- Ensure the DiscrepancyReason__c field is on the MeetingMember__c - Attendee page layout and MeetingMember__c - Speaker page layout.
- Ensure TriggerHandler.MeetingTopicComplianceHandler has been activated/ For **OCE9** deactivate MeetingTopicComplianceHandler and activate MeetingTopicCompliance.

The below information is a summary of how the validations behave and the different configurations you can set.

✅ means the validation will fire on that particular action, ❌ means it will not fire.

Actions							
		Add Meeting Member Before Meeting Date	Add Meeting Topic Before Meeting Date	Add Meeting Member On/After Meeting Date	Add Meeting Topic On/After Meeting Date	Sign In on Mobile	Edit Meeting Date
Validations / Updates	Restricted Products Validation - Block	✓	✓	✓	✓	✓	✗
	Restricted Products Validation - Warn	✗	✗	✓	✗	✓	✗
	Topic Compliance Validation - Block	✓	✓	✓	✓	✗	✓
	Topic Compliance Validation - Warn	✓	✓	✓	✓	✗	✓
	Capture Discrepancy Reason - Restricted Products	✗	✗	✓	✗	✓	✗
	Capture Discrepancy Reason - Topic Compliance	✓	✓	✓	✓	✗	✓
	Stamp Account Restricted Products/Restricted Products Override Fields	✓	✗	✓	✗	✓	✗

Note: The below mentioned functionality is implemented both on Salesforce and iPad (with the exception of signing, as this is mobile only functionality).

Restricted Products Summary (OCE9 Package)

Validations

Restricted products will be stored on the Account object. We read the Restricted Products JSON field for this check (format: `{["id": "a0O46000000KE7LEAW", "name": "PHENIOXX 10MG"]}`).

Restricted products can also be stored at an Account Territory level. A field has been added to Account, Territory Restricted Products JSON, to denormalize the fields from the ATF level onto the Account directly in the following format:

```
{ "records": [ { "territory": "Territory1", "products": [
{ "id": "1111", "name": "Product1" }
```

This field will be read by Meetings module to validate Account Territory level restricted products. The Territories__c field on Meetings will be used to compare against the territories mentioned in the Territory Restricted Products JSON field (i.e. only fields mentioned in Territories field on Meetings will be validated against if they exist in Territory Restricted Products JSON field). If values exist in both Territory Restricted Products JSON and Restricted Products JSON, Restricted Products JSON only will be used to throw the validations.

When adding an Account Attendee or Speaker type of Meeting Member (before Meeting date), we will always show a **blocking message** if there are restricted product violations. We determine this by the Meeting Topic that was added to the Meeting. We read the associated Topic Products and if those match the Account's restricted products, we throw a blocking error. This is **not configurable** from Admin. Console if it is **before** the Meeting date.

When adding an Account Attendee or Speaker on the date of the Meeting or later (when their Invitation Status = Walk In), we will show a **blocking message** or a **warning message** depending on what is configured in the "Validate Restricted Products (Walk In)" Custom Setting in Admin. Console. This can only be set to "Warn" or "Block", meaning it has to throw a message in some way if the restricted products exist.

Compliance Custom Settings

Number of Days in Past to Check Topic
90

Validate Days in Past for Topic
Block

Validate Days in Past for Topic (Walk In)
Warn

Validate Restricted Products (Walk In)
Warn

Attend. Statuses For Topic Compliance ⓘ

Available	Selected
No Show	Attended-eSigned
Cancelled Late	Attended-Paper Signed
Not Applicable	Attended-Did Not Sign

Save

When adding a Meeting Topic before the Meeting date (after already adding Meeting Members), we will show a **blocking message** if there are restricted product violations for any of the Account Attendees or Speakers. This is **not configurable** from Admin. Console if it is before the Meeting date.


When adding a Meeting Topic on or after the Meeting date (after already adding Meeting Members), we will show a **blocking message** if there are restricted product violations for any of the Account Attendees or Speakers. This is **not configurable** from Admin. Console. Even if the "Validate Restricted Products (Walk In)" Custom Setting is set to "Warn" for Walk In scenario, we will always block adding a Meeting Topic on the date of the Meeting or later if there is a restricted products violation. This is because we need to update the "Discrepancy Reason" field on Meeting Member when the attendee is added with a violation, and we cannot update this from both sides (on add Meeting Member and add Meeting Topic) in this scenario due to complexity. Thus, we must always block adding a Meeting Topic to a Meeting when it is the date of the Meeting or later for restricted product violations.


When editing the Meeting date, no evaluation is necessary for restricted product violations, so no validations are thrown for this scenario.

When signing in a **non-Walk In** Meeting Member (mobile only), we will show a **blocking message** if there are restricted product violations for any of the Account Attendees or Speakers. This scenario will be possible when you were able to add someone to your Meeting because they had no restricted products violations, but on the date of the Meeting when signing them in, their restricted products are updated to where they now have a violation, so we need to validate.

When signing in a **Walk In Meeting Member** (mobile only), we will show a **blocking message** or a **warning message** if there are restricted products violations, depending on what is configured in the "Validate Restricted Products (Walk In)" setting. If this setting is set to "Warn", this means you were able to add a Meeting Member as a Walk In with a warning message, and so this same warning will be shown when they sign as well. If this setting is set to "Block", it means that you were not able to add them as a Walk In at all, so this scenario is also only possible in the event that you added them as Walk In but their restricted products change between adding them and signing, so we block on sign if they now have a violation.

Examples of Blocking Messages for Restricted Products (OCE9 Package)

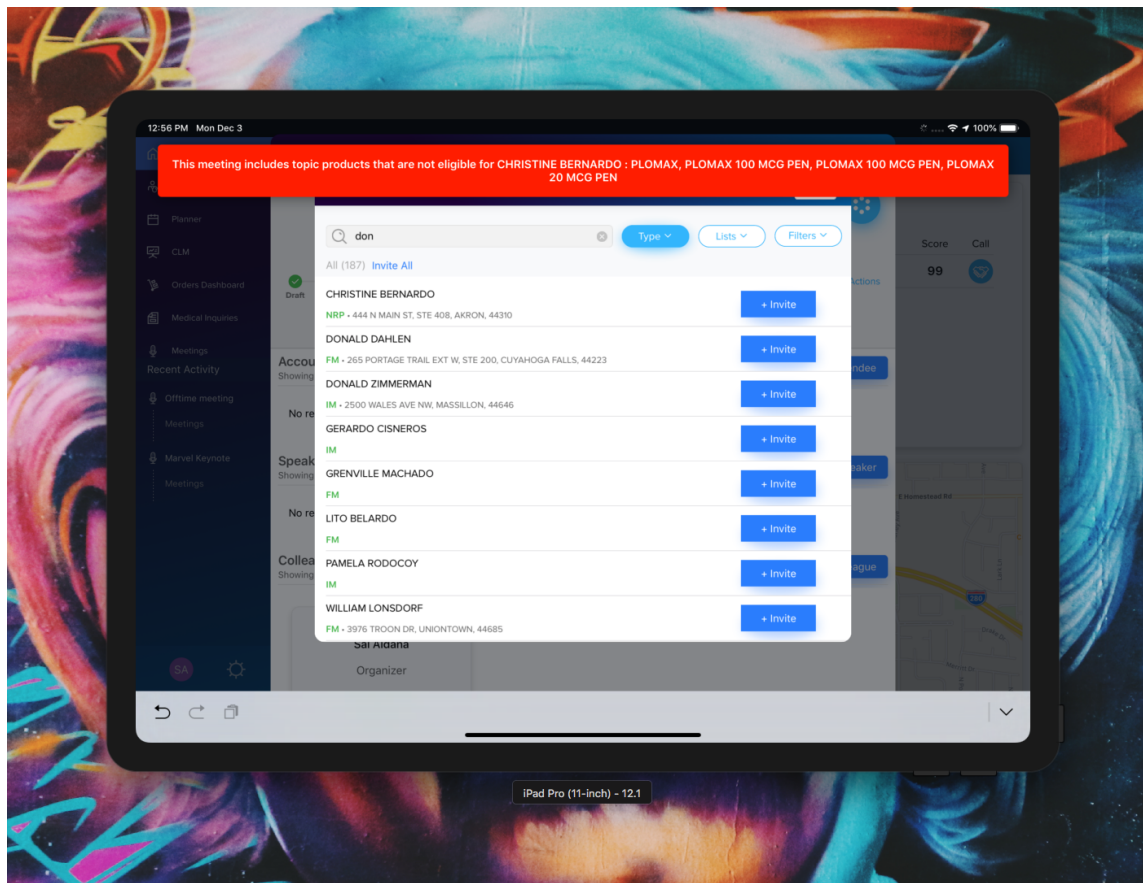

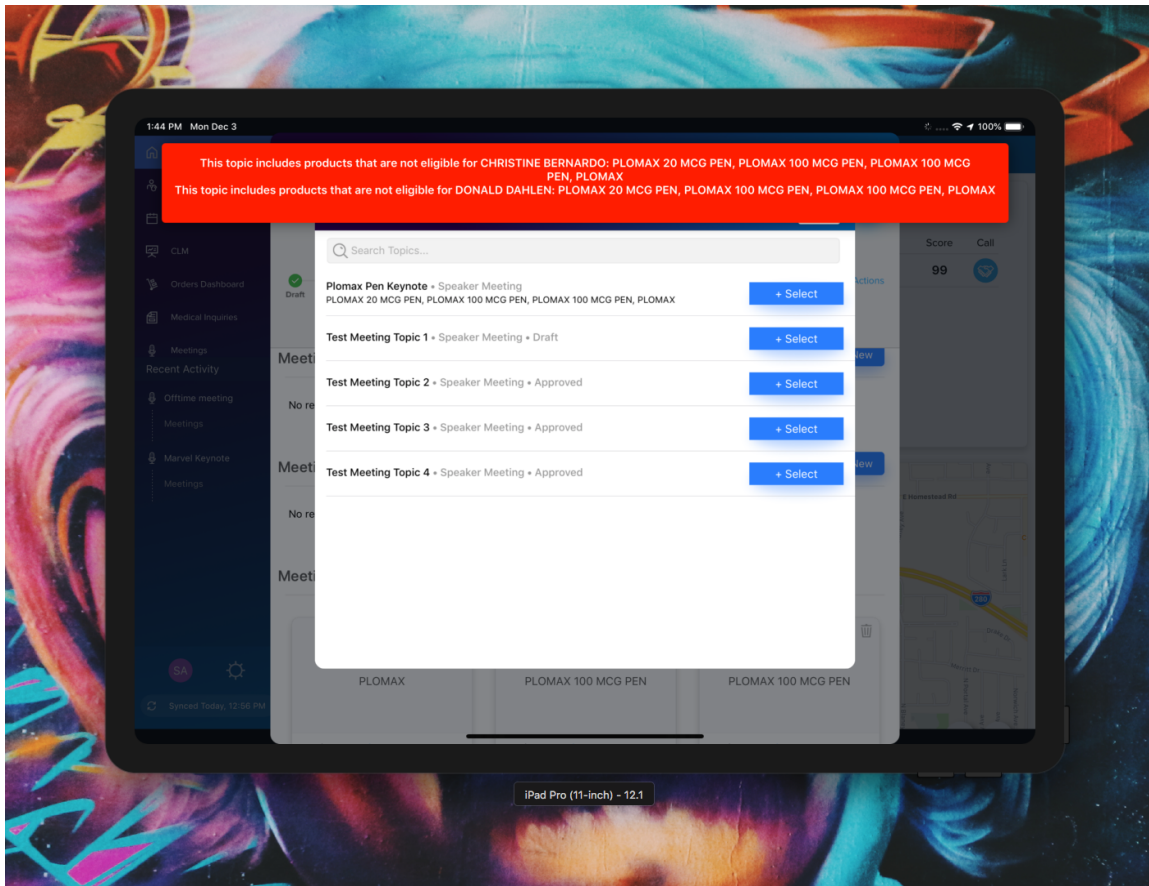

Capture Discrepancy Reason (OCE9 Package)

A field has been added to Meeting Member object called **Discrepancy Reason**. This field is a multiselect picklist with two values: "Topic recently heard by Account" and "Meeting contains restricted products".

When adding an Account Attendee or Speaker to a Meeting that has a restricted products violation, we will capture the Discrepancy Reason field on Meeting Member record as "Meeting contains restricted products". Note that this scenario is only possible for Walk Ins, as we cannot even add a Meeting Member to the Meeting before the Meeting date if they have a restricted products violation.

As described in item number 5 of the **Validations** section, when adding a Meeting Topic on the date of the Meeting or later, we will always block this if there is a restricted products violation, so no update will happen for the Discrepancy Reason field in this scenario.

When editing the Meeting date, we do not evaluate restricted products so do not capture Discrepancy Reason.

When signing in a Meeting Member, we will capture the Discrepancy Reason only if there is a **warning**. This is because when a **block** is thrown, we do not do any save transactions, so the Meeting Member is never updated. But, if they are able to get to the signature page, then when the signature is saved we check if any warnings did/should have been thrown for that Meeting Member and update the field then.

Stamp Account Restricted Products / Restricted Products Override on Meeting Member (OCE9 Package)

When adding an Account Attendee or Speaker to a Meeting (whether it is before the Meeting date or on/after), we will capture the restricted products the Account had at the time they were added to the Meeting on the Meeting Member record in a field called **Account Restricted Products**. This stores the JSON of the product name and ID. We will also capture a checkbox field called **Restricted Products Override**. This displays the value of the field on the Account object called **Allow Restricted Products**. If this field is checked, it means that all restricted product rules should be ignored and even if the Account has restricted products in violation, we will ignore it and not throw any validation messages or prevent them from being added to the Meeting. Both these fields will be captured when adding Meeting Members.

When adding a Meeting Topic, we do not stamp restricted products or capture the override information on the Meeting Member.

When signing in a Meeting Member, we again stamp restricted products and capture the override information. This is because something on the Account could have changed in between the Meeting Member being added to the Meeting and actually attending/signing in at the Meeting, so we need to re-evaluate.

When editing the Meeting date, we do not evaluate restricted products so do not stamp this information at that time.

Topic Compliance Summary (OCE9 Package)

Validations

When adding an Account Attendee type of Meeting Member (**this is not done for Speakers**) before the Meeting date, we will check if they attended a Meeting a certain number of days ago with the same Meeting Topic as this one and throw a **blocking message** or **warning message**, depending on what is configured in the "Validate Days in Past for Topic" Custom Setting in the Admin. Console (this can also be set to "None", meaning no validation will occur). The number of days in the past we check is determined in the "Number of Days in Past to Check Topic" Custom Setting. We will look at the End Date of the prior Meeting with that topic and compare to the Start Date of the current Meeting. Additionally, it is configurable for which Attendance Statuses on Meeting Member that we consider to validate against. This is set in the "Attend. Statuses For Topic Compliance" Custom Setting. For example, we may want to only check for Meeting Members that actually attended the Meeting (so therefore would have heard the topic), so we do not validate against any Meeting Members that had an Attendance Status of "Declined", "Cancelled Late", or "Not Applicable" on the prior Meeting in question. Only Meeting Members that had "Attended" statuses would be validated against, where applicable.

Compliance Custom Settings

Number of Days in Past to Check Topic	90
Validate Days in Past for Topic	Block
Validate Days in Past for Topic (Walk In)	Warn
Validate Restricted Products (Walk In)	Warn

Attend. Statuses For Topic Compliance ⓘ

Available	Selected
No Show	Attended-eSigned
Cancelled Late	Attended-Paper Signed
Not Applicable	Attended-Did Not Sign

Save

When adding an Account Attendee on the date of the Meeting or later (when their Invitation Status = Walk In), we will check if they attended a Meeting a certain number of days ago with the same Meeting Topic as this one and throw a **blocking message** or **warning message**, depending on what is configured in the "Validate Days in Past for Topic (Walk In)" Custom Setting in the Admin. Console (this can also be set to "None", meaning no validation will occur). The number of days in the past we check is determined in the "Number of

Days in Past to Check Topic" Custom Setting. We will look at the End Date of the prior Meeting with that topic and compare to the Start Date of the current Meeting. Additionally, it is configurable for which Attendance Statuses on Meeting Member that we consider to validate against. This is set in the "Attend. Statuses For Topic Compliance" Custom Setting.

Compliance Custom Settings

Number of Days in Past to Check Topic
90

Validate Days in Past for Topic
Block

Validate Days in Past for Topic (Walk In)
Warn

Validate Restricted Products (Walk In)
Warn

Attend. Statuses For Topic Compliance ⓘ

Available	Selected
No Show	Attended-eSigned
Cancelled Late	Attended-Paper Signed
Not Applicable	Attended-Did Not Sign

Save

When adding a Meeting Topic before the Meeting date (after already adding Meeting Members), we will check if any of the Account Attendees on the Meeting attended a Meeting a certain number of days ago with the same Meeting Topic as this one and throw a **blocking message** or **warning message**, depending on what is configured in the "Validate Days in Past for Topic" Custom Setting (this can also be set to "None", meaning no validation will occur). The number of days in the past we check is determined in the "Number of Days in Past to Check Topic" Custom Setting. We will look at the End Date of the prior Meeting with that topic and compare to the Start Date of the current Meeting. Additionally, it is configurable for which Attendance Statuses on Meeting Member that we consider to validate against. This is set in the "Attend. Statuses For Topic Compliance" Custom Setting.

When adding a Meeting Topic on or after the Meeting date (after already adding Meeting Members), we will check if any of the Account Attendees on the Meeting attended a Meeting a certain number of days ago with the same Meeting Topic as this one and throw a **blocking message** or **warning message**, depending on what is configured in the "Validate Days in Past for Topic (Walk In)" Custom Setting (this can also be set to "None", meaning no validation will occur). The number of days in the past we check is determined in the "Number of Days in Past to Check Topic" Custom Setting. We will look at the End Date of the prior Meeting with that topic and compare to the Start Date of the current Meeting. Additionally, it is configurable for which Attendance Statuses on Meeting Member that we consider to validate against. This is set in the "Attend. Statuses For Topic Compliance" Custom Setting.


When editing the Meeting date, we will check if any of the Account Attendees on the Meeting attended a Meeting a certain number of days ago with the same Meeting Topic as this one and throw a **blocking message** or **warning message**, depending on what is configured in the "Validate Days in Past for Topic" or "Validate Days in Past for Topic (Walk In)" Custom Setting (this can also be set to "None", meaning no validation will occur). We can show block or warn in this case because the date of the Meeting may be edited in such a way that could make it the date of the Meeting or later, meaning it is now "Walk In" status for anyone added, so we need to check the correct setting. The number of days in the past we check is determined in the "Number of Days in Past to Check Topic" Custom Setting. We will look at the End Date of the prior Meeting with that topic and compare to the Start Date of the current Meeting. Additionally, it is configurable for which Attendance Statuses on Meeting Member that we consider to validate against. This is set in the "Attend. Statuses For Topic Compliance" Custom Setting.


Note: Due to limitations on Salesforce, we are not able to show a **warning** message when editing the Meeting date as it is done at the trigger level. So on Salesforce side, only the **blocking** message will show. On iPad we are able to show either type of message.

There is an additional bulk update scenario we consider: if Meeting dates are being updated in the same batch through data loads, there could potentially be a scenario where changing the date on one Meeting leads to a Topic compliance violation on another Meeting in the same batch. In this scenario, we show a message that says: "The Meeting you are trying to update has a dependency on another Meeting, <Meeting ID>, with a topic compliance violation." However, if trying to update more than 200 records at a time, Salesforce automatically splits the records into separate batches. This could lead to a scenario where the correlated Meetings that could cause the violations are in two different batches. In this case, there is nothing we can do, so this may be a scenario where a Topic compliance violation technically exists but we are not able to capture it due to the records being loaded in separate batches.

When signing in an Account Attendee on a Meeting, we do not throw any validations for Topic compliance.

Examples of Warning Messages for Topic Compliance (OCE9 Package)

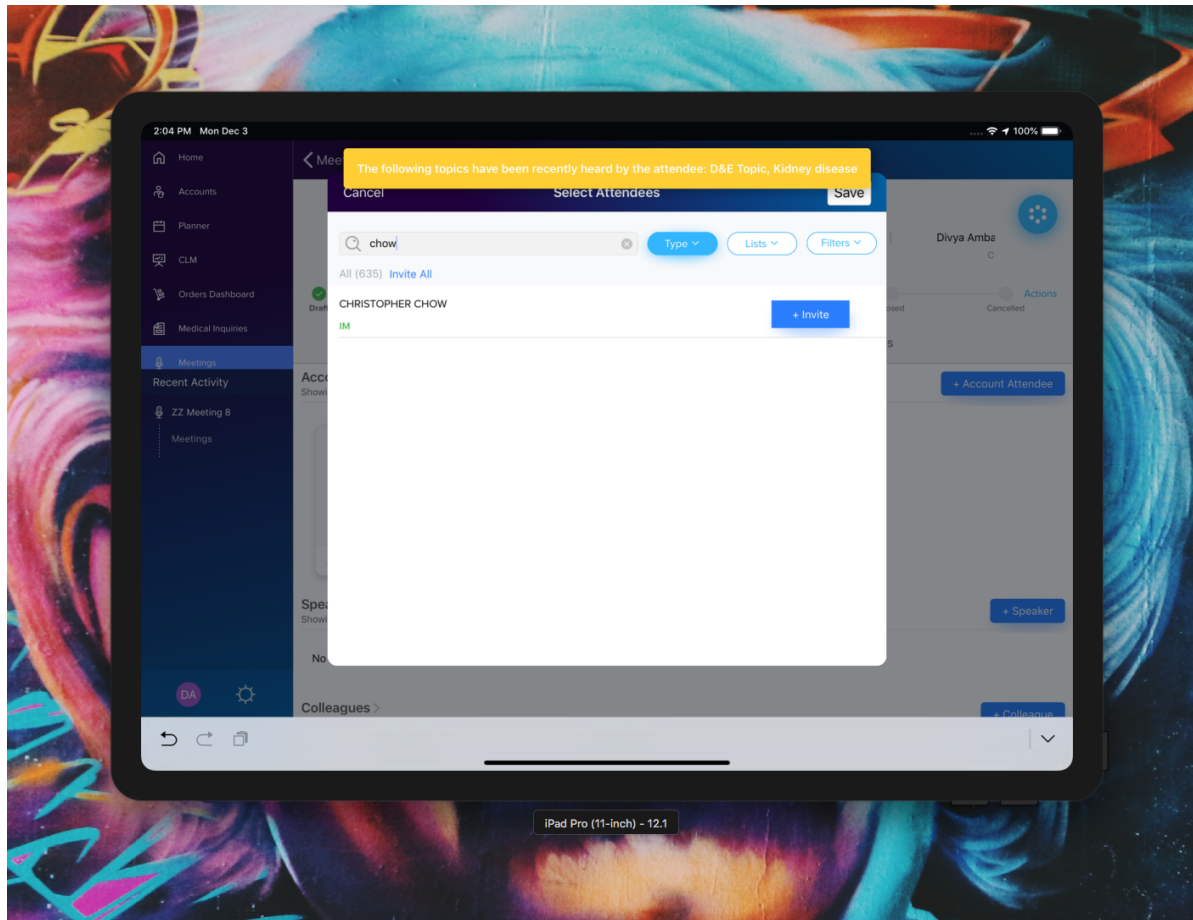

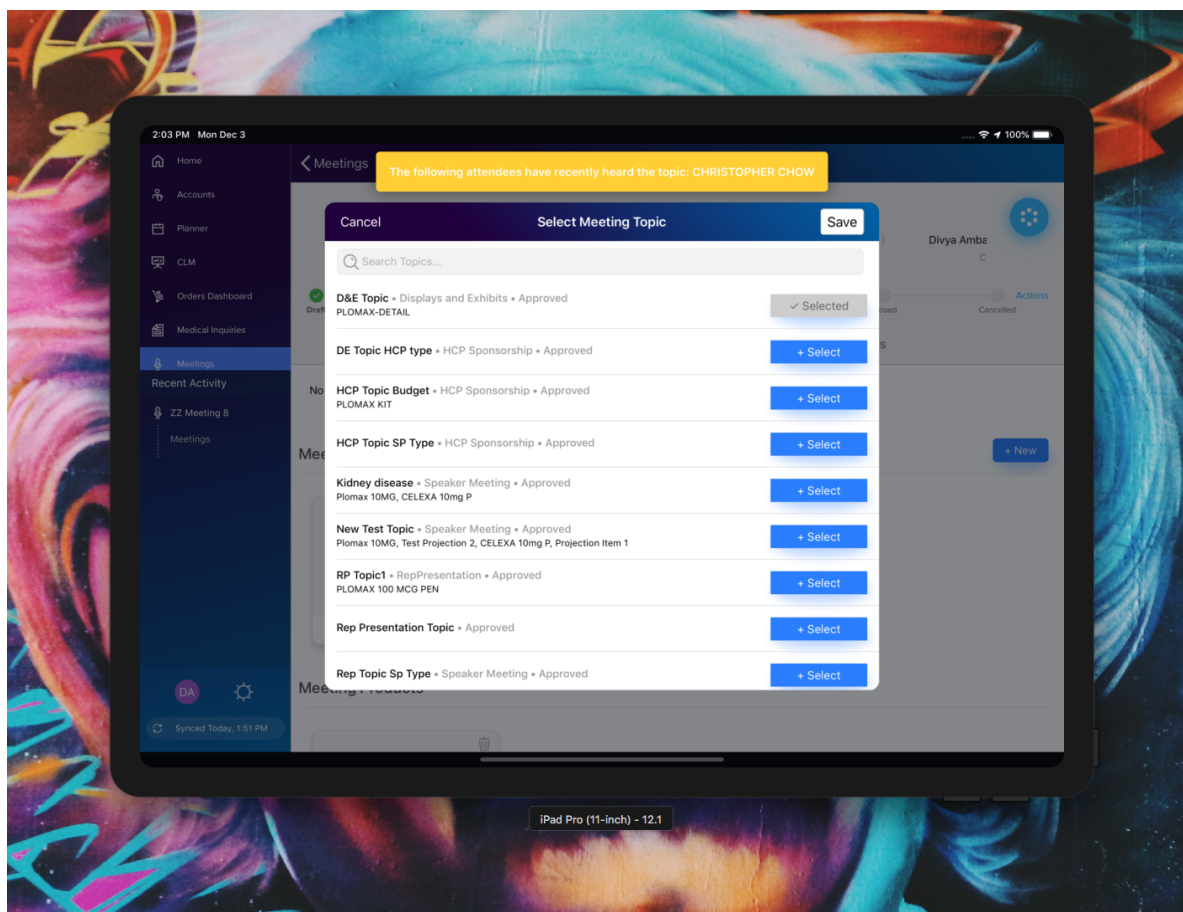

Capture Discrepancy Reason (OCE9 Package)

A field has been added to Meeting Member object called **Discrepancy Reason**. This field is a multiselect picklist with two values: "Topic recently heard by Account" and "Meeting contains restricted products".

When adding an Account Attendee to a Meeting that has a Topic compliance violation (before the Meeting date or on/after), we will capture the Discrepancy Reason field on Meeting Member record as "Topic recently heard by Account". Note that this scenario is only

possible if the "Validate Days in Past for Topic" or "Validate Days in Past for Topic (Walk In)" Custom Setting is set as "Warn", since if it is "Block" we don't add the Meeting Member to the Meeting at all.

When adding a Meeting Topic (before the Meeting date or on/after), we will capture the Discrepancy Reason field on Meeting Member record as "Topic recently heard by Account". Note that this scenario is only possible if the "Validate Days in Past for Topic" or "Validate Days in Past for Topic (Walk In)" Custom Setting is set as "Warn", since if it is "Block" we don't add the Meeting Topic to the Meeting at all. We will validate against all Meeting Members added to the Meeting for the current Meeting Topic being added.

When editing the Meeting date, we will capture the Discrepancy Reason field on Meeting Member record as "Topic recently heard by Account". Note that this scenario is only possible if the "Validate Days in Past for Topic" or "Validate Days in Past for Topic (Walk In)" Custom Setting is set as "Warn". The assumption is that the user should have edit access to the Meeting Member record since the system will be updating the Discrepancy Reason field. If they do not, we throw a validation: "You cannot edit the Meeting date because you do not have access to edit Meeting Member."

When signing in a Meeting Member, we do not capture the Discrepancy Reason for Topic compliance as we don't validate this on sign.

Out of Scope + Limitations (OCE9 Package)

We do not handle updating Discrepancy Reason field when **removing** a Meeting Topic. If the Meeting Topic is removed and now Meeting Members do not have any violations, we will not go back and update this field in previous versions.

We do not handle removing Discrepancy Reason when adding Meeting Topic if the Meeting Member no longer has a violation. For example, someone was added to your Meeting with a Topic compliance violation and they have the Discrepancy Reason captured as such. Then, you add another Meeting Topic to the Meeting. We validate all Meeting Members again and update their Discrepancy Reason if they have a violation for the new Meeting Topic. Suppose the previous Meeting that you were comparing to get the original Topic compliance violation for a Meeting Member was changed, and that Meeting Topic was removed or the date was changed to no longer fall in the violation date range. We will not remove the Discrepancy Reason for this Meeting Member, even though now they may technically not have any violations based on the prior Meeting being changed.

For Topic compliance validations, we consider the Attendance Status of the Meeting Member to determine if we should validate against them or not on a new Meeting. We do not throw any validations when going back and changing a Meeting Member's Attendance Status on

a prior Meeting once the new Meeting we are validating on has already been created and Meeting Members/Meeting Topics have been added.

We do not show the number of days in the past the Account heard the topic in the Topic compliance validation message.

We do not capture the specific products or topics in question in the Discrepancy Reason field.

On iPad we do not have access to all Meetings, only Meetings shared with the user (who is the owner or co-organizer on the Meeting). For this reason, we can only check and validate Topic compliance against Meetings that the user has created or is co-organizer on.

For the Topic compliance scenario when editing Meeting dates in bulk: When trying to update more than 200 records at a time, Salesforce automatically splits the records into separate batches. This could lead to a scenario where the correlated Meetings that could cause the violations are in two different batches. In this case, there is nothing we can do, so this may be a scenario where a Topic compliance violation technically exists but we are not able to capture it due to the records being loaded in separate batches.

Meetings Super User (OCE9 Package)

See [Meetings Super User](#) section of the Configuration Guide to learn how to configure this feature.

Configure Generic Workflow (OCE9 Package)

Please refer to the [Reusable Components > Configuring Generic Workflow \(MVP\)](#) section of the Configuration Guide to learn how to configure the Generic Workflow.

OCE and Engage Orchestration Configuration (OCE9 Package)

See [OCE and Engage Orchestration Configuration](#) section.

Configure Meeting Checklist (OCE9 Package)

The Meetings Checklist is a list of conditions that ideally should be satisfied before a Meeting moves to a different status. To view it, a user taps the "information" (lowercase i) icon on a menu item on a Meeting's actions popover.

Meetings

Dr. Bornstein Live in Person

Dr. Bornstein Live in Person

06/02/2018 12:00 AM

06/02/2018 12:00 AM

Meeting Name

Start Date/Time

End Date/Time

✓

Draft

Pending Approval

Approved

Execute

Concluded

Closed

Cancelled

⋮

Actions

Details

Attendees

Expenses

Tasks

Information

Record Type ID

Speaker Meeting

Subtype

Live/In-Person

Territories ⓘ

;TM - SPC - A

Meeting ID


SM-2018-

Actions

Cancel ⓘ

Submit for Approval ⓘ

The checklist appears as shown.

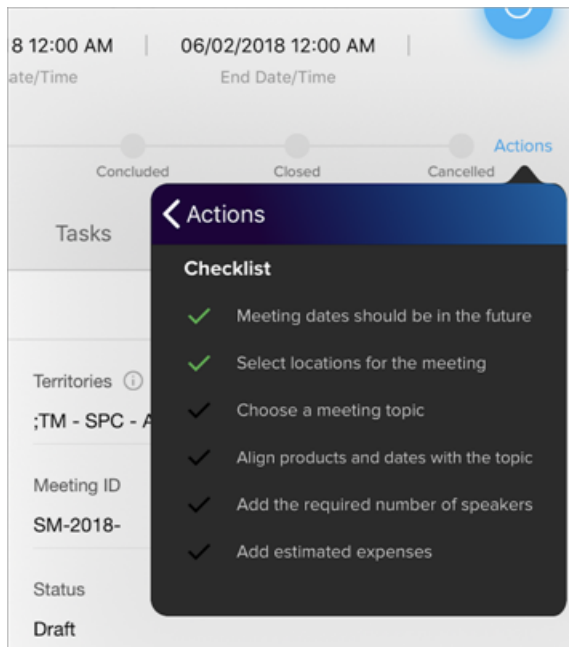

The checkmark to the left of each line changes color depending on whether the condition has been satisfied or not. Currently, the checklist is purely informational; it does not prevent the user from moving to a different Meeting status even if the condition has not been met (though the Meeting business rule validation script can be used for this – see more in [Configuring Meeting Business Rules \(Custom Script\)](#) section).

The checklist is fully dynamic, configurable, and not hard-coded. The Admin can change the conditions, remove them, or even define new conditions. Configuration is done by modifying Javascript code in the Salesforce org. This code is then downloaded to the mobile app during sync, and runs inside the app when invoked by the user. The code should then return a JSON (Javascript Object Notation) string, which is used to build the checklist.

No HTML is involved in the process; the checklist is fully native iOS code. The Javascript is used only to control the native user interface.

To activate this feature:

- Confirm the CustomScript__c object level read access and CustomScript__c.IsActive__c field level read access has been given to all relevant profiles.
- Confirm/Add the IsActive__c, Type__c, UniqueIntegrationID__c have been added to the CustomScript__c page layout.
- Confirm/Add the **OCE__IsActive__c = TRUE** to the whereclause of CustomScript__c DB Schema.
- Confirm the CustomScript__c DB Schema is active.
- Confirm all the necessary profiles have been added to CustomScript__c DB Schema and the DB Schema has been activated.
- Deactivate existing Customscript__c record with name as **meeting-checklist**.
- Clone all fields of Customscript__c record with UniqueIntegrationID__c as **meeting-checklist-default** and clear the value in UniqueIntegrationID__c.
- Activate the newly created Customscript__c record and customize the script in the code__c field, if necessary.
- If using Generic Workflow (not Legacy), set "Checklist Custom Script" with required Script name from Admin Console > Workflow Configuration > Context Type tab.
- Run metadata cache.

As of March 2021 release, the Checklist has been made generic and is supported on Salesforce. To activate the Checklist in Salesforce:

- Ensure DefaultCustomScriptLockHandler is enabled.
- Ensure user has access to sObjects and fields used in Checklist scripts.
- To use OOB Meeting checklist:
 - Navigate to Admin Console > Workflow Configuration tile > Context Type tab.
 - Update "Checklist Custom Script" for Meeting sObject with "meeting-checklist-2-default".

- To create new Checklist scripts and use for Meeting/non Meeting sObjects: Navigate to Admin Console > Meetings tile > Meeting Scripts (now supports all sObjects).
 - Create new script or clone an existing script.
 - In Checklist JavaScript, use keyword "record." instead of "meeting." to access parent record values for non Meeting sObjects.
 - Validate and Activate the script. Ensure Version is set as 2.0.
 - Set "Checklist Custom Script" with required Script name from Admin Console > Workflow Configuration > Context Type tab.
- Run metadata cache

Modify the Default Checklist Script (OCE9 Package)

The OCE Meetings module comes with a default script out of the box. However, you will probably need to modify it to suit your specific needs. For instance, your users might want to have more items on the list, or your org might have custom meeting status values.

To modify the default script

1. Using a web browser, log into the org you want to configure. Use an account with an OCE Admin profile.
2. Navigate to the **Custom Script (CustomScript__c)** object. You can do this in several ways, for example, you could add a custom tab for the object.
3. Find the **Custom Script** object with a **Name** field that has the value **meeting-checklist**.
4. Copy the value of the **Code** field (**Code__c**).
5. Paste the value into a text editor of your choice. Any plain text editor will do, such as vim or even Windows Notepad. However, we suggest a code editor that has syntax highlighting, such as Sublime Text. After pasting, make sure to set the language to "Javascript" to enable syntax highlighting and hints.

6. Edit the default script as required. When using a code editor, make sure that there are no flagged errors. When done, copy the entire file into the clipboard.
7. Use the web browser again to navigate to the **Custom Script** object and paste the value into the **Code** field.
8. Save the record.

After you save the record, the updated script will synchronize down into the mobile app.

Additionally, if using the generic workflow for Meetings (see [Configuring Generic Workflow](#) for more details), you can configure the custom script you want to use for the Checklist from the Admin Console.


- Go to the Admin Console > Workflow Configuration > Context Type and click the Edit button next to the **Meeting** record.
- Select a value in the Checklist Custom Script field that you want to use in your org.

Sample Checklist Script (OCE9 Package)

Following is a sample checklist script.

```
return [{  
  title: "Hello from the script",  
  isChecked: true  
}];
```

This results in the following output.

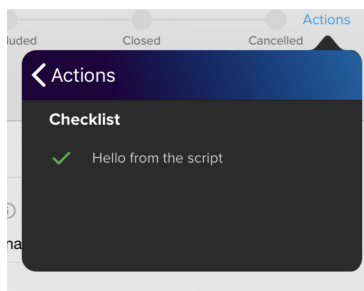

Note: This is old UI, UI has since changed which is reflected in earlier screenshots.

The output from the script should always be a Javascript array. At the end of your script, it is a good idea always to have this line:

```
return \[\];
```

This ensures that you always return an array in the default case. Since there can be a unique checklist for each combination of “From” and “To” statuses along with the meeting’s type (Speaker, Rep Presentation, etc.), you need to handle each case in your script. For more details, see the default script.

To retrieve the current meeting status, use this function call:

```
env.getOption("fromStatus");
```

To retrieve the status that the user intends to change into, use this function call:

```
env.getOption("toStatus");
```

To get the current meeting’s type:

```
meeting.recordTypeName();
```

To get any other property of the current meeting:

```
meeting.stringValue('someproperty__c');
```

Meetings Checklist Script API (OCE9 Package)

From within your custom Javascript code, you can use a set of functions to get information, such as the current user, the current meeting, and the status that the user intends to change into. Collectively, these functions are called the Application Programming Interface (API). For your reference, we list them all here.

env Object

This object represents the execution environment.

Methods:

```
function getOption(name)
```

- Description: Retrieves an environment parameter value
- Parameter (name): The name of the environment setting (String)
- Returns: The String value for the parameter

```
function setOption(name, value)
```

- Description: Sets an environment parameter value
- Parameter (name): The name of the environment setting (String)
- Parameter (value): The new value for the environment setting (String, Number, Boolean or Date)

```
function log(message)
```

- Description: Outputs a message to the application console
- Parameter (message): The name of the environment setting (String)

Meeting Object

This object represents the current meeting to which the checklist applies. In addition to the methods below, the meeting object also supports all the methods from the JsDb object.

Methods:

```
function numAttendees()
```

- Description: Retrieves the number of meeting attendees
- Returns: The number of attendees (Number)

```
function numSpeakers()
```

- Description: Retrieves the number of meeting speakers
- Returns: The number of speakers (Number)

```
function numColleagues()
```

- Description: Retrieves the number of meeting colleagues
- Returns: The number of colleagues (Number)

```
function numExpenses()
```

- Description: Retrieves the total number of meeting expenses (estimated and actual)
- Returns: The total number of meeting expenses (Number)

```
function numEstimatedExpenses()
```

- Description: Retrieves the total number of estimated meeting expenses
- Returns: The total number of estimated meeting expenses (Number)

```
function numActualExpenses()
```

- Description: Retrieves the total number of actual meeting expenses
- Returns: The total number of actual meeting expenses (Number)

```
function numTopics()
```

- Description: Retrieves the number of meeting topics
- Returns: The number of topics (Number)

```
function childRows(entityName)
```

- Description: Retrieves database rows for a meeting's child objects
- Returns: An array of **JsDb** objects
- Parameter (entityName): The Salesforce object name. For example:

```
MeetingLocation__c, MeetingProduct__c
```

JsDb Object

This object is only available as return values of other method calls. There is no “JsDb” object in the global scope, unlike **env** and **meeting**.

Methods:

```
function stringValue(name)
```

- Description: Retrieves a database field value of type String. These have the same name as the SFDC object property. Use this method to get values of field types, except numerical fields, booleans, and dates. For instance, picklist values can be retrieved with this function
- Parameter (name): The name of the field (String)
- Returns: The String value of the field

```
function numValue(name)
```

- Description: Retrieves a database field value of type Number. These have the same name as the SFDC object property. Use this method to get values of field types such as currency, double, and integer

- Parameter (name): The name of the field (String)
- Returns: The numerical value of the field

```
function boolValue(name)
```

- Description: Retrieves a database field value of type Boolean. These have the same name as the SFDC object property
- Parameter (name): The name of the field (String)
- Returns: The Boolean value of the field

```
function boolValue(name)
```

- Description: Retrieves a database field value of type Boolean. These have the same name as the SFDC object property
- Parameter (name): The name of the field (String)
- Returns: The Boolean value of the field

```
function dateValue(name)
```

- Description: Retrieves a database field value of type Date or Datetime. These have the same name as the SFDC object property
- Parameter (name): The name of the field (String)
- Returns: The Date value of the field (Javascript Date)

```
function recordTypeName()
```


- Description: Retrieves the record type name of a particular database record. The value will be the same as the SFDC record type's API name
- Returns: The API name of the record's Record Type (String)

Testing Your Script on a Device

If you can access an iPad's console log, you can use the API function **env.log("My log message");** to output a console message and inspect it. This message appears on the app's console log with a red apple icon to differentiate it from other log messages.

Configure Meeting Business Rules - (Custom Script) (OCE9 Package)

In the Meetings module, Administrators can add their own business validation rules using JavaScript, similar to the method described for the **Meeting Checklist**. These will fire upon tapping an action. An example of how these rules will appear to the end user is seen here:

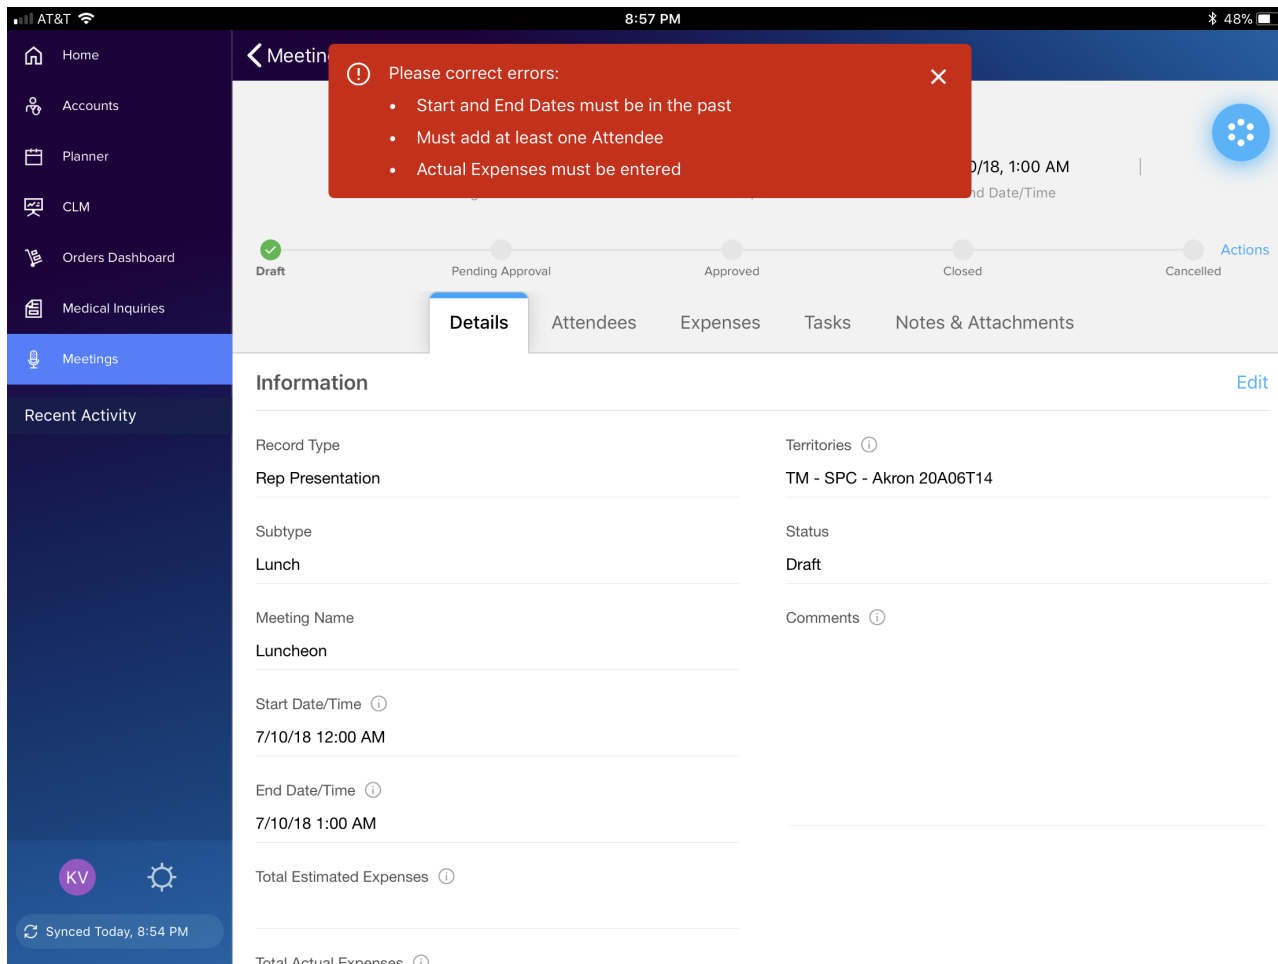

To configure Custom Scripts (2.0):

- Go to the Admin Console > Workflow Configuration > Custom Scripts (see **Configuring Custom Scripts from Admin Console** section of this guide below for more details on using the Admin Console to set up custom scripts).
- Deselect the IsActive field of the in use **meetingvalidation** custom script.

- Either clone script **meeting-validation-currency-2-default** or write a new custom script with async/await functions with version 2.0. (For reference, please see the **meeting-validation-currency-2-default** script.)
- Check the IsActive field.
- Assign Meetings Admin/Meetings User permission set or give Edit permission for all fields of CustomScript__c object.
- Go to the Admin Console > Workflow Configuration > Context Type and click the Edit button next to the **Meeting** record.
- Select a value in the Validation Custom Script field for the business rule script you would like to run in your org for Meetings.
- To use the dynamic rules (based on Custom Settings), activate DbSchema.MeetingValidationSettings__c and give proper limit value in MeetingValidationSettings__c object in .json format e.g. For Lead_Time__c, add {"Speaker_Meeting":30,"HCP_Sponsorship":30,"Displays_Exhibits":30}

Note:

Only Custom Script version 2.0 is supported (Custom Script version 1.0 was retired). The Custom Script is considered to be v2 if its Version field is not empty and not equal to `1.0`.

While creating/modifying a script, be aware that if a custom label uses the same name as an OCE Package label and it is referred to in the validation script, the OCE Label will display in the error message.

You cannot edit an OOB Custom Script. You must clone it first.

\b and \f escape patterns should not be used in Custom Labels as they render incorrectly in Custom Scripts.

There is a current limitation to retrieve Custom Setting records in the Custom Scripts API. It retrieves all records of the same type (e.g. MeetingValidationSettings__c) and chooses the first of them. This could result in a setting not being applied as expected to a profile. This will be improved in a future release.

Read on for more technical details on the v2.0 scripts.

Dependencies

Because v2.0 Business Rules/Custom Scripts are executed on mobile and web, additional context variables are available along with v1 context variables to provide cross-platform compatibility.

In v2.0 Business Rules/Custom Scripts, the following context variables are available:

env

db

meeting (or *record* variable if it is non-Meeting)

user

ConditionBuilder

ConditionBuilder_noNs

Query

SetCondition

SetCondition_noNs

FieldCondition

FieldCondition_noNs

DateFieldCondition

DateFieldCondition_noNs

AndCondition

OrCondition

Env

env is a key-value container that stores information about Meeting Statuses.

getOption(key)

Returns value stored with the given key

Parameters

key

Type: String

Return value

Type: String

Usage

env container has 2 values – *fromStatus* and *toStatus* that correspond to current Meeting Status and new Meeting Status, respectively.

Example

```
let fromStatus = env.getOption("fromStatus"); // fromStatus === "Draft"
let toStatus = env.getOption("toStatus");

// toStatus === "PendingApproval"
```

formatCustomLabel(key, defaultValue, arguments)

Translates given Custom Label to the current user locale and replaces %@ symbols with given arguments.

Parameters

key

Type: String

The name of the custom label

defaultValue

Type: String

The text that is displayed if Custom Label is not found

arguments

Type: Array

Values that replace %@ symbols in the Custom Label

Multiple %@ symbols are allowed in the Custom Label. In this case each %@ symbol is replaced with corresponding argument.

Return value

Type: String

Usage

Has different return value type in web application. JS object is returned instead of a String. Despite the type the return value should be assigned to the *title* attribute.

Example

```
let key = "Min_Attendees_Should_be_added";

let defaultValue = 'You must select a minimum of %@ Attendee(s) as defined in the Meeting Topic';

let arguments = ['10'];
formattedCustomLabel = env.formatCustomLabel(key, defaultValue, arguments);

return {
  title: formattedCustomLabel,
  isValid: attendeesCountValid
};

//Resulting label is 'You must select a minimum of 10 Attendee(s) as defined in the Meeting Topic'

let key = "attendees_exceeded_max_estimated_spend";

let defaultValue = 'The following Account Attendees have exceeded the maximum allowed estimated spend %@ for this Meeting: %@';

let arguments = ['10', 'Current Meeting'];
formattedCustomLabel = env.formatCustomLabel(key, defaultValue, arguments);
```

```
return {  
  title: formattedCustomLabel,  
  isValid: attendeesCountValid  
};
```

//Resulting label is 'The following Account Attendees have exceeded the maximum allowed estimated spend 10 for this Meeting: Current Meeting'

Db

db is an object that provides access to the database and allows querying Salesforce sObjects. Each query method in the *db* object has **noNs** version that allows working with non-package sObject fields and sObjects. All *db* functions are executed asynchronously on web and synchronously on mobile. In order to work properly *async/await* syntax should be used.

All DB query methods allow setting the optional parameter - *selectedFields*. By default, Business Rule Engine returns all sObject fields available to the user in a query result, but when *selectedFields* parameter is defined, only available selected fields are returned instead.

Limiting the total number of fields returned in a query by using *selectedFields* parameter may improve query performance.

Note: Caching mechanism will define two queries as equal only when their parameters are equal. For example, both queries have same *selectedFields* value ["Name", "Meeting__c"].

rowById(entity, uid, selectedFields)

Retrieves single record of given sObject type with a specific id. Retrieved record contains all fields accessible to the current user.

Parameters

entity

Type: String

The name of the sObject, for example *Meeting__c*, *Account*

uid

Type: String

Record Id

selectedFields

Type: Array<String>

Optional. List of fields to select from DB.

Return value

Type: JsDbObject

Usage

Function treats entity argument as OCE package object name. Namespace is applied automatically. Returns promise, use await to retrieve the result.

Example

```
let locationId = 'a2J3C000000Dyq8UAC';
```

```

let location = await db.rowById('location__c', locationId);

if (location) {

  hasLocation = true;

  let status = location.stringValue('status__c');

}

let locationId = 'a2J3C000000Dyq8UAC';

let location = await db.rowById('location__c', locationId, ['Status__c']); //in this case only Status field is returned

if (location) {

  hasLocation = true;

  let status = location.stringValue('status__c');

}

```

rowsByEntity(entity, selectedFields)

Retrieves all records of given sObject type. Retrieved records contain all fields accessible to the current user.

Parameters

entity

Type: String

The name of the sObject, for example *Meeting__c*, *Account*

selectedFields

Type: Array<String>

Optional. List of fields to select from DB.

Return value

Type: Array<JsDbObject>

Usage

Function treats entity argument as OCE package object name. Namespace is applied automatically. Returns promise, use **await** to retrieve the result.

Example

```
let validations = await db.rowsByEntity('meetingvalidationsettings__c');  
let validations = await db.rowsByEntity('meetingvalidationsettings__c', ['Lead_Time__c']);
```

query(entity, whereClause, selectedFields)

Retrieves all records of given sObject type filtered by the **whereClause**. Retrieved records contain all fields accessible to the current user.

Parameters

entity

Type: String

The name of the sObject, for example *Meeting__c*, *Account*

whereClause

Type: String

Where part of an SQL query. Doesn't support Salesforce SOQL features because the query is also executed on mobile.

selectedFields

Type: Array<String>

Optional. List of fields to select from DB.

Return value

Type: Array<JsDbObject>

Usage

Function treats entity argument as OCE package entities. Namespace is applied automatically. Returns promise, use **await** to retrieve the result.

While **query** function supports v1.0 where clause syntax with String queries, a new ConditionBuilder approach is also available. See Condition Builder section for more examples.

Example

```
let meetingId = 'a2J3C000000HQmNUAW';

let attendees = await db.query('meetingMember__c', 'meeting__c = \'' + meetingId + '\'' and recordtypeid in (select id from recordtype
where developername = 'Attendee\')');

let topicsProducts = await db.query('topicproduct__c', 'topic__c in (\'a2J3C000000HQmNUAW\')');

let topicsProducts = await db.query('topicproduct__c', 'topic__c in (\'a2J3C000000HQmNUAW\')', ['topic__c']);
let expenses = await db.query("MeetingExpense__c", await new ConditionBuilder(
"MeetingExpense__c",
new AndCondition()
.add(new FieldCondition("Meeting__c", "=", meetingId))
.add(new SetCondition("RecordTypeId", "IN", new Query()
.select("Id")
.from("RecordType")
.where(new FieldCondition("DeveloperName", "=", "Estimate")))
))
.add(new SetCondition("Category__c", "IN", new Query()
.select("Id")
.from("ExpenseType__c")
.where(new FieldCondition("DistributionType__c", "=", "All"))
```

```
))  
).build());
```

noNS_rowById(entity, uid, selectedFields)

Retrieves single record of given sObject type with a specific id. Doesn't apply OCE package namespace to entity argument. Retrieved record contains all fields accessible to the current user.

Parameters

entity

Type: String

The name of the sObject, for example *OCE__Meeting__c, Account*

uid

Type: String

Record Id

selectedFields

Type: Array<String>

Optional. List of fields to select from DB.

Return value

Type: JsDbObject

Usage

Package namespace must be added to the entity value if this entity is a part of managed package. To retrieve local entity do not add the namespace to the entity value. Returns promise, use **await** to retrieve the result.

Example

```
let locationId = 'a2J3C000000Dyq8UAC';

let location = await db.noNS_rowById('oce__location__c', locationId);

if (location) {

  hasLocation = true;

  let status = location.stringValue('status__c');

}

let locationId = 'a2J3C000000Dyq8UAC';

let location = await db.noNS_rowById('oce__location__c', locationId, ['status__c']);

if (location) {

  hasLocation = true;

  let status = location.stringValue('status__c');

}
```

```
let account = await db.noNS_rowById('Account', '0013C00000AnYKNQA3');
```

noNs_rowsByEntity(entity, selectedFields)

Retrieves all records of given sObject type. Doesn't apply OCE package namespace to entity argument. Retrieved records contain all fields accessible to the current user.

Parameters

entity

Type: String

The name of the sObject, for example *OCE__Meeting__c*, *Account*

selectedFields

Type: Array<String>

Optional. List of fields to select from DB.

Return value

Type: Array<JsDbObject>

Usage

Package namespace must be added to the entity value if this entity is a part of managed package. To retrieve local entity do not add the namespace to the entity value. Returns promise, use **await** to retrieve the result.

Example

```
let validations = db.rowsByEntity('oce__meetingvalidationsettings__c');  
let validations = db.rowsByEntity('oce__meetingvalidationsettings__c', ['lead_time__c']);
```

noNS_query(entity, whereClause, selectedFields)

Retrieves all records of given sObject type filtered by the **whereClause**. Doesn't apply OCE package namespace to entity and whereClause arguments. Retrieved records contain all fields accessible to the current user.

Parameters

entity

Type: String

The name of the sObject, for example *OCE__Meeting__c*, *Account*

whereClause

Type: String

Where part of a SQL query. Doesn't support Salesforce SOQL features because the query is also executed on mobile.

selectedFields

Type: Array<String>

Optional. List of fields to select from DB.

Return value

Type: Array<JsDbObject>

Usage

Doesn't apply OCE package namespace to entity and whereClause arguments. Returns promise, use **await** to retrieve the result.

While **query** function supports v1.0 where clause syntax with String queries, a new ConditionBuilder approach is also available. See Condition Builder section for more examples.

Example

```
let meetingId = 'a2J3C000000HQmNUAW';

let attendees = await db.noNs_query('oce__meetingMember__c', 'oce__meeting__c = \'' + meetingId + '\'' and recordtypeid in (select id from recordtype where developername = \'Attendee\')');

let topicsProducts = await db.noNs_query('oce__topicproduct__c', 'oce__topic__c in (\''a2J3C000000HQmNUAW\')');
```

```

let topicsProducts = await db.noNs_query('oce__topicproduct__c', 'oce__topic__c in (\'a2J3C000000HQmNUAW\')', ['topic__c']);
let expenses = await db.query("OCE__MeetingExpense__c", await new ConditionBuilder(
    "MeetingExpense__c",
    new AndCondition()
        .add(new FieldCondition("Meeting__c", "=", meetingId))
        .add(new SetCondition("RecordTypeId", "IN", new Query()
            .select("Id")
            .from("RecordType")
            .where(new FieldCondition("DeveloperName", "=", "Estimate")))
        ))
        .add(new SetCondition("Category__c", "IN", new Query()
            .select("Id")
            .from("ExpenseType__c")
            .where(new FieldCondition("DistributionType__c", "=", "All")))
        ))
    ).build());

```

Meeting

meeting context variable combines features of *JsDbObject* and *db* objects and represents the Meeting record that is validated. It provides access to the Meeting fields in the same way *JsDbObject* provides access to an sObject fields and allows querying child records (Meeting

Topic, Meeting Expense, etc). All database functions are executed asynchronously on web and synchronously on mobile. In order to work properly, async/await syntax should be used.

childRows(entity, selectedFields)

Returns the all records of given entity that is related to the Meeting.

Parameters

entity

Type: String

The name of the sObject type to get

selectedFields

Type: Array<String>

Optional. List of fields to select from DB.

Return value

Type: Array<JsDbObject>

Usage

Function treats entity argument as OCE package object name. Namespace is applied automatically. Returns promise, use **await** to retrieve the result.

Example

```
let rows = await meeting.childRows('MeetingLocation__c');
if (rows) {
  for (let row of rows) {
    if (row.recordTypeName() == "Caterer") {
      hasCaterer = true;
      break;
    }
  }
}
let rows = await meeting.childRows('MeetingLocation__c', ['Meeting__c']);
if (rows) {
  for (let row of rows) {
    if (row.recordTypeName() == "Caterer") {
      hasCaterer = true;
      break;
    }
  }
}
```

```
}  
  
}
```

noNs_childRows(entity, selectedFields)

Returns the all records of given entity that is related to the Meeting. Doesn't apply OCE package namespace to entity argument. Retrieved record contains all fields accessible to the current user.

Parameters

entity

Type: String

The name of the sObject type to get

selectedFields

Type: Array<String>

Optional. List of fields to select from DB.

Return value

Type: Number

Usage

Package namespace must be added to the entity value if this entity is a part of managed package. To retrieve local entity do not add the namespace to the entity value. Returns promise, use **await** to retrieve the result.

Example

```
let rows = await meeting.noNs_childRows('OCE__MeetingLocation__c');

if (rows) {

  for (let row of rows) {

    if (row.recordTypeName() == "Caterer") {

      hasCaterer = true;

      break;

    }

  }

}

let rows = await meeting.noNs_childRows('OCE__MeetingLocation__c', ['Meeting__c']);

if (rows) {

  for (let row of rows) {

    if (row.recordTypeName() == "Caterer") {

      hasCaterer = true;

      break;

    }

  }

}
```

```
}  
}  
}
```

User

user context variable is an instance of *JsDbObject* that contains information about the context user. It provides access to the User record of a current Salesforce User.

stringValue(key)

Returns String value stored with the given key.

Parameters

key

Type: String

The name of the User field to get.

Return value

Type: String

Usage

To retrieve User Id use stringValue("uid"). UID represents Salesforce sObject Id on mobile application. Function treats key argument as OCE package field name. Namespace is applied automatically.

Example

```
let name = user.stringValue("Name");  
  
//name === "John Doe"
```

numValue(key)

Returns Number value stored with the given key.

Parameters

key

Type: String

The name of the User field to get

Return value

Type: Number

Usage

Function treats key argument as OCE package field name. Namespace is applied automatically.

Example

```
let depth = user.numValue("PreferenceAffiliationDepth__c");  
  
// depth === 2
```

boolValue(key)

Returns Boolean value stored with the given key.

Parameters

key

Type: String

The name of the User field to get

Return value

Type: Boolean

Usage

Function treats key argument as OCE package field name. Namespace is applied automatically.

Example

```
let value = user.boolValue("sActive__c");  
  
// value === true
```

dateValue(key)

Returns Date value stored with the given key.

Parameters

key

Type: String

The name of the User field to get

Return value

Type: Date

Usage

Function treats key argument as OCE package field name. Namespace is applied automatically.

Example

```
let value = record.dateValue("LastSyncTime__c");  
// value.getTime() === new Date(2020, 12, 1).getTime();
```

noNs_stringValue(key)

Returns String value stored with the given key. Doesn't apply OCE package namespace to key argument.

Parameters

key

Type: String

The name of the User field to get

Return value

Type: String

Usage

To retrieve sObject Id use stringValue("uid"). UID represents Salesforce sObject Id on mobile application. Package namespace must be added to the key if this field is a part of managed package. To retrieve local field do not add the namespace to the key.

Example

```
let version = user.noNs_stringValue("OCE__AppVersion__c");  
  
//version === "10.0.1"
```

noNs_numValue(key)

Returns Number value stored with the given key. Doesn't apply OCE package namespace to key argument.

Parameters

key

Type: String

The name of the User field to get

Return value

Type: Number

Usage

Package namespace must be added to the key if this field is a part of managed package. To retrieve local field do not add the namespace to the key.

Example

```
let depth = user.numValue("OCE__PreferenceAffiliationDepth__c");  
  
// depth === 2
```

noNs_boolValue(key)

Returns Boolean value stored with the given key. Doesn't apply OCE package namespace to key.

Parameters

key

Type: String

The name of the User field to get

Return value

Type: Boolean

Usage

Package namespace must be added to the key if this field is a part of managed package. To retrieve local field do not add the namespace to the key.

Example

```
let value = record.noNs_boolValue("OCE__ IsLoggingEnabled__c");  
  
// value === false
```

noNs_dateValue(key)

Returns Date value stored with the given key. Doesn't apply OCE package namespace to key.

Parameters

key

Type: String

The name of the User field to get

Return value

Type: Date

Usage

Package namespace must be added to the key if this field is a part of managed package. To retrieve local field do not add the namespace to the key.

Example

```
let value = record.noNs_dateValue("OCE__LastSyncTime__c");  
// value.getTime() === new Date(2020, 12, 1).getTime();
```

Record

record context variable is available when Custom Script is set up for Generic Workflow for non-Meeting object. *record* context variable replaces *meeting* when available.

All JsDbObject methods are available on the *record* variable:

stringValue(key)

numValue(key)

boolValue(key)

dateValue(key)

noNs_stringValue(key)

noNs_numValue(key)

noNs_boolValue(key)

noNs_dateValue(key)

recordTypeName()

ConditionBuilder

ConditionBuilder class contains different query conditions, handles query building, and handles field access in queries.

constructor(objectType, condition)

Constructor of the ConditionBuilder class

Parameters

objectType

Type: String

The sObject type of the queried records. Needed to perform field access check.

condition

Type: Condition

SQL query conditions represented by one of the following classes:

AndCondition

OrCondition

SetCondition

SetCondition_noNs

FieldCondition

FieldCondition_noNs

DateFieldCondition

DateFieldCondition_noNs

DateTimeFieldCondition

DateTimeFieldCondition_noNs

Usage

Function treats objectType argument as OCE package object name. Namespace is applied automatically.

Example

```
let topicIds = ["a2b3C000000QjS4QAK"];  
let builder = new ConditionBuilder("Topic__c", new SetCondition("uid", "IN", topicIds));  
  
//construct new instance of the ConditionBuilder
```

build()

Constructs String *WHERE* part of a SQL query. If a User has no access to the field that is used in the query a JS exception is thrown.

Usage

Returns promise, use **await** to retrieve the result. Pass the result of this function to *db.query* function.

Example

```
let topicIds = ["a2b3C000000QjS4QAK"];
let builder = new ConditionBuilder("Topic__c", new SetCondition("uid", "IN", topicIds));

let topics = await db.query("Topic__c", await builder.build());

//builder.build() results in - "Id IN ('a2b3C000000QjS4QAK')"
```

```
let topicIds = ["a2b3C000000QjS4QAK"];
let builder = new ConditionBuilder("MeetingTopic__c", new SetCondition("Topic__c", "IN", topicIds));

let topics = await db.query("MeetingTopic__c", await builder.build());

//builder.build() results in - "OCE__Topic__c IN ('a2b3C000000QjS4QAK')"
```

ConditionBuilder_noNs

ConditionBuilder class contains different query conditions, handles query building, and handles field access in queries.

constructor(objectType, condition)

Constructor of the ConditionBuilder class

Parameters

objectType

Type: String

The sObject type of the queried records. Needed to perform field access check.

condition

Type: Condition

SQL query conditions represented by one of the following classes:

AndCondition

OrCondition

SetCondition

SetCondition_noNs

FieldCondition

FieldCondition_noNs

DateFieldCondition

DateFieldCondition_noNs

DateTimeFieldCondition

DateTimeFieldCondition_noNs

Usage

Package namespace must be added to the entity value if this entity is a part of managed package. To retrieve local entity do not add the namespace to the entity value.

Example

```
let topicIds = ["a2b3C000000QjS4QAK"];
let builder = new ConditionBuilder_noNs("Topic__c", new SetCondition("uid", "IN", topicIds));

//construct new instance of the ConditionBuilder
```

build()

Constructs String *WHERE* part of a SQL query. If a User has no access to the field that is used in the query a JS exception is thrown.

Usage

Package namespace must be added to the entity value if this entity is a part of managed package. To retrieve local entity do not add the namespace to the entity value. Returns promise, use **await** to retrieve the result. Pass the result of this function to *db.query* function.

Example

```
let topicIds = ["a2b3C000000QjS4QAK"];
let builder = new ConditionBuilder_noNs("Topic__c", new SetCondition("uid", "IN", topicIds));

let topics = await db.query("Topic__c", await builder.build());

//builder.build() results in - "Id IN ('a2b3C000000QjS4QAK')"

let topicIds = ["a2b3C000000QjS4QAK"];
let builder = new ConditionBuilder("MeetingTopic__c", new SetCondition("Topic__c", "IN", topicIds));
```



```
let topics = await db.query("MeetingTopic__c", await builder.build());  
  
//builder.build() results in - "OCE__Topic__c IN ('a2b3C000000QjS4QAK')"
```

Query

Query class is needed to make semi-join queries. *Query* is supported only by *SetCondition* and *SetCondition_noNs* conditions.

select(field)

Sets the field that is selected in semi-join query

Parameters

field

Type: String

The sObject field of the subquery.

Return value

Type: Query

Usage

Function treats field argument as OCE package field name. Namespace is applied automatically.

Example

```
let expenses = await db.query("MeetingExpense__c", await new ConditionBuilder(
    "MeetingExpense__c",
    new AndCondition()
        .add(new FieldCondition("Meeting__c", "=", "a2b3C000000QjSEQA0"))
        .add(new SetCondition("RecordTypeId", "IN", new Query()
            .select("Id")
            .from("RecordType")
            .where(new FieldCondition("DeveloperName", "=", "Estimate")))
        )), build())

// build() returns "(OCE__Meeting__c = 'a2b3C000000QjSEQA0') AND (RecordTypeId IN (SELECT Id FROM RecordType WHERE DeveloperName = 'Estimate'))"
```

noNs_select(field)

Sets the field that is selected in semi-join query

Parameters

field

Type: String

The sObject field of the subquery.

Return value

Type: Query

Usage

Package namespace must be added to the *field* argument if this field is a part of managed package. To retrieve local field do not add the namespace to the *field*.

Example

```
let expenses = await db.query("MeetingExpense__c", await new ConditionBuilder(  
  "MeetingExpense__c",  
  new AndCondition()  
    .add(new FieldCondition("Meeting__c", "=", "a2b3C000000QjSEQA0"))  
    .add(new SetCondition("RecordTypeId", "IN", new Query()  
      .noNs_select("Id")  
      .from("RecordType")  
      .where(new FieldCondition("DeveloperName", "=", "Estimate"))  
    )))  
    .build()  
  
// build() returns "(OCE__Meeting__c = 'a2b3C000000QjSEQA0') AND (RecordTypeId IN (SELECT Id FROM RecordType WHERE  
DeveloperName = 'Estimate'))"
```

from(subjectType)

Sets the sObject that is selected in semi-join query

Parameters

subjectType

Type: String

The sObject of the subquery.

Return value

Type: Query

Usage

Function treats subjectType argument as OCE package field name. Namespace is applied automatically.

Example

```
let expenses = await db.query("MeetingExpense__c", await new ConditionBuilder(  
    "MeetingExpense__c",
```

```
new AndCondition()  
  .add(new FieldCondition("Meeting__c", "=", "a2b3C000000QjSEQA0"))  
  .add(new SetCondition("RecordTypeId", "IN", new Query()  
    .select("Id")  
    .from("RecordType")  
    .where(new FieldCondition("DeveloperName", "=", "Estimate"))  
  )).build())
```

// build() returns "(OCE__Meeting__c = 'a2b3C000000QjSEQA0') AND (RecordTypeId IN (SELECT Id FROM RecordType WHERE DeveloperName = 'Estimate'))"

noNs_from(subjectType)

Sets the sObject that is selected in semi-join query

Parameters

subjectType

Type: String

The sObject of the subquery.

Return value

Type: Query

Usage

Package namespace must be added to the *field* argument if this field is a part of managed package. To retrieve local field do not add the namespace to the *field*.

Example

```
let expenses = await db.query("MeetingExpense__c", await new ConditionBuilder(  
  "MeetingExpense__c",  
  new AndCondition()  
    .add(new FieldCondition("Meeting__c", "=", "a2b3C000000QjSEQA0"))  
    .add(new SetCondition("RecordTypeId", "IN", new Query()  
      .select("Id")  
      .noNs_from("RecordType")  
      .where(new FieldCondition("DeveloperName", "=", "Estimate"))  
    ).build()  
  )).build()  
  
// build() returns "(OCE__Meeting__c = 'a2b3C000000QjSEQA0') AND (RecordTypeId IN (SELECT Id FROM RecordType WHERE  
DeveloperName = 'Estimate'))"
```

where(subjectType)

Sets filtering *WHERE* condition of the semi-join query. May be omitted if filtering is not needed.

Parameters

condition

Type: Condition

SQL query conditions represented by one of the following classes:

AndCondition

OrCondition

SetCondition

SetCondition_noNs

FieldCondition

FieldCondition_noNs

DateFieldCondition

DateFieldCondition_noNs

DateTimeFieldCondition

DateTimeFieldCondition_noNs

Return value

Type: Query

Example

```
let expenses = await db.query("MeetingExpense__c", await new ConditionBuilder(  
    "MeetingExpense__c",
```

```
new AndCondition()  
  .add(new FieldCondition("Meeting__c", "=", "a2b3C000000QjSEQA0"))  
  .add(new SetCondition("RecordTypeId", "IN", new Query()  
    .select("Id")  
    .from("RecordType")  
    .where(new FieldCondition("DeveloperName", "=", "Estimate"))  
  )).build())
```

// build() returns "(OCE__Meeting__c = 'a2b3C000000QjSEQA0') AND (RecordTypeId IN (SELECT Id FROM RecordType WHERE DeveloperName = 'Estimate'))"

SetCondition

SetCondition is used to create *field1 IN (id1, id2, ...)* filtering clauses.

constructor(field, operator, values)

Creates new instance of the SetCondition

Parameters

field

Type: String

The sObject field of the query.

operator

Type: String

SQL operator that is placed between field and parentheses

values

Type: Array or Query

The value inside parentheses. Array is joined with comma. Query type is used to make semi-join queries.

Usage

Function treats field argument as OCE package field name. Namespace is applied automatically.

Example

```
let attendeeAllocations = await db.query(  
  "MeetingExpenseAllocation__c",  
  await new ConditionBuilder(  
    "MeetingExpenseAllocation__c",  
    new SetCondition("MeetingMember__c", "IN", attendeeIds)  
  ).build()
```

```
);
```

```
//build() results in "OCE__MeetingMember__c IN ('a2b3C000000QjS4QAK')"
```

SetCondition_noNs

SetCondition is used to create *field1 IN (id1, id2, ...)* filtering clauses.

constructor(field, operator, values)

Creates new instance of the SetCondition

Parameters

field

Type: String

The sObject field of the query.

operator

Type: String

SQL operator that is placed between field and parentheses.

values

Type: Array or Query

The value inside parentheses. Array is joined with comma. Query type is used to make semi-join queries.

Usage

Package namespace must be added to the *field* argument if this field is a part of managed package. To retrieve local field do not add the namespace to the *field*.

Example

```
let attendeeAllocations = await db.query(  
  "MeetingExpenseAllocation__c",  
  await new ConditionBuilder(  
    "MeetingExpenseAllocation__c",  
    new SetCondition_noNs("MeetingMember__c", "IN", attendeeIds)  
  ).build()
```

```
);
```

```
//build() results in "MeetingMember__c IN ('a2b3C000000QjS4QAK')"
```

FieldCondition

FieldCondition is used to create *field1 = value* filtering clauses.

constructor(field, operator, value)

Creates new instance of the FieldCondition

Parameters

field

Type: String

The sObject field of the query.

operator

Type: String

SQL operator that is placed between field and value

value

Type: Object

The value of the condition.

Usage

Function treats field argument as OCE package field name. Namespace is applied automatically.

Example

```
let expenseTypes = await db.query(  
  "ExpenseType__c",  
  await new ConditionBuilder(  
    "ExpenseType__c",  
    new OrCondition()  
      .add(new FieldCondition("DistributionType__c", "=", "Individual"))  
      .add(new FieldCondition("DistributionType__c", "=", "Multiple"))  
  ).build());  
  
//build() results in "(OCE__DistributionType__c = 'Individual') OR (OCE__DistributionType__c = 'Multiple')"
```

FieldCondition_noNs

FieldCondition_noNs is used to create *field1 = value* filtering clauses.

constructor(field, operator, value)

Creates new instance of the FieldCondition

Parameters

field

Type: String

The sObject field of the query.

operator

Type: String

SQL operator that is placed between field and value.

value

Type: Object

The value of the condition.

Usage

Package namespace must be added to the *field* argument if this field is a part of managed package. To retrieve local field do not add the namespace to the *field*.

Example

```
let expenseTypes = await db.query(
  "ExpenseType__c",
  await new ConditionBuilder(
    "ExpenseType__c",
    new OrCondition()
      .add(new FieldCondition("DistributionType__c", "=", "Individual"))
      .add(new FieldCondition_noNs("DistributionType__c", "=", "Multiple"))
  ).build());

//build() results in "(OCE__DistributionType__c = 'Individual') OR (DistributionType__c = 'Multiple')"
```

DateFieldCondition

DateFieldCondition is used to create *dateField1 = value* filtering clauses.

constructor(dateField, operator, dateValue)

Creates new instance of the DateFieldCondition

Parameters

dateField

Type: String

The sObject field of the query with Date type.

operator

Type: String

SQL operator that is placed between field and value.

dateValue

Type: Date

The date value of the condition.

Usage

Function treats dateField argument as OCE package field name. Namespace is applied automatically.

Example

```
await new ConditionBuilder(  
    "DatedConversionRate",  
    new AndCondition()  
        .add(new SetCondition("IsoCode", "IN", Array.from(['EUR', 'USD'])))  
        .add(new DateFieldCondition("StartDate", "<=", new Date()))  
        .add(new DateFieldCondition("NextStartDate", ">", new Date()))  
    ).build()  
//results in "(IsoCode IN ('EUR','USD')) AND (StartDate <= 2020-06-01) AND (NextStartDate > 2020-06-01)"
```

DateFieldCondition_noNs

DateFieldCondition_noNs is used to create *dateField1 = value* filtering clauses.

constructor(dateField, operator, dateValue)

Creates new instance of the DateFieldCondition

Parameters

dateField

Type: String

The sObject field of the query with Date type.

operator

Type: String

SQL operator that is placed between field and value.

dateValue

Type: Date

The date value of the condition.

Usage

Package namespace must be added to the *dateField* argument if this field is a part of managed package. To retrieve local field do not add the namespace to the *dateField*.

Example

```
await new ConditionBuilder(
    "DatedConversionRate",
    new AndCondition()
        .add(new SetCondition("IsoCode", "IN", Array.from(['EUR', 'USD'])))
        .add(new DateFieldCondition_noNs("StartDate", "<=", new Date()))
        .add(new DateFieldCondition_noNs("NextStartDate", ">", new Date()))
    ).build()
//results in "(IsoCode IN ('EUR','USD')) AND (StartDate <= 2020-06-01) AND (NextStartDate > 2020-06-01)"
```

DateTimeFieldCondition

DateTimeFieldCondition is used to create *dateField1 = value* filtering clauses.

constructor(dateField, operator, dateValue)

Creates new instance of the DateFieldCondition

Parameters

dateField

Type: String

The sObject field of the query with DateTime type.

operator

Type: String

SQL operator that is placed between field and value.

dateValue

Type: Date

The date value of the condition.

Usage

Function treats dateField argument as OCE package field name. Namespace is applied automatically.

Example

```
await new ConditionBuilder('Meeting__c', new DateTimeFieldCondition('StartDateTime__c', '<', new Date())).build()
```

```
//result in "OCE__StartDateTime__c < 2020-06-01T12:41:36.960Z"
```

DateTimeFieldCondition_noNs

DateTimeFieldCondition is used to create *dateField1 = value* filtering clauses.

constructor(dateField, operator, dateValue)

Creates new instance of the DateFieldCondition

Parameters

dateField

Type: String

The sObject field of the query with DateTime type.

operator

Type: String

SQL operator that is placed between field and value.

dateValue

Type: Date

The date value of the condition. Must be JS Date.

Return value

Type: Query

Usage

Package namespace must be added to the *dateField* argument if this field is a part of managed package. To retrieve local field do not add the namespace to the *dateField*.

Example

```
await new ConditionBuilder('Meeting__c', new DateTimeFieldCondition('StartDateTime__c', '<', new Date())).build()  
  
//result in "StartDateTime__c < 2020-06-01T12:41:36.960Z"
```

AndCondition

AndCondition is used to add multiple conditions to the query. Combines all added conditions with *AND* operator.

add(condition)

Adds a condition to the query

Parameters

condition

Type: Condition

SQL query conditions represented by one of the following classes:

AndCondition

OrCondition

SetCondition

SetCondition_noNs

FieldCondition

FieldCondition_noNs

DateFieldCondition

DateFieldCondition_noNs

DateTimeFieldCondition

DateTimeFieldCondition_noNs

Return value

Type: Query

Example

```
await new ConditionBuilder(
```

```
"DatedConversionRate",  
new AndCondition()  
    .add(new SetCondition("IsoCode", "IN", Array.from(['EUR', 'USD'])))  
    .add(new DateFieldCondition_noNs("StartDate", "<=", new Date()))  
    .add(new DateFieldCondition_noNs("NextStartDate", ">", new Date()))  
)  
.build()  
//results in "(IsoCode IN ('EUR','USD')) AND (StartDate <= 2020-06-01) AND (NextStartDate > 2020-06-01)"
```

OrCondition

AndCondition is used to add multiple conditions to the query. Combines all added conditions with *OR* operator.

add(condition)

Adds a condition to the query

Parameters

condition

Type: Condition

SQL query conditions represented by one of the following classes:

AndCondition

OrCondition

SetCondition

SetCondition_noNs

FieldCondition

FieldCondition_noNs

DateFieldCondition

DateFieldCondition_noNs

DateTimeFieldCondition

DateTimeFieldCondition_noNs

Return value

Type: Query

Example

```
await new ConditionBuilder(  
    "DatedConversionRate",  
    new OrCondition()  
        .add(new SetCondition("IsoCode", "IN", Array.from(['EUR', 'USD'])))  
        .add(new DateFieldCondition_noNs("StartDate", "<=", new Date()))
```

```

        .add(new DateFieldCondition_noNs("NextStartDate", ">", new Date()))
    ).build()

//results in "(IsoCode IN ('EUR','USD')) OR (StartDate <= 2020-06-01) OR (NextStartDate > 2020-06-01)"

```

Creating Validation Functions

Business Rule engine v2.0 approach is similar to v1 but is stricter about syntax. This is required to execute a script on both mobile and web.

Unlike on mobile, all DB queries on the web are performed asynchronously. This requires additional JS syntax in order to work.

Business Rule engine v2.0 must return an array of JS Promise objects, while Promises itself contain JS object with title and isValid fields. The most convenient way to achieve this is to return an array of JS function calls marked with async keyword.

```

let fromStatus = env.getOption("fromStatus");
let toStatus = env.getOption("toStatus");

let meetingType = meeting.recordTypeName();

switch (meetingType) {
    case "Speaker_Meeting":
        if (fromStatus == "Draft" && toStatus == "PendingApproval") {
            return [
                hasDatesInFuture(),
                hasDatesInPast(),
                hasCatererLocation()
            ]
        }
    }
}

```

```

    }
    break;
}

```

Here for Speaker Meeting transitioning from Draft to Pending Approval Status `hasDatesInFuture()`, `hasDatesInPast()`, `hasCatererLocation()` functions are called.

All of these function have `async` operator in their declarations.

```

async function hasDatesInFuture() {
  let result = {
    title: "Start_and_End_Dates_must_be_in_the_future",
    isValid: true
  };

  let startDateTime = meeting.dateValue("StartDateTime__c");
  let endDateTime = meeting.dateValue("EndDateTime__c");
  if (isUndefined(startDateTime) || isUndefined(endDateTime)) return result;

  let currentDate = new Date();

  result.isValid = startDateTime > currentDate && endDateTime > currentDate;
  return result;
}

```

```

async function hasDatesInPast() {
  let result = {
    title: "Start_and_End_Dates_must_be_in_the_past",
    isValid: true
  };

  let startDateTime = meeting.dateValue("StartDateTime__c");
  let endDateTime = meeting.dateValue("EndDateTime__c");
  if (isUndefined(startDateTime) || isUndefined(endDateTime)) return result;
  let currentDate = new Date();

  result.isValid = startDateTime < currentDate && endDateTime < currentDate;
  return result;
}

```

At the same time each function should return JS Object with the following format:

```

{
  title: "Start_and_End_Dates_must_be_in_the_past",
  isValid: true
}

```

Where *title* is a Custom Label name and *isValid* is validity of the record. Title field may also contain result of *env.formatCustomLabel* function.

If at least one result structure is not valid then Meeting update is aborted and all non-valid results are shown in a toast message.

Standard *meeting-validation-currency.js* Custom Script consists of validation functions definition. Because queries on the web are executing longer, it is recommended for v2.0 scripts to use bulk approach in validation functions.

Examples

Retrieving validated Meeting Statuses and Record Type

```
let fromStatus = env.getOption("fromStatus");  
let toStatus = env.getOption("toStatus");
```

```
let meetingType = meeting.recordTypeName();
```

Validating Speaker Meeting on Draft to Pending Approval Status transition

```
async function hasDatesInPast() {  
  let result = {  
    title: "Start_and_End_Dates_must_be_in_the_past",  
    isValid: true  
  };  
  
  let startDateTime = meeting.dateValue("StartDateTime__c");  
  let endDateTime = meeting.dateValue("EndDateTime__c");  
  if (isUndefined(startDateTime) || isUndefined(endDateTime)) return result;
```

```

let currentDate = new Date();

result.isValid = startDateTime < currentDate && endDateTime < currentDate;
return result;
}

```

```

switch (meetingType) {
  case "Speaker_Meeting":
    if (fromStatus == "Draft" && toStatus == "PendingApproval") {
      return [hasDatesInPast()];
    }
}

```

Validation function with querying of child Meeting Topics and related topics.

```

async function isTopicStatusValid() {
  let result = {
    title: "Topic_must_be_in_Aproved_status",
    isValid: true
  }
}

```

```

};
let topicStatusValid = true;
let rows = await meeting.childRows("MeetingTopic__c");
if (isUndefined(rows)) return result;
let topicIds = rows.map(meetingTopic => meetingTopic.stringValue("Topic__c")).filter(id => id !== null);
if (topicIds.includes(undefined)) return result;
if (topicIds.length > 0) {
    let topics = await db.query(

        "Topic__c",

        await new ConditionBuilder(
            "Topic__c",
            new SetCondition("uid", "IN", topicIds)
        ).build()

    );
    if (isUndefined(topics)) return result;

    for (let topic of topics) {
        let status = topic.stringValue("Status__c");
        if (isUndefined(status)) return result;
        if (!status || status !== "Approved") {
            topicStatusValid = false;
            break;
        }
    }
}
}

```

```

return {
  title: "Topic_must_be_in_Aproved_status",
  isValid: topicStatusValid
};
}

```

Configure Custom Scripts from Admin Console (OCE9 Package)

To learn how to configure the Custom Script used to fire validations (Meetings Business Rules) from a Workflow Action, see section in Generic Workflow Config Guide - [Custom Scripts](#).

OOB Business Rule Descriptions (OCE9 Package)

The following are the business rules that are shipped with the out-of-box script:

Rep Presentation Business Rules

Button (from which the Rule should fire)	Status Transition	Rule	Validation Message
Submit for Approval	Draft >> Pending Approval	Meeting Dates must be in the past.	Start and End Dates must be in the past.

Button (from which the Rule should fire)	Status Transition	Rule	Validation Message
		Meeting should have Account Attendee.	Must add at least one Attendee.
		Meeting should have Actual Expense.	Actual Expenses must be entered.
		Valid location added (location is chosen and is not in 'Inactive' status on Location object or Account Address object (Is Active flag))	Location must be chosen and cannot be inactive.
		Topic was valid on the day of the meeting (Start Date of Meeting should fall in Start and End Date of Topic).	Meeting Start Date must be within Topic's Start and End Date.
		Valid Topic is added (based on Status).	Topic must be in "Approved" status.
		Valid Topic is added (based on Meeting Type). For Meeting Type, we check that the record type of the Meeting matches the Meeting Type selected on a Topic. Note that we had to hardcode a mapping between Meeting Type picklist values on Topic and record type values on Meeting, because the values for both of these fields did not exactly match and we couldn't change them since that field was already released in v2.	Topic is not valid for this type of Meeting.

Button (from which the Rule should fire)	Status Transition	Rule	Validation Message
		Valid Topic is added (based on Product). Topic Product should match Budget Product.	Topic Product does not match Budget Product.
		The sum of Allocations should equal the Amount given on Actual or Estimated Meeting Expenses.	The sum of Allocations is not equal to the Meeting Expense amount. The following Meeting Expenses have incorrect Allocations, please fix before proceeding: <List Meeting Expense name(s)>.
Cancel	Draft >> Cancelled	Actual Expenses should not exist if cancelling.	Cannot cancel Meeting because an Actual Expense has been added.
Approve	Pending Approval >> Approved	Meeting Dates must be in the past.	Start and End Dates must be in the past.
		Meeting should have Account Attendee.	Must add at least one Attendee.
		Meeting should have Actual Expense.	Actual Expenses must be entered.

Button (from which the Rule should fire)	Status Transition	Rule	Validation Message
		Valid location added (location is chosen and is not in 'Inactive' status on Location object or Account Address object (Is Active flag))	Location must be chosen and cannot be inactive.
		Topic was valid on the day of the meeting (Start Date of Meeting should fall in Start and End Date of Topic).	Meeting Start Date must be within Topic's Start and End Date.
		Valid Topic is added (based on Status).	Topic must be in "Approved" status.
		Valid Topic is added (based on Meeting Type). For Meeting Type, we check that the record type of the Meeting matches the Meeting Type selected on a Topic. Note that we had to hardcode a mapping between Meeting Type picklist values on Topic and record type values on Meeting, because the values for both of these fields did not exactly match and we couldn't change them since that field was already released in v2.	Topic is not valid for this type of Meeting.
		Valid Topic is added (based on Product). Topic Product should match Budget Product.	Topic Product does not match Budget Product.
Reject	Pending Approval >> Draft	N/A	N/A

Speaker Meeting Business Rules (OCE9 Package)

Button (from which the rule should fire)	Status Transition	Rule	Validation Message
Submit for Approval	Draft >> Pending Approval	Meeting Dates must be in the future.	Start and End Dates must be in the future.
		Valid location added (location is chosen and is not in 'Inactive' status on Location object or Account Address object (Is Active flag)).	Location must be chosen and cannot be inactive.
		If F&B Provided By field = Caterer, a Caterer Meeting Location must be added.	Caterer location must be added when caterer is providing food.
		Topic was valid on the day of the meeting (Start Date of Meeting should fall in Start and End Date of Topic).	Meeting Start Date must be within Topic's Start and End Date.
		Valid Topic is added (based on Status).	Topic must be in Approved status.
		Valid Topic is added (based on Meeting Type). For Meeting Type, we check that the record type of the Meeting matches the Meeting Type selected on a Topic. Note that we had to hardcode a mapping between Meeting Type picklist values on Topic and record type values on Meeting, because the values for both of these fields did not exactly match and we couldn't change them since that field was already released in v2.	Topic is not valid for this type of Meeting.

Button (from which the rule should fire)	Status Transition	Rule	Validation Message
		Valid Topic is added (based on Product). Topic Product should match Budget Product.	Topic Product does not match Budget Product.
		Topic's Account Record Type should match attendees' added to Meeting.	Meeting Accounts' Record Type should match with Topic Account Record Type.
		Topic's Account Specialty should match attendees' added to Meeting.	Meeting Accounts' Specialty should match with Topic Account Specialty.
		Number of speakers matches the min # of speakers (and is less than the max) allowed by the Topic.	Number of Speakers must be within Topic's Min. and Max. Number of Speakers.
		Meeting should have Account Attendee.	Must add at least one Attendee.
		Meeting should have estimates.	Estimates must be added to the Meeting.
		Meeting should have estimate allocations.	Estimates must be allocated.

Button (from which the rule should fire)	Status Transition	Rule	Validation Message
		Suggested Meal field on Topic for the Meeting should match the Meal Type on Meeting Location.	Your Meeting Location 'Meal Type' does not match the 'Suggested Meal' on Topic.
		Meeting Type on Expense Type object should match the record type of the Meeting.	Expense Type is not valid for this type of Meeting.
		Minimum # of Attendees were added to the Meeting as defined on selected Meeting Topic.	You must select a minimum of {MeetingTopic.Min Attendees} Attendee(s) as defined in the Meeting Topic.
		Difference between Meeting date and today's date must be less than or equal to Set Lead Time (Lead_Time.SpeakerMeeting)	You do not have enough lead time to plan this Meeting, you must plan {value of Lead_Time.SpeakerMeeting} day(s) prior to Meeting.
		Sum of all estimated allocations for each Account Attendee should not exceed the set value (Max_Est_Amnt_Allowed_Acct_Attendee)	The following Account Attendees have exceeded the maximum allowed estimated spend for this Meeting: {Attendee Names}

Button (from which the rule should fire)	Status Transition	Rule	Validation Message
		The sum of Allocations should equal the Amount given on Actual or Estimated Meeting Expenses.	The sum of Allocations is not equal to the Meeting Expense amount. The following Meeting Expenses have incorrect Allocations, please fix before proceeding: <List Meeting Expense name(s)>.
Cancel	Draft >> Cancelled	Actual Expenses should not exist if cancelling.	Cannot cancel Meeting because an Actual Expense has been added.
Approve	Pending Approval >> Approved	Meeting Dates must be in the future	Start and End Dates must be in the future.
		If F&B Provided By field = Caterer, a Caterer Meeting Location must be added.	Caterer location must be added when caterer is providing food.
		Valid location added (location is chosen and is not in 'Inactive' status on Location object or Account Address object (Is Active flag)).	Location must be chosen and cannot be inactive.

Button (from which the rule should fire)	Status Transition	Rule	Validation Message
		Topic was valid on the day of the meeting (Start Date of Meeting should fall in Start and End Date of Topic).	Meeting Start Date must be within Topic's Start and End Date.
		Valid Topic is added (based on Status).	Topic must be in "Approved" status.
		Valid Topic is added (based on Meeting Type). For Meeting Type, we check that the record type of the Meeting matches the Meeting Type selected on a Topic. Note that we had to hardcode a mapping between Meeting Type picklist values on Topic and record type values on Meeting, because the values for both of these fields did not exactly match and we couldn't change them since that field was already released in v2.	Topic is not valid for this type of Meeting
		Valid Topic is added (based on Product). Topic Product should match Budget Product.	Topic Product does not match Budget Product.
		Topic's Account Record Type should match attendees' added to Meeting.	Meeting Accounts' Record Type should match with Topic Account Record Type.

Button (from which the rule should fire)	Status Transition	Rule	Validation Message
		Topic's Account Specialty should match attendees' added to Meeting.	Meeting Accounts' Specialty should match with Topic Account Specialty.
		Number of speakers matches the min # of speakers (and is less than the max) allowed by the Topic.	Number of Speakers selected must be greater than Min. Speakers defined on Topic and less than Max. Speakers defined on Topic.
		Meeting should have Account Attendee.	Must add at least one Attendee.
		Meeting should have estimates.	Estimates must be added to the Meeting.
		Meeting should have estimate allocations.	Estimates must be allocated.
		Suggested Meal field on Topic for the Meeting should match the Meal Type on Meeting Location.	Your Meeting Location 'Meal Type' does not match the 'Suggested Meal' on Topic.
		Meeting Type on Expense Type object should match the record type of the Meeting.	Expense Type is not valid for this type of Meeting.

Button (from which the rule should fire)	Status Transition	Rule	Validation Message
		Minimum # of Attendees were added to the Meeting as defined on selected Meeting Topic.	You must select a minimum of {MeetingTopic.Min Attendees} Attendee(s) as defined in the Meeting Topic.
		Difference between Meeting date and today's date must be less than or equal to Set Lead Time (Lead_Time.SpeakerMeeting)	You do not have enough lead time to plan this Meeting, you must plan {value of Lead_Time.SpeakerMeeting} day(s) prior to Meeting.
		Sum of all estimated allocations for each Account Attendee should not exceed the set value (Max_Est_Amnt_Allowed_Acct_Attendee)	The following Account Attendees have exceeded the maximum allowed estimated spend for this Meeting: {Attendee Names}
Reject	Pending Approval >> Draft	N/A	N/A
Execute	Approved >> In Execution	Meeting start date must be day of or later than execution date.	Meeting can be set to In Execution only on the day of the Meeting or later.

Button (from which the rule should fire)	Status Transition	Rule	Validation Message
		Speakers must accept.	Speakers must be set to "Accepted" Invitation Status.
		Locations must be confirmed.	Meeting Locations must be set to "Confirmed" status.
		The sum of Allocations should equal the Amount given on Actual or Estimated Meeting Expenses.	The sum of Allocations is not equal to the Meeting Expense amount. The following Meeting Expenses have incorrect Allocations, please fix before proceeding: <List Meeting Expense name(s)>.
Conclude	In Execution >> Concluded	Meeting dates are in the past.	Meeting date must be in the past to conclude.

Button (from which the rule should fire)	Status Transition	Rule	Validation Message
		The sum of Allocations should equal the Amount given on Actual or Estimated Meeting Expenses.	The sum of Allocations is not equal to the Meeting Expense amount. The following Meeting Expenses have incorrect Allocations, please fix before proceeding: <List Meeting Expense name(s)>.
Close	Concluded >> Closed	Actual Expenses must be added.	Actual Expenses must be added.
		Actual Expenses must be allocated. We consider the Distribution Type on Expense Type object here. Only Expense that can be allocated are checked.	Actual Expenses must be allocated.
		Attendees must have Attendance Status.	Attendees/Speakers/Colleagues must have Attendance Status set.

Button (from which the rule should fire)	Status Transition	Rule	Validation Message
		The sum of Allocations should equal the Amount given on Actual or Estimated Meeting Expenses.	The sum of Allocations is not equal to the Meeting Expense amount. The following Meeting Expenses have incorrect Allocations, please fix before proceeding: <List Meeting Expense name(s)>.

Displays & Exhibits Business Rules (OCE9 Package)

Button (from which the rule should fire)	Status Transition	Rule	Validation Message
Submit for Approval	Draft >> Pending Approval	Meeting Dates must be in the future.	Start and End Dates must be in the future.
		Valid location added (location is chosen and is not in 'Inactive' status on Location object or Account Address object (Is Active flag)).	Location must be chosen and cannot be inactive.

Button (from which the rule should fire)	Status Transition	Rule	Validation Message
		Topic was valid on the day of the meeting (Start Date of Meeting should fall in Start and End Date of Topic).	Meeting Start Date must be within Topic's Start and End Date.
		Valid Topic is added (based on Status).	Topic must be in Approved status.
		Valid Topic is added (based on Meeting Type). For Meeting Type, we check that the record type of the Meeting matches the Meeting Type selected on a Topic. Note that we had to hardcode a mapping between Meeting Type picklist values on Topic and record type values on Meeting, because the values for both of these fields did not exactly match and we couldn't change them since that field was already released in v2. and we couldn't change them since that field was already released in v2.	Topic is not valid for this type of Meeting.
		Valid Topic is added (based on Product). Topic Product should match Budget Product.	Topic Product does not match Budget Product.
		Meeting should have estimates.	Estimates must be added to the Meeting.

Button (from which the rule should fire)	Status Transition	Rule	Validation Message
		Meeting Type on Expense Type object should match the record type of the Meeting.	Expense Type is not valid for this type of Meeting.
		Difference between Meeting date and today's date must be less than or equal to Set Lead Time (Lead_Time.Displays&Exhibits).	You do not have enough lead time to plan this Meeting, you must plan {value of Lead_Time.Displays&Exhibits} day(s) prior to Meeting.
Cancel	Approved or In Execution >> Cancelled	Actual Expenses should not exist if cancelling.	Cannot cancel Meeting because an Actual Expense has been added.
Approve	Pending Approval >> Approved	Meeting Dates must be in the future	Start and End Dates must be in the future.
		Valid location added (location is chosen and is not in 'Inactive' status on Location object or Account Address object (Is Active flag)).	Location must be chosen and cannot be inactive.

Button (from which the rule should fire)	Status Transition	Rule	Validation Message
		Topic was valid on the day of the meeting (Start Date of Meeting should fall in Start and End Date of Topic).	Meeting Start Date must be within Topic's Start and End Date.
		Valid Topic is added (based on Status).	Topic must be in Approved status.
		Valid Topic is added (based on Meeting Type). For Meeting Type, we check that the record type of the Meeting matches the Meeting Type selected on a Topic. Note that we had to hardcode a mapping between Meeting Type picklist values on Topic and record type values on Meeting, because the values for both of these fields did not exactly match and we couldn't change them since that field was already released in v2.	Topic is not valid for this type of Meeting.
		Valid Topic is added (based on Product). Topic Product should match Budget Product.	Topic Product does not match Budget Product.
		Meeting should have estimates.	Estimates must be added to the Meeting.

Button (from which the rule should fire)	Status Transition	Rule	Validation Message
		Meeting Type on Expense Type object should match the record type of the Meeting.	Expense Type is not valid for this type of Meeting.
		Difference between Meeting date and today's date must be less than or equal to Set Lead Time (Lead_Time.Displays&Exhibits).	You do not have enough lead time to plan this Meeting, you must plan {value of Lead_Time.Displays&Exhibits} day(s) prior to Meeting.
Reject	Pending Approval >> Draft	N/A	N/A
Execute	Approved >> In Execution	Meeting start date must be day of or later than execution date.	Meeting can be set to In Execution only on the day of the Meeting or later.
		Speakers must accept.	Speakers must be set to "Accepted" Invitation Status.

Button (from which the rule should fire)	Status Transition	Rule	Validation Message
		Locations must be confirmed.	Meeting Locations must be set to "Confirmed" status.
Conclude	In Execution >> Concluded	Meeting dates are in the past.	Meeting date must be in the past to conclude.
Close	Concluded >> Closed	Actual Expenses must be added.	Actual Expenses must be added.

HCP Sponsorship Business Rules (OCE9 Package)

Button (from which the rule should fire)	Status Transition	Rule	Validation Message
Submit for Approval	Draft >> Pending Approval	Meeting Dates must be in the future.	Start and End Dates must be in the future.

Button (from which the rule should fire)	Status Transition	Rule	Validation Message
		Valid location added (location is chosen and is not in 'Inactive' status on Location object or Account Address object (Is Active flag)).	Location must be chosen and cannot be inactive.
		Topic was valid on the day of the meeting (Start Date of Meeting should fall in Start and End Date of Topic).	Meeting Start Date must be within Topic's Start and End Date.
		Valid Topic is added (based on Status).	Topic must be in Approved status.
		Valid Topic is added (based on Meeting Type). For Meeting Type, we check that the record type of the Meeting matches the Meeting Type selected on a Topic. Note that we had to hardcode a mapping between Meeting Type picklist values on Topic and record type values on Meeting, because the values for both of these fields did not exactly match and we couldn't change them since that field was already released in v2.	Topic is not valid for this type of Meeting.
		Valid Topic is added (based on Product). Topic Product should match Budget Product.	Topic Product does not match Budget Product.
		Topic's Account Record Type should match attendees' added to Meeting.	Meeting Accounts' Record Type should match with Topic Account Record Type.

Button (from which the rule should fire)	Status Transition	Rule	Validation Message
		Topic's Account Specialty should match attendees' added to Meeting.	Meeting Accounts' Specialty should match with Topic Account Specialty.
		Meeting should have estimates.	Estimates must be added to the Meeting.
		Meeting Type on Expense Type object should match the record type of the Meeting.	Expense Type is not valid for this type of Meeting.
		Minimum # of Speakers were added to the Meeting as defined on selected Meeting Topic.	Number of Speakers must be within Topic's Min. and Max. Number of Speakers.
		Difference between Meeting date and today's date must be less than or equal to Set Lead Time (Lead_Time.HCPSPonsorship).	You do not have enough lead time to plan this Meeting, you must plan at least {value of Lead_Time.HCPSPonsorship} day(s) prior to Meeting.

Button (from which the rule should fire)	Status Transition	Rule	Validation Message
		The sum of Allocations should equal the Amount given on Actual or Estimated Meeting Expenses.	The sum of Allocations is not equal to the Meeting Expense amount. The following Meeting Expenses have incorrect Allocations, please fix before proceeding: <List Meeting Expense name(s)>.
Cancel	Approved or In Execution >> Cancelled	Actual Expenses should not exist if cancelling.	Cannot cancel Meeting because an Actual Expense has been added.
Approve	Pending Approval >> Approved	Meeting Dates must be in the future	Start and End Dates must be in the future.
		Valid location added (location is chosen and is not in 'Inactive' status on Location object or Account Address object (Is Active flag)).	Location must be chosen and cannot be inactive.

Button (from which the rule should fire)	Status Transition	Rule	Validation Message
		Topic was valid on the day of the meeting (Start Date of Meeting should fall in Start and End Date of Topic).	Meeting Start Date must be within Topic's Start and End Date.
		Valid Topic is added (based on Status).	Topic must be in Approved status.
		Valid Topic is added (based on Meeting Type). For Meeting Type, we check that the record type of the Meeting matches the Meeting Type selected on a Topic. Note that we had to hardcode a mapping between Meeting Type picklist values on Topic and record type values on Meeting, because the values for both of these fields did not exactly match and we couldn't change them since that field was already released in v2.	Topic is not valid for this type of Meeting.
		Valid Topic is added (based on Product). Topic Product should match Budget Product.	Topic Product does not match Budget Product.
		Topic's Account Record Type should match attendees' added to Meeting.	Meeting Accounts' Record Type should match with Topic Account Record Type.

Button (from which the rule should fire)	Status Transition	Rule	Validation Message
		Topic's Account Specialty should match attendees' added to Meeting.	Meeting Accounts' Specialty should match with Topic Account Specialty.
		Meeting should have estimates.	Estimates must be added to the Meeting.
		Meeting Type on Expense Type object should match the record type of the Meeting.	Expense Type is not valid for this type of Meeting.
		Minimum # of Speakers were added to the Meeting as defined on selected Meeting Topic.	Number of Speakers must be within Topic's Min. and Max. Number of Speakers.
		Difference between Meeting date and today's date must be less than or equal to Set Lead Time (Lead_Time.HCPSPonsorship).	You do not have enough lead time to plan this Meeting, you must plan {value of Lead_Time.HCPSPonsorship} day(s) prior to Meeting.
Reject	Pending Approval >> Draft	N/A	N/A

Button (from which the rule should fire)	Status Transition	Rule	Validation Message
Execute	Approved >> In Execution	Speakers must have invite status.	Speakers must have Invitation Status set.
		The sum of Allocations should equal the Amount given on Actual or Estimated Meeting Expenses.	The sum of Allocations is not equal to the Meeting Expense amount. The following Meeting Expenses have incorrect Allocations, please fix before proceeding: <List Meeting Expense name(s)>.
Conclude	In Execution >> Concluded	Meeting dates are in the past.	Meeting date must be in the past to conclude.

Button (from which the rule should fire)	Status Transition	Rule	Validation Message
		The sum of Allocations should equal the Amount given on Actual or Estimated Meeting Expenses.	The sum of Allocations is not equal to the Meeting Expense amount. The following Meeting Expenses have incorrect Allocations, please fix before proceeding: <List Meeting Expense name(s)>.
Close	Concluded >> Closed	Speakers must have attendance status.	Speakers must have Attendance Status set.
		The sum of Allocations should equal the Amount given on Actual or Estimated Meeting Expenses.	The sum of Allocations is not equal to the Meeting Expense amount. The following Meeting Expenses have incorrect Allocations, please fix before proceeding: <List Meeting Expense name(s)>.

To use the dynamic rules that are related to custom settings (Lead Time, Max Est Amnt Allowed Acct Attendee), you must activate **DbSchema.MeetingValidationSettings_c** and give the proper limit value in MeetingValidationSettings__c object in .json format: e.g. For Lead_Time__c, add {"Speaker_Meeting":30,"HCP_Sponsorship":30,"Displays_Exhibits":30}

Configure Multi-Level Approvals for Meeting (OCE9 Package)

Some OCE customers may require multi-level approval processes for their Meetings. For example, a client may require that any Meetings that have total estimated expenses exceeding \$1,000 need to have an advanced approver after the Meeting goes through the normal approval. Also, they need this \$1,000 to be configurable.

Follow the steps below to configure this logic.

1. An extra picklist value (e.g. Advanced Pending Approval) should be added to the Status__c field in Meeting object.
2. An additional approver role (e.g. Advanced Approver) should be set up in the Type__c field of the Meeting Member object.
3. Create a field in MeetingValidationSettings__c Custom Settings object (e.g. Advanced_Approver_Threshold__c). This will be the field to read to determine at what point advanced approval is needed for the Meeting.
4. Assign a value to the new field in the following format: e.g. {"Speaker_Meeting":1000,"HCP_Sponsorship":1500,"Rep_Presentation":1500}.
5. Configure the metadata in the Workflow Admin Console for the new Advanced Approver role with all the appropriate status picklist values needed.
6. Configure the metadata in the Workflow Admin Console for the multi-level approval logic (e.g. for Approver in **Pending Approval** status, set up 2 actions: one is **Approve** (connected to Approved status), one is **Submit for Advanced Approval** (connected to **Advanced Pending Approval** status). For the Advanced Approver in **Advanced Pending Approval** status, set up an action called **Advanced Approve** (connected to **Approved** status)).
7. Configure the trigger on Meeting object to verify that when the status changes, the total expense of the Meeting matches the threshold setting (configured in step 4).
8. Add a new function in Meeting Validation record in Custom Script object to check whether the total expense of the Meeting matches the threshold setting. For the function, see the sample below:

```

switch (meetingType) {
  case "POC_RecordType":
    if (fromStatus == "PendingApproval" && toStatus == "Approved") {
      return [
        isTheToalEstimateValidForApproved()
      ];
    } else if (fromStatus == "PendingApproval" && toStatus == "AdvancedPendingApproval") {
      return [
        isTheToalEstimateValidForRMAproved()
      ];
    }
    break;
}

```

```

function isTheToalEstimateValidForRMAproved(){
  let entity = "OCE__MeetingValidationSettings__c";
  let field = "Advanced_Approver_Threshold__c";

  let meetingValidationSettings = db.noNs_rowsByEntity(entity)[0];
  let advancedApproverThreshold = meetingValidationSettings.noNs_stringValue(field);
  var advancedApproverThresholdJSON ;
  var advancedApproverThresholdValue;

  if (advancedApproverThreshold) {
    advancedApproverThresholdJSON = JSON.parse(advancedApproverThreshold);
    advancedApproverThresholdValue = advancedApproverThresholdJSON[meetingType];
  }
  if (advancedApproverThresholdValue == undefined) {
    return {
      title: 'Invalid Threshold Data' ,
      isValid: false
    };
  }

  let estimatesTotalAmt = 0;
  let rows = meeting.childRows('meetingExpense__c');
  if(rows.length > 0){
    for (let row of rows) {
      if (row.recordTypeName() == "Estimate") {
        estimatesTotalAmt = estimatesTotalAmt + row.numValue('Amount__c');
      }
    }
  }
}

```

```

    }
}

return {
  title: "Can not move to 'RMAApproved' When total estimate amount is less than the threshold value" ,
  isValid: estimatesTotalAmt >= advancedApproverThresholdValue
};
}

function isTheToalEstimateValidForApproved(){
  let entity = "OCE__MeetingValidationSettings__c";
  let field = "Advanced_Approver_Threshold__c";

  let meetingValidationSettings = db.noNs_rowsByEntity(entity)[0];
  let advancedApproverThreshold = meetingValidationSettings.noNs_stringValue(field);
  var advancedApproverThresholdJSON ;
  var advancedApproverThresholdValue;

  if (advancedApproverThreshold) {
    advancedApproverThresholdJSON = JSON.parse(advancedApproverThreshold);
    advancedApproverThresholdValue = advancedApproverThresholdJSON[meetingType];
  }
  if (advancedApproverThresholdValue == undefined) {
    return {
      title: 'Invalid Threshold Data' ,
      isValid: false
    };
  }

  let estimatesTotalAmt = 0;
  let rows = meeting.childRows('meetingExpense__c');
  if(rows.length > 0){
    for (let row of rows) {
      if (row.recordTypeName() == "Estimate") {
        estimatesTotalAmt = estimatesTotalAmt + row.numValue('Amount__c');
      }
    }
    return {
      title: "Can not move to 'Approved' When total estimate amount is greater than or equal to the threshold value" ,
      isValid: estimatesTotalAmt < advancedApproverThresholdValue
    };
  }
}

```

```
return {  
  title:"",  
  isValid: true  
};
```

Note: For the new created field, as it doesn't have a namespace prefix, please use the functions as below to replace the regular function in Validation script:

"noNs_" functions have been added to query without adding namespace. They work just like their counterparts:

db

- noNs_rowById
- noNs_rowsByEntity
- noNs_query

dbObject

- noNs_stringValue
- noNs_numValue
- noNs_boolValue
- noNs_dateValue
- noNs_setValue

meeting

- noNs_childRows

To provide users with access to the **Meetings** tile in the Admin Console, assign to the users the **OCE.Meetings** custom permission. See [Configuring Admin Console Access](#).

Concur Integration with Meetings (OCE9 Package)

OCE has integrated with SAP Concur. With this comes the ability to assign Expense Reports from Concur to a Meeting Expense and sync information about that Meeting Expense, Meeting Expense Allocations, and Meeting Expense Attachment (receipt) with Concur.

Read on to learn how to configure the OCE Meetings module to work with Concur.

Prerequisites (OCE9 Package)

- Though not mandatory, it is recommended that any Accounts and Users (including Accounts that are linked to Speakers) that will be used as Meeting Members be pre-loaded in Concur. OCE creates Expense Attendees on Concur side in case Meeting Member has no Concur ID populated, however, this consumes resources while syncing Expenses and Allocations, so this recommendation helps increase integration performance.
- Ensure **Meeting Member Populate Fields** (Trigger Handler API Name:OCE9.MeetingMemberPopulateFieldsHandler2) trigger handler is enabled and **MeetingMemberPopulateFieldsHandler** (DEPRECATED)(Trigger Handler API Name:OCE.MeetingMemberPopulateFieldsHandler) is disabled. This will denormalize fields from Account/Speaker/User objects onto the Meeting Member object when creating an Account Attendee/Speaker/Colleague record.
- The following fields will be copied:
 - Account (when creating Account Attendee)
 - First Name
 - Middle Name
 - Last Name
 - City
 - Country
 - State/Province

- Postal Code
- Street Address Line 1
- Street Address Line 2
- Speaker (when creating Speaker)
 - First Name
 - Middle Name
 - Last Name
 - City
 - Country
 - State/Province
 - Postal Code
 - Street Address Line 1
 - Street Address Line 2
- User (when creating Colleague)
 - First Name
 - Middle Name
 - Last Name
 - City

- Country (note: it must be value from value set Countries)
- State/Province (note: it must be value from value set States)
- Postal Code
- Street Address Line 1
- Street Address Line 2

Connect Salesforce and Concur Instances (OCE9 Package)


To get started, you must connect your Salesforce instance with Concur.

- Login to your Concur instance with administrator permissions.
- Find the OCE connector application in the Concur marketplace and install it.
- Open the application and click the Connect button.
- Accept the Privacy Policy and Terms and Conditions.
- Select Salesforce Instance type.
- Enter your Salesforce login ID and password to grant access.
- Connecting multiple OCE-P orgs to one Concur org is not supported per Concur guidelines/limits.

Set Authorization and Base Endpoints (OCE9 Package)


Once your Salesforce and Concur instances are connected, the authorization and base endpoints will be automatically set in Salesforce.

- Assign **OCE9 Concur Admin (OCE9)** and **Concur Admin (QIDC)** permission sets. Ensure OCE Concur Admin (OCE) permission set is not assigned.
 - **OCE9 Concur Admin** includes a Concur Admin custom permission and access to QIDC__CON__CompanyLevelAuthRestResource, ConcurMeetingSettingsController, and ConcurMeetingsJobsManagementController Apex classes.
- Open the **Admin Console** tab.
- Click on the **Concur** tile to open the Concur setup menu.
- Inside the Concur setup menu, navigate to **Concur Data Connector Setup** and click on the button **Navigate to Concur Data Connector Setup** (note that this is taking you to the Data Connector package Admin. Console).

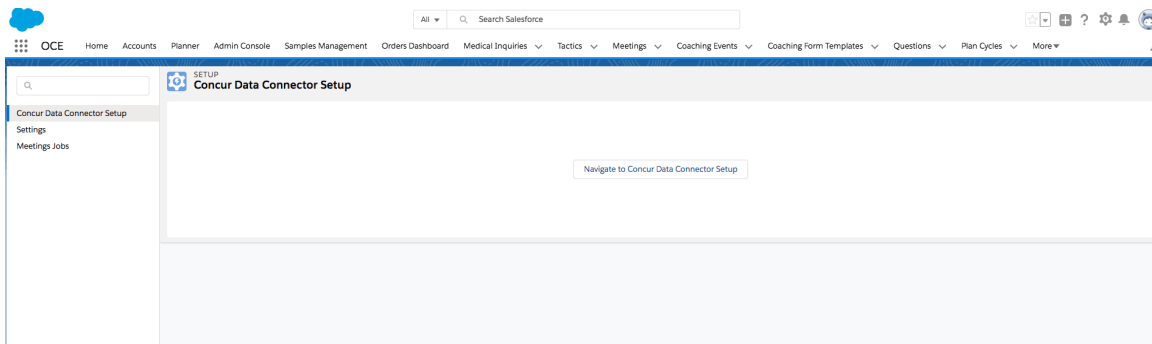

- On the **Credentials** tab of Concur Data Connector Setup, either ensure your Authorization Endpoint and Base Endpoint have been set (these will be populated automatically when connecting the org to Concur), or set up a new one. Based on your geolocation, the Concur API can have different endpoints: <https://developer.concur.com/api-reference/authentication/apidoc.html>
 - US: <https://us.api.concursolutions.com>
 - EU: <https://emea.api.concursolutions.com>
 - China: <https://cn.api.concurcdc.cn>

- Add the Concur Base Endpoint as a Remote Site URL in Salesforce (Setup > Security > Remote Site Settings).

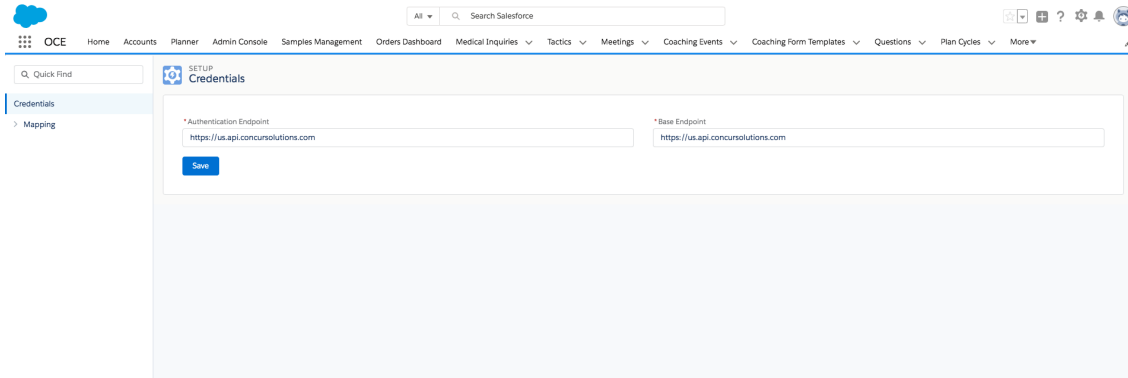

Note:

- If you need the authorization details stored in the org, please raise a case with IQVIA Support.
- If users report the following error while using Concur integration in Meetings, please add a new Remote Site URL in the Remote Site Settings as follows: <https://us2.api.concursolutions.com>

Error: 'Unauthorized endpoint, please check Setup->Security->Remote site settings. endpoint = [https://us2.api.concursolutions.com/api/v3.0/expense/reports?user=adminoce@iqvia-connect-pro.com&approvalStatusCode=A RESU,A NOTF&limit=100&offset=gWmEDXv4\\$s3Js3eu2I\\$pnoTLalZbZ4](https://us2.api.concursolutions.com/api/v3.0/expense/reports?user=adminoce@iqvia-connect-pro.com&approvalStatusCode=A RESU,A NOTF&limit=100&offset=gWmEDXv4$s3Js3eu2I$pnoTLalZbZ4)

Configure Mapping (OCE9 Package)

Congratulations! You've connected Salesforce to Concur. Now it's time to start configuring the Meetings module to work with Concur so users can begin assigning Expense Reports. The first step in this is to map objects and fields in OCE with entities and attributes from Concur, so that the data is saved in the correct place during synchronization.

To configure the field mapping, follow these steps.

Prerequisites: Before setting up the mapping, there is a one-time setup step to create a Concur Mapping static resource and Apex classes, then run an Apex job. This job will prepare a predefined Concur field mapping and transfer any old mapped fields to a new mapping.

- Create Apex Class `ConcurDefaultMappingApplier.cls` on target org using the file available in attachment (archive file).
- Create static resource with name using the `default_mapping.json` from attachment.
 - Name: `ConcurMapping`
 - MIME Type: `application/zip`
- The classes and static resource can be found in the following .zip file.


Note: Refer to the files section of CSH (OCE Personal Library) to find *ConcurDefaultMappingLoader* files.

- The code to execute the job is: `System.enqueueJob(new ConcurDefaultMappingApplier());`

Once that is complete, follow the below steps.

- Open the **Admin Console** tab.
- Click on the **Concur** tile to open Concur setup menu.
- Inside Concur setup menu, navigate to **Concur Data Connector Setup** and click on the button **Navigate to Concur Data Connector Setup**.

Note: This is taking you to the Data Connector package Admin. Console.

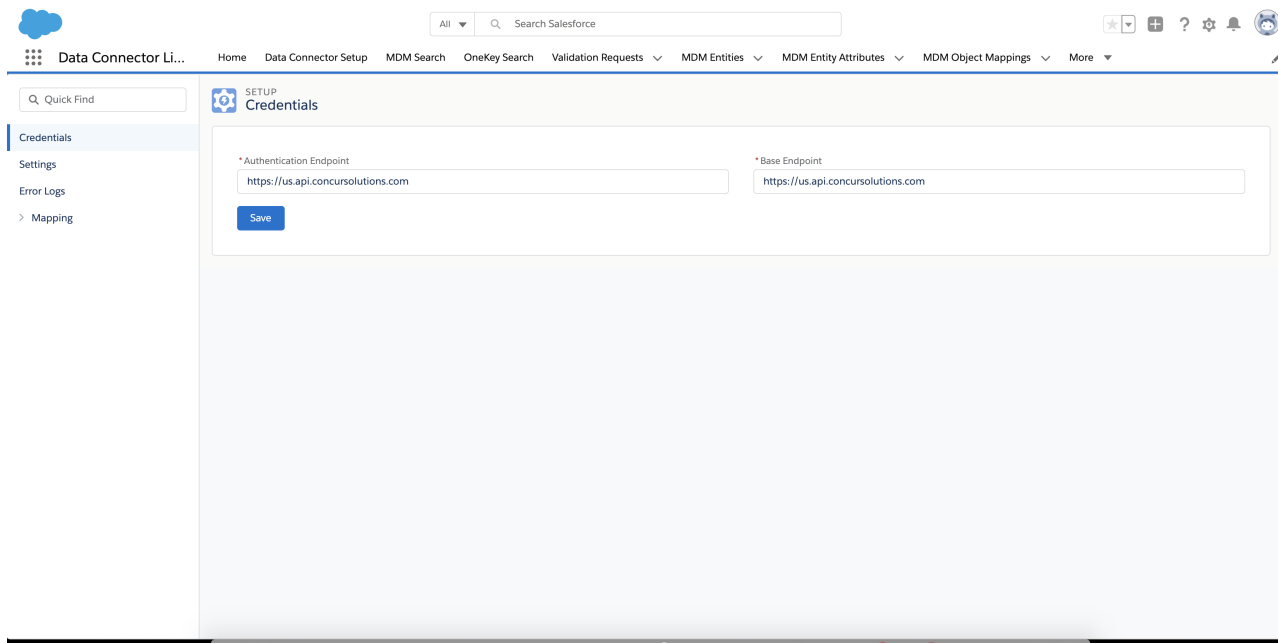

- Under the **Mapping** tab, begin the mapping of IDs for each Concur entity using the below guidelines.
- **Expense Entry** must be mapped to **Meeting Expense** object (this is hardcoded on the UI).
 - Select which Salesforce External Id field must be mapped to the Concur Id field.
 - Mark this entry as Primary Key.
 - Map other Concur fields to Salesforce fields (click Add Field button to add more).
 - Save mapping.

Q Quick Find

SETUP
Expense Attendee

Object Name: MeetingMember Save

CONCUR FIELD	SALESFORCE FIELD	IS PRIMARY KEY	IS PICKLIST	ACTION
Id	ConcurId	☒	☐	
AttendeeTypeID	AttendeeType	☐	☐	X
LastName	Name	☐	☐	

Add Field

Note: When clicking "Add Field", you can select fields that can be mapped from QIDC_CON_ConcurMapping_mdt (record ConcurFieldMapping). This mdt record contains fields for mapping. To add new field(s), update the JSON in this metadata. You can add this at any time regardless of product release/update.

- **Expense Entry Attendee Association** must be mapped to the **Meeting Expense Allocation** object (this is hardcoded on the UI).
 - Select which Salesforce External Id field must be mapped to the Concur Id field.
 - Mark this entry as Primary Key.
 - Map other Concur fields to Salesforce fields (click Add Field button to add more).
 - Save mapping.

Q Quick Find

SETUP
Expense Entry Attendee Association

Object Name: MeetingExpenseAllocation Save

CONCUR FIELD	SALESFORCE FIELD	IS PRIMARY KEY	IS PICKLIST	ACTION
ID	UniqueIntegrationID	☒	☐	X
Amount	Amount	☐	☐	X
N/A	IntegrationStatus	☐	☐	
N/A	IntegrationError	☐	☐	

Add Field

Note:


Certain fields in the Concur column will be marked as N/A, meaning there is a Salesforce field that does not directly correspond with any Concur fields (e.g. Integration Status). These are fields needed in OCE but cannot be sent to Concur; they are displayed on the UI for visual purposes only.

When clicking "Add Field", you can select fields that can be mapped from QIDC_CON_ConcurMapping_mdt (record ConcurFieldMapping). This mdt record contains fields for mapping. To add new field(s), update the JSON in this metadata. You can add this at any time regardless of product release/update.

- **User** must be mapped to the **User** object (this is hardcoded on the UI).
 - Select which Salesforce unique field must be mapped to the Concur User 'Login Id' field.
 - Mark this entry as Primary Key.
 - Save mapping.

Note:

No other fields can be mapped for User object.

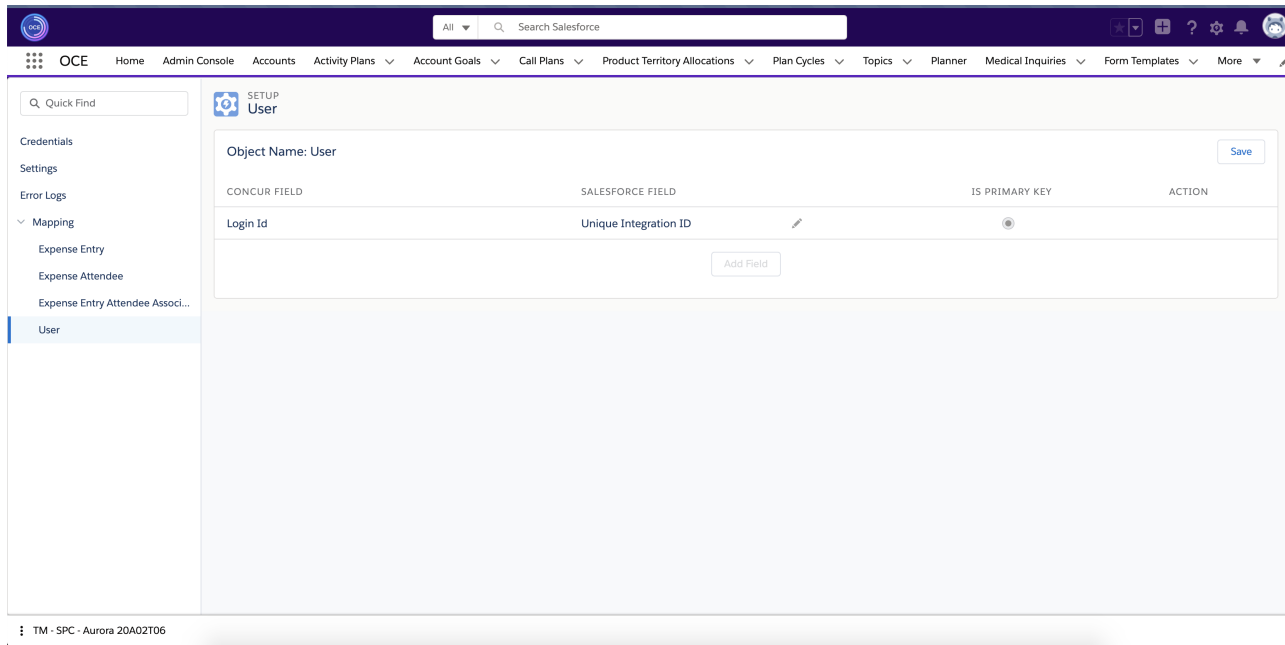

Configure Picklist Fields Mapping

In case if you have picklist fields configured on field mapping screen, you need to configure picklist items mapping as well. Currently, this feature is only supported for the Meetings module.

Prerequisites:

- Ensure "OAuth 2.0 Application Management" link is enabled (Administration > Company > Company Admin > Authentication Administration). Please ask Concur support to enable this if needed.
- Ensure "LIST", "spend.list.read" and "spend.listitem.read" scopes are enabled in Concur application settings.

To configure picklist mapping:

- Select a Concur field with data type List and a Salesforce picklist field, then set Is Picklist checkbox to true. An "Open picklist mapping" link will appear.

- Open picklist mapping window and choose a Concur list. Values for this list will be loaded automatically. Choose a Concur value, and a Salesforce value.

- Add rows for each pair of Concur-Salesforce picklist items. While adding a new row, the previously selected Concur list will be preserved, but can be changed if required.


Note:

- By design, only 1-1 picklist items mapping is supported. It is not allowed to duplicate either Concur value or Salesforce value.
- "Is picklist" checkbox is enabled only for Salesforce picklist fields. Multipicklist fields are not supported. Data type of Concur fields is not validated automatically.
- Keep in mind, that on Concur side multiple forms can be assigned for Expense Entry and one custom field can be associated with different lists on different forms.

Enable Concur Integration in OCE (OCE9 Package)

Now that you've finished your mappings, you must enable Concur in your OCE org, which will allow your users to assign Expense Reports in Meetings.

- Login to your OCE environment with the user that has the **OCE9 Concur Admin (OCE9)** and **Concur Admin (QIDC)** permission sets. (Ensure **OCE Concur Admin (OCE)** permission set is not assigned.)
- Open the **Admin Console** tab.
- Click on the **Concur** tile to open Concur setup menu.
- Navigate to the **Settings** tab and enable the **Sync Meeting Expense to Concur** option. Save changes.

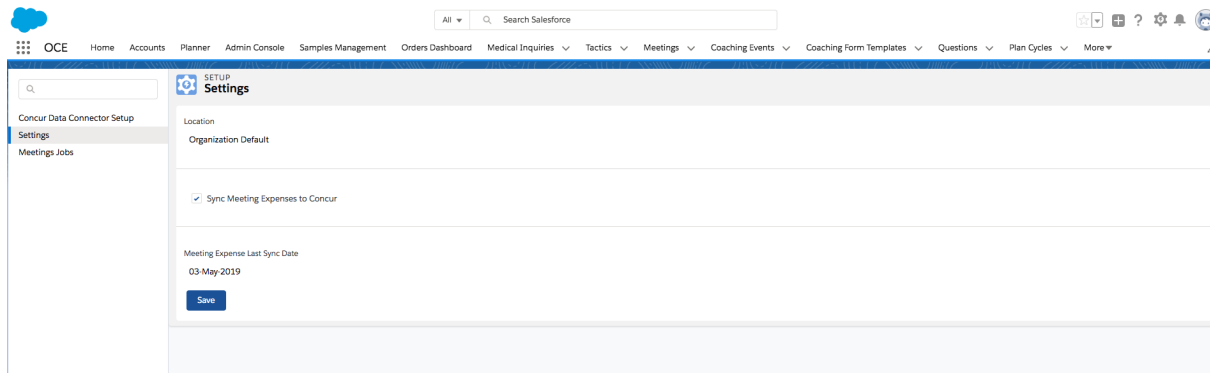

- From the **Meetings Jobs** tab, schedule jobs to pull information from Concur. There are 3 jobs:
 - Pull Meeting Expenses
 - Pull Meeting Expense Allocations
 - Check for deleted Expense Reports



HomeAccountsPlannerAdmin ConsoleSamples ManagementOrders DashboardMedical InquiriesTacticsMeetingsCoaching EventsCoaching Form TemplatesQuestionsPlan CyclesMore

AllSearch Salesforce



Concur Data Connector Setup

Settings

Meetings Jobs

SETUP

Meetings Jobs

Meetings Job

Pull changes from Concur

Run NowSchedule

JOB ID	JOB NAME	NUMBER OF FAILURES	NO. OF SUCCESSES	STATUS	START DATE/TIME	END TIME	TOTAL TIME (SEC)
70746000039CDXAAK	Pull Meeting Expense Allocations	12	0	Completed	03/05/2019, 04:59	04:59	6
70746000039CDF1AAK	Pull Meeting Expenses	0	10	Completed	03/05/2019, 04:59	04:59	6
707460000399OO4AAQ	Pull Meeting Expense Allocations	6	0	Completed	03/05/2019, 01:55	01:55	9
707460000399NBAAW	Pull Meeting Expenses	0	6	Completed	03/05/2019, 01:55	01:55	9
70746000038nPiDAE	Pull Meeting Expense Allocations	4	0	Completed	02/05/2019, 11:53	11:53	7
70746000038nPgCAAU	Pull Meeting Expenses	0	3	Completed	02/05/2019, 11:53	11:53	10
70746000038nLSxAM	Pull Meeting Expense Allocations	5	0	Completed	02/05/2019, 11:36	11:36	8
70746000038nLdJAAU	Pull Meeting Expenses	0	3	Completed	02/05/2019, 11:36	11:36	8
70746000038nLurAAE	Pull Meeting Expense Allocations	5	0	Completed	02/05/2019, 11:25	11:25	9
70746000038nJDXAA2	Pull Meeting Expenses	0	3	Completed	02/05/2019, 11:25	11:25	14

First Previous Next Last

Page 1 of 2

- Ensure the following trigger handler configuration:

Active Handler Label	Active Handler API Name	Disabled Handler Label	Disabled Handler API Name
Attachment To Concur	OCE9.AttachmentToConcurHandler2	MeetingExpensesToConcurHandler (DEPRECATED)	OCE.MeetingExpensesToConcurHandler (DEPRECATED)
Meeting Expense Allocation To Concur	OCE9.MeetingExpenseAllocationToConcurHandler2	MeetingExpenseAllocationToConcurHandler (DEPRECATED)	OCE.MeetingExpenseAllocationToConcurHandler (DEPRECATED)
Meeting Expenses To Concur	OCE9.MeetingExpensesToConcurHandler2	AttachmentToConcurHandler (DEPRECATED)	OCE.AttachmentToConcurHandler (DEPRECATED)

- Make DB Schema ConcurSettings_c active.

Note: UI components for Concur are part of Meeting Expenses UI components. This functionality will be called when using 'Meeting Expenses Lwc' (or 'MeetingExpensesNew') (DEPRECATED) component from OCE9.

Setup Users, Attendees and Expense Types (OCE9 Package)

- Based on the Concur User mapping, update your OCE users with the Concur Login Id.
- Based on the Concur Expense Attendee mapping, update your OCE Accounts (for Meeting Members of Account Attendee type) and User (for Meeting Members of Colleague type) with Concur Attendee Ids.
 - Ensure the Concur Attendee Type Id is mapped to a field on Meeting Member object. This field should be populated with Attendee Type values from their Concur instance. The picklist value API name should match the Concur Attendee Type code.
- For Expense Type records with record type = Line Item, setup the required values in the fields **Type Code** and **Payment Type ID** (can be retrieved by calling Expense Group Configurations API <https://developer.concur.com/api-reference/expense/expense-report/expense-group-configurations.html>).

Note: You must raise a case with IQVIA Support (providing Concur Administrator username and password) to retrieve these IDs as this information is not accessible to clients.

- Type Code must have a value from the Concur Expense Types dictionary field “Code”.
- Payment Type ID must have a value from the Concur Payment Types dictionary field “Id”.

Note: For clients who have made Location ID mandatory, these can be retrieved by calling Locations API <https://developer.concur.com/api-reference/common/locations/v3.locations.html>. As with Type Code and Payment Type ID, you must raise a case with IQVIA Support (providing Concur Administrator username and password) to retrieve these IDs.

Detailed Description of Jobs and Field Mapping (OCE9 Package)

Push Information to Concur from SF

ConcurAllocationSyncJob (proceeds 10 MeetingExpenseAllocation__c records in chunk)

1. Gets user Concur ID (based on the mapping configuration on the User) from the SF User record.
2. Gets related Meeting Members and Meeting Expenses.
3. Syncs Meeting Members with Concur only if they have empty ConcurId__c (see mapping below where this field can be found for different record types).

Field Mapping

If Meeting Member record type Attendee

- if MeetingMember__c.Customer__r.IsPersonAccount equals true MeetingMember__c.Customer__r.Name => LastName
else
- MeetingMember__c.Customer__r.FirstName => FirstName
- MeetingMember__c.Customer__r.LastName => LastName
- MeetingMember__c.Customer__r.Id => ExternalID
- MeetingMember__c.Customer__r.ConcurId__c => ID
- Attendee Type value from mapping configuration on Expense Attendee tab => attendeeTypeID

If Meeting Member record type Speaker

- if MeetingMember__c.Speaker__r.Account__c is not empty get mapping the same as for Attendee record type
- else if MeetingMember__c.Speaker__r.User__c is not empty get mapping the same as for Colleague record type
- else if

- MeetingMember__c.Speaker__r.Name => LastName
- MeetingMember__c.Speaker__r.ConcurId__c => ID
- Attendee Type value from mapping configuration on Expense Attendee tab => attendeeTypeID

If Meeting Member record type Colleague

- MeetingMember__c.Colleague__r.CompanyName => Company
- MeetingMember__c.Colleague__r.FirstName => FirstName
- MeetingMember__c.Colleague__r.LastName => LastName
- MeetingMember__c.Colleague__r.Suffix => Suffix
- MeetingMember__c.Colleague__r.Title => Title
- MeetingMember__c.Colleague__r.ConcurId__c => ID
- Attendee Type value from mapping configuration on Expense Attendee tab => attendeeTypeID

If Meeting Member record type Non-Profiled Attendee

- MeetingMember__c.Name => LastName
- MeetingMember__c.ConcurId__c => ID
- Attendee Type value from mapping configuration on Expense Attendee tab => attendeeTypeID

1. Sync Meeting Expense Allocations to Concur

2. If Concur ID (based on the mapping on Expense Entry Attendee Association tab) is empty, system creates the record in Concur.

Field Mapping

- MeetingExpenseAllocation__c.Amount__c/MeetingExpenseAllocation__c.CurrencyAmount__c => Amount
- MeetingExpenseAllocation__c.MeetingMember__r.(concur id) => AttendeeID
- MeetingExpenseAllocation__c.MeetingExpense__c.(concur id) => EntryID

If success - update Meeting Expense Allocation Concur ID field with value from Concur and IntegrationStatus__c = 'Sent'

1. If Concur ID is not empty, system updates record in Concur.
2. If any exception happens on any step above, system will throw exception and update Meeting Expense Allocation with IntegrationStatus__c equal to 'Failed to Send' and IntegrationError__c equal to exception error message.
3. Update Meeting Expense Allocation and Meeting Members (Account, Speaker, Meeting Member, User) in SF database.
4. At the end of Meeting Expense Allocation sync, system will run either ConcurAttachmentSyncJob or ConcurContentDocumentSyncJob based on the latest date of the related Meeting Expense record Attachment or ContentVersion (ContentDocument).

ConcurAttachmentSyncJob

1. Add Attachment (receipt) to Expense record in Concur.
 - All information regarding receipt process is saved on the related Meeting Expense record in the field ExpenseReceiptInformation__c.
2. At the end of attachment sync, system runs ConcurContentDocumentSyncJob.

ConcurContentDocumentSyncJob

- Add ContentVersion (receipt) to Expense record in Concur.
- All information regarding receipt process is saved on the related Meeting Expense record in the field ExpenseReceiptInformation__c.

Pull Changes from Concur to SF

1. In Admin Console - Concur - Meeting Jobs tab, run schedule to pull changes from Concur instance.
2. ConcurCheckRemovedReportsBatch job (check for deleted reports) is started with ConcurExpenseReportsReceiver job.

ConcurCheckRemovedReportsBatch (name - Check for deleted reports)

1. Process all Meeting Expenses (10 records in each chunk) where MeetingExpense__c.ExternalExpenseReportID__c is not empty and MeetingExpense__c.ExpenseReportApprovalStatus__c has one of these values('A_NOTF','A_RESU');
2. Get Expense Report information from Concur for each Meeting Expense record.
3. If no Expense Report is found, the system clears reference to respective Concur records and Concur Expense Report from the related Meeting Expense and their Meeting Expense Allocations.

ConcurExpenseReportsReceiver

1. Check if Expense Report was updated from the last sync (ConcurSettings__c.MeetingExpenseLastSyncDate__c). (If any item is updated below Expense Report, the Last Modified Date is also updated on the Expense Report in Concur.) Get all assigned Expenses for this Report.
2. At the end system runs PullConcurExpensesBatch, which pulls Meeting Expenses from Concur.

PullConcurExpensesBatch (name - Pull Meeting Expenses)

1. For each report, pulls all Expenses from Concur and updates only those that exist in Salesforce.
2. Additionally, updates MeetingExpense__c.ExpenseReportApprovalStatus__c, MeetingExpense__c.ExpenseReportInformation__c with actual Report information and update MeetingExpense__c.ExpenseReceiptInformation__c if related receipt was deleted in Concur.
3. Clears reference from Meeting Expense to respective Concur record if Expense was deleted in Concur and updates MeetingExpense__c.IntegrationStatus__c with 'Deleted' value.
4. On finish, system runs PullConcurExpenseAllocationsBatch, which pulls Meeting Expense Allocations from Concur.

PullConcurExpenseAllocationsBatch (name - Pull Meeting Expense Allocations)

1. Processes all related Meeting Expense Allocations and updates MeetingExpenseAllocation__c.Amount__c/MeetingExpenseAllocation__c.CurrencyAmount__c from respective Concur records.
2. If respective Concur record was deleted, clears reference to it from Meeting Expense Allocation and updates MeetingExpenseAllocation__c.IntegrationStatus__c with 'Deleted' value.

Configure Concur Sync to Work With 'Use Queueable for System Job' Setting for Mobile Sync (OCE9 Package)

When Concur integration with Meetings is enabled in combination with the Sync setting "Use Queueable for System Job", which helps mobile sync work more efficiently, a sync issue can occur. In the Meetings-Concur sync scenario, there are two jobs involved in this process, one for Sync process and another for Concur. This results in a Salesforce Queueable Job limit error. Thus, a handler was built to allow orgs to use Concur integration with Meetings along with the "Use Queueable for System Job" setting enabled.

To enable this:

Activate **Send Data To Concur** (Trigger Handler API Name: OCE9.SendDataToConcurHandler) trigger handler on DataChangeEvent object.

Note: Ensure that the basic Concur configuration is done for OCE9.

Use Cases (OCE9 Package)

Assign Expense Reports to Meeting Expenses

On both iPad and Salesforce, users can assign an Expense Report to a Meeting Expense (of type Actual) once the above mentioned steps have been completed. To do this, the user will do the following:

- Create a Meeting and add an Actual type of Meeting Expense.
- On mobile, they will tap a header called **Expenses** to see a list of Actual Expenses added to the Meeting.
- On Salesforce, they will tap a button called **Actions** where they can then choose an option **Add Expense Report**. Selecting this will open a modal with a list of Actual Expenses to select.
- The user can choose one or multiple Actual Expenses at a time to assign an Expense Report. On mobile they will do this by selecting the expenses and then tapping a button, **+ Expense Report**, which will launch a modal with a list of Expense Reports owned by the user and in Not Submitted status from Concur. They can then select a single Expense Report that will get assigned to all the selected Meeting Expenses.
- On Salesforce they will accomplish assigning the Expense Report by clicking a **Next** button in the modal after they have chosen their expenses, which will open the list of Expense Reports owned by the user and in Not Submitted status from Concur. They can then select a single Expense Report that will get assigned to all the selected Meeting Expenses.
- There is also an option on both mobile and Salesforce to directly assign an Expense Report in line with the Actual Expense from the Meeting Expense table.

Note: Expense Reports can only be assigned to Meeting Expenses created by the user. If there is an Organizer and Co-organizer on a Meeting that are both creating Meeting Expenses, they cannot assign Expense Reports to Meeting Expenses not created by them.

Once an Expense Report gets approved on Concur side, OCE is not doing any verification to prevent the user from changing the Expense Report/Meeting Expenses/Allocations/Receipts on OCE side.

Synchronize Meeting Expenses, Meeting Expense Allocations, Meeting Members and Receipts with Concur (OCE9 Package)

When the user has assigned their Expense Reports to Meeting Expenses, the below conditions must be satisfied to synchronize them with Concur:

- For all objects (Meeting Expense, Meeting Expense Allocation, Meeting Expense Attachment) to send:
 - Meeting must have a status of "Concluded" or "Closed".
 - "Expense Report Approval Status" field on Meeting Expense must be "A_NOTF" (equals to "Not submitted") or "A_RESU" (equals to "Needs to be resubmitted").
 - "External Expense Report ID" field on Meeting Expense must not be blank.
 - "Paid by" field on Meeting Expense must equal "Rep".
- Considerations for Meeting Expense Allocation:
 - Parent Meeting Expense must already be synced with Concur.
 - Related Meeting Member must meet the below mentioned conditions.
- Considerations for Meeting Members:
 - For type "Colleague": related User record must have non-blank Integration Id (field name is defined in the mapping for User object).
 - For type "Account Attendee": related Account must have non-blank Integration Id (field name is defined in the mapping for Account object).
 - For type "Non Profiled Attendee": Integration Id field must be defined in the mapping for object Meeting Member. In case this field is blank, new Expense Attendee record will be created on Concur side and its Id will be fulfilled in this field during sync.
 - For type "Speaker":

- If the record has associated Account: synchronization will only be successful if the Account has an Integration Id (like Account Attendee).
- If the record doesn't have associated Account: the behavior will be similar to Non Profiled Attendees with the only difference being that mapping must be created for object Speaker.
- Considerations for receipts (Meeting Attachments):
 - Receipts will be synchronized automatically together with Meeting Expenses.
 - The following file types are supported: jpeg, jpg, png, pdf.
 - The maximum file size allowed is 10MB.
 - Only one file can be attached to the Expense on Concur side and only the latest file will be sent to Concur.
- For Salesforce, on the Expenses tab of the Meeting, the user can open the **Actions** menu and select **Set 'Ready to Send' Status** for the Actual Expenses they want to send to Concur so that the background synchronization process will start (once the above conditions have been met).
- After a few moments, the user can refresh the Meeting page and observe Synchronization Status for each Expense.

Note: The sync status for Meeting Expense Attachment records may take a few minutes longer to appear in the sync indicator pop-up than the Meeting Expense and Meeting Expense Allocation statuses.

- The total amount of the report in a pop-up will be shown according to the report currency in Concur (currency code and decimal places). For proper displaying of information in the expenses created earlier you can deploy and run a job:

- Create Apex Class **ExpenseReportCurrencyCodeUpdateBatch.cls** on target org using the file available in the attachment:

Note: Refer to the files section of CSH (OCE Personal Library) to find **ExpenseReportCurrencyCodeUpdateBatch.zip** files.

- Deactivate WorkflowPathPermissionHandler.
- The code to execute the job is: `Database.executeBatch(new ExpenseReportCurrencyCodeUpdateBatch());`
- Activate WorkflowPathPermissionHandler after job finished.
- On mobile, the user will tap the **Expenses** header to view their list of Actual Expenses to send to Concur and can press a button that says **Set 'Ready to Send' Status**.

Note: Once the user has set the 'Ready to Send' status, the Meeting Expense record will be locked until it has synced with Concur. Once a record has synced with Concur, it cannot be deleted. If any modifications are made after it has synced (to Meeting Expense, Meeting Expense Allocation, Meeting Attachment, or Meeting Members that have been added/removed (which would affect allocations)), the user must manually press the **Set 'Ready to Send' Status** button again to send those changes to Concur.