UC-003 Bring an ontology to a collection

Bring an ontology to a collection

Use case, reversed from the implementation at 0.3.0. Draft.

The solution in one sentence


A curator gives a collection an ontology they already have, as a Turtle master beside optional shapes, a table mapping and metrics, and the store publishes and extracts against it, so that the graph is typed in the organisation's own terms from the first document.

An organisation with a standard's ontology, or one of its own, should not have one discovered for it. Bringing an ontology must be configuration, and changing it must be a version.

What is different afterwards

The collection's ontology_dir names the files; apply uploads them; the sweep publishes the version owl:versionInfo names and activates it. To change it, bump the version and apply.

The solution on one page

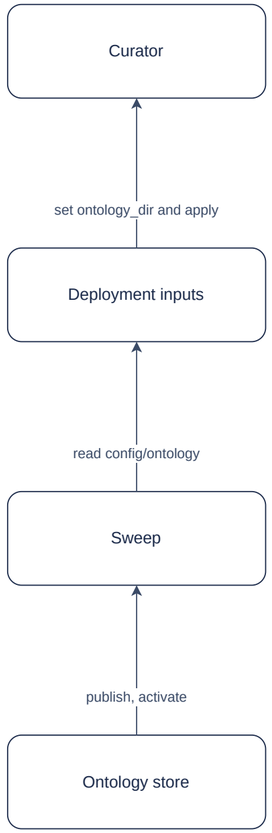

Generated from the Participants and Interactions tables with the model skill; `components.drawio` is the source.

Participants

Participant	Role in this use case	Kind
01 Curator	Owns the master and its versions	actor
02 Deployment inputs	ontology_dir on the collection	solution
03 Sweep	Publishes and activates the provided version	solution
04 Ontology store	Versions, renditions, manifests, the active pointer	solution

Interactions

Interface	Provider	Consumer	Purpose
IF-01	02 Deployment inputs	01 Curator	set ontology_dir and apply
IF-02	03 Sweep	02 Deployment inputs	read config/ontology
IF-03	04 Ontology store	03 Sweep	publish, activate

Catalogue Mapping


What each local participant stands for in the catalogue: an actor or an external system is a gap by design (no artefact of this catalogue realises a person or a vendor); a solution participant realises or partly realises a building block.

Local ID	Maps To	Relationship
01	gap	gap
02	ABB-002 Lake	partial
03	ABB-024 Ingestion and extraction pipeline	realises
04	ABB-002 Lake	partial

The flow

UC-003 Bring an ontology to a collection: scenarios

S1 Main success scenario | S2 A change without a bump

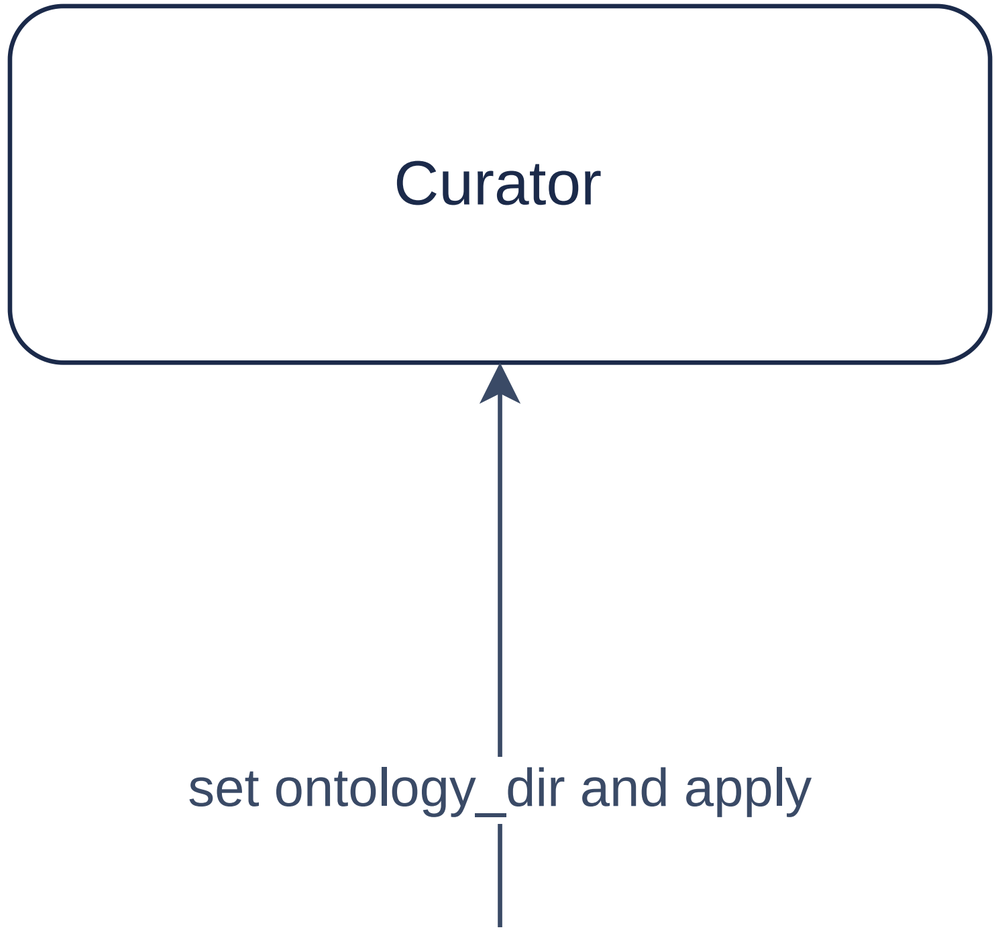

S1 Main success scenario

◀ Prev | Next ▶ | ▶ Play

Restart | Zoom to step: on

Arrow keys step, space plays

1. point ontology_dir at ontology.ttl, shapes.ttl, mappings.yaml, metrics.osi.yaml; apply
2. find a provided ontology newer than the active version
3. publish the version, render every rendition, write the manifest, activate
4. extract every document against it

Data and measures

- The master, shapes, mapping and metrics
- The manifest with checksums and the change kind