UC-007 Evaluate the answers

Evaluate the answers

Use case, reversed from the implementation at 0.3.0. Draft.

The solution in one sentence

An evaluator runs a set of questions with the facts a right answer states and the documents it should cite against a lake or the deployed chat, and reads a deterministic score, so that a release or an ontology change can be judged against the last.

Grounded is not the same as right. Without a set and a scorer, a change to the prompt, the ontology or the model cannot be compared.

What is different afterwards

A report with accuracy, mean score, grounded share, source hits, false abstentions and missed abstentions, overall and per question kind.

The solution on one page



Generated from the Participants and Interactions tables with the model skill; `components.drawio` is the source.

Participants

Participant	Role in this use case	Kind
01 Evaluator	Writes the set, runs it, reads the report	actor
02 Runner	In-process or against the API	solution
03 Agent	Answers each question	solution
04 Scorer	Deterministic measures and the report	solution

Interactions

Interface	Provider	Consumer	Purpose
IF-01	02 Runner	01 Evaluator	run with --lake or --api
IF-02	03 Agent	02 Runner	each question, as a person
IF-03	04 Scorer	02 Runner	answers in, measures out

Catalogue Mapping


What each local participant stands for in the catalogue: an actor or an external system is a gap by design (no artefact of this catalogue realises a person or a vendor); a solution participant realises or partly realises a building block.

Local ID	Maps To	Relationship
01	gap	gap
02	ABB-021 Evaluation runner	realises
03	ABB-014 Answering agent	realises
04	ABB-021 Evaluation runner	partial

The flow

UC-007 Evaluate the answers: scenarios

S1 Main success scenario

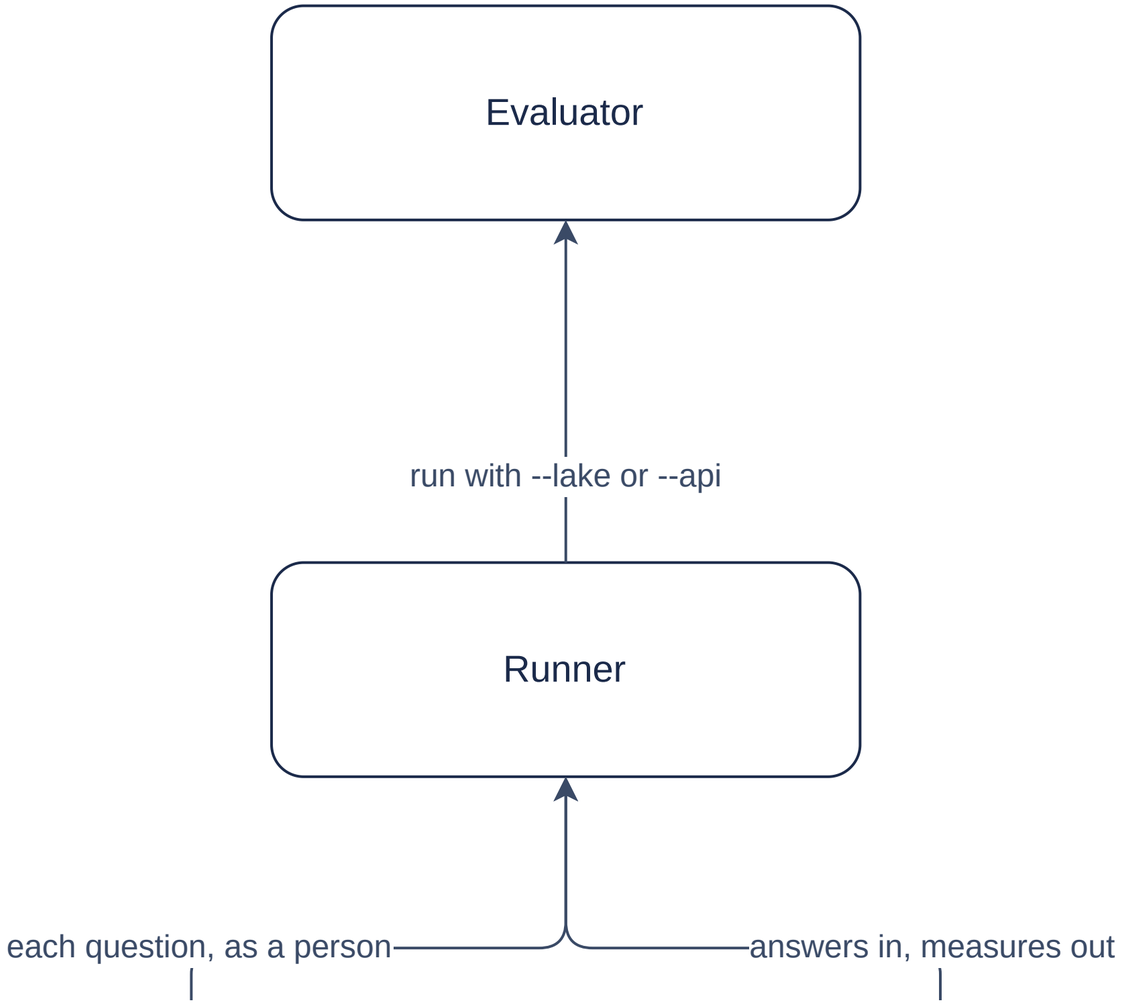

S1 Main success scenario

◀ Prev | Next ▶ | ▶ Play | Restart | Zoom to step: on

Arrow keys step, space plays

1. start a run; confirm the estimate
2. ask each question, polling the API or calling in process
3. score must, must_not, first, sources and abstention
4. write report.md and results.json

Data and measures

- The set, the answers with claims_proposed and claims_shown, the report