

Pascal Documentation

Constants

100	MAX_COUNT
	Maximale Anzahl.
3.1415	PI_VALUE
	This is the documentation for the PI const
'MyApp'	APP_NAME
	This is the application name
\$1001	APP_VERSION
	This is the Version

Global Variables

Integer	score_board
	point score board
string	score_text
	player name text
Integer	main_width
Integer	main_height

Classes

TBaseClass

Basisklasse.

Public Methods

procedure	BaseMethod
-----------	-------------------

Member Function Documentation

```
procedure TBaseClass.BaseMethod
```

Dies ist die ausführliche Beschreibung der Basisklasse.

TChildClass

Abgeleitete Klasse

Inherits: TBaseClass

Public Methods

procedure	ChildMethod
-----------	-------------

Member Function Documentation

```
procedure TChildClass.ChildMethod
```

TExampleClass

Beispielklasse.

Inherits: TBaseClass, IExample

Public Methods

procedure	Execute
	Führt die Aktion aus.

Member Function Documentation

```
procedure TExampleClass.Execute
```

Führt die Aktion aus.

Diese Methode implementiert die Interface-Methode.

TSprite

Sprite class implementing IDrawable

Inherits: TObject, IDrawable

Public Methods

procedure	Draw
-----------	------

Member Function Documentation

```
procedure TSprite.Draw
```

TWeapon

TInventory

TPlayer

Inherits: TObject, IRenderable

Public Methods

procedure	Equip (AWeapon: TWeapon)
procedure	Render

Private Fields

TWeapon	FWeapon
TInventory	FInventory

Member Function Documentation

```
procedure TPlayer.Equip(AWeapon: TWeapon)
```

```
procedure TPlayer.Render
```

Field Documentation

FWeapon: TWeapon

No documentation for this Field.

FInventory: TInventory

No documentation for this Field.

TPerson

This is the TPerson class

Inherits: TObject

Public Methods

constructor	Create
	Erzeugt ein neues Objekt
destructor	Destroy ; override

procedure	Save (S1: string ; S2: string) ; virtual
	Speichert die aktuellen Daten
procedure	Point (A: TPoint ; B: TPoint)
function	GetName : string
	Get the name of the class

Protected Methods

procedure	Paint
-----------	--------------

Public Properties

property	Name : string read FName write FName
----------	---

Private Fields

string	FName
Integer	FAge

Constructors and Destructor

constructor **TPerson**.Create

Erzeugt ein neues Objekt

destructor **TPerson**.Destroy ; override

Member Function Documentation

procedure **TPerson**.Paint

procedure **TPerson**.Save(
 S1: string;
 S2: string
) ; virtual

Speichert die aktuellen Daten

Parameters

S1 string 1
 S2 string 2

Note

Wird intern gecached.

Info

Diese Methode ist thread-safe.

Warning

X und Y dürfen nicht negativ sein.

```
procedure TPerson.Point(  
  A: TPoint;  
  B: TPoint  
)
```

```
function TPerson.GetName: string
```

Get the name of the class

Returns

string - Ein String als Rückgabe

Property Documentation

```
property Name: string  
  read FName  
  write FName
```

Type

Datentyp

Read

getter of Name

Write

setter of Name

Field Documentation

```
FName: string
```

No documentation for this Field.

```
FAge: Integer
```

No documentation for this Field.

TRepository<T>

Generic repository class

Public Methods

procedure	Add (Entity: T) Add entity
function	FindById (Id: Integer): T Find entity by id

Public Properties

property	Items : IList < T > read FItems
----------	--

Private Fields

IList < T >	FItems
-------------	---------------

Member Function Documentation

procedure TRepository<T>.Add(Entity: T)

Add entity

function TRepository<T>.FindById(Id: Integer): T

Find entity by id

Property Documentation

property Items: IList < T >
read FItems

Type
list datatype

Read
returns internal list

Field Documentation

No documentation for this Field.

Interfaces

IExample

Beispiel-Interface.

Methods

procedure	Execute
	Beispiel-Interface.

Member Function Documentation

```
procedure IExample.Execute
```

Beispiel-Interface.

Dies ist eine längere Beschreibung für das Interface.

IDrawable

Basis-Interface für zeichnbare Objekte

Methods

procedure	Draw
	Basis-Interface für zeichnbare Objekte

Properties

property	Visible: Boolean read FVisible write FVisible
	Sichtbarkeit des Objekts

Member Function Documentation

```
procedure IDrawable.Draw
```

Basis-Interface für zeichnbare Objekte

Property Documentation

```
property Visible: Boolean
  read FVisible
  write FVisible
```


Sichtbarkeit des Objekts

Read
Liefert den Sichtbarkeitsstatus

Write
Setzt den Sichtbarkeitsstatus

IShape
Interface für geometrische Formen
Inherits: IDrawable

Inheritance Diagram

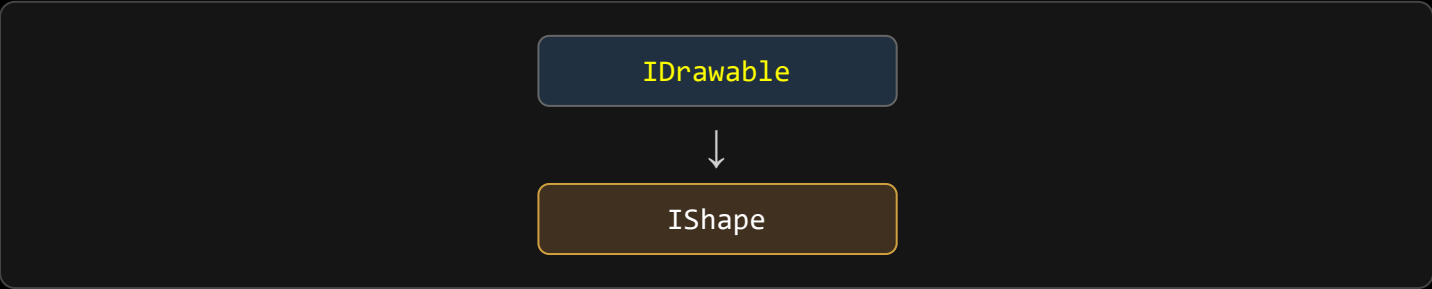

Methods

function	Area: Double
	Interface für geometrische Formen

Properties

property	Name: string read FName write FName
	Name der Form

Member Function Documentation

```
function IShape.Area: Double
```

Interface für geometrische Formen

Property Documentation

```
property Name: string
  read FName
  write FName
```

Name der Form

Read
Liefert den Namen

Write
Setzt den Namen

IList<T>
Generisches Listen-Interface

Methods

procedure	Add (Item: T) Generisches Listen-Interface
function	GetItem (Index: Integer): T Liefert ein Element anhand des Index

Properties

property	Count : Integer read FCount Anzahl der Elemente
----------	---

Member Function Documentation

```
procedure IList<T>.Add(Item: T)
```

Generisches Listen-Interface

```
function IList<T>.GetItem(Index: Integer): T
```

Liefert ein Element anhand des Index

Property Documentation

property

Count: Integer

read FCount

Anzahl der Elemente

Read

Liefert die Anzahl

IRenderable

Methods

procedure	Render
-----------	--------

Member Function Documentation

procedure

IRenderable.Render

IList<T>

Generic list interface

Methods

procedure	Add (Item: T)
	Generic list interface
function	GetItem (Index: Integer): T
	Get item by index

Properties

property	Count: Integer read GetCount
----------	------------------------------

Member Function Documentation

procedure

IList<T>.Add(Item: T)

Generic list interface

function

IList<T>.GetItem(Index: Integer): T

Get item by index

Property Documentation

```
property Count: Integer  
  read GetCount
```

Type

number datatype

Read

returns item count

Records

TPoint

Beispiel-Record.

```
record X: Integer ;  Y: Integer ;  end
```

Fields

Integer	X
	give the X position
Integer	Y
	give the Y position

TPair<TKey, TValue>

Generic key value pair record

```
record Key: TKey ;  Value: TValue ;  end
```

Fields

TKey	Key
	key value
TValue	Value
	stored value

Arrays

TIntArray

this is a integer array 0 .. 10

```
array [0 ..10] of Integer
```

Sets

TCharSet

a char set

set of Char

Enums

TCard

available cards

(One, Two, Three)

enum	One
enum	Two
enum	Three

TColor

available colors

(Red, Green, Blue)

enum	Red
	red color
enum	Green
	green color
enum	Blue
	blue color