

# Pascal Documentation

## Constants

|         |                                            |
|---------|--------------------------------------------|
| 100     | <b>MAX_COUNT</b>                           |
|         | Maximale Anzahl.                           |
| 3.1415  | <b>PI_VALUE</b>                            |
|         | This is the documentation for the PI const |
| 'MyApp' | <b>APP_NAME</b>                            |
|         | This is the application name               |
| \$1001  | <b>APP_VERSION</b>                         |
|         | This is the Version                        |

## Global Variables

|         |                    |
|---------|--------------------|
| Integer | <b>score_board</b> |
|         | point score board  |
| string  | <b>score_text</b>  |
|         | player name text   |
| Integer | <b>main_width</b>  |
| Integer | <b>main_height</b> |

## Classes

### TBaseClass

Basisklasse.

## Public Methods

|           |                   |
|-----------|-------------------|
| procedure | <b>BaseMethod</b> |
|-----------|-------------------|

## Member Function Documentation

```
procedure TBaseClass.BaseMethod
```

Dies ist die ausführliche Beschreibung der Basisklasse.

### TChildClass

Abgeleitete Klasse

Inherits: TBaseClass

## Public Methods

|           |             |
|-----------|-------------|
| procedure | ChildMethod |
|-----------|-------------|

## Member Function Documentation

```
procedure TChildClass.ChildMethod
```

### TExampleClass

Beispielklasse.

Inherits: TBaseClass, IExample

## Public Methods

|           |                       |
|-----------|-----------------------|
| procedure | Execute               |
|           | Führt die Aktion aus. |

## Member Function Documentation

```
procedure TExampleClass.Execute
```

Führt die Aktion aus.

Diese Methode implementiert die Interface-Methode.

### TSprite

Sprite class implementing IDrawable

Inherits: TObject, IDrawable

## Public Methods

|           |      |
|-----------|------|
| procedure | Draw |
|-----------|------|

## Member Function Documentation

```
procedure TSprite.Draw
```

### TWeapon

TInventory

## TPlayer

Inherits: TObject, IRenderable

## Public Methods

|           |                                 |
|-----------|---------------------------------|
| procedure | <b>Equip</b> (AWeapon: TWeapon) |
| procedure | <b>Render</b>                   |

## Private Fields

|            |                   |
|------------|-------------------|
| TWeapon    | <b>FWeapon</b>    |
| TInventory | <b>FInventory</b> |

## Member Function Documentation

```
procedure TPlayer.Equip(AWeapon: TWeapon)
```

```
procedure TPlayer.Render
```

## Field Documentation

**FWeapon**: TWeapon

---

No documentation for this Field.

**FInventory**: TInventory

---

No documentation for this Field.

## TPerson

This is the TPerson class

Inherits: TObject

## Public Methods

|             |                           |
|-------------|---------------------------|
| constructor | <b>Create</b>             |
|             | Erzeugt ein neues Objekt  |
| destructor  | <b>Destroy</b> ; override |
|             |                           |

|           |                                                     |
|-----------|-----------------------------------------------------|
| procedure | <b>Save</b> (S1: string ; S2: string) ; virtual     |
|           | Speichert die aktuellen Daten                       |
| procedure | <b>Point</b> (A: <b>TPoint</b> ; B: <b>TPoint</b> ) |
| function  | <b>GetName</b> : string                             |
|           | Get the name of the class                           |

## Protected Methods

|           |              |
|-----------|--------------|
| procedure | <b>Paint</b> |
|-----------|--------------|

## Public Properties

|          |                                             |
|----------|---------------------------------------------|
| property | <b>Name</b> : string read FName write FName |
|----------|---------------------------------------------|

## Private Fields

|         |              |
|---------|--------------|
| string  | <b>FName</b> |
| Integer | <b>FAge</b>  |

## Constructors and Destructor

```
constructor TPerson.Create
```

Erzeugt ein neues Objekt

```
destructor TPerson.Destroy ; override
```

## Member Function Documentation

```
procedure TPerson.Paint
```

```
procedure TPerson.Save(
  S1: string;
  S2: string
) ; virtual
```

Speichert die aktuellen Daten

Parameters

S1 string 1  
S2 string 2

**Note**

Wird intern gecached.

#### Info

Diese Methode ist thread-safe.

#### Warning

X und Y dürfen nicht negativ sein.

```
procedure TPerson.Point(  
    A: TPoint;  
    B: TPoint  
)
```

```
function TPerson.GetName: string
```

Get the name of the class

Returns

string - Ein String als Rückgabe

## Property Documentation

```
property Name: string  
    read FName  
    write FName
```

#### Type

Datentyp

#### Read

getter of Name

#### Write

setter of Name

## Field Documentation

**FName:** string

No documentation for this Field.

**FAge:** Integer

No documentation for this Field.

# TRepository<T>

Generic repository class

## Public Methods

|           |                                                       |
|-----------|-------------------------------------------------------|
| procedure | <b>Add</b> (Entity: T)<br>Add entity                  |
| function  | <b>FindById</b> (Id: Integer): T<br>Find entity by id |

## Public Properties

|          |                                        |
|----------|----------------------------------------|
| property | <b>Items</b> : IList < T > read FItems |
|----------|----------------------------------------|

## Private Fields

|             |               |
|-------------|---------------|
| IList < T > | <b>FItems</b> |
|-------------|---------------|

## Member Function Documentation

**procedure** TRepository<T>.Add(Entity: T)

Add entity

**function** TRepository<T>.FindById(Id: Integer): T

Find entity by id

## Property Documentation

**property** Items: IList < T >  
read FItems

**Type**  
list datatype

**Read**  
returns internal list

## Field Documentation

No documentation for this Field.

# Interfaces

## IExample

Beispiel-Interface.

## Methods

|           |                     |
|-----------|---------------------|
| procedure | <b>Execute</b>      |
|           | Beispiel-Interface. |

# Member Function Documentation

```
procedure IExample.Execute
```

Beispiel-Interface.

Dies ist eine längere Beschreibung für das Interface.

## IDrawable

Basis-Interface für zeichnbare Objekte

## Methods

|           |                                        |
|-----------|----------------------------------------|
| procedure | <b>Draw</b>                            |
|           | Basis-Interface für zeichnbare Objekte |

# Properties

|          |                                                      |
|----------|------------------------------------------------------|
| property | <b>Visible:</b> Boolean read FVisible write FVisible |
|          | Sichtbarkeit des Objekts                             |

# Member Function Documentation

```
procedure IDrawable.Draw
```

Basis-Interface für zeichnbare Objekte

# Property Documentation

```
property Visible: Boolean
  read FVisible
  write FVisible
```


Sichtbarkeit des Objekts

**Read**  
Liefert den Sichtbarkeitsstatus

**Write**  
Setzt den Sichtbarkeitsstatus

**IShape**  
Interface für geometrische Formen  
Inherits: IDrawable

## Inheritance Diagram

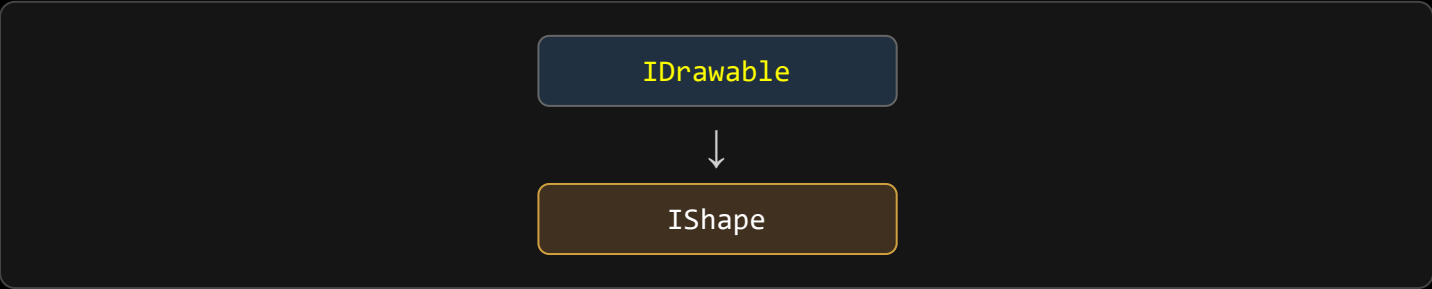

## Methods

|          |                                   |
|----------|-----------------------------------|
| function | <b>Area:</b> Double               |
|          | Interface für geometrische Formen |

## Properties

|          |                                            |
|----------|--------------------------------------------|
| property | <b>Name:</b> string read FName write FName |
|          | Name der Form                              |

## Member Function Documentation

```
function IShape.Area: Double
```

Interface für geometrische Formen



# Property Documentation

```
property Name: string
  read FName
  write FName
```

Name der Form

**Read**  
Liefert den Namen

**Write**  
Setzt den Namen

**IList<T>**  
Generisches Listen-Interface

## Methods

|           |                                                                            |
|-----------|----------------------------------------------------------------------------|
| procedure | <b>Add</b> (Item: T)<br>Generisches Listen-Interface                       |
| function  | <b>GetItem</b> (Index: Integer): T<br>Liefert ein Element anhand des Index |

## Properties

|          |                                                           |
|----------|-----------------------------------------------------------|
| property | <b>Count</b> : Integer read FCount<br>Anzahl der Elemente |
|----------|-----------------------------------------------------------|

# Member Function Documentation

```
procedure IList<T>.Add(Item: T)
```

Generisches Listen-Interface

```
function IList<T>.GetItem(Index: Integer): T
```

Liefert ein Element anhand des Index

# Property Documentation

property

Count: Integer  
read FCount

Anzahl der Elemente

Read

Liefert die Anzahl

IRenderable

## Methods

|           |        |
|-----------|--------|
| procedure | Render |
|-----------|--------|

## Member Function Documentation

procedure

IRenderable.Render

IList<T>

Generic list interface

## Methods

|           |                                                  |
|-----------|--------------------------------------------------|
| procedure | Add (Item: T)<br>Generic list interface          |
| function  | GetItem (Index: Integer): T<br>Get item by index |

## Properties

|          |                              |
|----------|------------------------------|
| property | Count: Integer read GetCount |
|----------|------------------------------|

## Member Function Documentation

procedure

IList<T>.Add(Item: T)

Generic list interface

function

IList<T>.GetItem(Index: Integer): T

Get item by index

# Property Documentation

```
property Count: Integer  
  read GetCount
```

## Type

number datatype

## Read

returns item count

# Records

## TPoint

Beispiel-Record.

```
record X: Integer ;  Y: Integer ;  end
```

# Fields

|         |                     |
|---------|---------------------|
| Integer | <b>X</b>            |
|         | give the X position |
| Integer | <b>Y</b>            |
|         | give the Y position |

## TPair<TKey, TValue>

Generic key value pair record

```
record Key: TKey ;  Value: TValue ;  end
```

# Fields

|        |              |
|--------|--------------|
| TKey   | <b>Key</b>   |
|        | key value    |
| TValue | <b>Value</b> |
|        | stored value |

# Arrays

## TIntArray

this is a integer array 0 .. 10

```
array [0 ..10] of Integer
```

# Sets

# TCharSet

a char set

set of Char

# Enums

## TCard

available cards

(One, Two, Three)

|      |       |
|------|-------|
| enum | One   |
| enum | Two   |
| enum | Three |

## TColor

available colors

(Red, Green, Blue )

|      |             |
|------|-------------|
| enum | Red         |
|      | red color   |
| enum | Green       |
|      | green color |
| enum | Blue        |
|      | blue color  |