

Pascal Documentation

Constants

100	MAX_COUNT
	Maximale Anzahl.
3.1415	PI_VALUE
	This is the documentation for the PI const
'MyApp'	APP_NAME
	This is the application name
\$1001	APP_VERSION
	This is the Version

Global Variables

Integer	score_board
	point score board
string	score_text
	player name text
Integer	main_width
Integer	main_height

Classes

TBaseClass

Basisklasse.

Public Methods

procedure	BaseMethod
-----------	-------------------

Member Function Documentation

```
procedure TBaseClass.BaseMethod
```

Dies ist die ausführliche Beschreibung der Basisklasse.

TChildClass

Abgeleitete Klasse

Inherits: TBaseClass

Public Methods

procedure	ChildMethod
-----------	-------------

Member Function Documentation

```
procedure TChildClass.ChildMethod
```

TExampleClass

Beispielklasse.

Inherits: TBaseClass, IExample

Public Methods

procedure	Execute
	Führt die Aktion aus.

Member Function Documentation

```
procedure TExampleClass.Execute
```

Führt die Aktion aus.

Diese Methode implementiert die Interface-Methode.

TSprite

Sprite class implementing IDrawable

Inherits: TObject, IDrawable

Public Methods

procedure	Draw
-----------	------

Member Function Documentation

```
procedure TSprite.Draw
```

TWeapon

TInventory

TPlayer

Inherits: TObject, IRenderable

Public Methods

procedure	Equip (AWeapon: TWeapon)
procedure	Render

Private Fields

TWeapon	FWeapon
TInventory	FInventory

Member Function Documentation

```
procedure TPlayer.Equip(AWeapon: TWeapon)
```

```
procedure TPlayer.Render
```

Field Documentation

FWeapon: TWeapon

No documentation for this Field.

FInventory: TInventory

No documentation for this Field.

TPerson

This is the TPerson class

Inherits: TObject

Public Methods

constructor	Create ; overload
	Erzeugt ein neues Objekt
constructor	Create (S1: String) ; overload

	Erzeugt ein neues Objekt mit einen string.
constructor	Create (P1: TPoint) ; overload
destructor	Destroy ; override
procedure	Save (S1: string ; S2: string) ; virtual
	Speichert die aktuellen Daten
procedure	Point (A: TPoint ; B: TPoint)
function	GetName : string
	Get the name of the class

Protected Methods

procedure	Paint
-----------	--------------

Public Properties

property	Name : string read FName write FName
----------	---

Private Fields

string	FName
Integer	FAge

Constructors and Destructor

```
constructor TPerson.Create ; overload
```

Erzeugt ein neues Objekt

This is the default constructor.

```
constructor TPerson.Create(S1: String) ; overload
```

Erzeugt ein neues Objekt mit einen string.

This is the constructor with a string.

```
constructor TPerson.Create(P1: TPoint) ; overload
```

```
destructor TPerson.Destroy ; override
```

Member Function Documentation

```
procedure TPerson.Paint
```

```
procedure TPerson.Save(  
    S1: string;  
    S2: string  
) ; virtual
```

Speichert die aktuellen Daten

Parameters

S1 string 1
S2 string 2

Note

Wird intern gecached.

Info

Diese Methode ist thread-safe.

Warning

X und Y dürfen nicht negativ sein.

```
procedure TPerson.Point(  
    A: TPoint;  
    B: TPoint  
)
```

```
function TPerson.GetName: string
```

Get the name of the class

Returns

string - Ein String als Rückgabe

Property Documentation

```
property Name: string  
    read FName  
    write FName
```

Type

Datentyp

Read

getter of Name

Write
setter of Name

Field Documentation

FName: string

No documentation for this Field.

FAge: Integer

No documentation for this Field.

TRepository<T>

Generic repository class

Public Methods

procedure	Add (Entity: T) Add entity
function	FindById (Id: Integer): T Find entity by id

Public Properties

property	Items: IList < T > read FItems
----------	---------------------------------------

Private Fields

IList < T >	FItems
-------------	---------------

Member Function Documentation

```
procedure TRepository<T>.Add(Entity: T)
```

Add entity

```
function TRepository<T>.FindById(Id: Integer): T
```

Find entity by id

Property Documentation

`property` Items: IList < T >
read FItems

Type
list datatype

Read
returns internal list

Field Documentation

`FItems`: IList < T >

No documentation for this Field.

TFile

Inherits: TObject

TDialog

Inherits: TObject

TWindows

Inherits: TObject

TControl

Inherits: TObject

TCustomForm

Inherits: TObject

Interfaces

IExample

Beispiel-Interface.

Methods

procedure	<code>Execute</code>
	Beispiel-Interface.

Member Function Documentation

`procedure IExample.Execute`

Beispiel-Interface.

Dies ist eine längere Beschreibung für das Interface.

IDrawable

Basis-Interface für zeichnbare Objekte

Methods

procedure	Draw
	Basis-Interface für zeichnbare Objekte

Properties

property	Visible: Boolean read FVisible write FVisible
	Sichtbarkeit des Objekts

Member Function Documentation

`procedure IDrawable.Draw`

Basis-Interface für zeichnbare Objekte

Property Documentation

`property Visible: Boolean
 read FVisible
 write FVisible`

Sichtbarkeit des Objekts


Read
Liefert den Sichtbarkeitsstatus

Write
Setzt den Sichtbarkeitsstatus

IShape

Interface für geometrische Formen

Inheritance Diagram

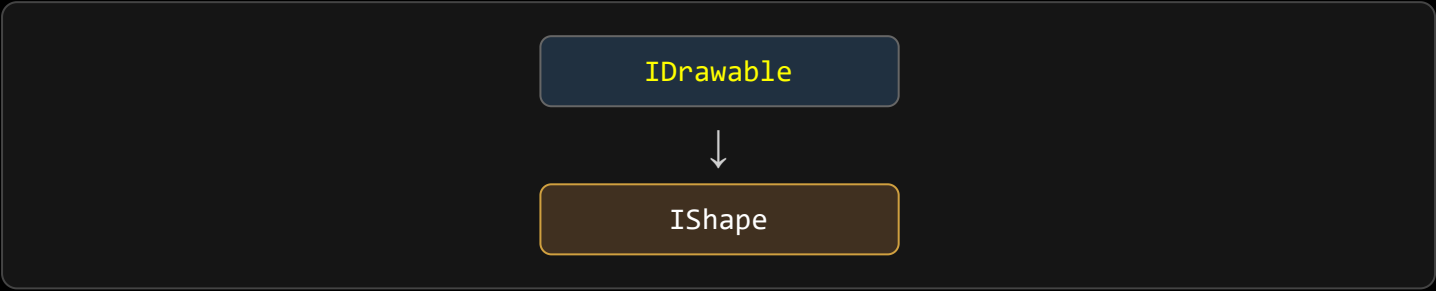

Methods

function	Area: Double
	Interface für geometrische Formen

Properties

property	Name: string read FName write FName
	Name der Form

Member Function Documentation

`function IShape.Area: Double`

Interface für geometrische Formen

Property Documentation

`property Name: string`
`read FName`
`write FName`

Name der Form

Read
Liefert den Namen

Write
Setzt den Namen

IList<T>
Generisches Listen-Interface

Methods

procedure	Add (Item: T)
	Generisches Listen-Interface
function	GetItem (Index: Integer): T
	Liefert ein Element anhand des Index

Properties

property	Count : Integer read FCount
	Anzahl der Elemente

Member Function Documentation

```
procedure IList<T>.Add(Item: T)
```

Generisches Listen-Interface

```
function IList<T>.GetItem(Index: Integer): T
```

Liefert ein Element anhand des Index

Property Documentation

```
property Count: Integer  
  read FCount
```

Anzahl der Elemente

Read
Liefert die Anzahl

IRenderable

Methods

procedure	Render
-----------	---------------

Member Function Documentation

```
procedure IRenderable.Render
```

IList<T>

Generic list interface

Methods

procedure	Add (Item: T)
	Generic list interface
function	GetItem (Index: Integer): T
	Get item by index

Properties

property	Count : Integer read GetCount
----------	--------------------------------------

Member Function Documentation

```
procedure IList<T>.Add(Item: T)
```

Generic list interface

```
function IList<T>.GetItem(Index: Integer): T
```

Get item by index

Property Documentation

```
property Count: Integer
  read GetCount
```

Type
number datatype

Read
returns item count

Records

TPoint

Beispiel-Record.

```
record X: Integer ; Y: Integer ; end
```

Fields

Integer	X
	give the X position
Integer	Y
	give the Y position

TPair<TKey, TValue>

Generic key value pair record

```
record Key: TKey ; Value: TValue ; end
```

Fields

TKey	Key
	key value
TValue	Value
	stored value

Arrays

TIntArray

this is a integer array 0 .. 10

```
array [0 ..10] of Integer
```

Sets

TCharSet

a char set

```
set of Char
```

Enums

TCard

available cards

```
(One, Two, Three)
```

enum	One
enum	Two
enum	Three

TColor

available colors

(Red, Green, Blue)

enum	Red
	red color
enum	Green
	green color
enum	Blue
	blue color