

Pascal Documentation

Constants

100	MAX_COUNT
	Maximale Anzahl.
3.1415	PI_VALUE
	This is the documentation for the PI const
'MyApp'	APP_NAME
	This is the application name
\$1001	APP_VERSION
	This is the Version

Global Variables

Integer	score_board
	point score board
string	score_text
	player name text
Integer	main_width
Integer	main_height

Groups

Das sind die Integer Variablen

Subgroups

- Das sind die Integer Variable S

Group Members

Class	VirtualClass
-------	--------------

Das sind die Integer Variable S

Units

Dialogs

Interface Uses

SysUtils

Used By

TestUnit

Forms

Interface Uses

SysUtils

Used By

TestUnit

Objects

Interface Uses

SysUtils

Used By

TestUnit

SysUtils

Interface Uses

SysUtils

Used By

TestUnit

Objects

SysUtils

Dialogs

Windows

VCL

Forms

TestUnit

Interface Uses

Objects

Base classes of all others

SysUtils

System Utils function's

Classes

Pascal Class'es

Dialogs

Implementation Uses

Windows

Windows XP System stuff

VCL

Visual Control Library

Forms

Window Forms stuff

VCL

Interface Uses

SysUtils

Used By

TestUnit

Windows

Interface Uses

SysUtils

Used By

TestUnit

Classes

VirtualClass

eine virtuelle Klasse

TBaseClass

Basisklasse.

Public Methods

procedure

BaseMethod

Member Function Documentation

`procedure TBaseClass.BaseMethod`

Dies ist die ausführliche Beschreibung der Basisklasse.

TChildClass

Abgeleitete Klasse

Inherits: TBaseClass

Public Methods

procedure	ChildMethod
-----------	-------------

Member Function Documentation

`procedure TChildClass.ChildMethod`

TExampleClass

Beispielklasse.

Inherits: TBaseClass, IExample

Public Methods

procedure	Execute
	Führt die Aktion aus.

Member Function Documentation

`procedure TExampleClass.Execute`

Führt die Aktion aus.

Diese Methode implementiert die Interface-Methode.

TSprite

Sprite class implementing IDrawable

Inherits: TObject, IDrawable

Public Methods

procedure	Draw
-----------	-------------

Member Function Documentation

```
procedure TSprite.Draw
```

TWeapon

TInventory

TPlayer

Inherits: TObject, IRenderable

Public Methods

procedure	Equip (AWeapon: TWeapon)
procedure	Render

Private Fields

TWeapon	FWeapon
TInventory	FInventory

Member Function Documentation

```
procedure TPlayer.Equip(AWeapon: TWeapon)
```

```
procedure TPlayer.Render
```

Field Documentation

FWeapon: TWeapon

No documentation for this Field.

FInventory: TInventory

No documentation for this Field.

TPerson

This is the TPerson class

Inherits: TObject

Public Methods

constructor	Create ; overload
	Erzeugt ein neues Objekt
constructor	Create (S1: String) ; overload
	Erzeugt ein neues Objekt mit einen string.
constructor	Create (P1: TPoint) ; overload
destructor	Destroy ; override
procedure	Save (S1: string ; S2: string) ; virtual
	Speichert die aktuellen Daten
procedure	Point (A: TPoint ; B: TPoint)
function	GetName : string
	Get the name of the class

Protected Methods

procedure	Paint
-----------	--------------

Public Properties

property	Name : string read FName write FName
----------	---

Private Fields

string	FName
Integer	FAge

Constructors and Destructor

```
constructor TPerson.Create ; overload
```

Erzeugt ein neues Objekt

This is the default constructor.

```
constructor TPerson.Create(S1: String) ; overload
```

Erzeugt ein neues Objekt mit einen string.

This is the constructor with a string.

```
constructor TPerson.Create(P1: TPoint) ; overload
```

```
destructor TPerson.Destroy ; override
```

Member Function Documentation

```
procedure TPerson.Paint
```

```
procedure TPerson.Save(  
    S1: string;  
    S2: string  
) ; virtual
```

Speichert die aktuellen Daten

Parameters

S1 string 1

S2 string 2

Note

Wird intern gecached.

Info

Diese Methode ist thread-safe.

Warning

X und Y dürfen nicht negativ sein.

```
procedure TPerson.Point(  
    A: TPoint;  
    B: TPoint  
)
```

```
function TPerson.GetName: string
```

Get the name of the class

Returns

string - Ein String als Rückgabe

Property Documentation

```
property Name: string
  read FName
  write FName
```

Type
Datentyp

Read
getter of Name

Write
setter of Name

Field Documentation

FName: string

No documentation for this Field.

FAge: Integer

No documentation for this Field.

TRepository<T>

Generic repository class

Public Methods

procedure	Add (Entity: T) Add entity
function	FindById (Id: Integer): T Find entity by id

Public Properties

property	Items: IList < T > read FItems
----------	--------------------------------

Private Fields

IList < T >	FItems
-------------	--------

Member Function Documentation

```
procedure TRepository<T>.Add(Entity: T)
```

Add entity

```
function TRepository<T>.FindById(Id: Integer): T
```

Find entity by id

Property Documentation

```
property Items: IList < T >  
    read FItems
```

Type

list datatype

Read

returns internal list

Field Documentation

```
FItems: IList < T >
```

No documentation for this Field.

TVirtualClass

Virtuelle Klasse

TObject

TFile

Inherits: TObject

TDialog

Inherits: TObject

TWindows

Inherits: TObject

TControl

Inherits: TObject

TCustomForm

Inherits: TObject

Interfaces

IExample

Beispiel-Interface.

Methods

procedure	Execute
	Beispiel-Interface.

Member Function Documentation

`procedure IExample.Execute`

Beispiel-Interface.

Dies ist eine längere Beschreibung
für das Interface.

IDrawable

Basis-Interface für zeichnbare Objekte

Methods

procedure	Draw
	Basis-Interface für zeichnbare Objekte

Properties

property	Visible: Boolean read FVisible write FVisible
	Sichtbarkeit des Objekts

Member Function Documentation

`procedure IDrawable.Draw`

Property Documentation

property Visible: Boolean
read FVisible
write FVisible

Sichtbarkeit des Objekts

Read
Liefert den Sichtbarkeitsstatus


Write
Setzt den Sichtbarkeitsstatus

IShape

Interface für geometrische Formen

Inherits: IDrawable

Inheritance Diagram

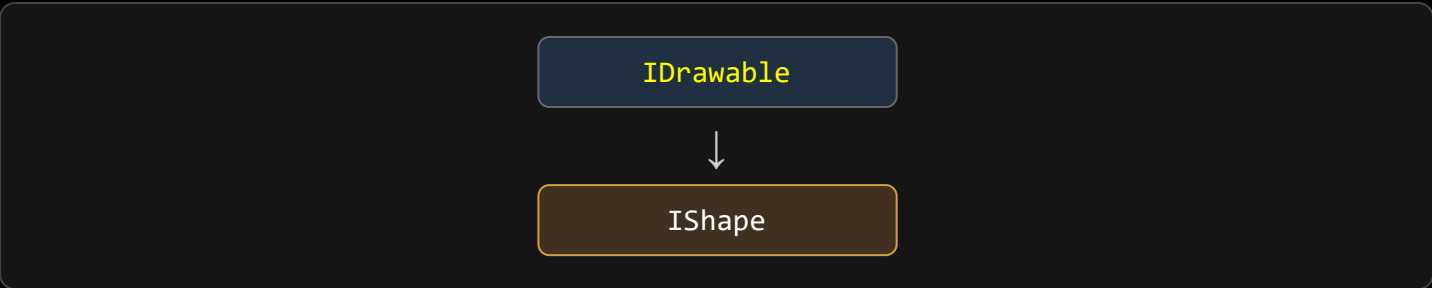

Methods

function	Area: Double
	Interface für geometrische Formen

Properties

property	Name: string read FName write FName
	Name der Form

Member Function Documentation

function IShape.Area: Double

Property Documentation

```
property Name: string
  read FName
  write FName
```

Name der Form

Read
Liefert den Namen

Write
Setzt den Namen

IList<T>

Generisches Listen-Interface

Methods

procedure	Add (Item: T) Generisches Listen-Interface
function	GetItem (Index: Integer): T Liefert ein Element anhand des Index

Properties

property	Count : Integer read FCount Anzahl der Elemente
----------	---

Member Function Documentation

```
procedure IList<T>.Add(Item: T)
```

Generisches Listen-Interface

```
function IList<T>.GetItem(Index: Integer): T
```

Liefert ein Element anhand des Index

Property Documentation

property

Count: Integer
read FCount

Anzahl der Elemente

Read
Liefert die Anzahl

IRenderable

Methods

procedure	Render
-----------	---------------

Member Function Documentation

procedure

IRenderable.Render

IList<T>

Generic list interface

Methods

procedure	Add (Item: T) Generic list interface
function	GetItem (Index: Integer): T Get item by index

Properties

property	Count : Integer read GetCount
----------	--------------------------------------

Member Function Documentation

procedure

IList<T>.Add(Item: T)

Generic list interface

function

IList<T>.GetItem(Index: Integer): T

Property Documentation

property

Count: Integer

read

GetCount

Type
number datatype

Read
returns item count

IVirtualInterface

Virtuelles Interface

Records

TPoint

Beispiel-Record.

```
record X: Integer ; Y: Integer ; end
```

Detailed Description

Dieser Record speichert X- und Y-Werte.

Fields

Integer	X
	give the X position
Integer	Y
	give the Y position

Field Documentation

X: Integer

blah blah about X pos field

Y: Integer

Fields

Integer	X
	give the X position
Integer	Y
	give the Y position

TPair<TKey, TValue>

Generic key value pair record

```
record Key: TKey ; Value: TValue ; end
```

Fields

TKey	Key
	key value
TValue	Value
	stored value

Field Documentation

Key: TKey

Value: TValue

Fields

TKey	Key
	key value
TValue	Value
	stored value

TVirtualRecord

Virtueller Record

```
TVirtualRecord = record end
```

Arrays

TIntArray

this is a integer array 0 .. 10

```
array [0 ..10] of Integer
```

Sets

TCharSet

a char set

```
set of Char
```

Enums

TCard

available cards

```
(One, Two, Three)
```

	enum	One
	enum	Two
	enum	Three

TColor

available colors

```
(Red, Green, Blue )
```

	enum	Red
		red color
	enum	Green
		green color
	enum	Blue
		blue color

TVirtualEnum

Virtuelles Enum

```
TVirtualEnum = (...)
```