

cdatastruct

Generated by Doxygen 1.8.1.2

Thu Sep 5 2013 22:51:00

Contents

1	Data Structure Index	1
1.1	Data Structures	1
2	File Index	3
2.1	File List	3
3	Data Structure Documentation	5
3.1	sl_list_node_t Struct Reference	5
3.1.1	Field Documentation	5
3.1.1.1	data	5
3.1.1.2	next	5
3.2	sl_list_t Struct Reference	6
3.2.1	Field Documentation	6
3.2.1.1	cfunc	6
3.2.1.2	front	6
3.2.1.3	length	6
4	File Documentation	7
4.1	cdatastruct.h File Reference	7
4.1.1	Detailed Description	7
4.2	cds_common.h File Reference	8
4.2.1	Detailed Description	8
4.2.2	Enumeration Type Documentation	8
4.2.2.1	cds_error	8
4.3	cds_general.h File Reference	9
4.3.1	Detailed Description	9
4.3.2	Function Documentation	10
4.3.2.1	cds_compare_int	10
4.3.2.2	cds_compare_long	10
4.3.2.3	cds_compare_string	10
4.3.2.4	cds_compare_uint	10
4.3.2.5	cds_compare_ulong	10

4.3.2.6	cds_new_int	11
4.3.2.7	cds_new_long	11
4.3.2.8	cds_new_string	11
4.3.2.9	cds_new_uint	11
4.3.2.10	cds_new_ulong	11
4.4	cds_sl_list.h File Reference	12
4.4.1	Detailed Description	13
4.4.2	Function Documentation	14
4.4.2.1	sl_list_data	14
4.4.2.2	sl_list_delete_at	14
4.4.2.3	sl_list_find_index	14
4.4.2.4	sl_list_find_itr	14
4.4.2.5	sl_list_first	14
4.4.2.6	sl_list_free	15
4.4.2.7	sl_list_index	15
4.4.2.8	sl_list_init	15
4.4.2.9	sl_list_insert_after	15
4.4.2.10	sl_list_insert_at	15
4.4.2.11	sl_list_isempty	16
4.4.2.12	sl_list_length	16
4.4.2.13	sl_list_next	16
4.4.2.14	sl_list_prepend	16
4.5	general.c File Reference	16
4.5.1	Detailed Description	17
4.5.2	Function Documentation	18
4.5.2.1	cds_compare_int	18
4.5.2.2	cds_compare_long	18
4.5.2.3	cds_compare_string	18
4.5.2.4	cds_compare_uint	18
4.5.2.5	cds_compare_ulong	18
4.5.2.6	cds_new_int	19
4.5.2.7	cds_new_long	19
4.5.2.8	cds_new_string	19
4.5.2.9	cds_new_uint	19
4.5.2.10	cds_new_ulong	19
4.6	sl_list.c File Reference	20
4.6.1	Detailed Description	21
4.6.2	Function Documentation	21
4.6.2.1	sl_list_data	21
4.6.2.2	sl_list_delete_at	21

4.6.2.3	sl_list_find_index	22
4.6.2.4	sl_list_find_itr	22
4.6.2.5	sl_list_first	22
4.6.2.6	sl_list_free	22
4.6.2.7	sl_list_free_node	22
4.6.2.8	sl_list_index	22
4.6.2.9	sl_list_init	23
4.6.2.10	sl_list_insert_after	23
4.6.2.11	sl_list_insert_at	23
4.6.2.12	sl_list_isempty	23
4.6.2.13	sl_list_length	24
4.6.2.14	sl_list_new_node	24
4.6.2.15	sl_list_next	24
4.6.2.16	sl_list_prepend	24
4.6.2.17	sl_list_remove_at	24
4.7	sl_list.h File Reference	24
4.7.1	Detailed Description	26
4.7.2	Function Documentation	26
4.7.2.1	sl_list_free_node	26
4.7.2.2	sl_list_new_node	26
4.7.2.3	sl_list_remove_at	26

Chapter 1

Data Structure Index

1.1 Data Structures

Here are the data structures with brief descriptions:

sl_list_node_t	Struct for singly linked list node	5
sl_list_t	Struct to contain a list	6

Chapter 2

File Index

2.1 File List

Here is a list of all documented files with brief descriptions:

cdatastruct.h	Interface to generic C data structures	7
cds_common.h	Common data types and data for C data structures library	8
cds_general.h	Interface to general data structure helper functions	9
cds_sl_list.h	User interface to singly linked list data structure	12
general.c	Implementation of general data structure helper functions	16
sl_list.c	Implementation of singly linked list data structure	20
sl_list.h	Developer interface to singly linked list data structure	24

Chapter 3


Data Structure Documentation

3.1 `sl_list_node_t` Struct Reference

Struct for singly linked list node.

```
#include <cds_sl_list.h>
```

Collaboration diagram for `sl_list_node_t`:



Data Fields

- void * [data](#)
- struct [sl_list_node_t](#) * [next](#)

3.1.1 Field Documentation

3.1.1.1 void* `sl_list_node_t::data`

Pointer to data

3.1.1.2 struct `sl_list_node_t`* `sl_list_node_t::next`

Pointer to next node

The documentation for this struct was generated from the following file:


- [cds_sl_list.h](#)

3.2 `sl_list_t` Struct Reference

Struct to contain a list.

```
#include <sl_list.h>
```

Collaboration diagram for `sl_list_t`:

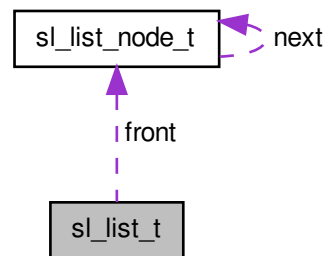

Data Fields

- struct [sl_list_node_t](#) * [front](#)
- [size_t](#) [length](#)
- [int](#)(* [cfunc](#))()

3.2.1 Field Documentation

3.2.1.1 `int(* sl_list_t::cfunc)()`

Pointer to compare function

3.2.1.2 `struct sl_list_node_t* sl_list_t::front`

Pointer to first node

3.2.1.3 `size_t sl_list_t::length`

Length of list

The documentation for this struct was generated from the following file:

- [sl_list.h](#)

Chapter 4


File Documentation

4.1 cdatastruct.h File Reference

Interface to generic C data structures.

```
#include "cds_common.h"  
#include "cds_general.h"  
#include "cds_sl_list.h"
```

Include dependency graph for cdatastruct.h:

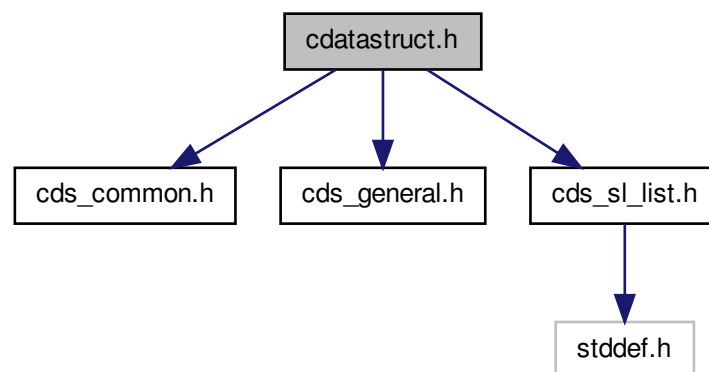

4.1.1 Detailed Description

Interface to generic C data structures.

Author

Paul Griffiths


Copyright

Copyright 2013 Paul Griffiths. Distributed under the terms of the GNU General Public License. <http://www.gnu.org/licenses/>

4.2 cds_common.h File Reference

Common data types and data for C data structures library.

This graph shows which files directly or indirectly include this file:

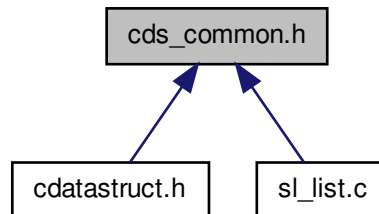

Typedefs

- typedef enum `cds_error` `cds_error`
Enumeration of return error codes.

Enumerations

- enum `cds_error` { `CDSERR_ERROR` = -1, `CDSERR_OUTOFRANGE` = -2, `CDSERR_NOTFOUND` = -3, `CDSERR_BADITERATOR` = -4 }
Enumeration of return error codes.

4.2.1 Detailed Description

Author

Paul Griffiths

Copyright

Copyright 2013 Paul Griffiths. Distributed under the terms of the GNU General Public License. <http://www.gnu.org/licenses/>

4.2.2 Enumeration Type Documentation

4.2.2.1 enum `cds_error`


Enumerator:

- `CDSERR_ERROR`** Unspecified error
- `CDSERR_OUTOFRANGE`** Index out of range
- `CDSERR_NOTFOUND`** Data element not found
- `CDSERR_BADITERATOR`** Invalid iterator

4.3 cds_general.h File Reference

Interface to general data structure helper functions.

This graph shows which files directly or indirectly include this file:

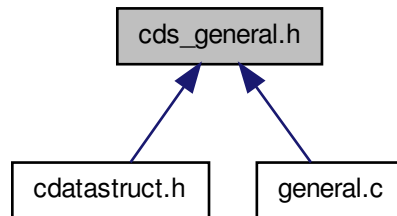

Functions

- void * [cds_new_int](#) (const int n)
Dynamically allocates memory for a new `int`.
- void * [cds_new_uint](#) (const unsigned int n)
Dynamically allocates memory for a new `unsigned int`.
- void * [cds_new_long](#) (const long n)
Dynamically allocates memory for a new `long`.
- void * [cds_new_ulong](#) (const unsigned long n)
Dynamically allocates memory for a new `unsigned long`.
- void * [cds_new_string](#) (const char *str)
Dynamically allocates memory for a new `string`.
- int [cds_compare_int](#) (const void *data, const void *cmp)
Compares two `int` via `void` pointers.
- int [cds_compare_uint](#) (const void *data, const void *cmp)
Compares two `unsigned int` via `void` pointers.
- int [cds_compare_long](#) (const void *data, const void *cmp)
Compares two `long` via `void` pointers.
- int [cds_compare_ulong](#) (const void *data, const void *cmp)
Compares two `unsigned long` via `void` pointers.
- int [cds_compare_string](#) (const void *data, const void *cmp)
Compares two `strings` via `void` pointers.

4.3.1 Detailed Description

Interface to general data structure helper functions.

Author

Paul Griffiths

Copyright

Copyright 2013 Paul Griffiths. Distributed under the terms of the GNU General Public License. <http://www.gnu.org/licenses/>

4.3.2 Function Documentation

4.3.2.1 `int cds_compare_int (const void * data, const void * cmp)`

Parameters

<i>data</i>	Pointer to the data to which to compare.
<i>cmp</i>	Pointer to the comparison data.

Returns

-1 if the comparison data is greater than the data, 1 if the comparison data is less than the data, and 0 if the comparison data is equal to the data.

4.3.2.2 `int cds_compare_long (const void * data, const void * cmp)`

Parameters

<i>data</i>	Pointer to the data to which to compare.
<i>cmp</i>	Pointer to the comparison data.

Returns

-1 if the comparison data is greater than the data, 1 if the comparison data is less than the data, and 0 if the comparison data is equal to the data.

4.3.2.3 `int cds_compare_string (const void * data, const void * cmp)`

Parameters

<i>data</i>	Pointer to the data to which to compare.
<i>cmp</i>	Pointer to the comparison data.

Returns

-1 if the comparison data is greater than the data, 1 if the comparison data is less than the data, and 0 if the comparison data is equal to the data.

4.3.2.4 `int cds_compare_uint (const void * data, const void * cmp)`

Parameters

<i>data</i>	Pointer to the data to which to compare.
<i>cmp</i>	Pointer to the comparison data.

Returns

-1 if the comparison data is greater than the data, 1 if the comparison data is less than the data, and 0 if the comparison data is equal to the data.

4.3.2.5 `int cds_compare_ulong (const void * data, const void * cmp)`

Parameters

<i>data</i>	Pointer to the data to which to compare.
<i>cmp</i>	Pointer to the comparison data.

Returns

-1 if the comparison data is greater than the data, 1 if the comparison data is less than the data, and 0 if the comparison data is equal to the data.

4.3.2.6 void* cds_new_int (const int *n*)

Parameters

<i>n</i>	The new int for which to allocate.
----------	------------------------------------

Returns

A void pointer to the allocated memory.

4.3.2.7 void* cds_new_long (const long *n*)

Parameters

<i>n</i>	The new long for which to allocate.
----------	-------------------------------------

Returns

A void pointer to the allocated memory.

4.3.2.8 void* cds_new_string (const char * *str*)

Parameters

<i>str</i>	The new string for which to allocate.
------------	---------------------------------------

Returns

A void pointer to the allocated memory.

4.3.2.9 void* cds_new_uint (const unsigned int *n*)

Parameters

<i>n</i>	The new unsigned int for which to allocate.
----------	---

Returns

A void pointer to the allocated memory.

4.3.2.10 void* cds_new_ulong (const unsigned long *n*)

Parameters

<i>n</i>	The new unsigned long for which to allocate.
----------	--

Returns


A void pointer to the allocated memory.

4.4 cds_sl_list.h File Reference


User interface to singly linked list data structure.

```
#include <stddef.h>
```

Include dependency graph for cds_sl_list.h:



This graph shows which files directly or indirectly include this file:

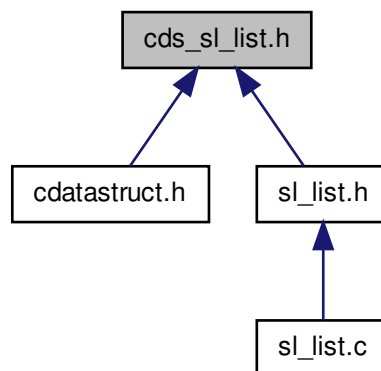**Data Structures**

- struct [sl_list_node_t](#)
Struct for singly linked list node.

Typedefs

- typedef struct [sl_list_node_t](#) [sl_list_node_t](#)
Struct for singly linked list node.
- typedef struct [sl_list_t](#) * [sl_list](#)
Typedef for list pointer.
- typedef struct [sl_list_node_t](#) * [sl_list_itr](#)
Typedef for list iterator.

Functions

- [sl_list sl_list_init](#) (int(*cfunc)(const void *, const void *))
Initializes a new singly linked list.
- void [sl_list_free](#) ([sl_list](#) list)
Frees the resources associated with a list.
- size_t [sl_list_length](#) (const [sl_list](#) list)
Returns the number of elements in a list.
- bool [sl_list_isempty](#) (const [sl_list](#) list)
Checks if a list is empty.
- void [sl_list_prepend](#) ([sl_list](#) list, void *data)
Inserts an element at the beginning of a list.
- int [sl_list_insert_at](#) ([sl_list](#) list, const size_t index, void *data)
Inserts an element at the specified index of a list.
- int [sl_list_insert_after](#) ([sl_list](#) list, const [sl_list_itr](#) itr, void *data)
Inserts an element after a provided iterator.
- int [sl_list_find_index](#) (const [sl_list](#) list, const void *data)
Finds the index of the specified data in a list.
- [sl_list_itr sl_list_find_itr](#) (const [sl_list](#) list, const void *data)
Gets an iterator to the specified data in a list.
- void * [sl_list_data](#) (const [sl_list](#) list, const size_t index)
Returns a pointer to the data at a specified index.
- [sl_list_itr sl_list_first](#) (const [sl_list](#) list)
Returns an iterator to the first element of a list.
- [sl_list_itr sl_list_next](#) (const [sl_list_itr](#) itr)
Advances a list iterator by one element.
- [sl_list_itr sl_list_index](#) (const [sl_list](#) list, const size_t index)
Return an iterator to a specified element of a list.
- int [sl_list_delete_at](#) ([sl_list](#) list, const size_t index)
Deletes a list element at a specified index.

4.4.1 Detailed Description

Author

Paul Griffiths

Copyright

Copyright 2013 Paul Griffiths. Distributed under the terms of the GNU General Public License. <http://www.gnu.org/licenses/>

4.4.2 Function Documentation

4.4.2.1 void* sl_list_data (const sl_list list, const size_t index)

Parameters

<i>list</i>	A pointer to the list.
<i>index</i>	The index of the data.

Returns

A pointer to the data, or NULL if the index is out of range.

4.4.2.2 int sl_list_delete_at (sl_list list, const size_t index)

Parameters

<i>list</i>	A pointer to the list.
<i>index</i>	The index of the element to delete.

Returns

0 on success, CDSERR_OUTOFRANGE if the the index is out of range.

4.4.2.3 int sl_list_find_index (const sl_list list, const void * data)

Parameters

<i>list</i>	A pointer to the list.
<i>data</i>	A pointer to the data to find.

Returns

The index of the element, if found, or CDSERR_NOTFOUND if it is not in the list.

4.4.2.4 sl_list_itr sl_list_find_itr (const sl_list list, const void * data)

Parameters

<i>list</i>	A pointer to the list.
<i>data</i>	A pointer to the data to find.

Returns

An iterator to the found element, or NULL is the element is not in the list.

4.4.2.5 sl_list_itr sl_list_first (const sl_list list)

Parameters

<i>list</i>	A pointer to the list.
-------------	------------------------

Returns

An iterator to the first element.

4.4.2.6 void sl_list_free (sl_list list)

Parameters

<i>list</i>	A pointer to the list to free.
-------------	--------------------------------

4.4.2.7 sl_list_itr sl_list_index (const sl_list list, const size_t index)

Parameters

<i>list</i>	A pointer to the list.
<i>index</i>	The specified index.

Returns

The iterator, or NULL if *index* is out of range.

4.4.2.8 sl_list sl_list_init (int(*) (const void *, const void *) cfunc)

Parameters

<i>cfunc</i>	A pointer to a compare function. The function should return <code>int</code> and accept two parameters of type <code>void *</code> . It should return less than 1 if the first parameter is less than the second, greater than 1 if the first parameter is greater than the second, and zero if the parameters are equal.
--------------	---

Returns

A pointer to the new list.

4.4.2.9 int sl_list_insert_after (sl_list list, const sl_list_itr itr, void * data)

Parameters

<i>list</i>	A pointer to the list.
<i>itr</i>	The iterator after which to insert.
<i>data</i>	A pointer to the data to add. The memory pointed to by this parameter must be dynamically allocated, as an attempt will be made to <code>free()</code> it when deleting the list.

Returns

0 on success, CDSERR_BADITERATOR if *itr* is a NULL pointer.

4.4.2.10 int sl_list_insert_at (sl_list list, const size_t index, void * data)

Parameters

<i>list</i>	A pointer to the list.
<i>index</i>	The index at which to insert. Setting this equal to the length of the list (i.e. to one element past the zero-based index of the last element) inserts the element at the end of the list.

<i>data</i>	A pointer to the data to add. The memory pointed to by this parameter must be dynamically allocated, as an attempt will be made to <code>free()</code> it when deleting the list.
-------------	---

Returns

0 on success, `CDSERR_OUTOFRANGE` if `index` exceeds the length of the list.

4.4.2.11 `bool sl_list_isempty (const sl_list list)`

Parameters

<i>list</i>	A pointer to the list.
-------------	------------------------

Returns

`true` if the list is empty, otherwise `false`.

4.4.2.12 `size_t sl_list_length (const sl_list list)`

Parameters

<i>list</i>	A pointer to the list.
-------------	------------------------

4.4.2.13 `sl_list_itr sl_list_next (const sl_list_itr itr)`

Parameters

<i>itr</i>	The iterator to advance
------------	-------------------------

Returns

The advanced iterator.

4.4.2.14 `void sl_list_prepend (sl_list list, void * data)`

Parameters


<i>list</i>	A pointer to the list.
<i>data</i>	A pointer to the data to add. The memory pointed to by this parameter must be dynamically allocated, as an attempt will be made to <code>free()</code> it when deleting the list.

4.5 general.c File Reference

Implementation of general data structure helper functions.

```
#include <string.h>
#include <paulgrif/chelpers.h>
#include "cds_general.h"
```

Include dependency graph for general.c:

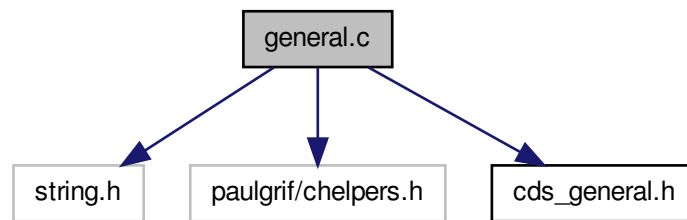

Functions

- void * `cds_new_int` (const int n)
Dynamically allocates memory for a new int.
- void * `cds_new_uint` (const unsigned int n)
Dynamically allocates memory for a new unsigned int.
- void * `cds_new_long` (const long n)
Dynamically allocates memory for a new long.
- void * `cds_new_ulong` (const unsigned long n)
Dynamically allocates memory for a new unsigned long.
- void * `cds_new_string` (const char *str)
Dynamically allocates memory for a new string.
- int `cds_compare_int` (const void *data, const void *cmp)
Compares two int via void pointers.
- int `cds_compare_uint` (const void *data, const void *cmp)
Compares two unsigned int via void pointers.
- int `cds_compare_long` (const void *data, const void *cmp)
Compares two long via void pointers.
- int `cds_compare_ulong` (const void *data, const void *cmp)
Compares two unsigned long via void pointers.
- int `cds_compare_string` (const void *data, const void *cmp)
Compares two strings via void pointers.

4.5.1 Detailed Description

Implementation of general data structure helper functions.

Author

Paul Griffiths

Copyright

Copyright 2013 Paul Griffiths. Distributed under the terms of the GNU General Public License. <http://www.gnu.org/licenses/>

4.5.2 Function Documentation

4.5.2.1 `int cds_compare_int (const void * data, const void * cmp)`

Parameters

<i>data</i>	Pointer to the data to which to compare.
<i>cmp</i>	Pointer to the comparison data.

Returns

-1 if the comparison data is greater than the data, 1 if the comparison data is less than the data, and 0 if the comparison data is equal to the data.

4.5.2.2 `int cds_compare_long (const void * data, const void * cmp)`

Parameters

<i>data</i>	Pointer to the data to which to compare.
<i>cmp</i>	Pointer to the comparison data.

Returns

-1 if the comparison data is greater than the data, 1 if the comparison data is less than the data, and 0 if the comparison data is equal to the data.

4.5.2.3 `int cds_compare_string (const void * data, const void * cmp)`

Parameters

<i>data</i>	Pointer to the data to which to compare.
<i>cmp</i>	Pointer to the comparison data.

Returns

-1 if the comparison data is greater than the data, 1 if the comparison data is less than the data, and 0 if the comparison data is equal to the data.

4.5.2.4 `int cds_compare_uint (const void * data, const void * cmp)`

Parameters

<i>data</i>	Pointer to the data to which to compare.
<i>cmp</i>	Pointer to the comparison data.

Returns

-1 if the comparison data is greater than the data, 1 if the comparison data is less than the data, and 0 if the comparison data is equal to the data.

4.5.2.5 `int cds_compare_ulong (const void * data, const void * cmp)`

Parameters

<i>data</i>	Pointer to the data to which to compare.
<i>cmp</i>	Pointer to the comparison data.

Returns

-1 if the comparison data is greater than the data, 1 if the comparison data is less than the data, and 0 if the comparison data is equal to the data.

4.5.2.6 void* cds_new_int (const int *n*)

Parameters

<i>n</i>	The new int for which to allocate.
----------	------------------------------------

Returns

A void pointer to the allocated memory.

4.5.2.7 void* cds_new_long (const long *n*)

Parameters

<i>n</i>	The new long for which to allocate.
----------	-------------------------------------

Returns

A void pointer to the allocated memory.

4.5.2.8 void* cds_new_string (const char * *str*)

Parameters

<i>str</i>	The new string for which to allocate.
------------	---------------------------------------

Returns

A void pointer to the allocated memory.

4.5.2.9 void* cds_new_uint (const unsigned int *n*)

Parameters

<i>n</i>	The new unsigned int for which to allocate.
----------	---

Returns

A void pointer to the allocated memory.

4.5.2.10 void* cds_new_ulong (const unsigned long *n*)

Parameters

<i>n</i>	The new unsigned long for which to allocate.
----------	--

Returns


A `void` pointer to the allocated memory.

4.6 sl_list.c File Reference

Implementation of singly linked list data structure.

```
#include <stdlib.h>
#include <stdbool.h>
#include <paulgrif/chelpers.h>
#include "cds_common.h"
#include "sl_list.h"
```

Include dependency graph for `sl_list.c`:

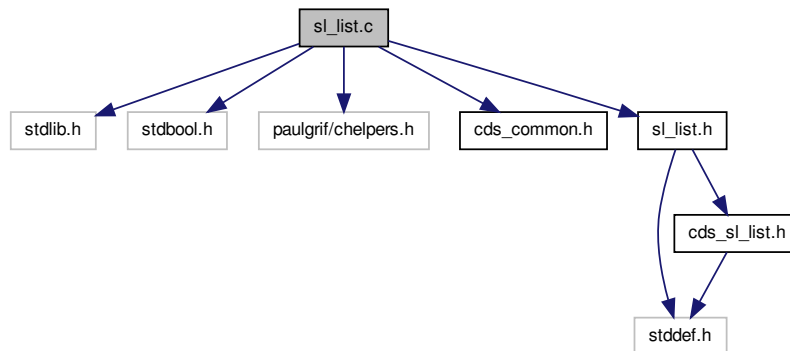

Functions

- `sl_list sl_list_init (int(*cfunc)(const void *, const void *))`
Initializes a new singly linked list.
- `void sl_list_free (sl_list list)`
Frees the resources associated with a list.
- `size_t sl_list_length (const sl_list list)`
Returns the number of elements in a list.
- `bool sl_list_isempty (const sl_list list)`
Checks if a list is empty.
- `void sl_list_prepend (sl_list list, void *data)`
Inserts an element at the beginning of a list.
- `int sl_list_insert_at (sl_list list, const size_t index, void *data)`
Inserts an element at the specified index of a list.
- `int sl_list_insert_after (sl_list list, const sl_list_itr itr, void *data)`
Inserts an element after a provided iterator.
- `int sl_list_find_index (const sl_list list, const void *data)`
Finds the index of the specified data in a list.

- [sl_list_itr sl_list_find_itr](#) (const [sl_list](#) list, const void *data)
Gets an iterator to the specified data in a list.
- void * [sl_list_data](#) (const [sl_list](#) list, const size_t index)
Returns a pointer to the data at a specified index.
- [sl_list_itr sl_list_first](#) (const [sl_list](#) list)
Returns an iterator to the first element of a list.
- [sl_list_itr sl_list_next](#) (const [sl_list_itr](#) itr)
Advances a list iterator by one element.
- [sl_list_itr sl_list_index](#) (const [sl_list](#) list, const size_t index)
Return an iterator to a specified element of a list.
- int [sl_list_delete_at](#) ([sl_list](#) list, const size_t index)
Deletes a list element at a specified index.
- [sl_list_node sl_list_remove_at](#) ([sl_list](#) list, const size_t index)
Removes, but does not delete, an element at an index.
- [sl_list_node sl_list_new_node](#) (void *data)
Creates a new list node.
- void [sl_list_free_node](#) ([sl_list_node](#) node)
Frees resources for a node and any data.

4.6.1 Detailed Description

Author

Paul Griffiths

Copyright

Copyright 2013 Paul Griffiths. Distributed under the terms of the GNU General Public License. <http://www.gnu.org/licenses/>

4.6.2 Function Documentation

4.6.2.1 void* sl_list_data (const [sl_list](#) list, const size_t index)

Parameters

<i>list</i>	A pointer to the list.
<i>index</i>	The index of the data.

Returns

A pointer to the data, or NULL if the index is out of range.

4.6.2.2 int sl_list_delete_at ([sl_list](#) list, const size_t index)

Parameters

<i>list</i>	A pointer to the list.
<i>index</i>	The index of the element to delete.

Returns

0 on success, CDSERR_OUTOFRANGE if the the index is out of range.

4.6.2.3 `int sl_list_find_index (const sl_list list, const void * data)`

Parameters

<i>list</i>	A pointer to the list.
<i>data</i>	A pointer to the data to find.

Returns

The index of the element, if found, or CDSERR_NOTFOUND if it is not in the list.

4.6.2.4 `sl_list_itr sl_list_find_itr (const sl_list list, const void * data)`

Parameters

<i>list</i>	A pointer to the list.
<i>data</i>	A pointer to the data to find.

Returns

An iterator to the found element, or NULL if the element is not in the list.

4.6.2.5 `sl_list_itr sl_list_first (const sl_list list)`

Parameters

<i>list</i>	A pointer to the list.
-------------	------------------------

Returns

An iterator to the first element.

4.6.2.6 `void sl_list_free (sl_list list)`

Parameters

<i>list</i>	A pointer to the list to free.
-------------	--------------------------------

4.6.2.7 `void sl_list_free_node (sl_list_node node)`

Parameters

<i>node</i>	A pointer to the node to free.
-------------	--------------------------------

4.6.2.8 `sl_list_itr sl_list_index (const sl_list list, const size_t index)`

Parameters

<i>list</i>	A pointer to the list.
<i>index</i>	The specified index.

Returns

The iterator, or `NULL` if `index` is out of range.

4.6.2.9 `sl_list sl_list_init (int(*) (const void *, const void *) cfunc)`

Parameters

<i>cfunc</i>	A pointer to a compare function. The function should return <code>int</code> and accept two parameters of type <code>void *</code> . It should return less than 1 if the first parameter is less than the second, greater than 1 if the first parameter is greater than the second, and zero if the parameters are equal.
--------------	---

Returns

A pointer to the new list.

4.6.2.10 `int sl_list_insert_after (sl_list list, const sl_list_itr itr, void * data)`

Parameters

<i>list</i>	A pointer to the list.
<i>itr</i>	The iterator after which to insert.
<i>data</i>	A pointer to the data to add. The memory pointed to by this parameter must be dynamically allocated, as an attempt will be made to <code>free()</code> it when deleting the list.

Returns

0 on success, `CDSERR_BADITERATOR` if `itr` is a `NULL` pointer.

4.6.2.11 `int sl_list_insert_at (sl_list list, const size_t index, void * data)`

Parameters

<i>list</i>	A pointer to the list.
<i>index</i>	The index at which to insert. Setting this equal to the length of the list (i.e. to one element past the zero-based index of the last element) inserts the element at the end of the list.
<i>data</i>	A pointer to the data to add. The memory pointed to by this parameter must be dynamically allocated, as an attempt will be made to <code>free()</code> it when deleting the list.

Returns

0 on success, `CDSERR_OUTOFRANGE` if `index` exceeds the length of the list.

4.6.2.12 `bool sl_list_isempty (const sl_list list)`

Parameters

<i>list</i>	A pointer to the list.
-------------	------------------------

Returns

`true` if the list is empty, otherwise `false`.

4.6.2.13 `size_t sl_list_length (const sl_list list)`

Parameters

<i>list</i>	A pointer to the list.
-------------	------------------------

4.6.2.14 `sl_list_node sl_list_new_node (void * data)`

Parameters

<i>data</i>	The data for the new node.
-------------	----------------------------

Returns

A pointer to the newly created node.

4.6.2.15 `sl_list_itr sl_list_next (const sl_list_itr itr)`

Parameters

<i>itr</i>	The iterator to advance
------------	-------------------------

Returns

The advanced iterator.

4.6.2.16 `void sl_list_prepend (sl_list list, void * data)`

Parameters

<i>list</i>	A pointer to the list.
<i>data</i>	A pointer to the data to add. The memory pointed to by this parameter must be dynamically allocated, as an attempt will be made to <code>free()</code> it when deleting the list.

4.6.2.17 `sl_list_node sl_list_remove_at (sl_list list, const size_t index)`

Parameters

<i>list</i>	A pointer to the list.
<i>index</i>	The index of the element to be removed.

Returns


A pointer to the removed node. This should be `free()`d by calling [sl_list_free_node\(\)](#).

4.7 `sl_list.h` File Reference


Developer interface to singly linked list data structure.

```
#include <stddef.h>
#include "cds_sl_list.h"
```

Include dependency graph for sl_list.h:

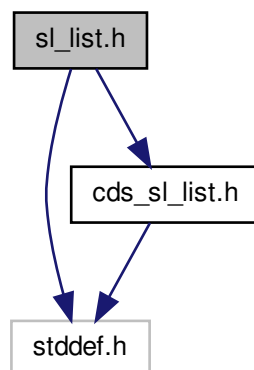

This graph shows which files directly or indirectly include this file:



Data Structures

- struct [sl_list_t](#)
Struct to contain a list.

Typedefs

- typedef struct [sl_list_t](#) [sl_list_t](#)
Struct to contain a list.
- typedef struct [sl_list_node_t](#) * [sl_list_node](#)
Typedef for list node.

Functions

- [sl_list_node](#) [sl_list_remove_at](#) ([sl_list](#) list, const [size_t](#) index)

Removes, but does not delete, an element at an index.

- `sl_list_node sl_list_new_node (void *data)`

Creates a new list node.

- `void sl_list_free_node (sl_list_node node)`

Frees resources for a node and any data.

4.7.1 Detailed Description

Author

Paul Griffiths

Copyright

Copyright 2013 Paul Griffiths. Distributed under the terms of the GNU General Public License. <http://www.gnu.org/licenses/>

4.7.2 Function Documentation

4.7.2.1 `void sl_list_free_node (sl_list_node node)`

Parameters

<i>node</i>	A pointer to the node to free.
-------------	--------------------------------

4.7.2.2 `sl_list_node sl_list_new_node (void * data)`

Parameters

<i>data</i>	The data for the new node.
-------------	----------------------------

Returns

A pointer to the newly created node.

4.7.2.3 `sl_list_node sl_list_remove_at (sl_list list, const size_t index)`

Parameters

<i>list</i>	A pointer to the list.
<i>index</i>	The index of the element to be removed.

Returns

A pointer to the removed node. This should be `free()` d by calling `sl_list_free_node()`.

Index

CDSERR_BADITERATOR
 cds_common.h, 8
CDSERR_ERROR
 cds_common.h, 8
CDSERR_NOTFOUND
 cds_common.h, 8
CDSERR_OUTOFRANGE
 cds_common.h, 8
cdatastruct.h, 7
cds_common.h
 CDSERR_BADITERATOR, 8
 CDSERR_ERROR, 8
 CDSERR_NOTFOUND, 8
 CDSERR_OUTOFRANGE, 8
cds_common.h, 8
 cds_error, 8
cds_compare_int
 cds_general.h, 10
 general.c, 18
cds_compare_long
 cds_general.h, 10
 general.c, 18
cds_compare_string
 cds_general.h, 10
 general.c, 18
cds_compare_uint
 cds_general.h, 10
 general.c, 18
cds_compare_ulong
 cds_general.h, 10
 general.c, 18
cds_error
 cds_common.h, 8
cds_general.h, 9
 cds_compare_int, 10
 cds_compare_long, 10
 cds_compare_string, 10
 cds_compare_uint, 10
 cds_compare_ulong, 10
 cds_new_int, 11
 cds_new_long, 11
 cds_new_string, 11
 cds_new_uint, 11
 cds_new_ulong, 11
cds_new_int
 cds_general.h, 11
 general.c, 19
cds_new_long
 cds_general.h, 11
 general.c, 19
 cds_new_string, 11
 general.c, 19
cds_new_uint
 cds_general.h, 11
 general.c, 19
cds_new_ulong
 cds_general.h, 11
 general.c, 19
cds_sl_list.h, 12
 sl_list_data, 14
 sl_list_delete_at, 14
 sl_list_find_index, 14
 sl_list_find_itr, 14
 sl_list_first, 14
 sl_list_free, 15
 sl_list_index, 15
 sl_list_init, 15
 sl_list_insert_after, 15
 sl_list_insert_at, 15
 sl_list_isempty, 16
 sl_list_length, 16
 sl_list_next, 16
 sl_list_prepend, 16
cfunc
 sl_list_t, 6
data
 sl_list_node_t, 5
front
 sl_list_t, 6
general.c, 16
 cds_compare_int, 18
 cds_compare_long, 18
 cds_compare_string, 18
 cds_compare_uint, 18
 cds_compare_ulong, 18
 cds_new_int, 19
 cds_new_long, 19
 cds_new_string, 19
 cds_new_uint, 19
 cds_new_ulong, 19
length
 sl_list_t, 6
next
 sl_list_node_t, 5

- sl_list.c, [20](#)
 - sl_list_data, [21](#)
 - sl_list_delete_at, [21](#)
 - sl_list_find_index, [21](#)
 - sl_list_find_itr, [22](#)
 - sl_list_first, [22](#)
 - sl_list_free, [22](#)
 - sl_list_free_node, [22](#)
 - sl_list_index, [22](#)
 - sl_list_init, [23](#)
 - sl_list_insert_after, [23](#)
 - sl_list_insert_at, [23](#)
 - sl_list_isempty, [23](#)
 - sl_list_length, [23](#)
 - sl_list_new_node, [24](#)
 - sl_list_next, [24](#)
 - sl_list_prepend, [24](#)
 - sl_list_remove_at, [24](#)
- sl_list.h, [24](#)
 - sl_list_free_node, [26](#)
 - sl_list_new_node, [26](#)
 - sl_list_remove_at, [26](#)
- sl_list_data
 - cds_sl_list.h, [14](#)
 - sl_list.c, [21](#)
- sl_list_delete_at
 - cds_sl_list.h, [14](#)
 - sl_list.c, [21](#)
- sl_list_find_index
 - cds_sl_list.h, [14](#)
 - sl_list.c, [21](#)
- sl_list_find_itr
 - cds_sl_list.h, [14](#)
 - sl_list.c, [22](#)
- sl_list_first
 - cds_sl_list.h, [14](#)
 - sl_list.c, [22](#)
- sl_list_free
 - cds_sl_list.h, [15](#)
 - sl_list.c, [22](#)
- sl_list_free_node
 - sl_list.c, [22](#)
 - sl_list.h, [26](#)
- sl_list_index
 - cds_sl_list.h, [15](#)
 - sl_list.c, [22](#)
- sl_list_init
 - cds_sl_list.h, [15](#)
 - sl_list.c, [23](#)
- sl_list_insert_after
 - cds_sl_list.h, [15](#)
 - sl_list.c, [23](#)
- sl_list_insert_at
 - cds_sl_list.h, [15](#)
 - sl_list.c, [23](#)
- sl_list_isempty
 - cds_sl_list.h, [16](#)
 - sl_list.c, [23](#)
- sl_list_length
 - cds_sl_list.h, [16](#)
 - sl_list.c, [23](#)
- sl_list_new_node
 - sl_list.c, [24](#)
 - sl_list.h, [26](#)
- sl_list_next
 - cds_sl_list.h, [16](#)
 - sl_list.c, [24](#)
- sl_list_node_t, [5](#)
 - data, [5](#)
 - next, [5](#)
- sl_list_prepend
 - cds_sl_list.h, [16](#)
 - sl_list.c, [24](#)
- sl_list_remove_at
 - sl_list.c, [24](#)
 - sl_list.h, [26](#)
- sl_list_t, [6](#)
 - cfunc, [6](#)
 - front, [6](#)
 - length, [6](#)