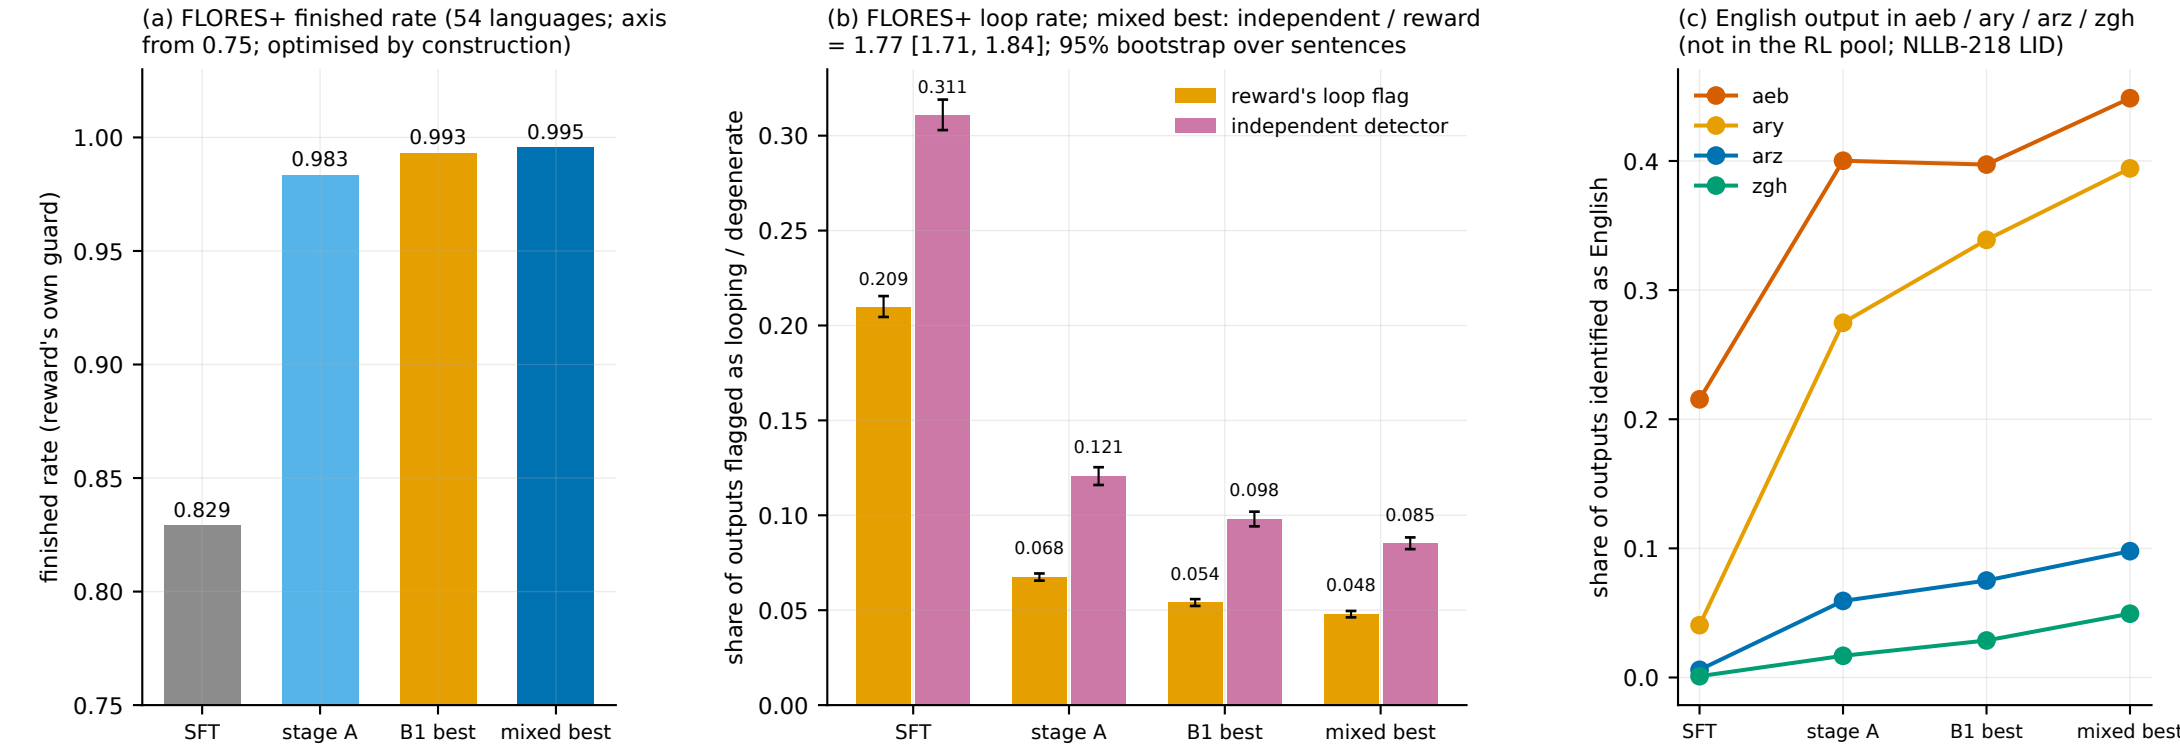Finishing, looping and English output (1 seed per model; FLORES+ devtest; reward flag = is_repetitive / is_self_repetitive; independent = lzma residual + repeated 8-grams, thresholds at 0.1% of human references)