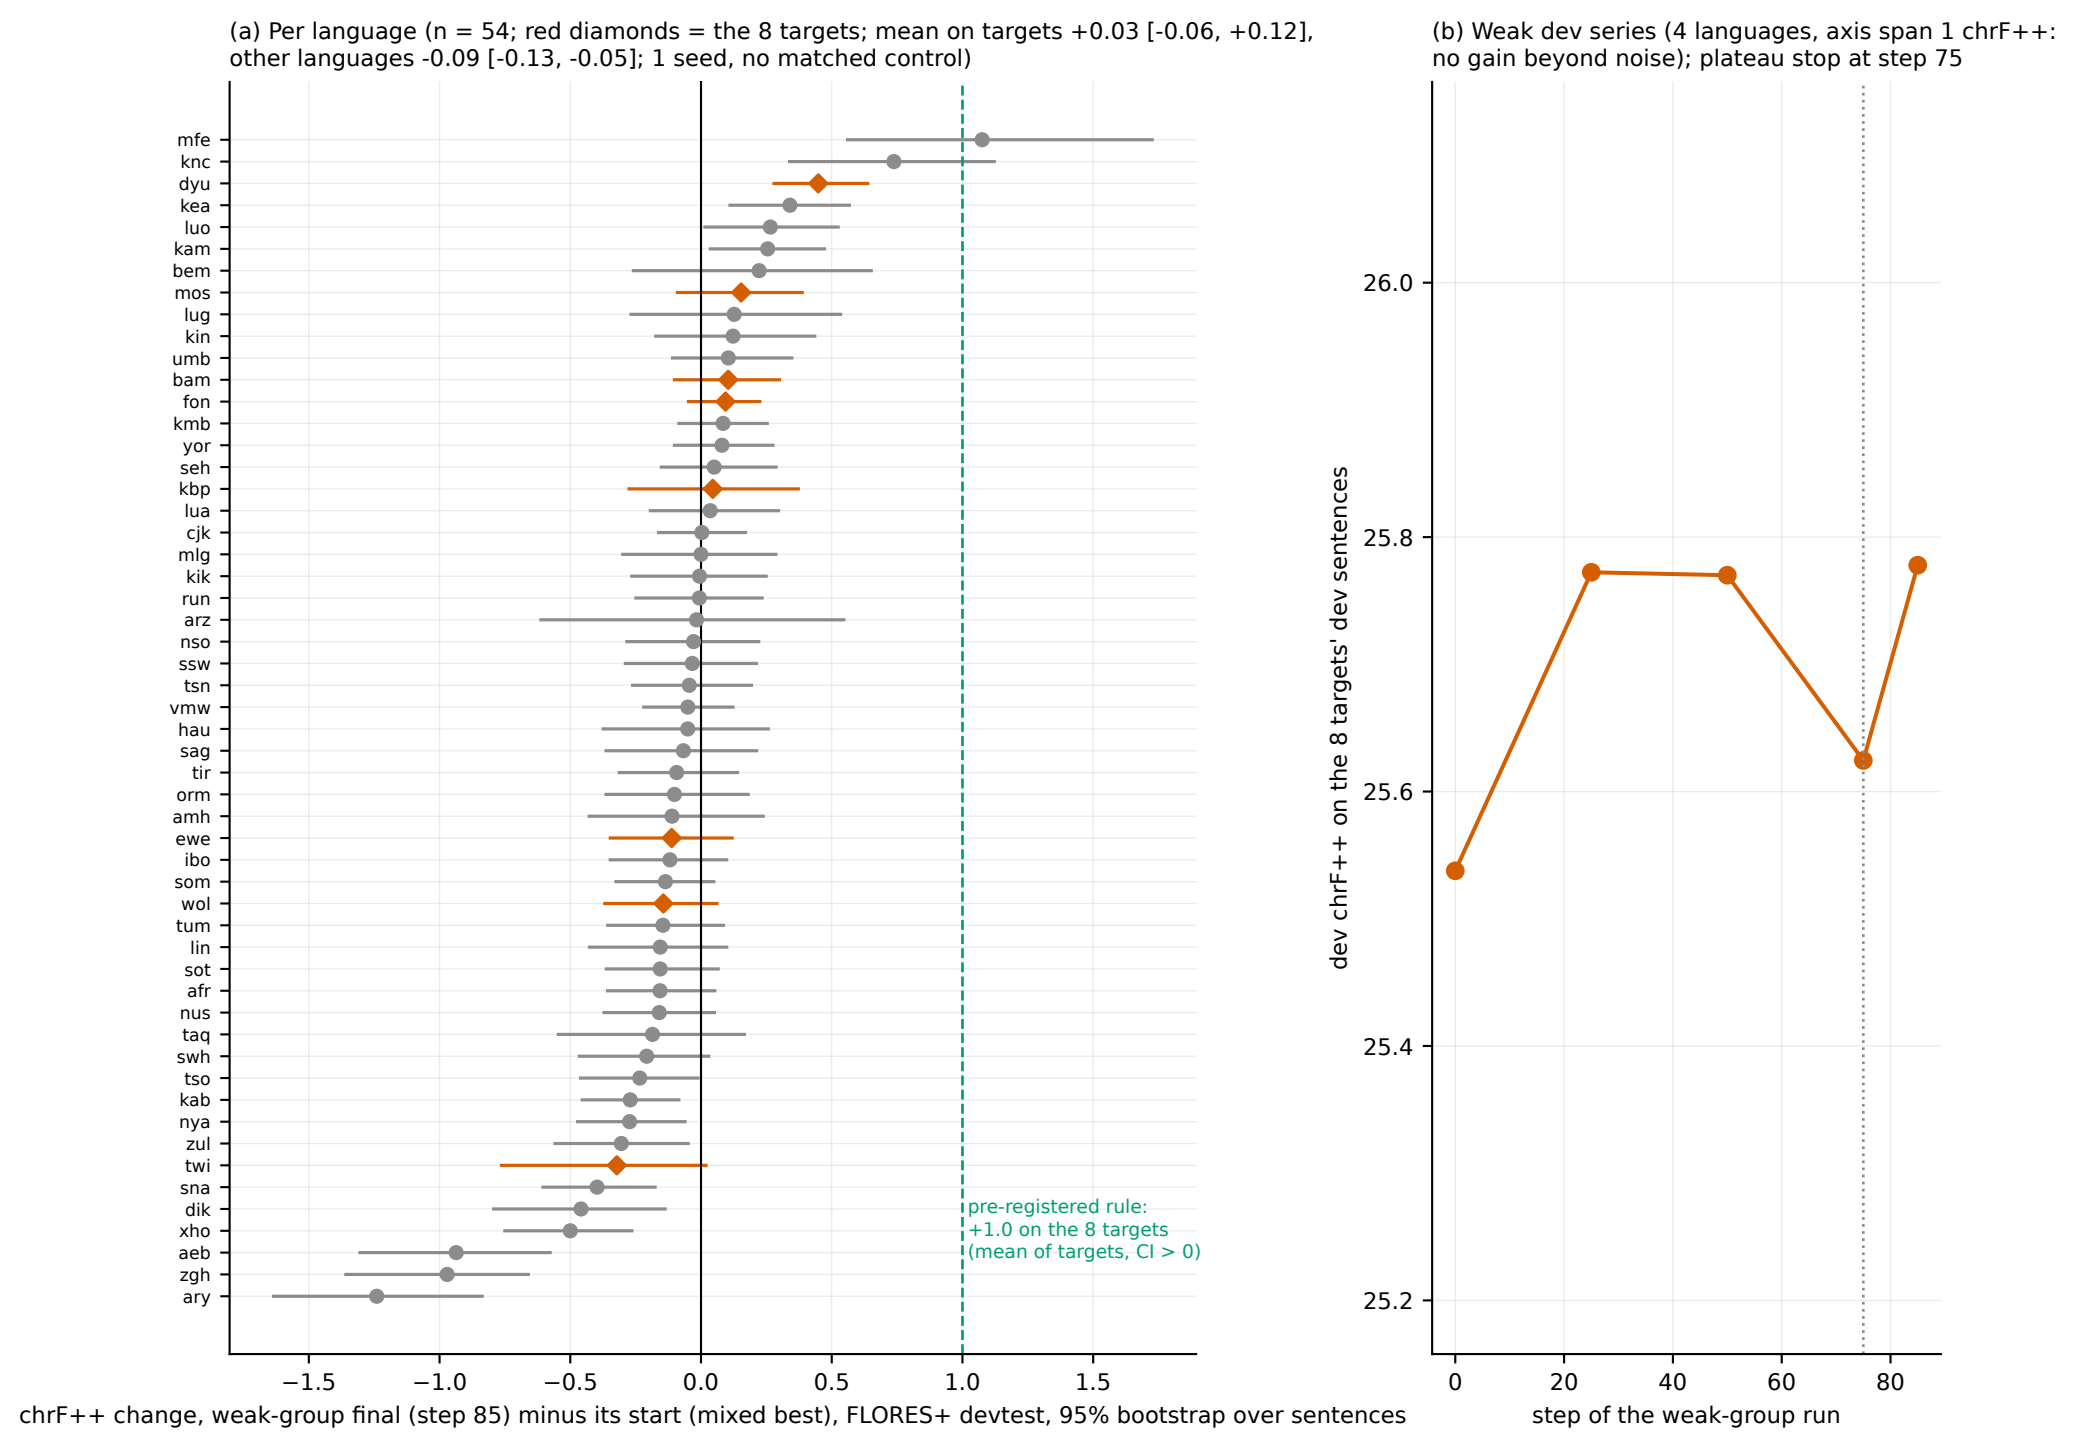
(a) Per language (n = 54; red diamonds = the 8 targets; mean on targets +0.03 [-0.06, +0.12], other languages -0.09 [-0.13, -0.05]; 1 seed, no matched control)
mfe
knc
dyu
kea
luo
kam
bem
mos
lug
kin
umb
bam
fon
kmb
yor
seh
kbp
lua
cjk
mlg
kik
run
arz
nso
ssw
tsn
vmw
hau
sag
tir
orm
amh
ewe
ibo
som
wol
tum
lin
sot
afr
nus
taq
swh
tso
kab
nya
zul
twi
sna
dik
xho
aeb
zgh
ary
−1.5
−1.0
−0.5
0.0
0.5
1.0
1.5
pre-registered rule:
+1.0 on the 8 targets
(mean of targets, CI > 0)
chrF++ change, weak-group final (step 85) minus its start (mixed best), FLORES+ devtest, 95% bootstrap over sentences
(b) Weak dev series (4 languages, axis span 1 chrF++: no gain beyond noise); plateau stop at step 75
dev chrF++ on the 8 targets' dev sentences
26.0
25.8
25.6
25.4
25.2
0
20
40
60
80
step of the weak-group run