Especificación API de Pagos v2 / Payments API v2

Generado el 1979-07-01 — contenido sintético ES/EN.

2. API de Pagos v2 — Payments API v2

Base URL: `https://api.acmepay.com/v2`. Autenticación con **Bearer token** en header *Authorization*.

Authentication via Bearer token in the Authorization header.

2.1 Endpoints principales — Main endpoints

Método	Ruta	Descripción	HTTP
POST	/payments	Crea un pago / Create payment	201
GET	/payments/{id}	Consulta pago / Get payment	200
POST	/payments/{id}/refund	Reembolso / Refund	200
GET	/payments?status=ok	Lista filtrada / Filtered list	200
DELETE	/payments/{id}	Cancela pendiente / Cancel	204

2.2 Códigos de error — Error codes

Código	Nombre	Causa / Cause
400	Bad Request	Parámetros inválidos / Invalid params
401	Unauthorized	Token ausente o expirado / Missing or expired token
403	Forbidden	Sin permisos / No permissions
404	Not Found	El pago no existe / Payment not found
429	Too Many Requests	Límite excedido / Rate limit exceeded
500	Server Error	Fallo interno / Internal failure

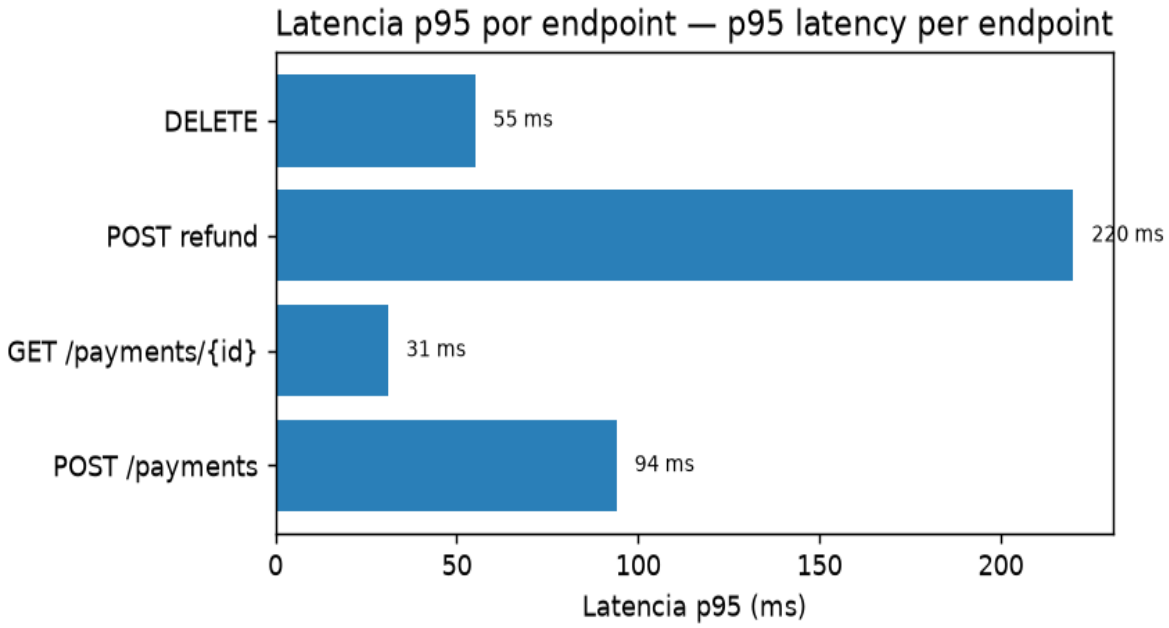

2.3 Ejemplo de request — Request example

```
curl -X POST https://api.acmepay.com/v2/payments \ -H "Authorization: Bearer TOKEN" \ -H "Content-Type: application/json" \ -d '{"amount": 1500, "currency": "MXN", "method": "card"}'
```

2.4 Rate limits

- Gratuito: 100 req/min, 5,000 req/día. / Free: 100 rpm, 5k/day.
- Estándar: 1,000 req/min, 100,000 req/día. / Standard: 1k rpm, 100k/day.
- Enterprise: negociable, sin tope. / Negotiable, no cap.
- Al exceder: HTTP 429 + header Retry-After (segundos). / On excess: 429 + Retry-After.