

a Causes of incorrect runs

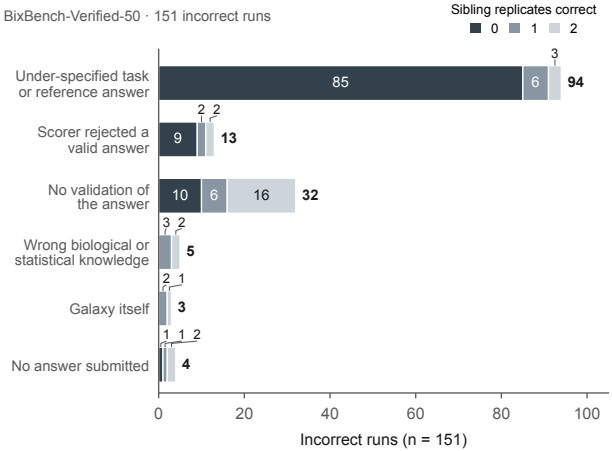

b Accuracy across replicates

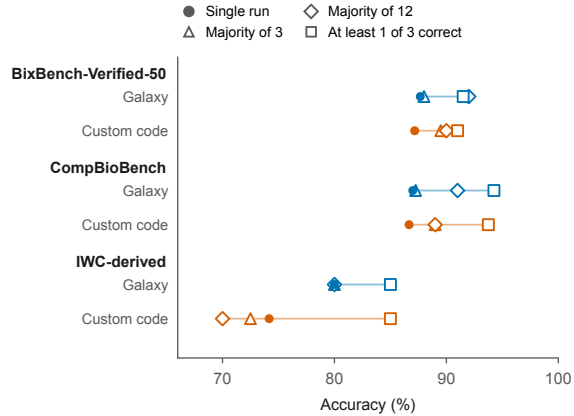

c What each execution record retains

bix-16-q1 · GPT-5.6 Luna · replicate 1

	Galaxy job record	Custom-code trace
Tool and version	featurewise_correlation 0.1.0+galaxy3 (Tool Shed identifier)	Inline Python script; pandas, NumPy and SciPy installed with unpinned pip
Parameters	Fields: method = spearman; transform_b = negate; min_pairs = 3	Written in the code; essentiality taken as −ρ when ranking
Inputs and outputs	2 input and 2 output datasets, linked by identifier in the history	Inputs named in the code; results printed to the log only
Status	Job state "ok", exit code 0	Exit code per command (5 of 21 analysis commands failed)
Answer	CDKN1A (accepted)	CDKN1A (accepted)

Stored parameter: DeepSeek V4 Pro r3 used transform_b = none and answered CCND1.

d Token use across interface rounds

