
Interface changes cut Galaxy tokens by more than half, with accuracy unchanged


BixBench-Verified-50. a, b, tokens per complete 50-task run (input including cached context, plus output; mean of 3 runs per task), Galaxy and custom code side by side at each stage; above each pair: Galaxy ÷ custom code; in the bars: accuracy. c, each task's Galaxy tokens after the changes relative to before (3 runs each, summed); the bar is the median. d, where the October savings came from: mean input tokens per run by phase (estimated as in the phase figure). Intervals: 95% cluster bootstrap over source capsules.

Custom code · Galaxy before the changes · Galaxy, intermediate round · Galaxy after the changes


a July 2026 · GPT-5.5

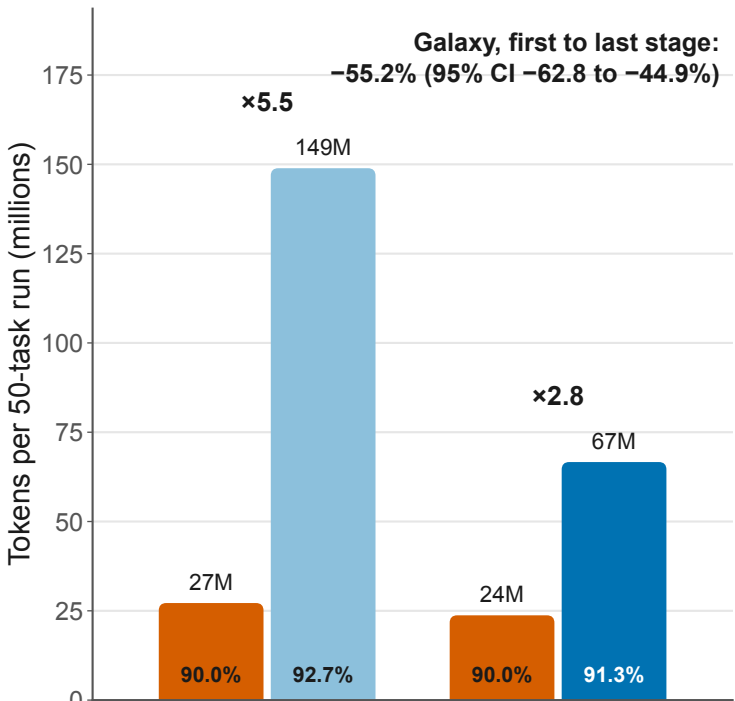

b October 2026 · GPT-5.6 Sol

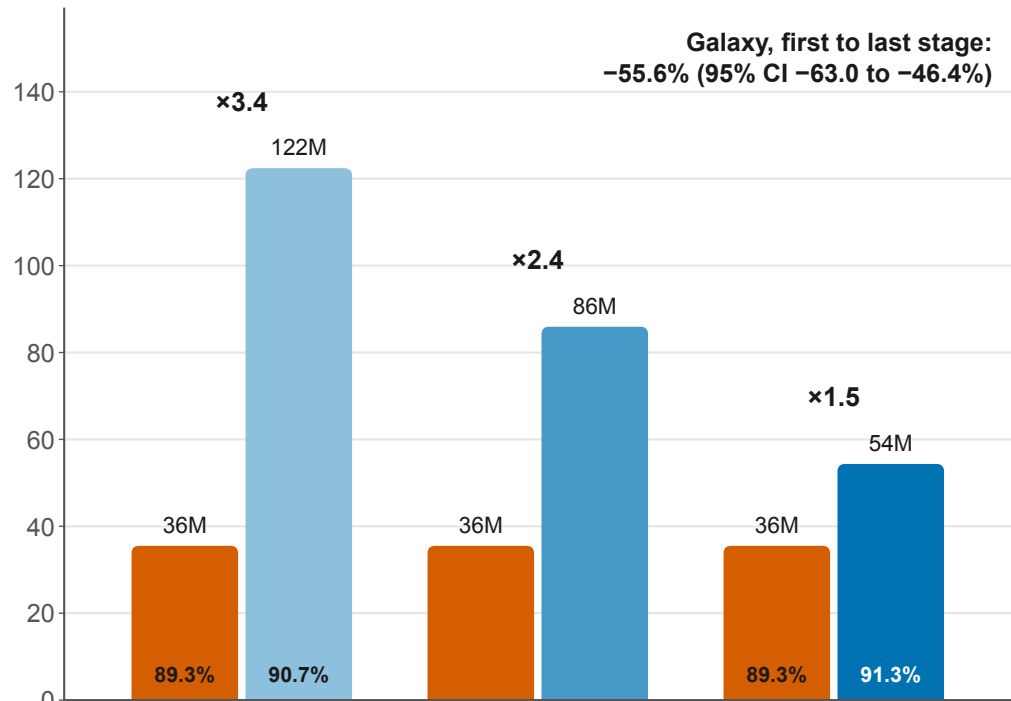


c Change for each task

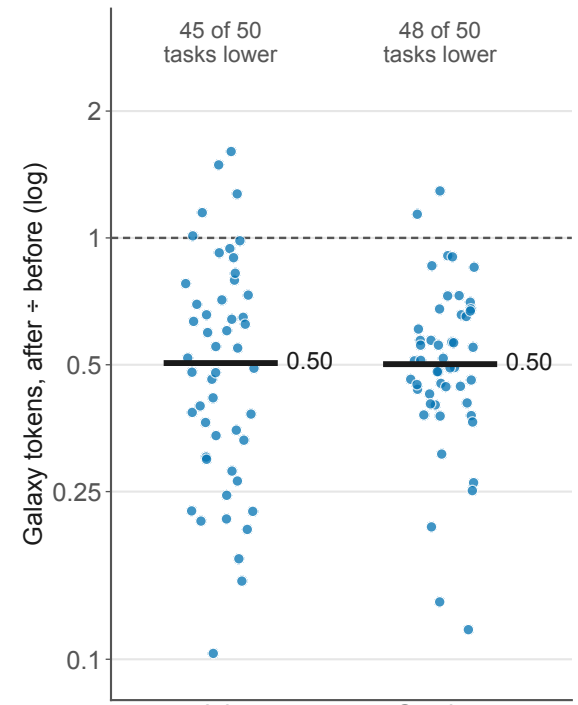

Round 3 (1 replicate): accuracy not reported. Custom code: the same archived runs at each stage.

d Where the October savings came from

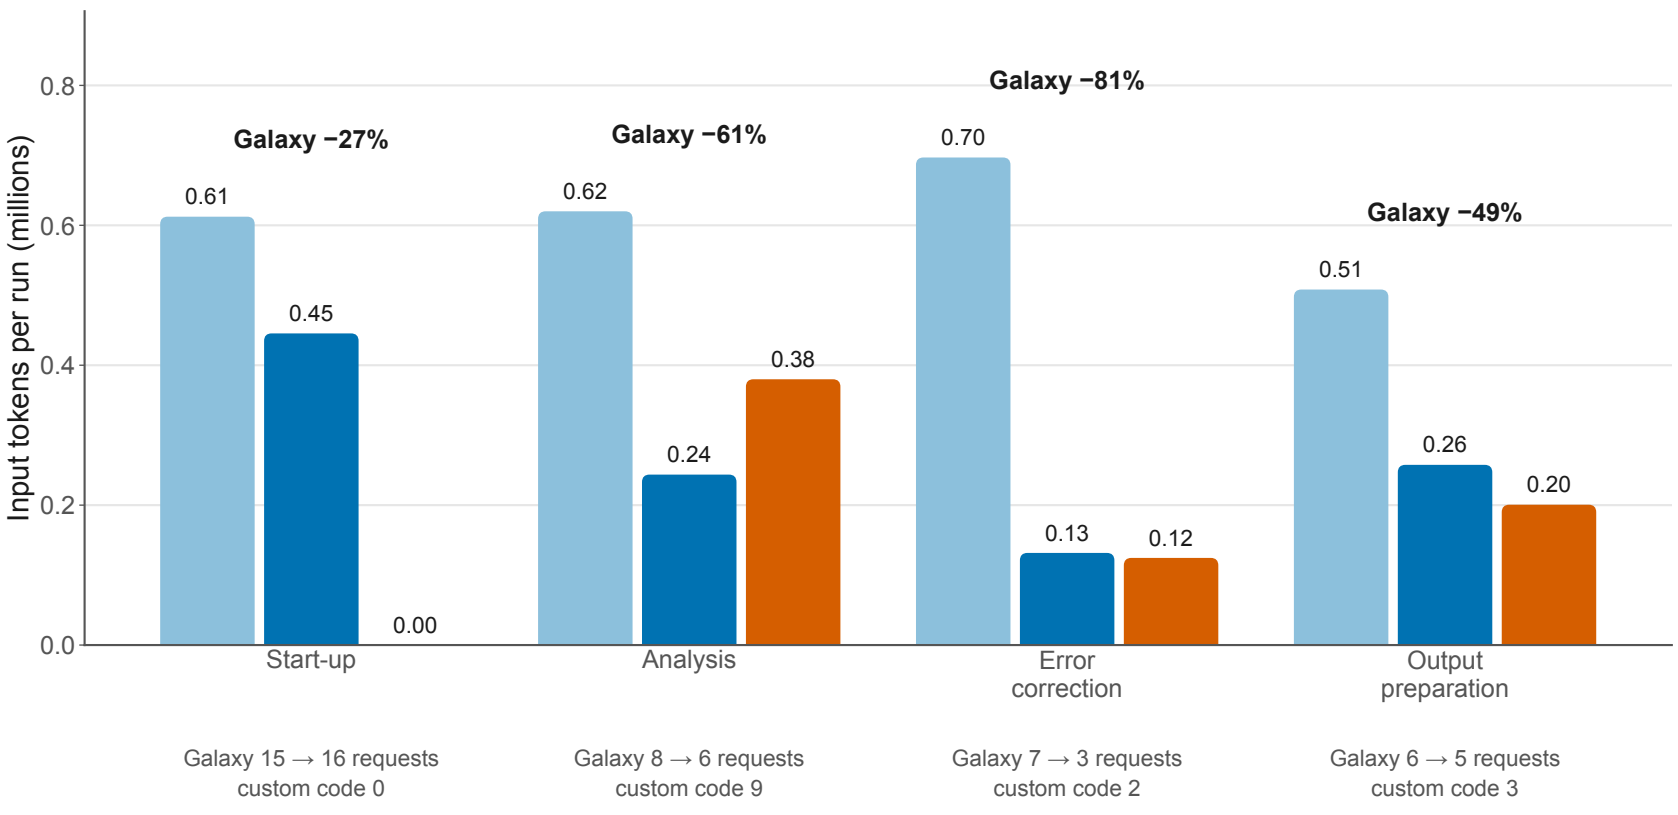

Mean input tokens per run

- Galaxy, archived runs (round 2): 2.44M per run
- Galaxy, round 3 plus longer waits: 1.08M
- Custom code, archived runs: 0.71M

Share of the Galaxy saving:
start-up 12%
analysis 28%
error correction 42%
output preparation 18%