




OP1-B1-NODE-07

ÍNDEX

1. POSTMAN	3
1 Registrar usuari	3
2 Login usuari	4
3 Obténir perfil (ruta protegida)	5
4 Actualitzar perfil	6
5 Canviar contrasenya	7
6 Crear tasca	8
7 Obténir tasques de l'usuari	9
8 Obténir tasca per ID	10
9 Actualitzar tasca	11
10 Eliminar tasca	12
11 Obténir tots els usuaris	13
12 Canviar rol d'usuari	14
13 Eliminar usuari	15
✗ Accés sense token	16
✗ Token invàlid	17
✗ Login incorrecte	18
✗ Usuari normal accedint a admin	19
✗ Registre amb email duplicat	20
✗ Validació de contrasenya massa curta	21
✗ Email invàlid	22
✗ Intentar accedir a tasca d'un altre usuari	23

1. POSTMAN

1 Registrar usuari

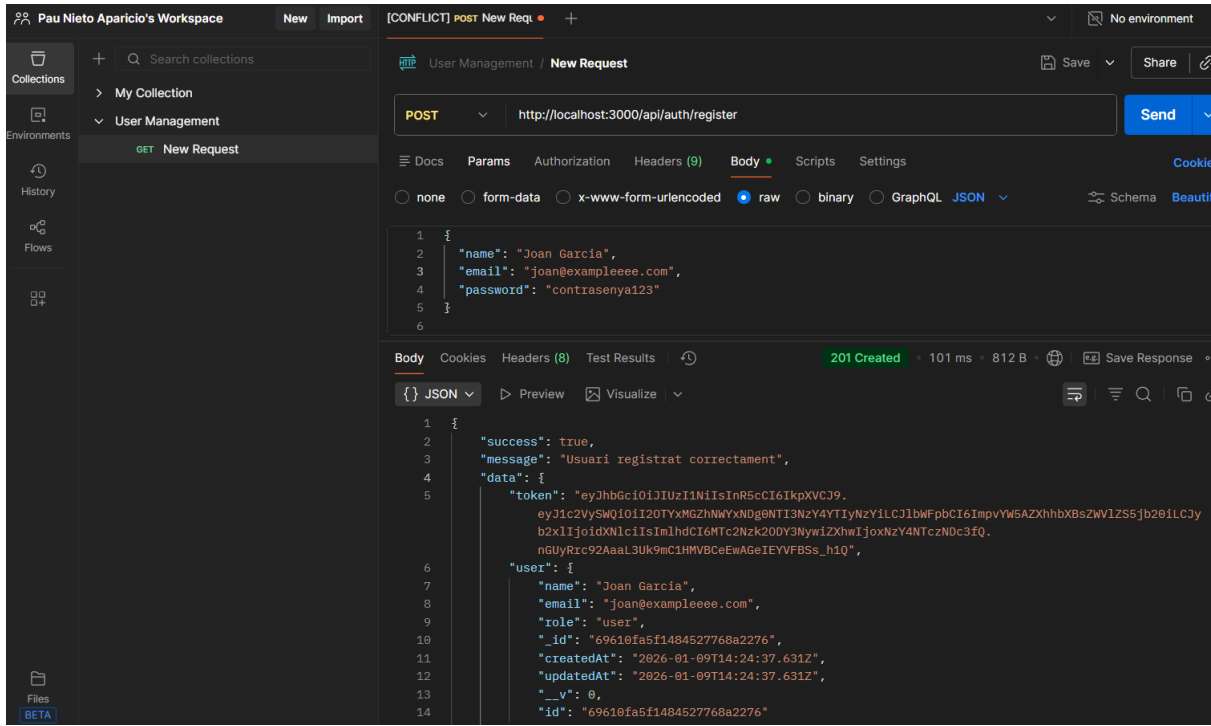


The screenshot shows the Postman interface with a workspace named "Pau Nieto Aparicio's Workspace". A new request is being made to the endpoint `http://localhost:3000/api/auth/register` using the `POST` method. The request body is a JSON object:

```
{
  "name": "Joan Garcia",
  "email": "joan@exampleeee.com",
  "password": "contrasenyai23"
}
```

The response is a 201 Created status, indicating successful registration. The response body is a JSON object:

```
{
  "success": true,
  "message": "Usuari registrat correctament",
  "data": {
    "token": "eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJ1c2VySWQIOnI1MjOTYxMGZhNmYxNDg8NTI3NzY4YTIyZy1lCjJlbWVpbC16ImpvYVW5A2XhhbXBsZWVlZS5jb201LlCjYyY2x1IjoiZXNlci1sImhldCI6MTc2Nzk2ODY3NywiZXBwIjozNzY4NTczNDc3fQ.nGUyRic92Aaal3Uk9mC1HmVBCeEwAGeIEYVFBSS_h1Q",
    "user": {
      "name": "Joan Garcia",
      "email": "joan@exampleeee.com",
      "role": "user",
      "id": "69610fa5f1484527768a2276",
      "createdAt": "2026-01-09T14:24:37.631Z",
      "updatedAt": "2026-01-09T14:24:37.631Z",
      "__v": 0,
      "id": "69610fa5f1484527768a2276"
    }
  }
}
```



3 Obtener perfil (ruta protegida)

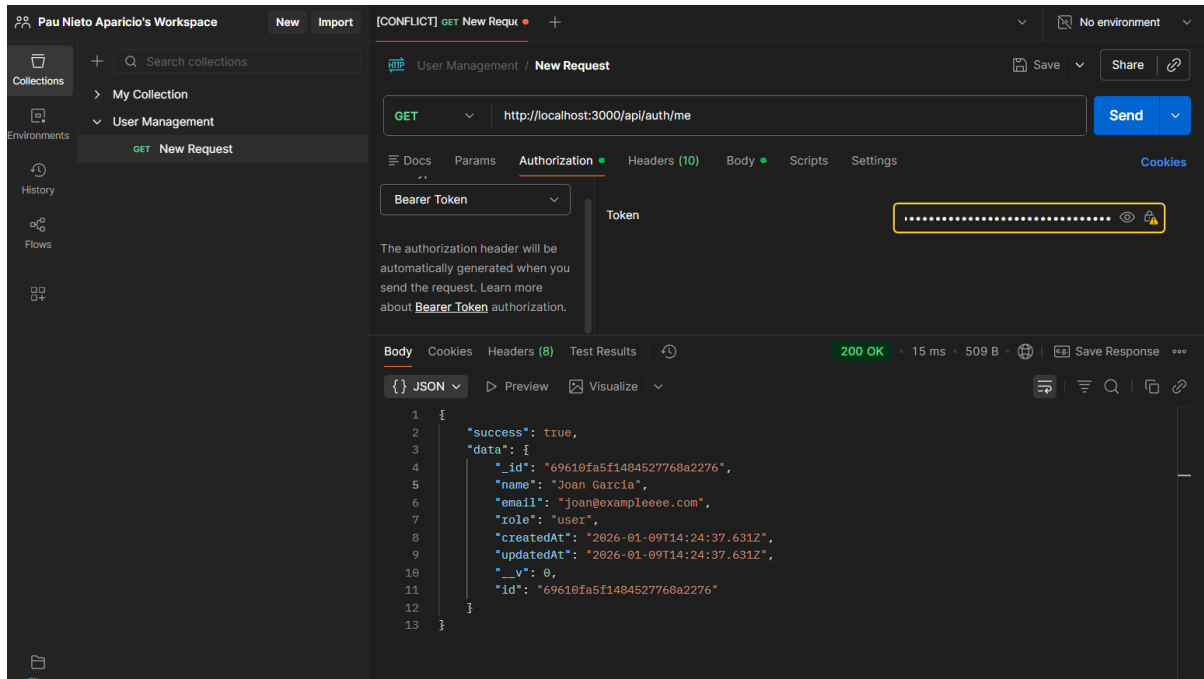

The screenshot shows the Postman interface with a new request configured. The request is a GET to `http://localhost:3000/api/auth/me`. The Authorization tab is selected, showing a Bearer Token. The response is a 200 OK status with a response time of 15 ms and a body size of 509 B. The response body is a JSON object representing a user profile.

```
{
  "success": true,
  "data": {
    "_id": "69610fa5f1484527768a2276",
    "name": "Joan Garcia",
    "email": "joan@exampleeee.com",
    "role": "user",
    "createdAt": "2026-01-09T14:24:37.631Z",
    "updatedAt": "2026-01-09T14:24:37.631Z",
    "__v": 0,
    "id": "69610fa5f1484527768a2276"
  }
}
```

4 Actualitzar perfil

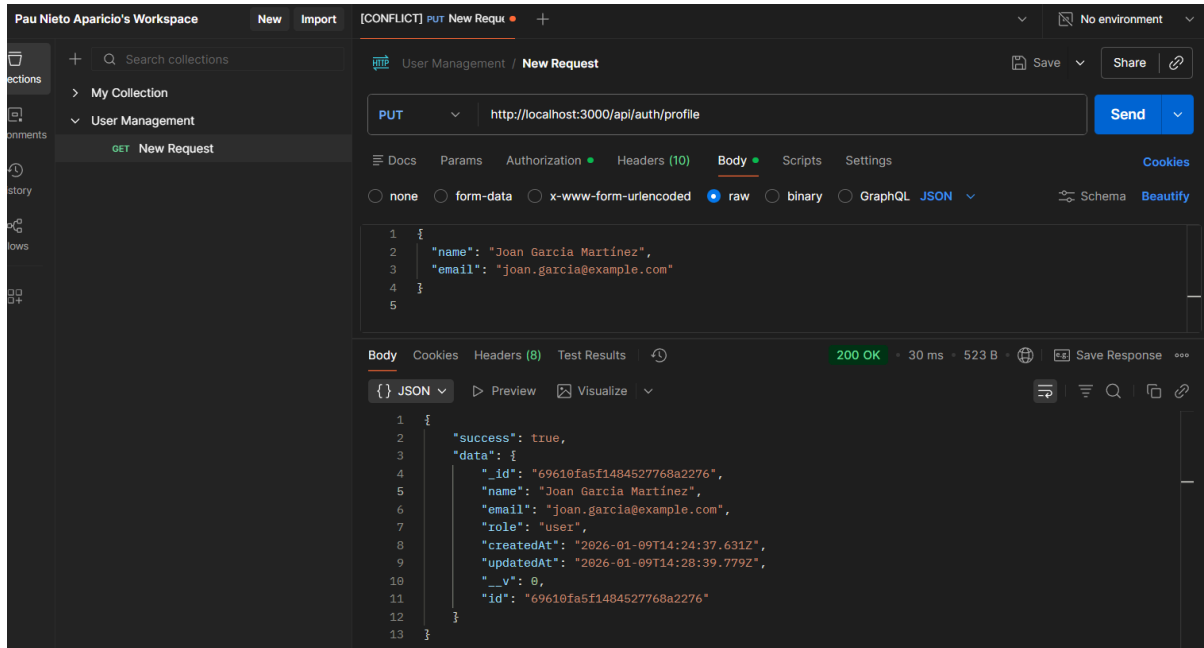

The screenshot shows a REST client interface with a workspace named "Pau Nieto Aparicio's Workspace". The left sidebar displays a collection named "User Management" with a "New Request" button. The main panel shows a "PUT" request to "http://localhost:3000/api/auth/profile". The request body is a JSON object with "name" and "email" fields. The response is a 200 OK status with a JSON body containing user details and a timestamp.

Request:


```
PUT http://localhost:3000/api/auth/profile
```

```
{
  "name": "Joan Garcia Martínez",
  "email": "joan.garcia@example.com"
}
```


Response:

```
{
  "success": true,
  "data": {
    "_id": "69610fa5f1484527768a2276",
    "name": "Joan Garcia Martínez",
    "email": "joan.garcia@example.com",
    "role": "user",
    "createdAt": "2026-01-09T14:24:37.631Z",
    "updatedAt": "2026-01-09T14:28:39.779Z",
    "__v": 0,
    "id": "69610fa5f1484527768a2276"
  }
}
```

5 Canviar contrasenya

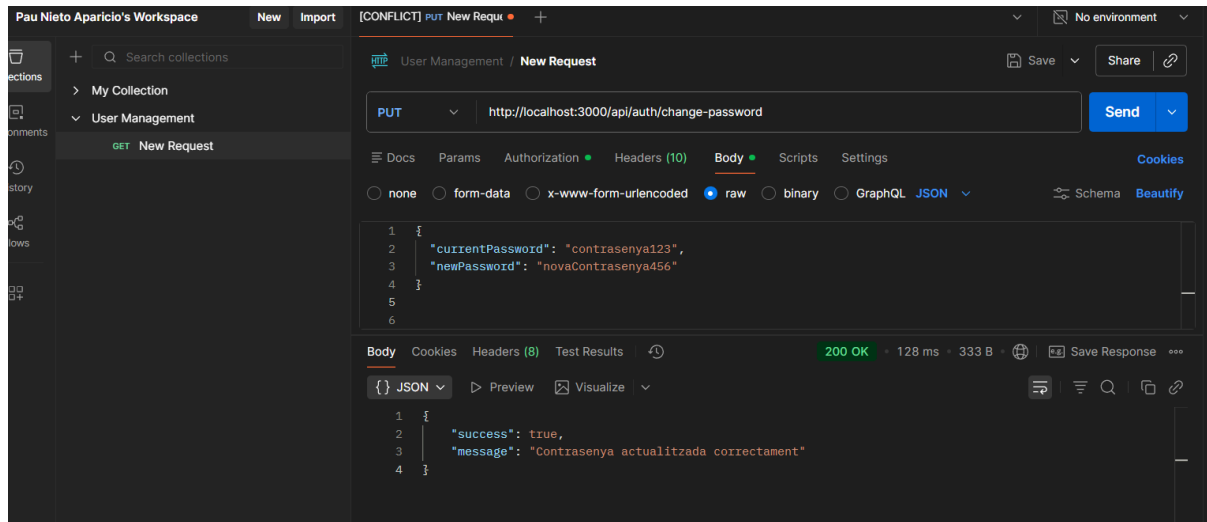

6 Crear tasca

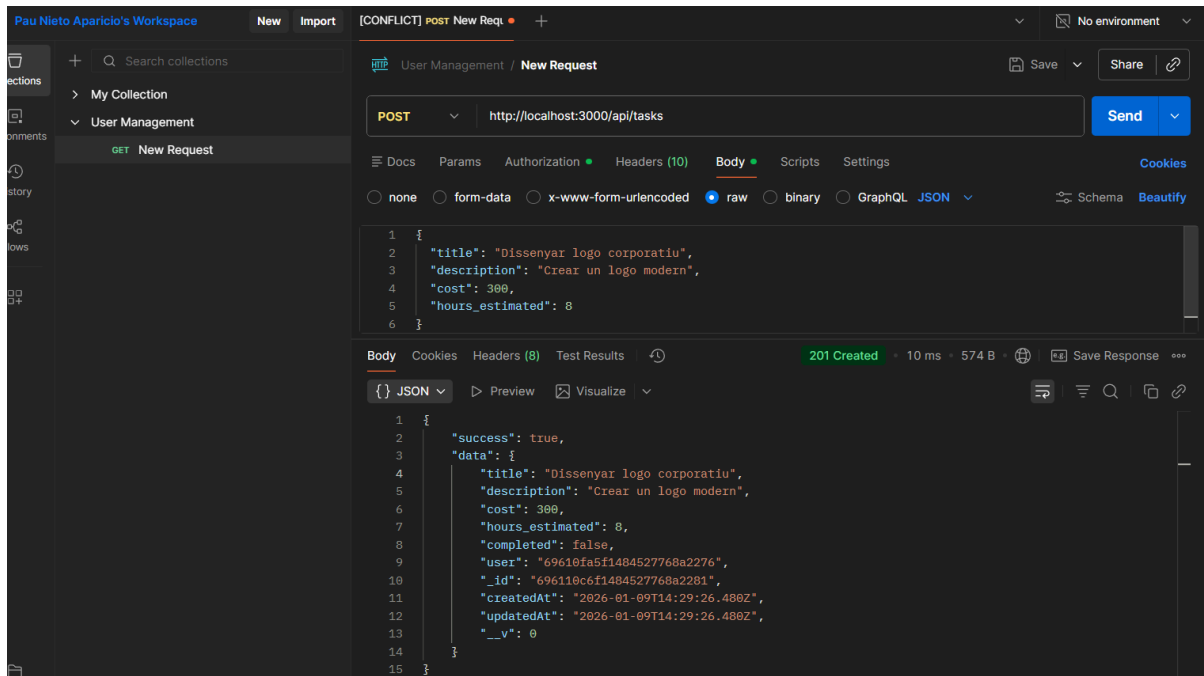


The screenshot shows the Postman interface with a workspace named "Pau Nieto Aparicio's Workspace". A new request is being made to the endpoint `http://localhost:3000/api/tasks` using the POST method. The request body is raw JSON, containing the following data:

```
{
  "title": "Dissenyar logo corporatiu",
  "description": "Crear un logo modern",
  "cost": 300,
  "hours_estimated": 8
}
```

The response is a 201 Created status, indicating the task was successfully created. The response body is JSON, containing the following data:

```
{
  "success": true,
  "data": {
    "title": "Dissenyar logo corporatiu",
    "description": "Crear un logo modern",
    "cost": 300,
    "hours_estimated": 8,
    "completed": false,
    "user": "69610fa5f1484527768a2276",
    "_id": "69610c6f1484527768a2281",
    "createdAt": "2026-01-09T14:29:26.488Z",
    "updatedAt": "2026-01-09T14:29:26.488Z",
    "__v": 0
  }
}
```



7 Obtenir tasques de l'usuari

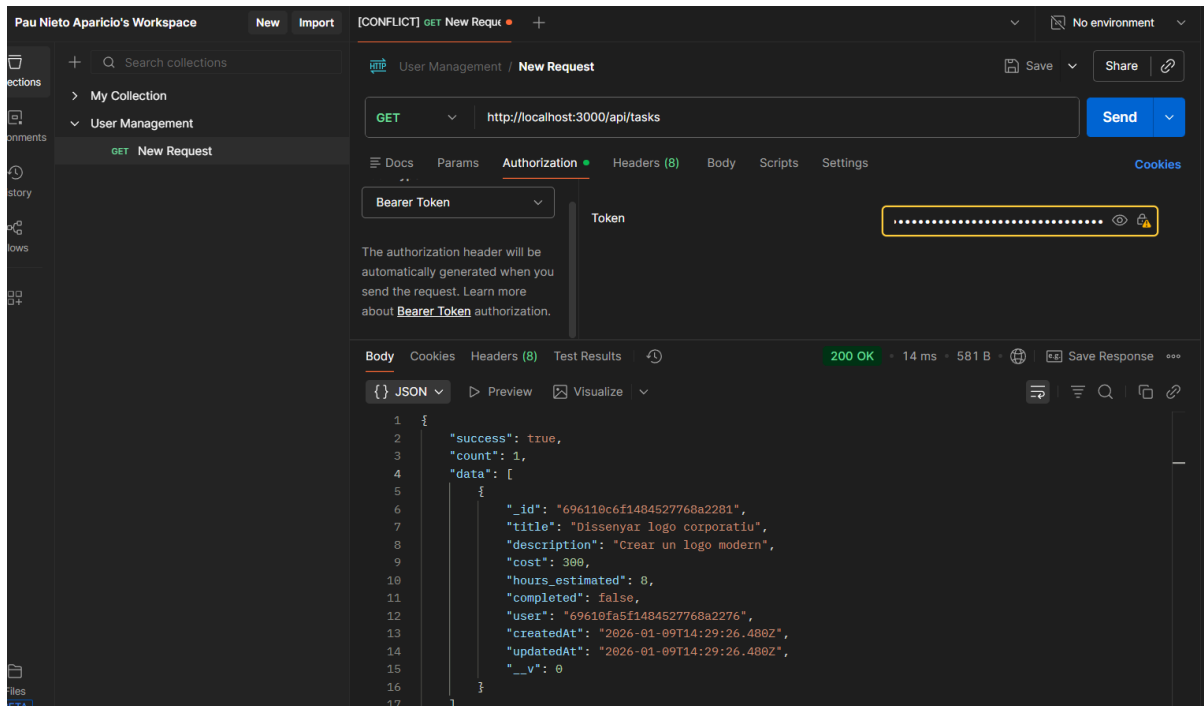

The screenshot shows the Postman interface for a workspace named "Pau Nieto Aparicio's Workspace". A new GET request is configured for the URL `http://localhost:3000/api/tasks`. The authorization is set to "Bearer Token", and a token is entered in the field. The request is sent, resulting in a `200 OK` status with a response time of 14 ms and a body size of 581 B. The response body is a JSON object:

```
{
  "success": true,
  "count": 1,
  "data": [
    {
      "_id": "696110c6f1484527768a2281",
      "title": "Dissenyar logo corporatiu",
      "description": "Crear un logo modern",
      "cost": 300,
      "hours_estimated": 8,
      "completed": false,
      "user": "69610fa5f1484527768a2276",
      "createdAt": "2026-01-09T14:29:26.488Z",
      "updatedAt": "2026-01-09T14:29:26.488Z",
      "__v": 0
    }
  ]
}
```


8 Obtenir tasca per ID

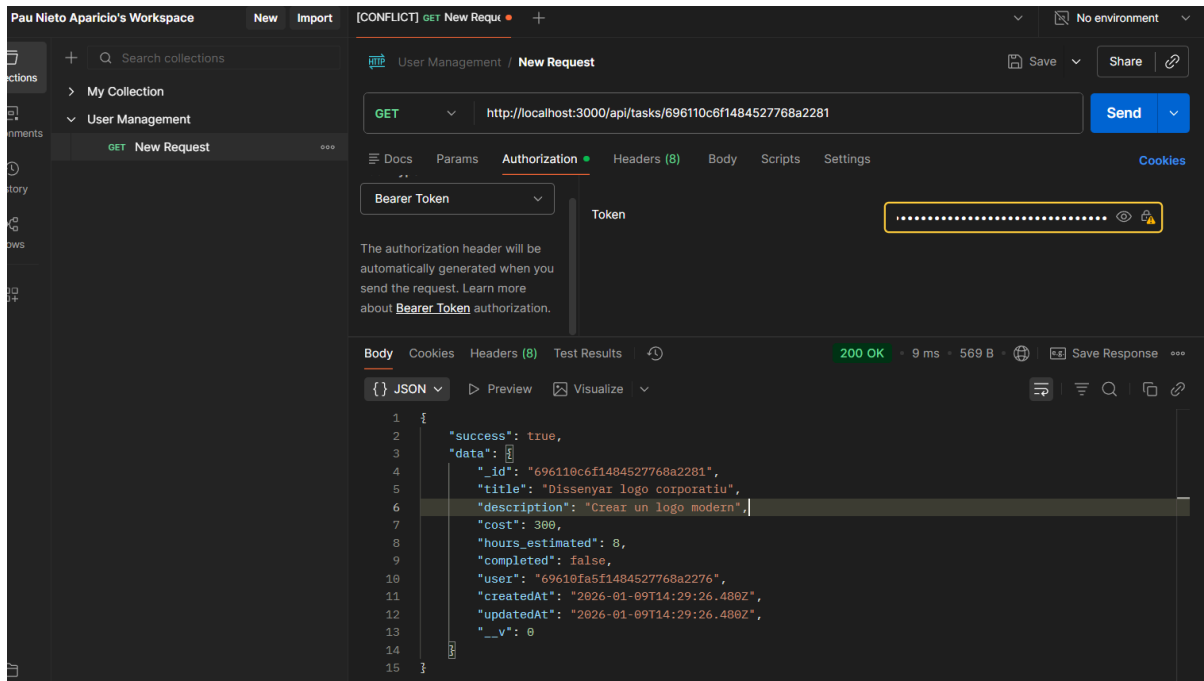

The screenshot displays the Postman interface for a REST client. The workspace is titled "Pau Nieto Aparicio's Workspace". The active collection is "User Management", and the selected request is "New Request". The request method is "GET" and the URL is "http://localhost:3000/api/tasks/696110c6f1484527768a2281". The authorization is set to "Bearer Token". The response status is "200 OK" with a response time of 9 ms and a size of 569 B. The response body is shown in JSON format:

```
1 {
2   "success": true,
3   "data": {
4     "_id": "696110c6f1484527768a2281",
5     "title": "Dissenyar logo corporatiu",
6     "description": "Crear un logo modern",
7     "cost": 300,
8     "hours_estimated": 8,
9     "completed": false,
10    "user": "69610fa5f1484527768a2276",
11    "createdAt": "2026-01-09T14:29:26.486Z",
12    "updatedAt": "2026-01-09T14:29:26.486Z",
13    "__v": 0
14  }
15 }
```

9 Actualitzar tasca

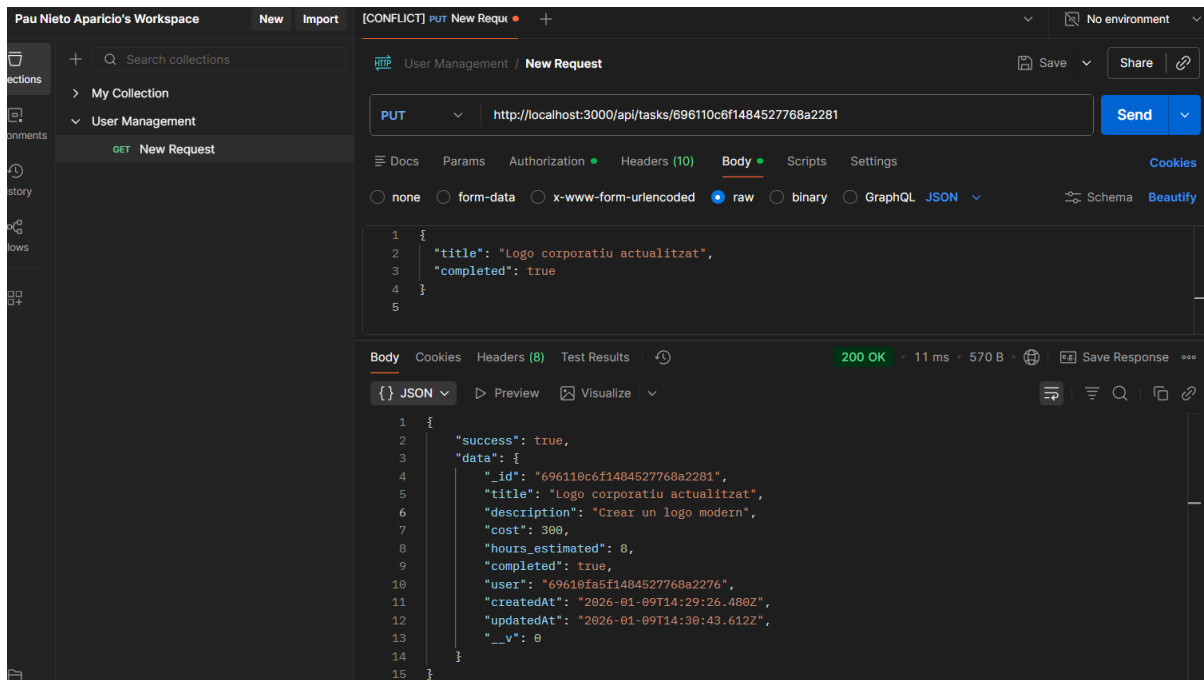


The screenshot shows a REST client interface with a PUT request to `http://localhost:3000/api/tasks/696110c6f1484527768a2281`. The request body is a JSON object:

```
{
  "title": "Logo corporatiu actualitzat",
  "completed": true
}
```

The response is a 200 OK status with a response time of 11 ms and a body size of 570 B. The response body is a JSON object:

```
{
  "success": true,
  "data": {
    "_id": "696110c6f1484527768a2281",
    "title": "Logo corporatiu actualitzat",
    "description": "Crear un logo modern",
    "cost": 300,
    "hours_estimated": 8,
    "completed": true,
    "user": "69610fa5f1484527768a2276",
    "createdAt": "2026-01-09T14:29:26.480Z",
    "updatedAt": "2026-01-09T14:30:43.612Z",
    "__v": 0
  }
}
```


10 Eliminar tasca

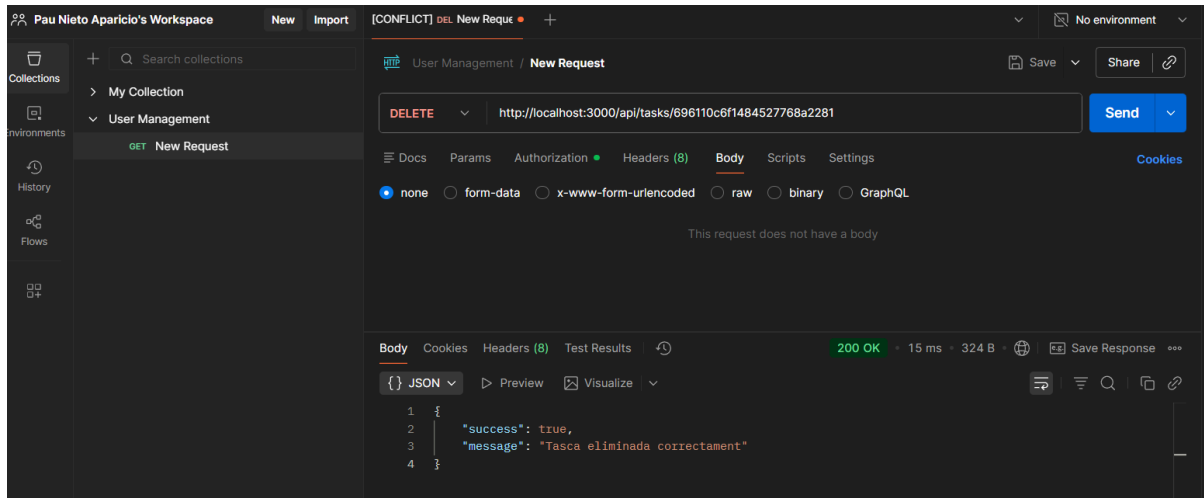

The screenshot shows the Postman interface with a workspace named "Pau Nieto Aparicio's Workspace". The left sidebar displays a collection tree with "My Collection" and "User Management". The "User Management" collection is expanded, showing a "New Request" entry. The main panel shows a "New Request" for the "DELETE" method at the URL "http://localhost:3000/api/tasks/696110c6f1484527768a2281". The "Body" tab is selected, and the message "This request does not have a body" is displayed. The "Headers" tab is also visible, showing 8 headers. The "Test Results" tab shows a successful response with a status of "200 OK", a response time of "15 ms", and a response size of "324 B". The response body is displayed in JSON format:

```
1 {
2   "success": true,
3   "message": "Tasca eliminada correctament"
4 }
```

11 Obtenir tots els usuaris

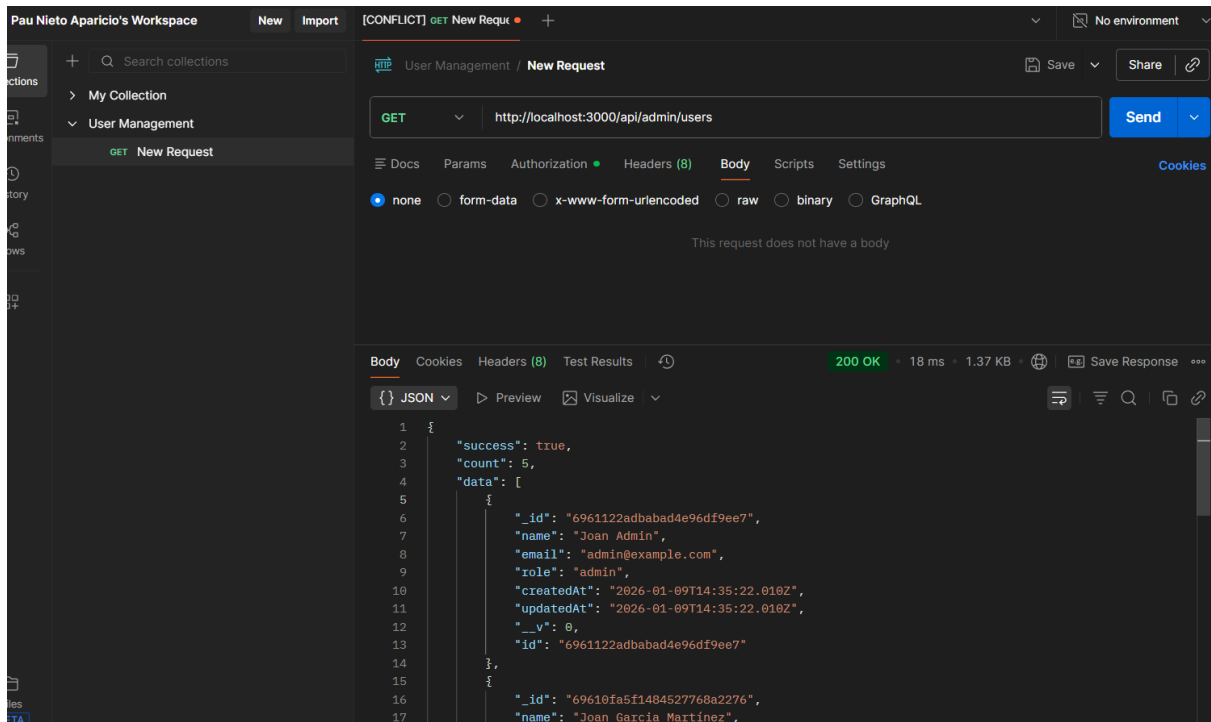


REST client interface showing a GET request to `http://localhost:3000/api/admin/users`. The response is a 200 OK status with a JSON body containing an array of users.

```
{
  "success": true,
  "count": 5,
  "data": [
    {
      "_id": "6961122adbabad4e96df9ee7",
      "name": "Joan Admin",
      "email": "admin@example.com",
      "role": "admin",
      "createdAt": "2026-01-09T14:35:22.010Z",
      "updatedAt": "2026-01-09T14:35:22.010Z",
      "__v": 0,
      "id": "6961122adbabad4e96df9ee7"
    },
    {
      "_id": "69610fa5f1484527768a2276",
      "name": "Joan Garcia Martínez",

```

```
{
  "_id": "69610fa5f1484527768a2276",
  "name": "Joan Garcia Martínez",
  "email": "joan.garcia@example.com",
  "role": "user",
  "createdAt": "2026-01-09T14:24:37.631Z",
  "updatedAt": "2026-01-09T14:29:00.927Z",
  "__v": 0,
  "id": "69610fa5f1484527768a2276"
},
```

12 Canviar rol d'usuari

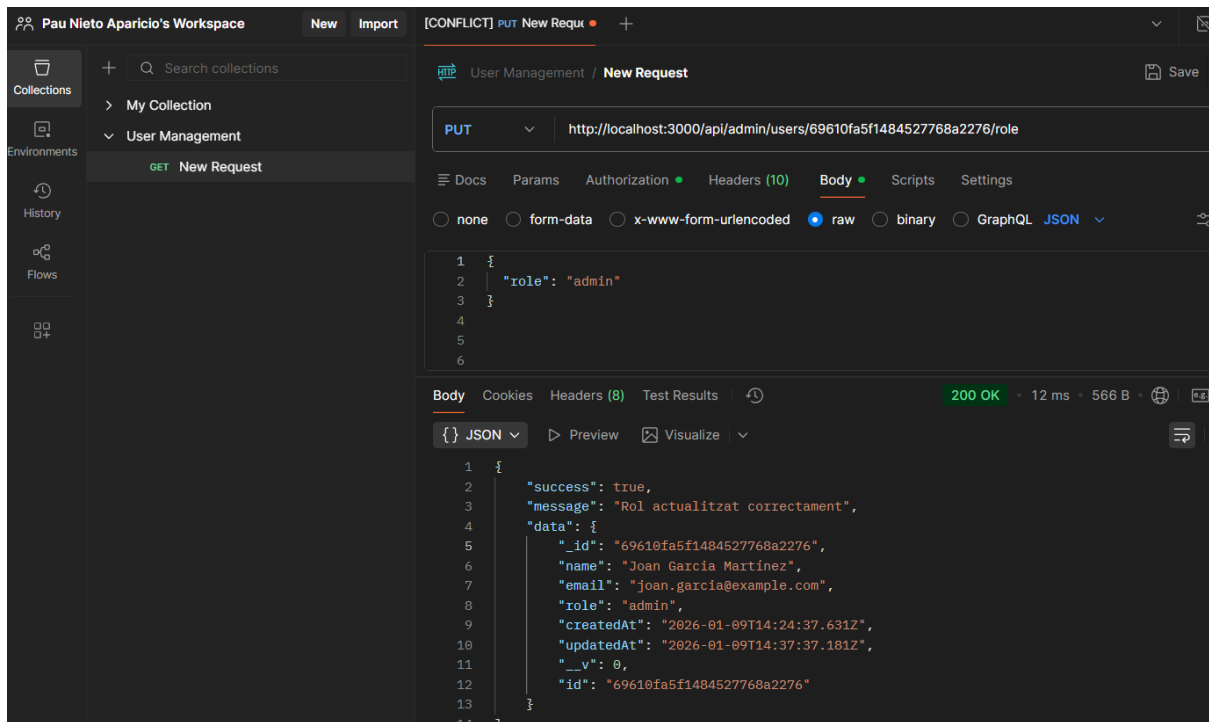

The screenshot shows the Postman interface for a workspace named "Pau Nieto Aparicio's Workspace". The left sidebar displays a collection named "User Management" with a sub-collection "New Request". The main panel shows a PUT request to the endpoint `http://localhost:3000/api/admin/users/69610fa5f1484527768a2276/role`. The request body is a JSON object with the role set to "admin". The response is a 200 OK status with a JSON body indicating success and providing user details.

Request:

```
PUT http://localhost:3000/api/admin/users/69610fa5f1484527768a2276/role
```


Body (raw):

```
{
  "role": "admin"
}
```

Response (JSON):

```
{
  "success": true,
  "message": "Rol actualitzat correctament",
  "data": {
    "_id": "69610fa5f1484527768a2276",
    "name": "Joan Garcia Mart\u00ednez",
    "email": "joan.garcia@example.com",
    "role": "admin",
    "createdAt": "2026-01-09T14:24:37.631Z",
    "updatedAt": "2026-01-09T14:37:37.181Z",
    "__v": 0,
    "id": "69610fa5f1484527768a2276"
  }
}
```


13 Eliminar usuari

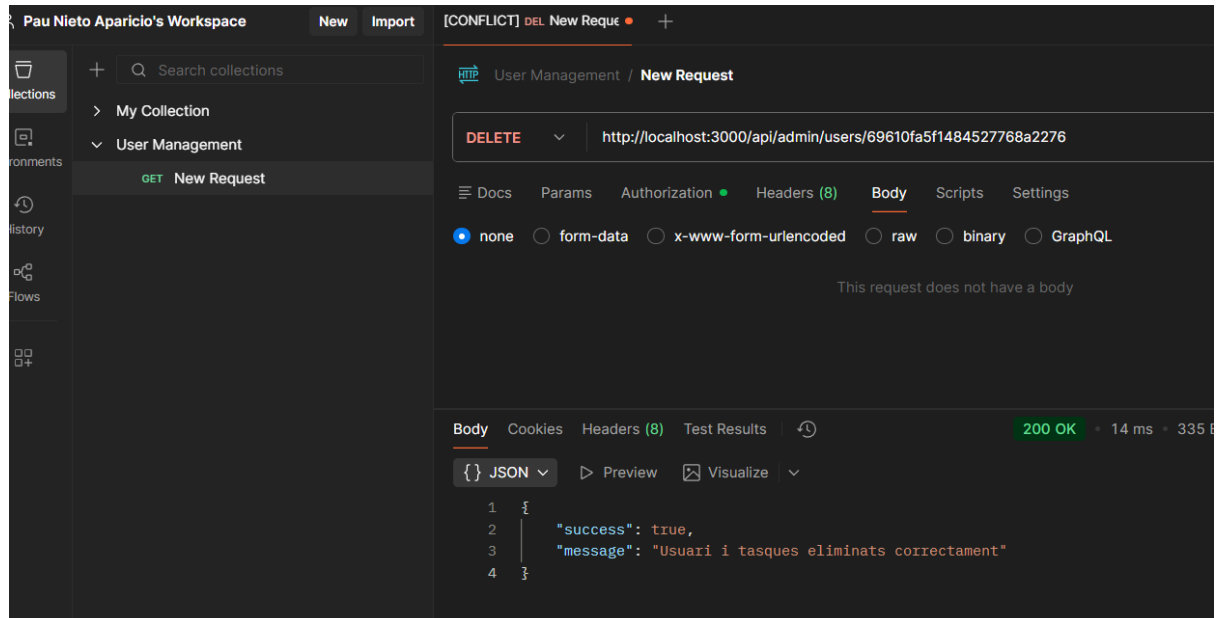

The screenshot displays a REST client interface with a sidebar on the left and a main workspace. The sidebar shows a collection named 'User Management' with a 'New Request' button. The main workspace shows a 'DELETE' request to the URL 'http://localhost:3000/api/admin/users/69610fa5f1484527768a2276'. The request is successful, returning a '200 OK' status with a response body in JSON format:

```
{
  "success": true,
  "message": "Usuari i tasques eliminats correctament"
}
```

✗ Accès sense token

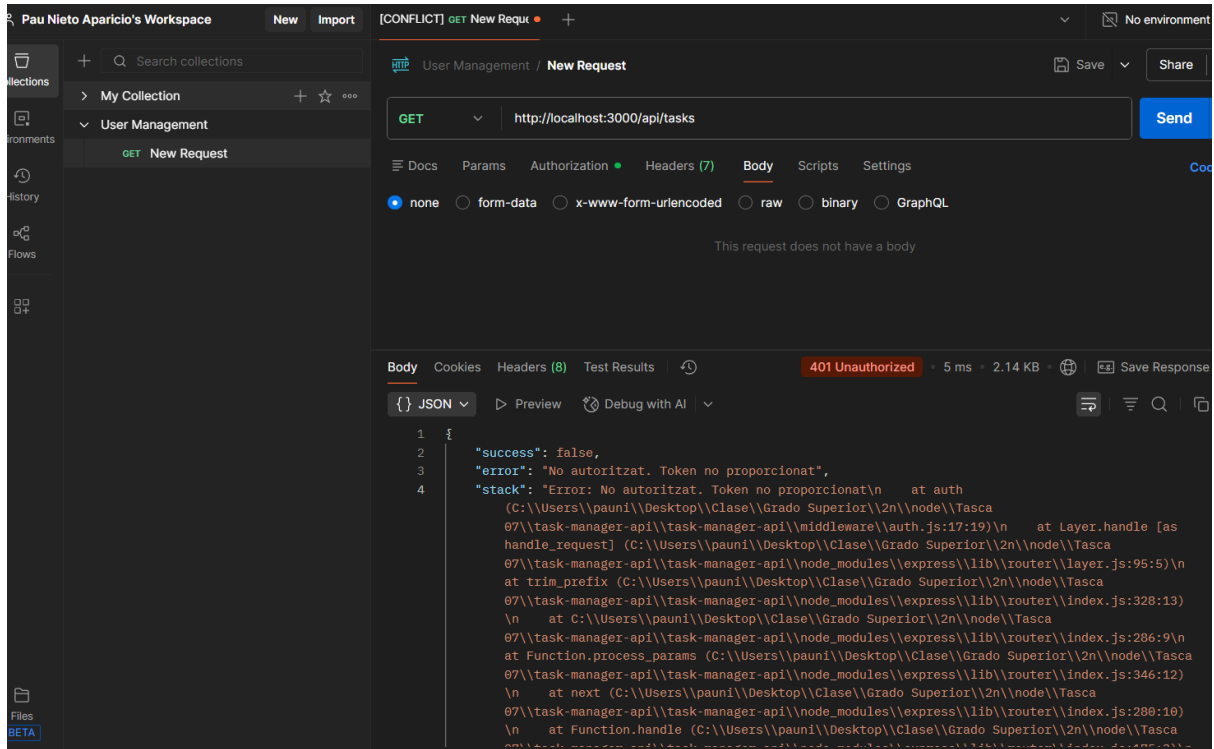


The screenshot shows a REST client interface with the following details:

- Request:** GET `http://localhost:3000/api/tasks`
- Body:** none
- Response:** 401 Unauthorized (5 ms, 2.14 KB)
- JSON Body:**

```
1 {
2   "success": false,
3   "error": "No autoritzat. Token no proporcionat",
4   "stack": "Error: No autoritzat. Token no proporcionat\n    at auth\n      (C:\\Users\\pauni\\Desktop\\Clase\\Grado Superior\\2n\\node\\Tasca\n        07\\task-manager-api\\task-manager-api\\middleware\\auth.js:17:19)\n    at Layer.handle [as\n      handle_request] (C:\\Users\\pauni\\Desktop\\Clase\\Grado Superior\\2n\\node\\Tasca\n        07\\task-manager-api\\task-manager-api\\node_modules\\express\\lib\\router\\layer.js:95:5)\n    at trim_prefix (C:\\Users\\pauni\\Desktop\\Clase\\Grado Superior\\2n\\node\\Tasca\n        07\\task-manager-api\\task-manager-api\\node_modules\\express\\lib\\router\\index.js:328:13)\n    at C:\\Users\\pauni\\Desktop\\Clase\\Grado Superior\\2n\\node\\Tasca\n        07\\task-manager-api\\task-manager-api\\node_modules\\express\\lib\\router\\index.js:286:9\n    at Function.process_params (C:\\Users\\pauni\\Desktop\\Clase\\Grado Superior\\2n\\node\\Tasca\n        07\\task-manager-api\\task-manager-api\\node_modules\\express\\lib\\router\\index.js:346:12)\n    at next (C:\\Users\\pauni\\Desktop\\Clase\\Grado Superior\\2n\\node\\Tasca\n        07\\task-manager-api\\task-manager-api\\node_modules\\express\\lib\\router\\index.js:280:10)\n    at Function.handle (C:\\Users\\pauni\\Desktop\\Clase\\Grado Superior\\2n\\node\\Tasca\n        07\\task-manager-api\\task-manager-api\\node_modules\\express\\lib\\router\\index.js:23:30)"
```


✗ Token invàlid

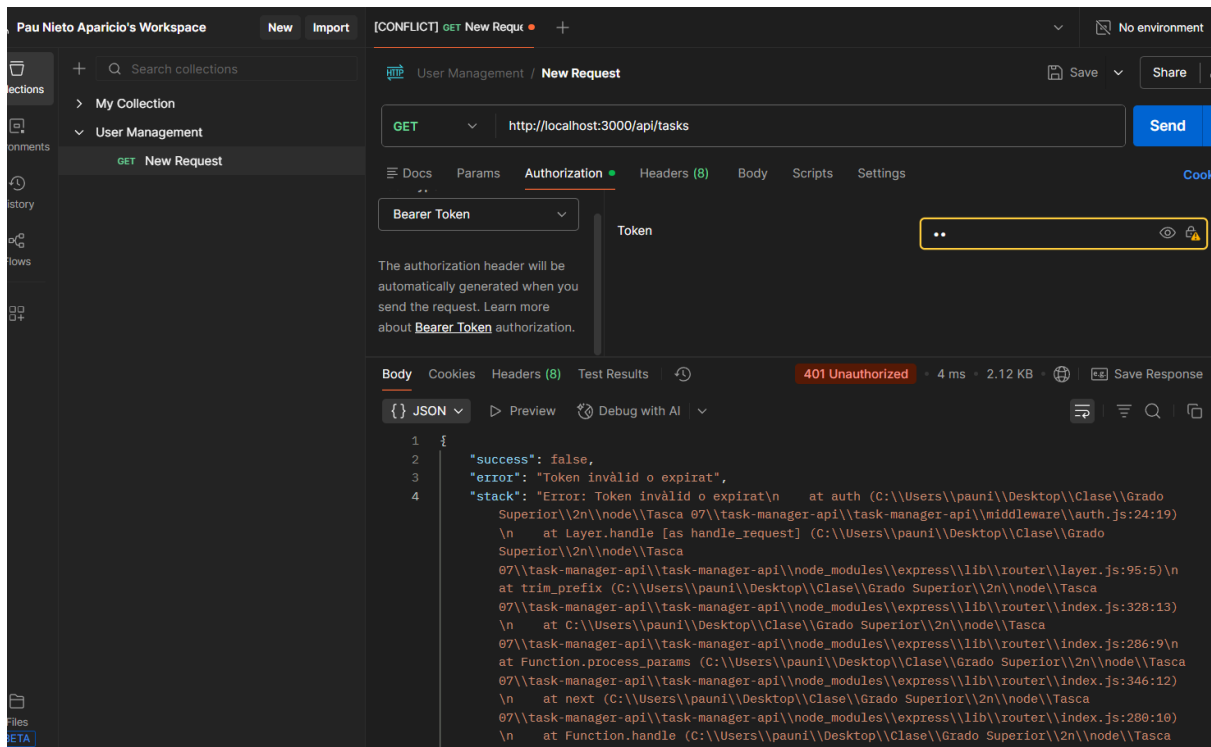


The screenshot shows a REST client interface with the following details:

- Request:** GET `http://localhost:3000/api/tasks`
- Authorization:** Bearer Token (The token field is empty, indicated by two dots).
- Response:** 401 Unauthorized (4 ms, 2.12 KB)
- JSON Body:**

```
{  "success": false,  "error": "Token invàlid o expirat",  "stack": "Error: Token invàlid o expirat\n    at auth (C:\\Users\\pauni\\Desktop\\Clase\\Grado Superior\\2n\\node\\Tasca 07\\task-manager-api\\task-manager-api\\middleware\\auth.js:24:19)\n    at Layer.handle [as handle_request] (C:\\Users\\pauni\\Desktop\\Clase\\Grado Superior\\2n\\node\\Tasca 07\\task-manager-api\\task-manager-api\\node_modules\\express\\lib\\router\\layer.js:95:5)\n    at trim_prefix (C:\\Users\\pauni\\Desktop\\Clase\\Grado Superior\\2n\\node\\Tasca 07\\task-manager-api\\task-manager-api\\node_modules\\express\\lib\\router\\index.js:328:13)\n    at C:\\Users\\pauni\\Desktop\\Clase\\Grado Superior\\2n\\node\\Tasca 07\\task-manager-api\\task-manager-api\\node_modules\\express\\lib\\router\\index.js:286:9\n    at Function.process_params (C:\\Users\\pauni\\Desktop\\Clase\\Grado Superior\\2n\\node\\Tasca 07\\task-manager-api\\task-manager-api\\node_modules\\express\\lib\\router\\index.js:346:12)\n    at next (C:\\Users\\pauni\\Desktop\\Clase\\Grado Superior\\2n\\node\\Tasca 07\\task-manager-api\\task-manager-api\\node_modules\\express\\lib\\router\\index.js:280:10)\n    at Function.handle (C:\\Users\\pauni\\Desktop\\Clase\\Grado Superior\\2n\\node\\Tasca 07\\task-manager-api\\task-manager-api\\node_modules\\express\\lib\\router\\index.js:275:3)"
```

✗ Login incorrecte

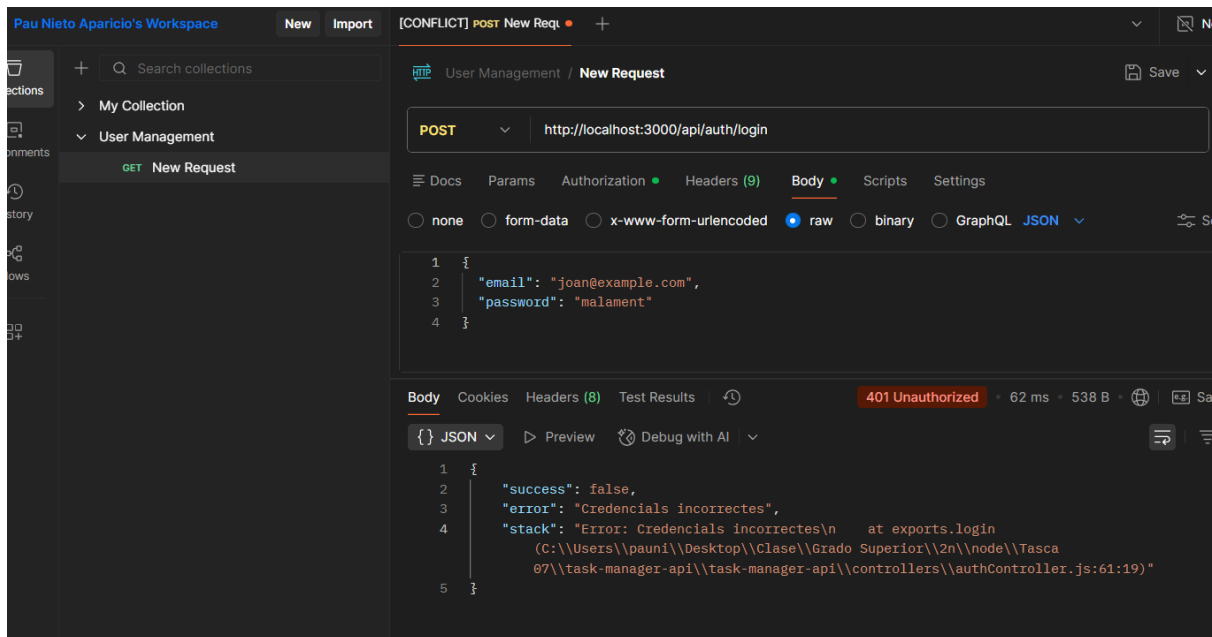


The screenshot shows a REST client interface with a workspace named "Pau Nieto Aparicio's Workspace". The left sidebar shows a collection named "User Management" with a "New Request" item. The main panel shows a "POST" request to "http://localhost:3000/api/auth/login". The request body is raw JSON:

```
1 {
2   "email": "joan@example.com",
3   "password": "malament"
4 }
```

The response status is "401 Unauthorized" with a response time of 62 ms and a size of 538 B. The response body is JSON:

```
1 {
2   "success": false,
3   "error": "Credenciales incorrectes",
4   "stack": "Error: Credenciales incorrectes\n    at exports.login\n    (C:\\Users\\pauni\\Desktop\\Clase\\Grado Superior\\2n\\node\\Tasca\n    07\\task-manager-api\\task-manager-api\\controllers\\authController.js:61:19)"
5 }
```


✗ Usuari normal accedint a admin

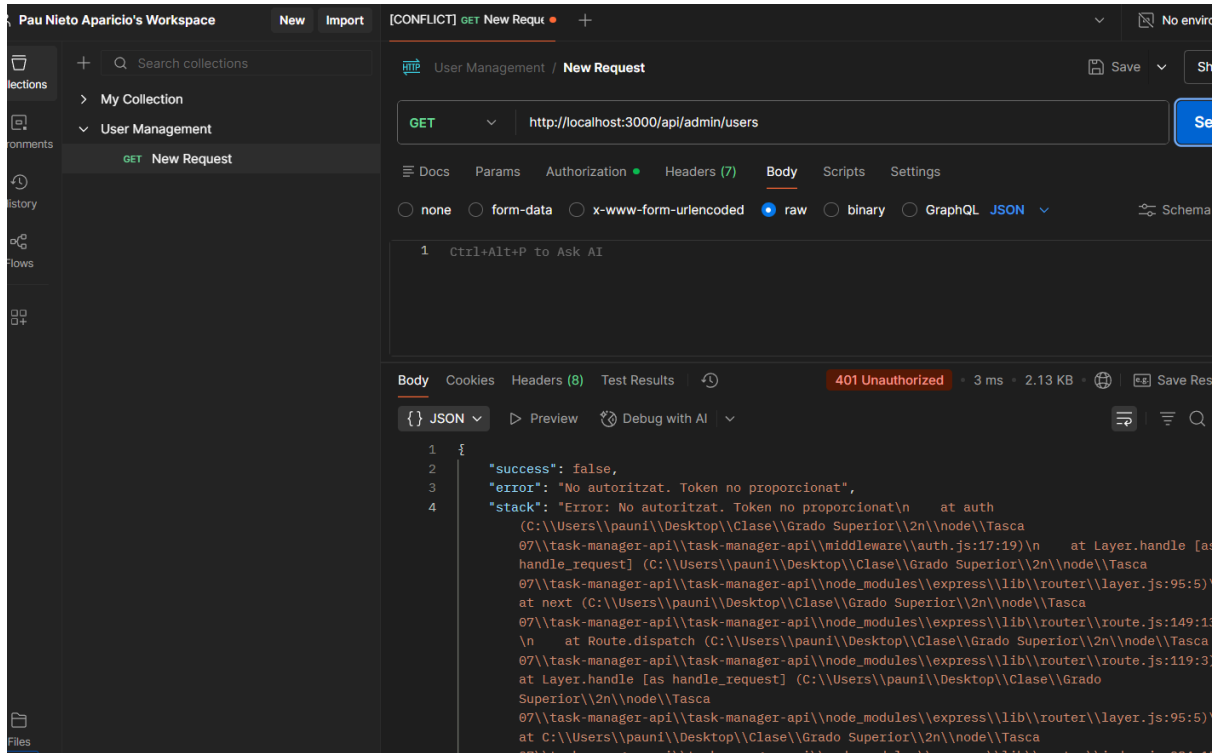

The screenshot shows a Postman workspace for 'Pau Nieto Aparicio'. A new GET request is configured to 'http://localhost:3000/api/admin/users'. The response is a 401 Unauthorized status, indicating that a normal user cannot access the admin endpoint. The response body is a JSON object with an error message and a stack trace.

```
{
  "success": false,
  "error": "No autoritzat. Token no proporcionat",
  "stack": "Error: No autoritzat. Token no proporcionat\n    at auth\n    (C:\\Users\\pauni\\Desktop\\Clase\\Grado Superior\\2n\\node\\Tasca\n    07\\task-manager-api\\task-manager-api\\middleware\\auth.js:17:19)\n    at Layer.handle [as\n    handle_request] (C:\\Users\\pauni\\Desktop\\Clase\\Grado Superior\\2n\\node\\Tasca\n    07\\task-manager-api\\task-manager-api\\node_modules\\express\\lib\\router\\layer.js:95:5)\n    at next (C:\\Users\\pauni\\Desktop\\Clase\\Grado Superior\\2n\\node\\Tasca\n    07\\task-manager-api\\task-manager-api\\node_modules\\express\\lib\\router\\route.js:149:13)\n    at Route.dispatch (C:\\Users\\pauni\\Desktop\\Clase\\Grado Superior\\2n\\node\\Tasca\n    07\\task-manager-api\\task-manager-api\\node_modules\\express\\lib\\router\\route.js:119:3)\n    at Layer.handle [as handle_request] (C:\\Users\\pauni\\Desktop\\Clase\\Grado\n    Superior\\2n\\node\\Tasca\n    07\\task-manager-api\\task-manager-api\\node_modules\\express\\lib\\router\\layer.js:95:5)\n    at C:\\Users\\pauni\\Desktop\\Clase\\Grado Superior\\2n\\node\\Tasca\n    07\\task-manager-api\\task-manager-api\\node_modules\\express\\lib\\router\\index.js:94:3"
```

✗ Registre amb email duplicat

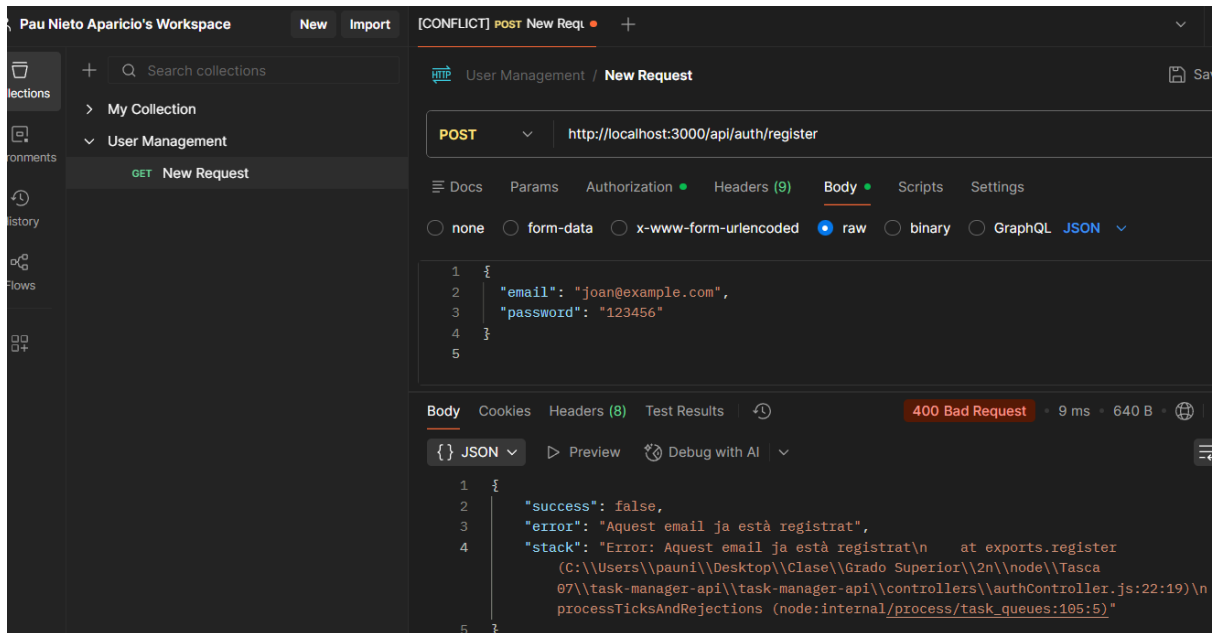


The screenshot shows a REST client interface with the following details:

- Workspace:** Pau Nieto Aparicio's Workspace
- Collection:** User Management / New Request
- Method:** POST
- URL:** http://localhost:3000/api/auth/register
- Body (raw):**

```
1 {
2   "email": "joan@example.com",
3   "password": "123456"
4 }
```
- Status:** 400 Bad Request (9 ms, 640 B)
- Response (JSON):**

```
1 {
2   "success": false,
3   "error": "Aquest email ja està registrat",
4   "stack": "Error: Aquest email ja està registrat\n    at exports.register\n      (C:\\Users\\pauni\\Desktop\\Clase\\Grado Superior\\2n\\node\\Tasca\n      07\\task-manager-api\\task-manager-api\\controllers\\authController.js:22:19)\n    processTicksAndRejections (node:internal/process/task_queues:105:5)"
5 }
```

✗ Validació de contrasenya massa curta

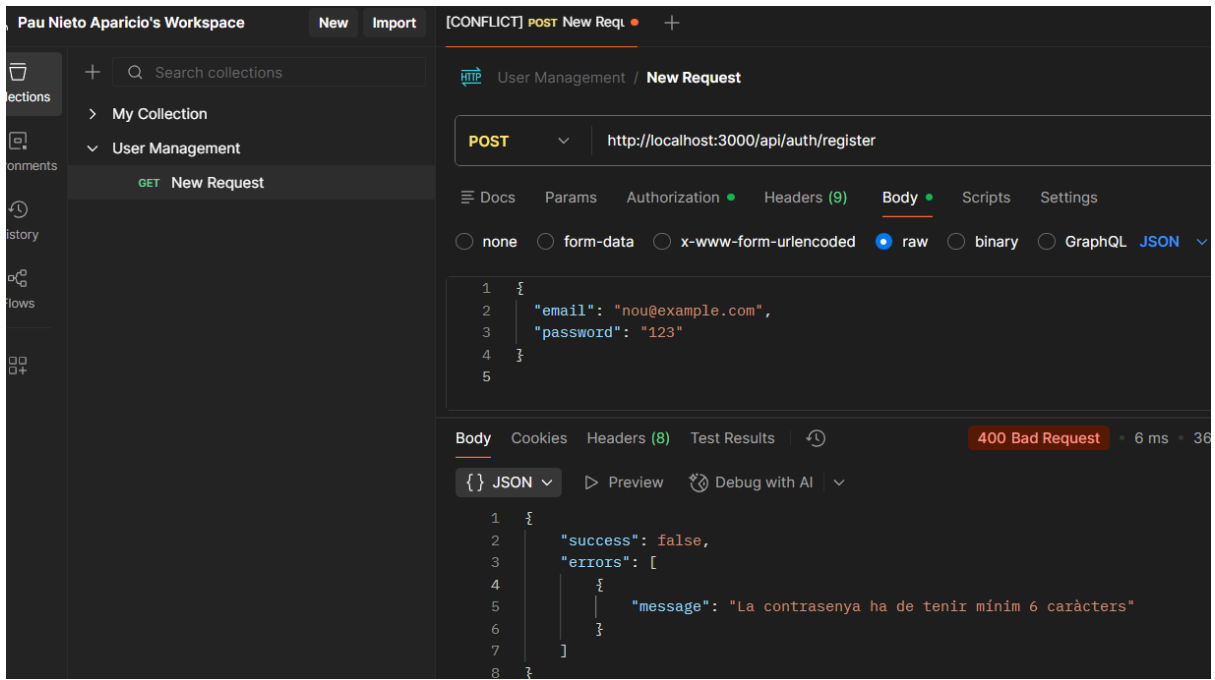


The screenshot shows a REST client interface with the following details:

- Workspace:** Pau Nieto Aparicio's Workspace
- Collection:** User Management
- Request Method:** POST
- URL:** http://localhost:3000/api/auth/register
- Body Type:** raw
- Request Body:**

```
1 {
2   "email": "nou@example.com",
3   "password": "123"
4 }
5
```
- Response Status:** 400 Bad Request
- Response Body (JSON):**

```
1 {
2   "success": false,
3   "errors": [
4     {
5       "message": "La contrasenya ha de tenir mínim 6 caràcters"
6     }
7   ]
8 }
```

✗ Email invàlid

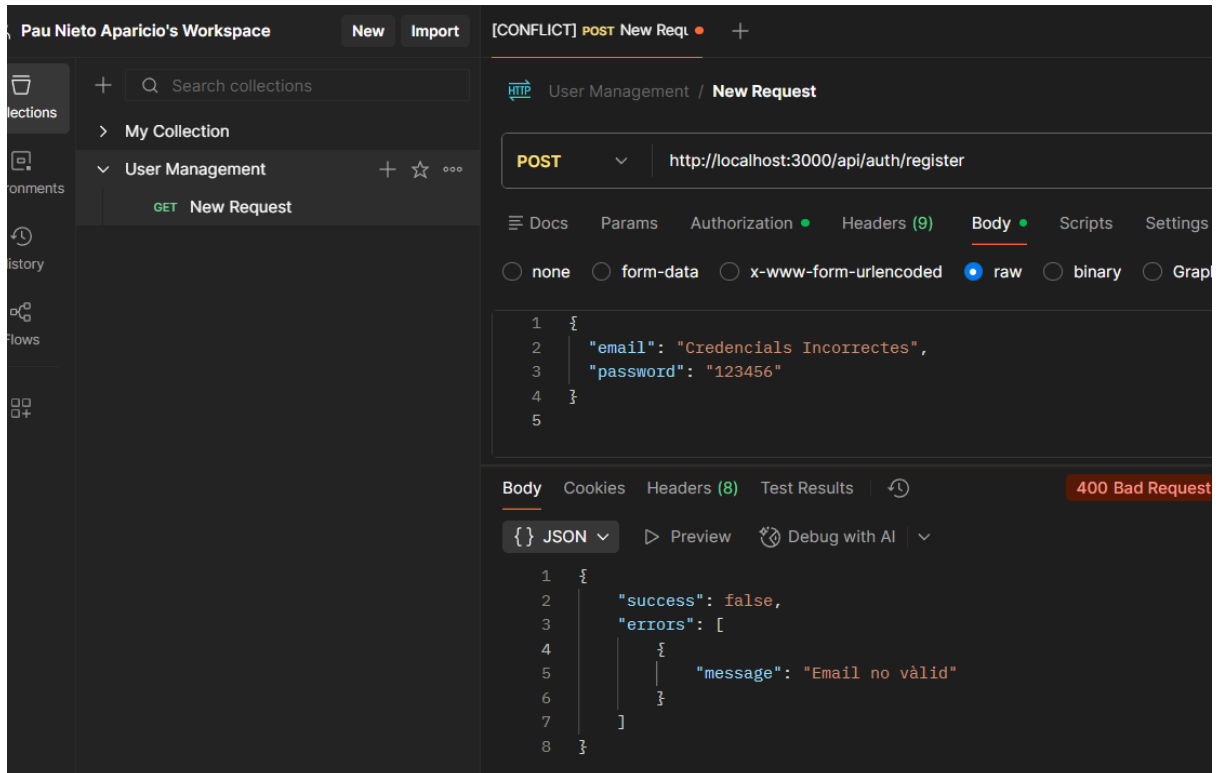


The screenshot shows the Postman interface for a workspace named "Pau Nieto Aparicio's Workspace". The left sidebar displays a collection named "User Management" with a sub-item "New Request". The main panel shows a POST request to the endpoint `http://localhost:3000/api/auth/register`. The request body is raw JSON, containing the following data:

```
1 {
2   "email": "Credenciales Incorrectes",
3   "password": "123456"
4 }
5
```

The response status is **400 Bad Request**. The response body is JSON, showing a failure with an error message:

```
1 {
2   "success": false,
3   "errors": [
4     {
5       "message": "Email no vàlid"
6     }
7   ]
8 }
```

✗ Intentar acceder a tasca d'un altre usuari

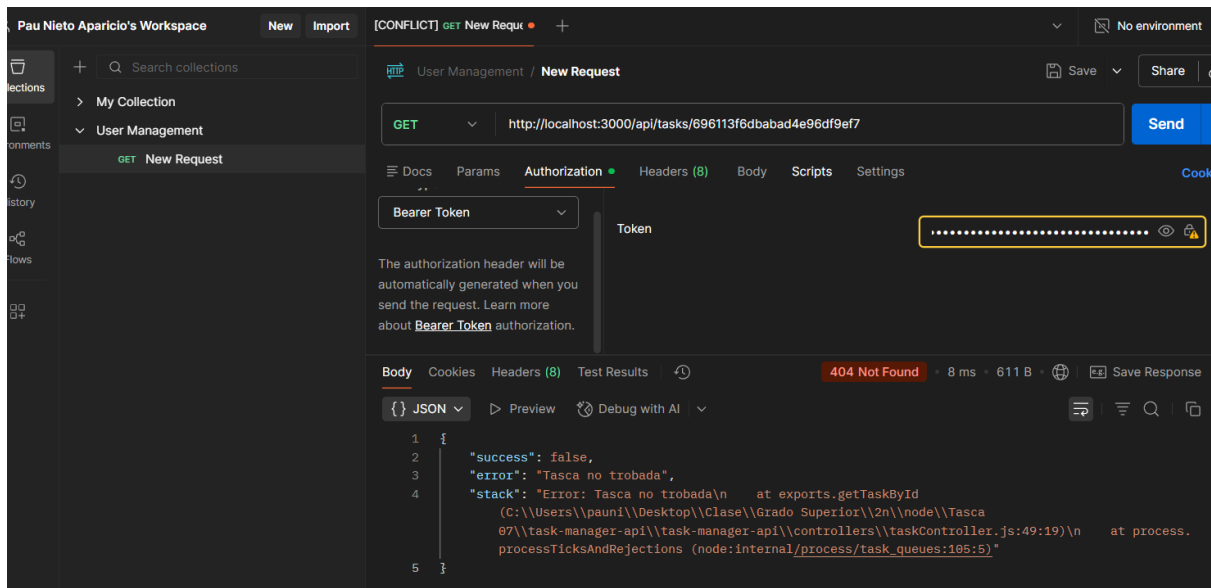

The screenshot shows a REST client interface with the following details:

- Workspace:** Pau Nieto Aparicio's Workspace
- Request:** GET http://localhost:3000/api/tasks/696113f6dbad4e96df9ef7
- Authorization:** Bearer Token (Token field is empty)
- Status:** 404 Not Found (8 ms, 611 B)
- Response Body (JSON):**

```
1 {
2   "success": false,
3   "error": "Tasca no trobada",
4   "stack": "Error: Tasca no trobada\n    at exports.getTaskById\n      (C:\\Users\\pauni\\Desktop\\Clase\\Grado Superior\\2n\\node\\Tasca\n07\\task-manager-api\\task-manager-api\\controllers\\taskController.js:49:19)\n    at process.\nprocessTicksAndRejections (node:internal/process/task_queues:105:5)"
5 }
```